

INTRODUCTION

MILLING

TURNING AND BORING

HEAVY TURNING

GROOVING, PROFILING AND CUT-OFF

API RING-GROOVE MACHINING

INDEXABLE DRILLING


TUBE SCARFING

SPECIAL ENGINEERING

APPLICATION and TECHNICAL INFORMATION

# 2016 METRIC

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

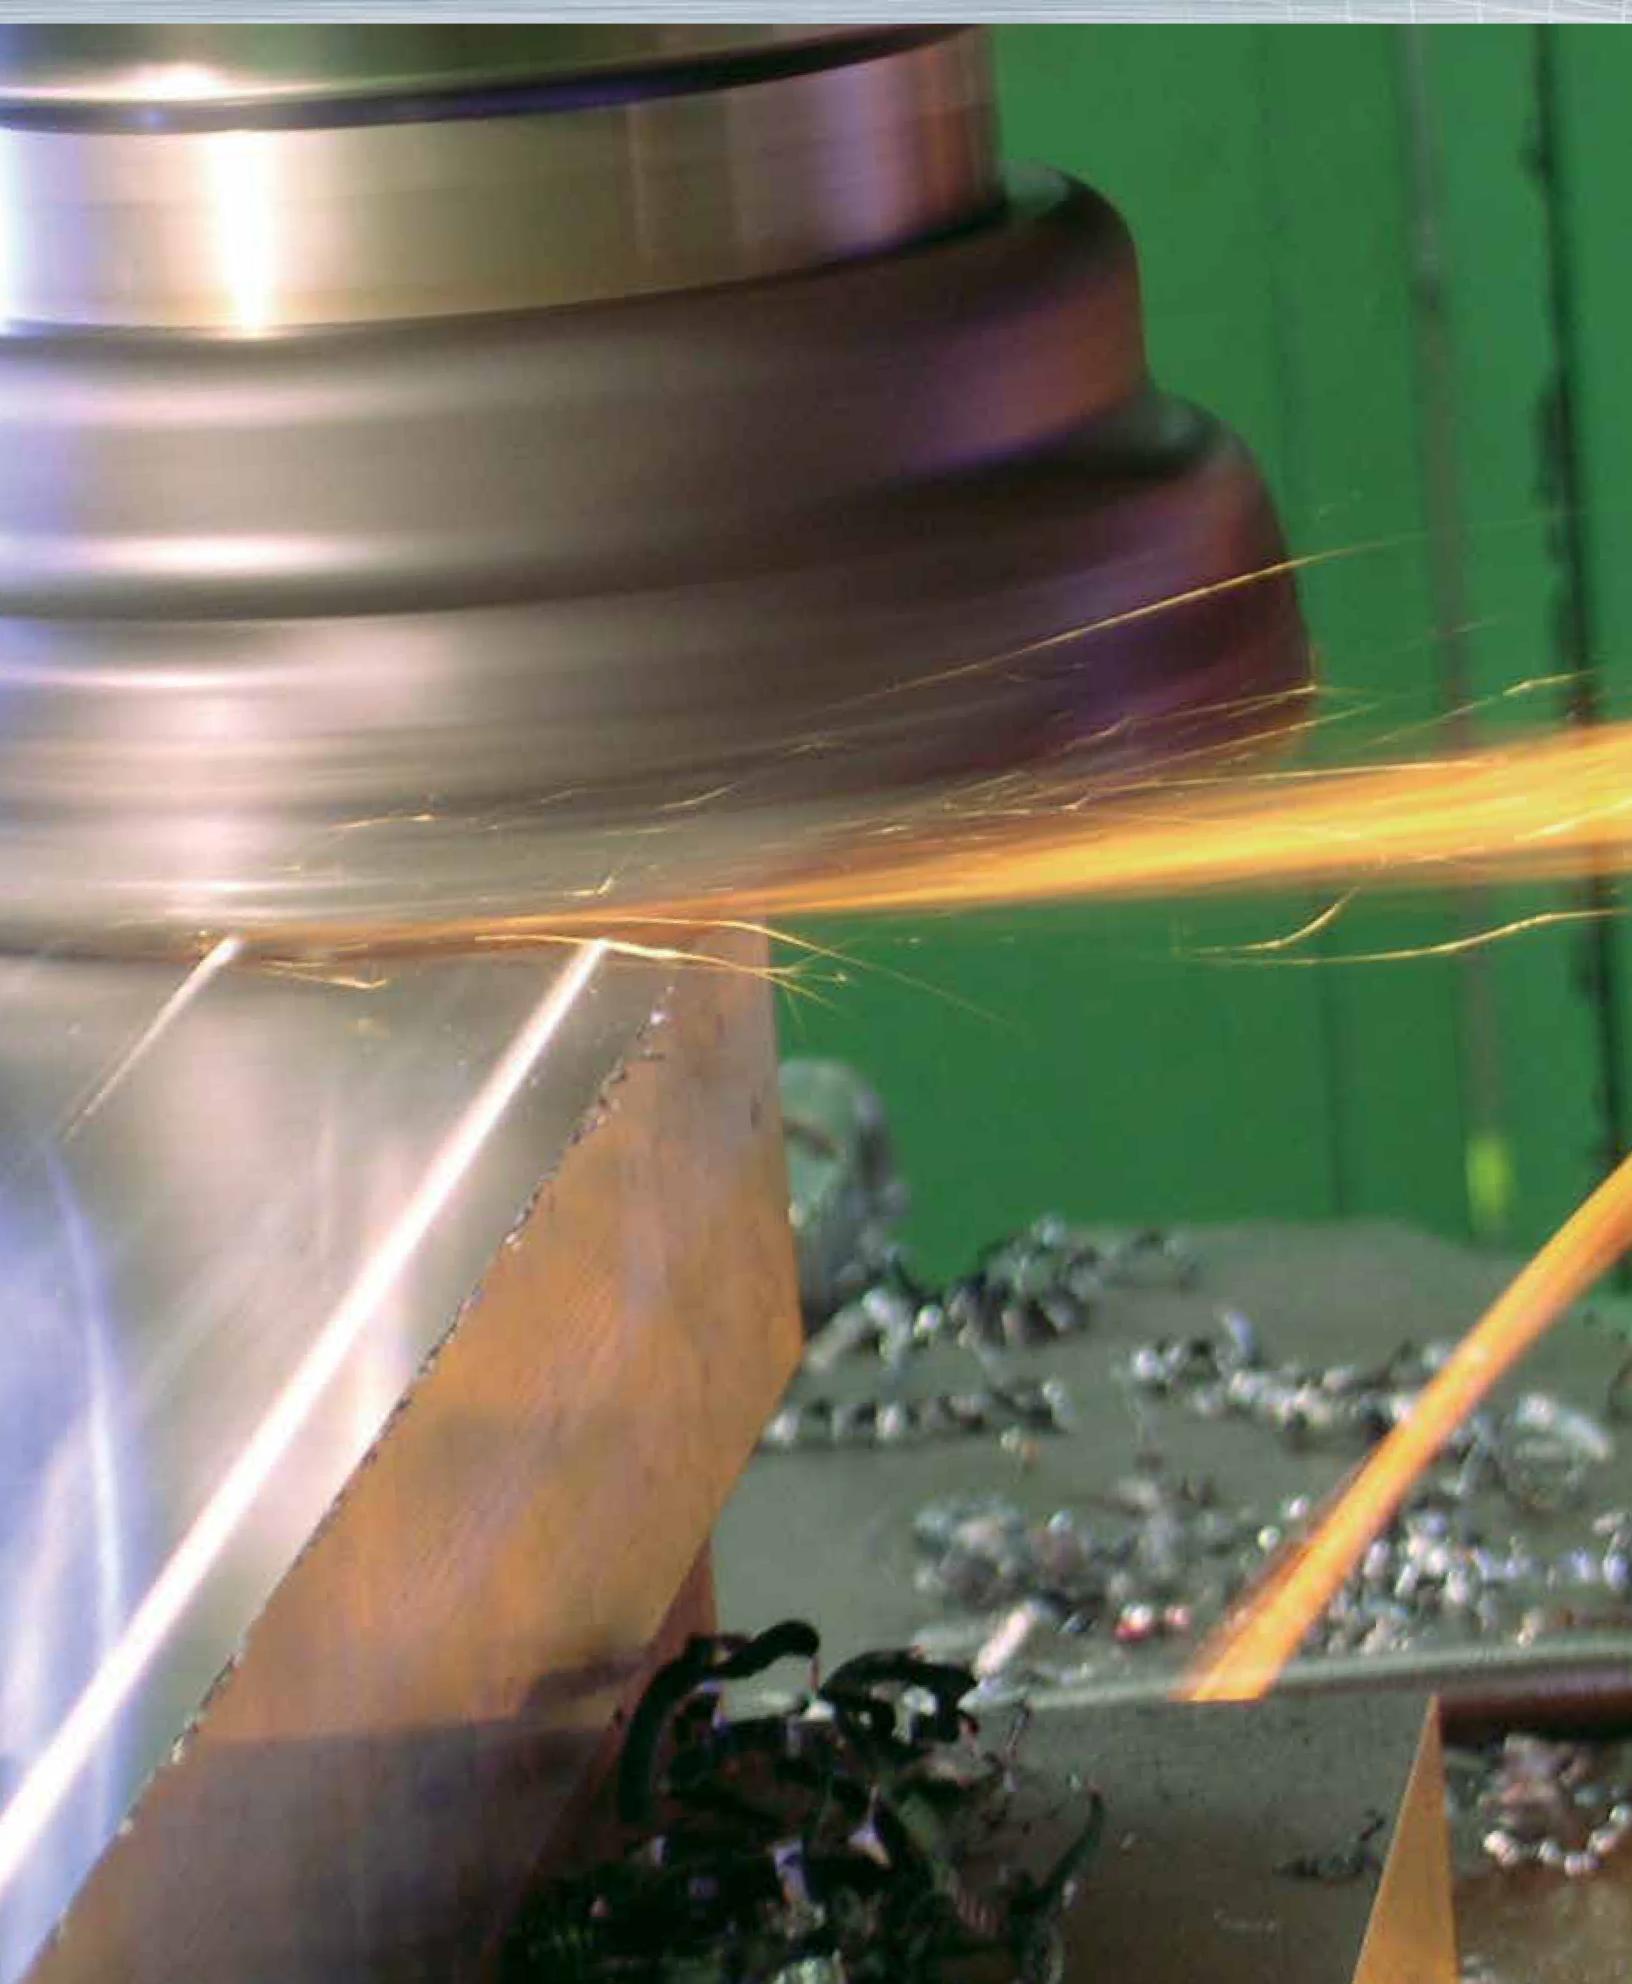



**James M. Greenleaf**  
President, Greenleaf Corporation  
[jgreenleaf@greenleafcorporation.com](mailto:jgreenleaf@greenleafcorporation.com)

*At Greenleaf, we use our expertise in advanced materials technology to develop products of superior quality and performance, and we work with our customers to help them use those products in the most efficient manner. It's our technology and our willingness to work closely with our customers that make us a world leader in cutting tools.*

*Our customers mean a lot to us, and we give them our personal attention. If you have the opportunity to visit us, we'll be glad to show you through our facilities. We're here to serve you, and we never lose sight of that fact.*

*Our goal is to help our customers become more successful by solving their productivity problems. We do this in several ways – by developing a better tool design, by producing superior tool materials, or just by offering some good shop-floor advice. Whatever it takes, we'll solve your toughest application problems. While other companies are selling commodities, we're offering technical ability, service, and excellent products.*



*Greenleaf Corporation is a leading developer of cutting tool technology, specializing in the manufacturing of high-performance tungsten carbide and ceramic inserts as well as innovative tool-holding systems. Greenleaf continues to build on 70 years of innovation, which centers on supplying customers with productive solutions to every metalcutting situation.*

*Greenleaf Corporation is positioned to serve the evolving needs of companies in all major segments of the metalcutting industry including aerospace, gas turbine, energy, oil and gas, steel, medical, roll turning, automotive, machine tool and rail. Greenleaf's products are engineered to provide optimal performance against a wide range of materials under the most rigorous metalcutting conditions. In addition to specially engineered tool-holding systems and a comprehensive line of carbide inserts, Greenleaf offers high-quality ceramic and ceramic composite materials, which can be custom designed for specific machining applications.*

*From its headquarters in Saegertown, Pennsylvania, a facility in North Carolina, and sales offices in Europe and China, Greenleaf maintains its commitment to pioneering breakthroughs in cutting tool technology and delivering productivity solutions to customers around the world.*



**MADE IN THE USA**

*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

**[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)**

# Master Table of Contents

## INTRODUCTION TO GREENLEAF

Product Guide.....	IG 04-05
Grade Descriptions.....	IG 06-07

## MILLING

Table of Contents .....	M 01
Usage Reference Guide .....	M 02
Pictorial Index.....	M 03
Milling Cutters	
Hushcut® (light and medium duty) .....	M 04-09
Index-O-Cut™ .....	M 10-13
High-Shear.....	M 14-18
Screw-On Inserts .....	M 19-20
Excelsior® Mill .....	M 21-35
Powermill® .....	M 36-43
Additional Greenleaf Milling Inserts .....	M 44-45
Insert Grade Descriptions .....	M 46
Insert Grade Reference for Milling .....	M 47
Technical Data for Milling.....	M 48-53

## TURNING AND BORING

Table of Contents .....	T 01
-------------------------	------

### INSERTS – CARBIDE

Carbide Grade Descriptions .....	T 04
Insert Grade Reference.....	T 05
Chipform Application Range .....	T 07
ISO Identification System.....	T 08-09
ANSI Identification System.....	T 10-11
Usage Reference Guide .....	T 12
Pictorial Index of Carbide Inserts .....	T 13
Negative Carbide Inserts .....	T 14-32
Positive Carbide Inserts .....	T 33-39

### INSERTS – CERAMIC

Ceramic Grade Descriptions .....	T 42
Insert Grade Reference.....	T 43
Edge Preparation and Application Guide .....	T 45
ISO Identification System.....	T 46-47
ANSI Identification System.....	T 48-49
Usage Reference Guide .....	T 50
Pictorial Index of Ceramic Inserts .....	T 51
Negative Ceramic Inserts.....	T 52-65
Rough Stuff® .....	T 54, 61
Positive Ceramic Inserts .....	T 66-70

### TOOLHOLDERS – INDUSTRY STANDARD

Introduction .....	T 71
Identification System.....	T 72-73
Usage Reference Guide .....	T 74
Pictorial Index of Industry-Standard Toolholders.....	T 75

Negative-Rake Toolholders..... T 76-90

Positive-Rake Toolholders .....

T 91-96

### TOOLHOLDERS – FOR CERAMIC INSERTS

Introduction .....	T 97
Identification System.....	T 98-99
Usage Reference Guide .....	T 100
Pictorial Index of Ceramic Toolholders.....	T 102-103
Negative-Rake Toolholders.....	T 104-111
Hard Turning .....	T 112-113
Positive-Rake Toolholders .....	T 114-119

### INDUSTRY-STANDARD BORING BARS

Introduction .....	T 121
Identification System.....	T 122-123
Usage Reference Guide .....	T 124
Pictorial Index.....	T 125
Negative Inserts .....	T 126-129
Positive Inserts .....	T 129-131
Screw-On.....	T 132-133

### CERAMIC-INSERT BORING BARS

Introduction .....	T 135
Identification System.....	T 136-137
Usage Reference Guide .....	T 138
Pictorial Index.....	T 139
Negative Inserts .....	T 140-143
Positive Inserts .....	T 144-146
Additional Greenleaf Turning Inserts .....	T 147

## HEAVY TURNING

Table of Contents .....	HT 01
Introduction .....	HT 03
Grade Descriptions .....	HT 04-05
Heavy Edge Preps .....	HT 06
Chipforms.....	HT 07
Pictorial Index.....	HT 08-09
Inserts .....	HT 10-32
Tooling Options .....	HT 34-35

## GROOVING, PROFILING and CUT-OFF SYSTEMS

Table of Contents .....	GP 01
Introduction .....	GP 03

### INSERTS

Grade Descriptions .....	GP 04
Grade Reference Guide.....	GP 05
Pictorial Index.....	GP 07
Inserts .....	GP 08-18
Cut-Off System .....	GP 08
Single-Ended Groovers.....	GP 09-13
V-Bottom Round.....	GP 14-17
Pulley and Poly Groove.....	GP 18

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Master Table of Contents *continued*

## **TOOLHOLDERS AND BARS**

Introduction .....	GP 19
Pictorial Index.....	GP 20-21
V-Bottom Round.....	GP 22-26
Single-Ended Groovers.....	GP 27-33
Grooving and Profiling Bars.....	GP 34-38

## **SUPPORT BLADES**

Introduction .....	GP 39
Overview .....	GP 40-41
Support Blades.....	GP 42-48
Face Grooving Tools Ordering Instructions.....	GP 50-51
Support Blades and Holders .....	GP 52-54

## **MILLING CUTTERS and RING MAX™**

Table of Contents .....	RM 01
-------------------------	-------

### **RING MAX™ Inserts**

Identification System.....	RM 04
Usage Reference Guide .....	RM 06
Grade Descriptions .....	RM 07
Inserts.....	RM 08

### **RING MAX™ II**

Identification System .....	RM 10
Usage Reference Guide .....	RM 12
Tooling .....	RM 13-16
Reference Information .....	RM 17-21

### **RING MAX™ III**

Identification System .....	RM 24
Usage Reference Guide .....	RM 26
Tooling .....	RM 27-29
Reference Information .....	RM 30-33

### **RING MAX™ CARTRIDGES**

Identification System .....	RM 34
Cartridges .....	RM 35-36

### **RING MAX™ STX**

Identification System .....	RM 38-39
Usage Reference Guide .....	RM 40
Tooling .....	RM 41-42
Reference Information .....	RM 43-44

## **INDEXABLE DRILLING**

Table of Contents .....	ID 01
Introduction .....	ID 03
Holemills™ and Inserts .....	ID 04
Technical Data .....	ID 05

## **TUBE SCARFING**

Table of Contents .....	TS 01
Introduction .....	TS 03
Grade Descriptions .....	TS 04
Usage Reference Guide .....	TS 06
Pictorial Index.....	TS 07
Inserts.....	TS 08-10
Toolholders .....	TS 11

## **SPECIAL ENGINEERING**

Introduction .....	SE 01
Aerospace Tools.....	SE 02-03
Milling Cutters .....	SE 02-03
Special Inserts.....	SE 02-03
Special Designs/Layouts.....	SE 02-03
Quote Form	

## **APPLICATION AND TECHNICAL INFORMATION**

Table of Contents .....	ATI 01
-------------------------	--------

### **CARBIDE**

Grade Descriptions .....	ATI 02-03
Feed and Speed Data.....	ATI 04-09
Chipform Application Range .....	ATI 10
Insert Grade Reference.....	ATI 12-13

### **CERAMIC**

Grade Descriptions .....	ATI 14
Feed and Speed Data.....	ATI 16-18
Edge Preparation.....	ATI 19
and Application Guide	
Insert Grade Reference.....	ATI 20-21

### **FORMULAS for TURNING and FACING**

.....	ATI 22
-------	--------

### **OPTIONAL CLAMPS**

.....	ATI 23
-------	--------

### **CERAMIC PRODUCTIVITY MANUAL**

.....	ATI 25-74
-------	-----------

## **PRODUCT INDEX**

Inserts .....	ATI 76-77
Toolholders .....	ATI 78-81

Milling Cutters and Ring Max™ .....	ATI 82
-------------------------------------	--------



## MILLING CUTTERS



### Powermill® Cutters

Ideal for heavy-duty cutting in severe interruptions and uneven surfaces. Replaceable components maximize cutter life while providing deep depths of cut.

Also available as end mills, face mills and sinusoidal.



### Powersine® Inserts

The Greenleaf Powersine® inserts are uniquely designed to have all four edge variations built into one insert, unlike other manufacturers who require sets of inserts. The sinusoidal or wave-type edge fits into the standard Powermill® cutter body and is especially helpful when dealing with long spindle extensions and limited horsepower machinery.



### Hushcut® Series II

#### Screw-on-Insert Cutters

Quiet and free-cutting mills with screw-on insert designs to make the most out of the available horsepower. The free cutting action results in longer tool life and improved surface finishes. Available in end mills and face mills in a wide range of small to large diameters.



### Multi-Purpose End Mills

High-speed ceramic or standard-speed carbide milling with positive and negative designs for a broad range of materials.

#### Ball Nose End Mills



### C-4 Series Face Mills

High-velocity cutters with ceramic inserts for use in high-temp alloys, hard metals, cast irons at high speeds and accelerated feed rates. Precision nests provide multiple insert configurations and body protection.



### Slotting Cutters

Standard screw-on and mechanically held indexable slotting cutters.

Special application cutters designed to produce precise narrow width slots.

## INDEXABLE DRILLING



### Holemill™ System

Indexable drill utilizing Greenleaf's advanced coated carbide grades for higher speeds, quieter cutting, longer tool life and reduced horsepower consumption. Inserts are positive squares (SPMT) for 4 indexes per insert. 1" to 3" diameter range.

## SPECIALLY ENGINEERED PRODUCTS

Greenleaf engineers have designed custom operation-specific metal-cutting tools for thousands of customers. Sometimes starting with a concept as simple as a paper sketch, they are able to implement their experience in materials and processes to devise a practical custom application.

From individual inserts making special cuts to ganged cutters providing special cutting paths, Greenleaf CAD engineering services can provide a prompt solution for your special metalcutting needs.



## GROOVING, TURNING AND BORING SYSTEMS



### ANSI Toolholders

Greenleaf manufactures a complete line of industry-standard toolholders in conformance with ANSI specifications in 4140 and 4150 alloy steel, hardened up to 42 Rc and oxide coated.



### Face Grooving / Support Blades

A selection of 248 width and face grooving diameter combinations to fit our standard advanced ceramic tooling offering. Support blades accept GTS carbide groovers as well as Greenleaf standard ceramic grooving inserts.



### Bar Turning Tools

Complete systems are available – heads, cartridges and inserts for Kiesler\*, Medart/BlawKnox\*, Daisho\* and Hetrana\* bar turning machines.



### Advanced Tooling

Greenleaf ceramic insert toolholders feature a geometry and pocket depth that maximizes ceramic performance.

\* These trademarks or registered trademarks are the property of the respective companies.



### COS – Cut-Off System

Greenleaf's advanced Cut-Off System features inserts that are qualified to fit into the standard Greenleaf grooving tools while maintaining superior performance.



### Trigon Inserts

Ceramic and carbide. Flexibility of a triangle with the corner strength of an 80° diamond.



### GTS – Groove Turn System


GTS inserts offer high-speed performance in a chipform geometry specifically designed to allow the Greenleaf carbide grooving insert to double as a turning tool when the application dictates. GTS carbide inserts are qualified to fit into the same pocket as its standard ceramic groover counterpart.

## GREENLEAF SURFACES/GEOMETRIES



### TurboForm® Inserts

Precise finishing with excellent chip control in nickel-based alloys. Very effective for machining wall sections as thin as .050".

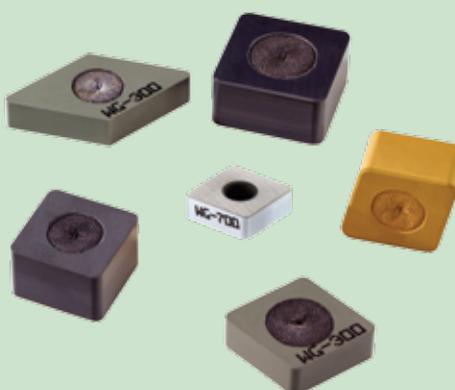

### Rough Stuff® Surface Treatment

Greatly improved insert-gripping power for greater accuracy, speed and pocket retention. Available on WG-300®, WG-600®, WG-700™ and GSN100™ ceramics.

*U.S. Patent No. 6,712,564 B1*

## CARBIDE

Greenleaf offers a comprehensive line of carbide inserts in grades ranging from sub-micron C-1 through C-8 classifications. An industry pioneer in coated carbide, Greenleaf offers a variety of uncoated, MT-CVD coated and PVD-coated grades. Carbide inserts are available in ANSI standard geometries with multi-purpose chipbreakers for heavy roughing through finishing.

### COATED

**GA5023** A high-speed performance grade for turning and milling cast iron. GA5023 features an advanced MT-CVD coating specifically developed for abrasive wear resistance. Application ranges from roughing to finishing on most cast iron materials including gray iron, ductile, nodular and other alloyed irons. The high wear and shock resistance of GA5023 allows machining at high speeds and a variety of feeds.

**GA5025** A high-speed MT-CVD coated grade for turning, light roughing and finishing of carbon and alloy steels, as well as selected stainless steels.

**GA5026** A high-speed grade developed for turning nickel- and cobalt-based super-alloys, stainless steels, and refractory metals. The advanced MT-CVD coating over a micro-grain substrate offers high wear resistance. GA5026 has exceptional resistance to the notching and deformation common to machining high strength materials. Apply at high speeds and light feeds in turning and selected milling applications.

**GA5035** A high-performance MT-CVD coated grade for turning all types of steels, and selected stainless steels. GA5035 can be used in rough, semi-finish, and finish turning situations requiring resistance to heat deformation, thermal shock, and abrasion. GA5035 should be applied at high speeds and a range of feeds.

**GA5036** A high-performance MT-CVD coated grade for milling steels at high speed. GA5036 should be used when milling forged and cast steels and selected ductile irons. GA5036 has a unique combination of toughness and heat resistance making it suitable for heavy and light duty milling at high cutting speeds.

**GA5125** New high-performance MT-CVD coated carbide milling grade especially suited for manganese steel. GA5125 is also applicable on chrome-moly steel, tool steel and similar high alloy steels. GA5125 provides excellent resistance to abrasion, crater wear, thermal shock, deformation and edge build-up. GA5125 should be applied at high speeds with moderate feed rates.

**G-910** PVD-coated grade for milling high-temp alloys, stainless steel, and low carbon steels. G-910 is a medium-speed grade and should be applied at moderate to high feed rates.

**G-9120** PVD-coated grade for milling and turning steel castings and steel forgings. G-9120 is engineered to maximize productivity at moderate to heavy feed rates and depths of cut.

**G-915** Multi-layer PVD-coated grade, excellent for cut off, milling and turning high-temp alloys, stainless steel, and low carbon steels. The multi-layer PVD coating adds heat and abrasion resistance to the tough, shock-resistant substrate. G-915 should be run at moderate speeds and moderate to high feeds in milling and interrupted turning applications.

**G-920** PVD-coated grade for turning and milling high-strength materials such as high-temp alloys, titanium and stainless steel. G-920 is also an excellent grade for aluminum and refractory metals. This grade has the resistance to deformation and notching required for higher speeds than G-910.

**G-9230** PVD-coated grade developed for medium to heavy machining of nickel alloys, cobalt alloys, titanium alloys, stainless steels and alloyed irons. G-9230 has superior wear resistance and toughness and is excellent for cast and forged scale machining conditions.

**G-925** Multi-layer PVD-coated grade specifically designed for machining abrasive and difficult-to-machine materials. Typical applications include high-temp alloys, titanium and other refractory metals, stainless steel, and many cast irons. G-925 exhibits excellent resistance to notching and deformation. Apply at moderate to high speeds and moderate feeds.

**G-935** Multi-layer PVD-coated grade for steel milling and turning applications requiring additional resistance to mechanical and thermal shock. The multi-layered PVD coating increases the speed capability and wear resistance in tough milling and interrupted turning applications.



## **UNCOATED**

**G-01** Developed for milling high-temp alloys, stainless steel, and low-carbon steels at low speeds and moderate to high feeds. Also can be used for turning in the same application range on severe interruption or old machinery.

**G-01M** A tough, sub-micron grade used for milling and roughing austenitic stainless steels, and stainless steel castings – even when rolling or casting skin is present. The edge strength of G-01M allows the use of sharp edges, high positive rakes, and intermittent cuts.

**G-10** For roughing all cast irons under severe conditions, including broaching. The edge strength of G-10 makes it a good choice for roughing high-temp alloys with positive rakes and machining non-ferrous materials when toughness is of prime importance. Apply at moderate speeds and feeds.

**G-02** An excellent general-purpose cast iron grade. G-02 can be applied to milling and turning cast iron at moderately high speeds and medium feeds. G-02 is also a good choice for machining aluminum with positive rakes, and light roughing of some high-temp alloys and stainless steels.

**G-20M** A sub-micron C-2 carbide grade suited for use in turning and milling titanium and nickel-based super-alloys. G-20M has the strength and edge wear characteristics to resist notching when turning high-strength materials.

**G-23** A finishing grade for all cast irons and other short-chipping non-ferrous materials, such as brass and bronze. Apply at moderately high speeds and moderate feed rates.

**G-40** Finish turning of cast iron and other hard-wearing materials at high speeds and light feeds in good conditions.

**G-50** Heavy roughing grade for steel and steel castings under difficult conditions, and ferritic stainless steels in most applications. G-50 is tough enough to enable the use of positive rakes for turning.

**G-53** Excellent general-purpose milling grade for steel and steel alloys at moderate speeds and feeds. Good combination of toughness and wear resistance for milling, or as an all-around grade for mixed production applications. G-53 is not recommended for continuous turning.

**G-60** Heavy, rough turning of steel, steel castings, and steel forgings. Apply G-60 at moderate speeds and heavy feed rates and depths of cut. More wear resistant than G-50, but lower in toughness.

**G-74** Roughing or finishing grade for steel and steel castings. G-74 has higher shock resistance than G-70, and should be applied at high speeds and moderate to heavy feeds. Well suited for turning of steel rolls.

## **CERAMIC**

Greenleaf is the industry leader in the development and manufacture of ceramic and coated ceramic inserts in ANSI standard and special geometries. Some of the most prominent include:

**WG-300®** Whisker-reinforced ceramic with excellent wear and shock resistance at high surface speeds. WG-300 is very effective at machining nickel and cobalt based super-alloys, and other hard materials at metal removal rates up to 10 times higher than carbide.

**WG-600®** Coated whisker-reinforced ceramic offering longer tool life and better performance over uncoated ceramics due to outstanding thermal properties and shock-resistance at high cutting speeds. Application areas include rough and finish turning, as well as high-performance milling of high-strength alloys, hardened steels and select stainless steels. U.S. Patent No. 6,447,896 B1

**WG-700™** New whisker-reinforced  $\text{Al}_2\text{O}_3$  ceramic substrate featuring improved toughness and a unique high-speed coating. WG-700 is ideal for machining nickel- and cobalt-based super alloys and other difficult-to-machine materials. WG-700 exhibits high metal-removal rates with exceptional tool life. U.S. Patent No. 6,447,896 B1

**XSYTIN™-1** New phase-toughened ceramic capable of extreme feed rates. XSYTIN™-1 excels at machining a wide variety of materials including steels, cast and ductile irons, high-temperature alloys and other challenging metals. XSYTIN™-1 is ideal for use in interrupted cuts, scale, abrasive casting materials and milling.

**GSN100™** New engineered blend of silicon nitride and proprietary toughening agents that redefines productivity in the machining of cast iron. GSN100 delivers outstanding tool life at high cutting speeds in turning, grooving and milling applications.

**GEM-7™**  $\text{Al}_2\text{O}_3 + \text{TiC}$  composite ceramic with a high degree of predictability in roll turning and hard alloy (up to 65 R/c) machining.

**GEM-19™** Cold pressed and sintered  $\text{Al}_2\text{O}_3$  ceramic for economical roughing and finishing of cast iron grades.





**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**Usage Reference Guide .....** M 02

**Pictorial Index.....** M 03

#### **Milling Cutters**

*Hushcut® (light and medium duty)..... M 04-09*

*Index-O-Cut™ ..... M 10-13*

*High Shear..... M 14-18*

*Screw-On Inserts..... M 19-20*

*Excelerator® Mill ..... M 21-35*

*Powermill® ..... M 36-43*

**Additional Greenleaf Milling Inserts..... M 44-45**

**Insert Grade Descriptions .....** M 46


**Insert Grade Reference for Milling .....** M 47

**Technical Data for Milling..... M 48-53**



**Hushcut® Series II Milling System**


**EM90S/L**  
0° Lead End Mill  
12mm – 50mm Diameter  
page: M 06




**FM90S/L**  
0° Lead Face Mill  
40mm – 160mm Diameter  
page: M 07




**FM75L**  
75° Lead Face Mill  
50mm – 160mm Diameter  
page: M 08




**FMC90L**  
Cartridge Style  
0° Lead Face Mill  
80mm – 250mm Diameter  
page: M 09

**Index-O-Cut™ Milling System**


**G-MOFHP**  
High Positive Face Mill  
Octagon Inserts  
51mm – 203mm Diameter  
page: M 12-13

**High-Shear Cutting Mills**



**FTHP**  
0° Lead Face Mill  
20° Positive Axial Rake  
63mm – 100mm Diameter  
page: M 16



**WSTHP**  
0° Lead End Mill  
20° Positive Axial Rake  
40mm – 63mm Diameter  
page: M 17



**SHPC**  
45° Lead Face Mill  
Negative Radial,  
20° Positive Axial Rake  
100mm – 160mm Diameter  
page: M 18

**Screw-On Insert Style Cutters**



**WSSCC**  
0° Lead End Mill  
Center Cutting  
20mm – 40mm Diameter  
page: M 20

**Excelerator® Milling Cutters  
Ceramic and Carbide Inserts  
80 – 315 mm Diameter Cutters**



**CP4 Series**  
Face Mill  
Positive Rake Inserts  
*Cutters and Nests*  
page: M 22-23



**C4 Series**  
Face Mill  
Negative Rake Inserts  
*Cutters and Nests*  
page: M 24-25

**Excelerator® Milling Cutters  
Ceramic and Carbide Inserts  
Up to 100 mm Diameter Cutters**



**FMRP**  
Face Mill  
Round Positive Inserts  
50mm – 100mm Diameter  
page: M 26




**FMRN**  
Face Mill  
Round Negative Inserts  
50mm – 100mm Diameter  
page: M 26




**WSRP**  
End Mill  
Round Positive Inserts  
16mm – 63mm Diameter  
page: M 27



**WSRN**  
End Mill  
Round Negative Inserts  
25mm – 63mm Diameter  
page: M 28




**WSTP**  
End Mill  
Triangle Positive Inserts  
12mm – 16mm Diameter  
page: M 29




**WSSP**  
End Mill  
Square Positive Inserts  
10mm – 40mm Diameter  
page: M 30




**WSAN**  
End Mill  
Parallelogram Inserts  
25mm – 63mm Diameter  
page: M 31

**Excelerator® Milling Cutters  
Ceramic and Carbide Inserts (continued)  
Up to 100 mm Diameter Cutters**



**XFSP**  
High-Feed End Mill  
Square Positive Inserts  
25mm – 40mm Diameter  
page: M 32-33



**XFSP**  
High-Feed Face Mill  
Square Positive Inserts  
55mm Diameter  
page: M 32-33




**SSBN**  
Ball Nose End Mill  
Ball Nose Inserts  
10mm – 25mm Diameter  
page: M 34-35

**Powermill® Cutters**


**M400LNP-A**  
0° Lead Face Mill  
Negative Radial  
Positive Axial  
100mm – 315mm Dia.  
page: M 38



**C430LNP-H**  
30° Lead Face Mill  
Negative Radial  
Positive Axial  
200mm – 315mm Dia.  
page: M 42



**M402LN-A**  
2° Lead Face Mill  
Negative Radial  
Negative Axial  
100mm – 315mm Dia.  
page: M 39



**C430LNP-W**  
30° Lead Face Mill  
Finishing Cutter  
Negative Radial,  
Positive Axial  
200mm – 315mm Dia.  
page: M 43



**M430LNP-A**  
30° Lead Face Mill  
Negative Radial,  
Positive Axial  
100mm – 315mm Dia.  
page: M 41

**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Hushcut® Series II Milling Cutters

Quiet and free-cutting mills with screw-on insert designs to make the most out of the available horsepower. The free-cutting action results in longer tool life and improved surface finishes. Available in end mills and face mills in a wide range of small to large diameters.



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*


[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# EM90S/L

## 0° Lead End Mill

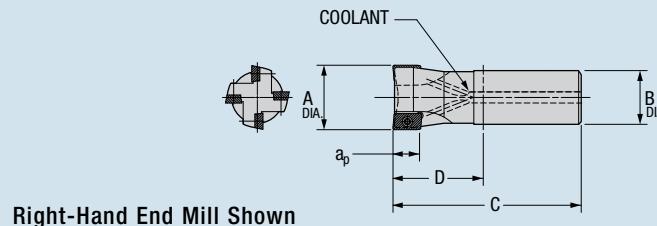


Part Number	Gage 			Dimensions (millimeters)					No. of Inserts	Standard Components	* Tune-Up Kit
EM90 S/L	Insert	Stock	A	B	C	D	ap			Insert Screw	Includes All Standard Components
EM90S-12R-16W	ADGT-100308DFRLD	○	12	16	75	25	9	1	PT-589T	TK-01002	
EM90S-16R-16W	ADGT-100308DFRLD	●	16	16	75	25	9	2	PT-589T	TK-01003	
EM90S-20R-20W	ADGT-100308DFRLD	●	20	20	82	32	9	2	313631	TK-02878	
EM90S-22R-25W	ADGT-100308DFRLD	○	22	25	88	32	9	3	313631	TK-02879	
EM90S-25R-20W	ADGT-100308DFRLD	●	25	20	90	40	9	4	PT-542T	TK-00860	
EM90S-25R-25W	ADGT-100308DFRLD	●	25	25	96	40	9	4	PT-542T	TK-00860	
EM90S-32R-25W	ADGT-100308DFRLD	●	32	25	96	40	9	5	PT-542T	TK-00861	
EM90S-32R-32W	ADGT-100308DFRLD	●	32	32	100	40	9	5	PT-542T	TK-00861	
EM90S-40R-32W	ADGT-100308DFRLD	●	40	32	100	40	9	5	PT-542T	TK-00861	
EM90L-20R-20W	APHT-160408PDR**	●	20	20	85	35	13	1	PT-559T	TK-00758	
EM90L-25R-20W	APHT-160408PDR**	●	25	20	97	47	13	2	312679	TK-00780	
EM90L-25R-25W	APHT-160408PDR**	○	25	25	97	47	13	2	312679	TK-00780	
EM90L-25R-25WL	APHT-160408PDR**	○	25	25	151	95	13	2	312679	TK-00780	
EM90L-32R-25W	APHT-160408PDR**	●	32	25	105	49	13	3	312679	TK-00781	
EM90L-32R-32W	APHT-160408PDR**	●	32	32	114	54	13	3	312679	TK-00781	
EM90L-32R-32WM	APHT-160408PDR**	○	32	32	135	75	13	3	312679	TK-00781	
EM90L-32R-32WL	APHT-160408PDR**	●	32	32	167	107	13	3	312679	TK-00781	
EM90L-40R-32W	APHT-160408PDR**	●	40	32	114	54	13	4	312679	TK-00782	
EM90L-40R-32WL	APHT-160408PDR**	●	40	32	167	107	13	4	312679	TK-00782	
EM90L-50R-40W	APHT-160408PDR**	●	50	40	123	63	13	5	312679	TK-00783	

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

\*\* APET can be used in place of APHT.

## Hushcut® Inserts ADGT/APHT/APET

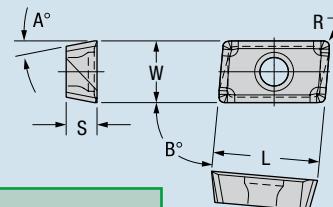

Inserts	Part Number	GA5036	G-9120	G-9115	Part Number	ANSI	Dimensions (millimeters)				
							L	W	S	R	A
ADGT/APHT/APET	ADGT-100308DFRLD	●	●	●	ADGT-16222DFR5LD	10,00	6,70	3,50	0,80	16°	84°
	ADGT-100316DFRLD	●	●	●	ADGT-16224DFR5LD	10,00	6,70	3,50	1,60	16°	84°
	APHT-160408PDR	●	●	●	APHT-32.73PD2R	16,50	9,50	4,76	0,80	11°	85°
	APHT-160416PDR	●	●	●	APHT-32.73PD4R	16,50	9,50	4,76	1,60	11°	85°
	APHT-160432PDR	●	●	●	APHT-32.73D8R	16,50	9,50	4,76	3,20	11°	85°
	APET-160408PDR	●	●	●	APET-32.73D2R	16,76	9,50	4,76	0,80	11°	85°
	APET-160416PDR	●	○	○	APET-32.73D4R	16,59	9,50	4,76	1,60	11°	85°
	APET-160432PDR	○	○	○	APET-32.73D6R	16,59	9,50	4,76	2,38	11°	85°

### GA5036 (MT-CVD coated)

A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

### G-9120 (PVD coated)

Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

### G-9115 (PVD coated)

Excellent for high-temp alloys, stainless steel, and low-carbon steels. Should be run at moderate speeds and moderate to high feeds.


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less <input checked="" type="checkbox"/> 10 Business Days or Less

# FM90S/L

## 0° Lead Face Mill

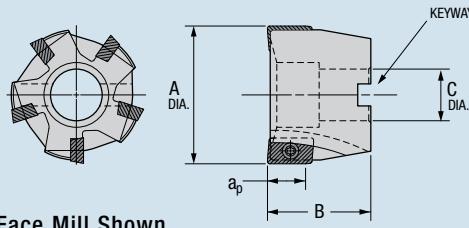


Right-Hand Face Mill Shown

Part Number FM90 S/L	Gage 	Stock	Dimensions (millimeters)				No. of Inserts	Keyway	Standard Components	* Tune-Up Kit
			A	B	C	ap				
FM90S-040R	ADGT-100308DFRLD	●	40	40	16	9	6	8	PT-542T	TK-00862
FM90S-050R	ADGT-100308DFRLD	●	50	40	22	9	7	10	PT-542T	TK-00863
FM90S-063R	ADGT-100308DFRLD	●	63	40	22	9	8	10	PT-542T	TK-00864
FM90S-080R	ADGT-100308DFRLD	●	80	50	27	9	9	12	PT-542T	TK-00913
FM90L-050R	APHT-160408PDR**	●	50	40	22	13	5	10	312679	TK-00783
FM90L-063R	APHT-160408PDR**	●	63	40	22	13	6	10	312679	TK-00784
FM90L-080R	APHT-160408PDR**	●	80	50	27	13	7	12	312679	TK-00785
FM90L-100R	APHT-160408PDR**	●	100	50	32	13	8	14	312679	TK-00786
FM90L-125R	APHT-160408PDR**	○	125	63	40	13	10	16	312679	TK-01249
FM90L-160R	APHT-160408PDR**	○	160	63	40	13	12	16	312679	TK-00787

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

\*\* APET can be used in place of APHT.

## Hushcut® Inserts ADGT/APHT/APET

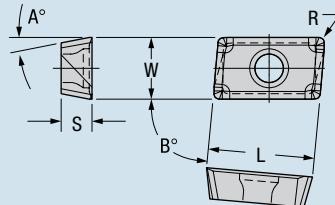

Inserts	Part Number ISO	Dimensions (millimeters)							
		L	W	S	R	A	B		
	ADGT-100308DFRLD	● ● ●	ADGT-16222DFR5LD	10,00	6,70	3,50	0,80	16°	84°
	ADGT-100316DFRLD	● ● ●	ADGT-16224DFR5LD	10,00	6,70	3,50	1,60	16°	84°
	APHT-160408PDR	● ● ●	APHT-32.73PD2R	16,50	9,50	4,76	0,80	11°	85°
	APHT-160416PDR	● ● ●	APHT-32.73PD4R	16,50	9,50	4,76	1,60	11°	85°
	APHT-160432PDR	● ● ●	APHT-32.73PD8R	16,50	9,50	4,76	3,20	11°	85°
	APET-160408PDR	● ● ●	APET-32.73D2R	16,76	9,50	4,76	0,80	11°	85°
	APET-160416PDR	● ○ ○	APET-32.73D4R	16,59	9,50	4,76	1,60	11°	85°
	APET-160432PDR	○ ○ ○	APET-32.73D6R	16,59	9,50	4,76	2,38	11°	85°

### GA5036 (MT-CVD coated)

A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons.

A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

### G-9120 (PVD coated)

Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

### G-915 (PVD coated)


Excellent for high-temp alloys, stainless steel, and low-carbon steels. Should be run at moderate speeds and moderate to high feeds.

Steel Products Only	Inserts and Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked Standard <input checked="" type="checkbox"/> <input type="checkbox"/>


**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# FM75L

## 75° Lead Face Mill

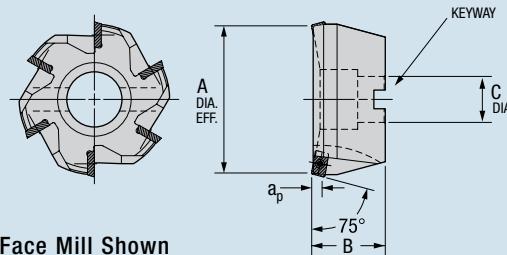


Right-Hand Face Mill Shown

Part Number	Gage 	Stock	Dimensions (millimeters)				Bolt Circle	No. of Inserts	Keyway	Standard Components	* Tune-Up Kit
FM75 S/L	Insert		A	B	C	ap					
FM75L-050R	APHT-160408PDR**	○	50	40	22	7,8	N/A	3	10	312679	TK-00781
FM75L-063R	APHT-160408PDR**	○	63	40	22	7,8	N/A	4	10	312679	TK-00782
FM75L-080R	APHT-160408PDR**	○	80	50	27	7,8	N/A	5	12	312679	TK-00783
FM75L-100R	APHT-160408PDR**	●	100	50	32	7,8	N/A	6	14	312679	TK-00784
FM75L-125R	APHT-160408PDR**	○	125	63	40	7,8	N/A	7	16	312679	TK-00785
FM75L-160R	APHT-160408PDR**	○	160	63	40	7,8	66,7	8	16	312679	TK-00786

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

\*\* APET can be used in place of APHT.

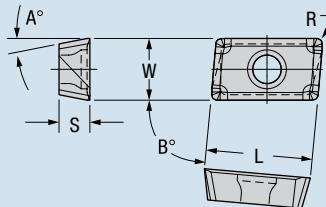

## Hushcut® Inserts

### APHT/APET

Inserts	Part Number ISO	GA5036	G-9120	G-915	Part Number ANSI	L	W	S	R	A	B
APHT/APET	APHT-160408PDR	● ● ●			APHT-32.73PD2R	16,50	9,50	4,76	0,80	11°	85°
	APHT-160416PDR	● ● ●			APHT-32.73PD4R	16,50	9,50	4,76	1,60	11°	85°
	APHT-160432PDR	○ ○ ○			APHT-32.73PD8R	16,50	9,50	4,76	3,20	11°	85°
	APET-160408PDR	● ● ●			APET-32.73D2R	16,76	9,50	4,76	0,80	11°	85°
	APET-160416PDR	● ○ ○			APET-32.73D4R	16,59	9,50	4,76	1,60	11°	85°
	APET-160432PDR	● ● ●			APET-32.73D6R	16,59	9,50	4,76	2,38	11°	85°

#### GA5036 (MT-CVD coated)

A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

#### G-9120 (PVD coated)

Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

#### G-915 (PVD coated)

Excellent for high-temp alloys, stainless steel, and low-carbon steels. Should be run at moderate speeds and moderate to high feeds.


#### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less <input checked="" type="checkbox"/> 10 Business Days or Less

# FMC90L

## 0° Lead Face Mill, Cartridge Style

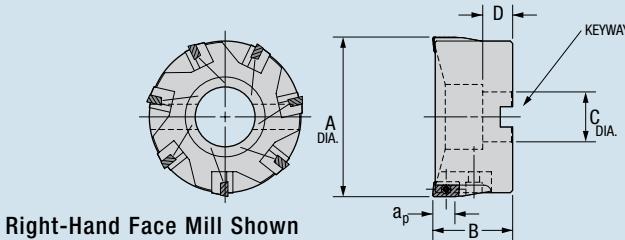

Right-Hand Face Mill Shown


Part Number	Gage	Insert	Stock	Dimensions (millimeters)						No. of Inserts	Keyway	Standard Components			*Tune-Up Kit
				A	B	C	D	ap	Cartridge Screw			Cartridge	Insert Screw	Insert Screw	
FMC90L		APHT-160408PDR**	○	80	40	22	20	13	SHCS M6-1.0 x 16mm	MC90L-R	312679	TK-02199			
FMC90L-100R		APHT-160408PDR**	●	100	63	40	28	13	SHCS M6-1.0 x 16mm	MC90L-R	312679	TK-02200			
FMC90L-125R		APHT-160408PDR**	○	125	63	40	28	13	SHCS M6-1.0 x 20mm	MC90L-R	312679	TK-02201			
FMC90L-160R		APHT-160408PDR**	○	160	63	40	28	13	SHCS M6-1.0 x 20mm	MC90L-R	312679	TK-02202			
FMC90L-200R		APHT-160408PDR**	○	200	63	60	32	13	SHCS M6-1.0 x 20mm	MC90L-R	312679	TK-02203			
FMC90L-250R		APHT-160408PDR**	○	250	63	60	32	13	SHCS M6-1.0 x 20mm	MC90L-R	312679	TK-02204			

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

\*\* APET can be used in place of APHT.

## Hushcut® Inserts

### APHT/APET

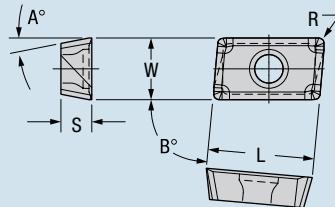

Inserts	Part Number ISO	GA5036 G-9120 G-915	Part Number ANSI	Dimensions (inches)					
				L	W	S	R	A	B
APHT/APET	APHT-160408PDR	● ● ●	APHT-32.73PD2R	16,50	9,50	4,76	0,80	11°	85°
	APHT-160416PDR	● ○ ○	APHT-32.73PD4R	16,50	9,50	4,76	1,60	11°	85°
	APHT-160432PDR	● ● ●	APHT-32.73PD8R	16,50	9,50	4,76	3,20	11°	85°
	APET-160408PDR	● ● ●	APET-32.73D2R	16,76	9,50	4,76	0,80	11°	85°
	APET-160416PDR	● ● ●	APET-32.73D4R	16,59	9,50	4,76	1,60	11°	85°
	APET-160432PDR	○ ○ ○	APET-32.73D6R	16,59	9,50	4,76	2,38	11°	85°

#### GA5036 (MT-CVD coated)

A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

#### G-9120 (PVD coated)

Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

#### G-915 (PVD coated)

Excellent for high-temp alloys, stainless steel, and low-carbon steels. Should be run at moderate speeds and moderate to high feeds.

Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked Standard <input checked="" type="checkbox"/> <input type="checkbox"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Index-O-Cut™ Milling Cutters

The Index-O-Cut™ is a high-performance milling system for all materials thanks to its high-shear cutting action and the 45° lead angle on the octagon-style insert. These mills are capable of running at higher speeds and feeds than the competition with low horsepower consumption.



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)


### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



# G-MOFHP

## Face Mill: High Positive

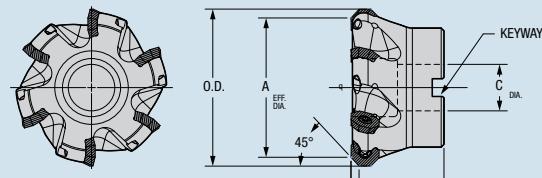


Part Number	Gage Insert	Stock	Dimensions (mm)					No. of Inserts	Keyway	Standard Components	* Tune-Up Kit Includes All Standard Components
			A	O.D.	B	C	DOC** D				
G-MOFHP-0545E050	00EW-060416	●	50	59,4	40	22	4,39	4	10	PT-546-T	TK-03249
G-MOFHP-0545E063	00EW-060416	●	63	72,4	40	22	4,39	5	10	PT-546-T	TK-03165
G-MOFHP-0545E080	00EW-060416	○	80	89,4	50	27	4,39	6	12	PT-546-T	TK-03250
G-MOFHP-0545E100	00EW-060416	●	100	109,4	50	32	4,39	7	14	PT-546-T	TK-03444
G-MOFHP-0545E125	00EW-060416	●	125	134,4	63	40	4,39	8	16	PT-546-T	TK-03445
G-MOFHP-0545E150	00EW-060416	●	150	159,4	63	40	4,39	9	16	PT-546-T	TK-03651
G-MOFHP-0545E800	00EW-060416	●	200	209,4	63	60	4,39	10	25	PT-546-T	TK-03437

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

\*\*Maximum depth of cut is 7,92mm.

## 00EW Insert

### Octagon

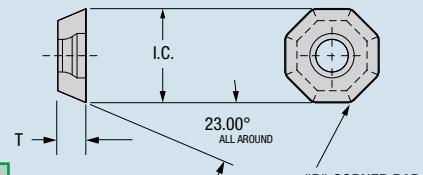

Inserts	Part Number ISO	G-9120	G-915	Part Number ANSI	Dimensions (mm)		
					A	T	R
00EW-060416	● ●			00EW-534	15,875	4,763	1,588

#### G-9120 (PVD coated)

Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

#### G-915 (PVD coated)

Excellent for high-temp alloys, stainless steel, and low-carbon steels. Should be run at moderate speeds and moderate to high feeds.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less <input checked="" type="checkbox"/> 10 Business Days or Less

# Performance Calculations

## Starting Speeds and Feeds for Index-O-Cut™ (M12)

Work Material	Insert Grades	Hardness (Hrc)	Cutting Speed (m/min)	Maximum Feed per Tooth (mm)
Low-Carbon Steel / Free Machining	G-9120	<25	365-487	0,12-0,25
Alloy Steel (4140, 4130, 6150, 8620)	G-9120	15-30	274-426	0,10-0,17
High-Carbon Steel (1080,1541, Nitr alloy, 52100)	G-9120	25-40	182-304	0,07-0,15
Tool Steel (A6, D2, P-20, H-13)	G-9120	<30	243-365	0,10-0,20
High-Temp (Inconel, Hastelloy, Waspaloy)	G-915	<35	121-243	0,07-0,17
Stainless Steel (304, 316, 17-4 PH)	G-915	<32	274-457	0,10-0,22

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## High-Shear Milling Cutters

Greenleaf's high-shear face milling cutters are industry's first choice when surface finish and material removal rate are a priority in materials such as aluminum, high-temp alloy, stainless steel or low-carbon steel. The zero-degree lead face mills offer a protected screw-on insert pocket design with an anvil backup or cartridge design in a diameter range from 40-160mm, which gives greater life to the cutter body.

The Greenleaf 45-degree face mill has a through-pocket wedge-behind design, which offers complete face adjustability to dial in the face runout and maximum chip gullets to allow even the most difficult-to-machine materials to exit the cut freely. This feature extends insert life and aids in achieving the desired surface finish.

- 40-100mm diameter, zero-degree lead are offered in a fixed pocket design.
- 100-160mm diameter, zero-degree and 45-degree lead are offered in adjustable pocket designs to pre-set face runout.



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)


### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# FTHP

## Milling Cutters: High Shear

Right-Hand Face Mill Shown



Part Number		Gage 		Dimensions (millimeters)				No. Of Inserts	Standard Components	* Tune-Up Kit	
Right Hand	Left Hand	Insert 	Stock	A	B	C	Keyway		Anvil 	Insert Screw 	Includes All Standard Components
FTHP-500063R	<b>FTHP-500063L</b>	TPCB-2204PF-R	○	63	40	22	10	4	308429	SE03-23	TK-00652
		TPCB-2204PF-L	○	63	40	22	10	4	308429	SE03-23	TK-00652
FTHP-500080R	<b>FTHP-500080L</b>	TPCB-2204PF-R	○	80	50	27	12	4	308429	SE03-23	TK-00652
		TPCB-2204PF-L	○	80	50	27	12	4	308429	SE03-23	TK-00652
FTHP-5000100R	<b>FTHP-5000100L</b>	TPCB-2204PF-R	○	100	50	32	14	5	308429	SE03-23	TK-02234
		TPCB-2204PF-L	○	100	50	32	14	5	308429	SE03-23	TK-02234

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

## TPCB Insert


Inserts	Part Number ISO	GA5036	G-915	G-53	Part Number ANSI	D	S	F	C	Dimensions (millimeters)	
	TPCB-2204PF-R	○	●	○	TPCB-43P8F-R	12,70	4,76	3,18	1,12		
	TPCB-2204PF-L	○	●	○	TPCB-43P8F-L	12,70	4,76	3,18	1,12		

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**G-915 (PVD coated)** Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

**G-53 (uncoated)** General purpose grade for steel and steel alloys. Good combination of toughness and wear resistance for milling, or as an all-around grade for mixed production applications.

"J" finish available upon request

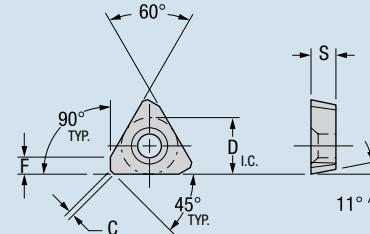


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less

# WSTHP

## End Mill: Screw-On Inserts

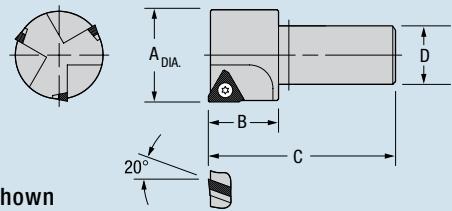

Right-Hand End Mill Shown

Part Number		Gage 		Dimensions (millimeters)				No. Of Inserts	Standard Components	* Tune-Up Kit	
Right Hand	Left Hand	Insert 	Stock	A	B	C	D		Anvil 	Insert Screw 	Includes All Standard Components
WSTHP-4032R		TPCB-2204PF-R	○	40	42	115	32	2	308429	SE03-23	TK-00650
	WSTHP-4032L	TPCB-2204PF-L	○	40	42	115	32	2	308429	SE03-23	TK-00650
WSTHP-5032R		TPCB-2204PF-R	●	50	42	115	32	3	308429	SE03-23	TK-00651
	WSTHP-5032L	TPCB-2204PF-L	○	50	42	115	32	3	308429	SE03-23	TK-00651
WSTHP-6332R		TPCB-2204PF-R	○	63	42	115	32	4	308429	SE03-23	TK-00652
	WSTHP-6332L	TPCB-2204PF-L	○	63	42	115	32	4	308429	SE03-23	TK-00652

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.


## TPCB Insert

Inserts	Part Number ISO	GA5036	G-915	G-53	Part Number ANSI	Dimensions (millimeters)			
						D	S	F	C
	TPCB-2204PF-R	○	●	○	TPCB-43P8F-R	12,70	4,76	3,18	1,12
	TPCB-2204PF-L	○	●	○	TPCB-43P8F-L	12,70	4,76	3,18	1,12

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**G-915 (PVD coated)** Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

**G-53 (uncoated)** General purpose grade for steel and steel alloys. Good combination of toughness and wear resistance for milling, or as an all-around grade for mixed production applications.

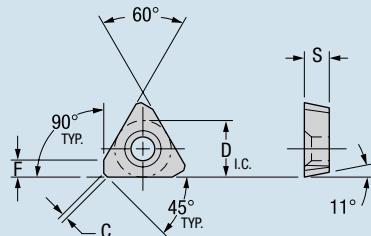

"J" finish available upon request


Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked Standard <input type="checkbox"/> <input checked="" type="checkbox"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# SHPC-345 45° Lead

45° Lead Face Mill, Negative Radial  
20° Positive Axial

Right-Hand Face Mill Shown

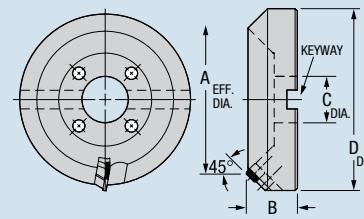

Part Number		Gage		Dimensions (millimeters)								Standard Components			* Tune-Up Kit
Right Hand	Left Hand	† Insert	Stock	A	B	C	D	Keyway	Bolt Circle	No. of Inserts	Wedge	Wedge Screw	Back-Up Plate	Includes All Standard Components	
SHPC-12-345-100R	-	SECN-42A6FR4	○	100	50	32	130	14	-	6	430996	STCM-11	307788	TK-02161	
-	SHPC-12-345-100L	SECN-42A6FR4	○	100	50	32	130	14	-	6	430996	STCM-11	307788	TK-02161	
SHPC-12-345-125R	-	SECN-42A6FR4	○	125	63	40	155	16	-	8	430996	STCM-11	307788	TK-02162	
-	SHPC-12-345-125L	SECN-42A6FR4	○	125	63	40	155	16	-	8	430996	STCM-11	307788	TK-02162	
SHPC-12-345-160R	-	SECN-42A6FR4	●	160	63	40	190	16	66,7	10	430996	STCM-11	307788	TK-02165	
-	SHPC-12-345-160L	SECN-42A6FR4	○	160	63	40	190	16	66,7	10	430996	STCM-11	307788	TK-02165	

† SECN-42A6F CAN BE USED FOR FINISHING, BUT THERE IS NOT 1,5mm CORNER RADIUS ON THE FLAT.

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

## SECN Insert

Inserts	Part Number	GA5036	GA5125	G-9120	G-9115	G-910	Part Number	Dimensions (millimeters)			
	ANSI						ANSI	D	S	F	R
	SECN-42A6FR4	● ○ ● ● ●					SECN-42A6FR4	12,70	3,18	2,38	0,25

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.


**GA5125 (MT-CVD coated)** A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

### G-9120 (PVD coated)

Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

**G-9115 (PVD coated)** Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

**G-910 (PVD coated)** A grade for high-temp alloys, stainless steel, and low carbon steels. A medium speed grade and should be applied at moderate to high feed rates.

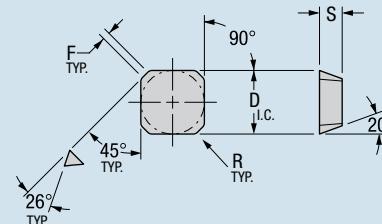

"J" polish available upon request.

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less <input checked="" type="checkbox"/> 10 Business Days or Less

## Screw-On Insert Milling Cutters

The special-duty end mills utilize the screw-on insert concept for simplicity and maximum chip clearance without hardware interference. This provides longer tool life and better surface finishes.

*Center Cutting*

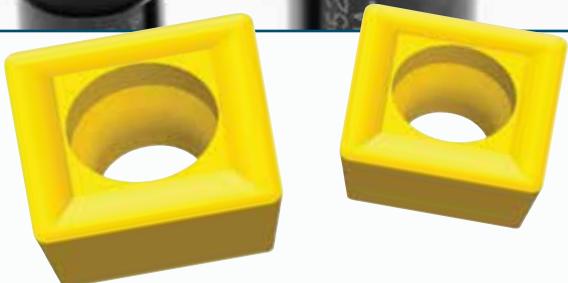


*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

# WSSCC

## 0° Lead End Mill, Center Cutting

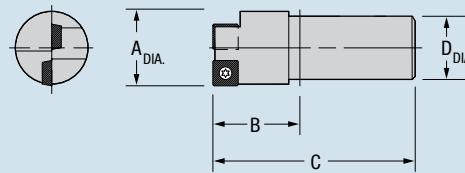

Right-Hand End Mill Shown

Part Number		Gage		Dimensions (millimeters)				No. of Inserts	Standard Components	* Tune-Up Kit	Optional Insert
Right Hand	Left Hand**	Insert	Stock	A	B	C	D		Insert Screw	Includes All Standard Components	
WSSCC-2020R		SPMT-070308	○	20	35	115	20	2	PT-543-T	TK-00737	SPMW-070308
	WSSCC-2020L	SPMT-070308	○	20	35	115	20	2	PT-543-T	TK-00737	SPMW-070308
WSSCC-2525R		SPMT-09T308	●	25	35	115	25	2	PT-559-T	TK-00738	SPMW-09T308
	WSSCC-2525L	SPMT-09T308	○	25	35	115	25	2	PT-559-T	TK-00738	SPMW-09T308
WSSCC-3232R		SPMT-120408	○	32	45	125	32	2	PT-588-T	TK-00739	SPMW-120408
	WSSCC-3232L	SPMT-120408	○	32	45	125	32	2	PT-588-T	TK-00739	SPMW-120408
WSSCC-4032R		SPMT-120408	○	40	45	125	32	2	PT-588-T	TK-00739	SPMW-120408
	WSSCC-4032L	SPMT-120408	○	40	45	125	32	2	PT-588-T	TK-00739	SPMW-120408

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

\*\* Left-Hand cutters are made to order only.

# Screw-On Inserts

## SPMT-X2


Inserts	Part Number ISO	GA5036	G-935	Part Number ANSI	Dimensions (millimeters)			
					D	L	S	R
	SPMT-070308-X2	● ●		SPMT-2.522-X2	7,94	7,94	3,18	0,80
	SPMT-09T308-X2	● ●		SPMT-32.52-X2	9,53	9,53	3,96	0,80
	SPMT-120408-X2	● ●		SPMT-432-X2	12,70	12,70	4,76	0,80

### GA5036 (MT-CVD coated)

A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

### G-935 (PVD coated)

For steel where additional resistance to mechanical and thermal shock is required. For moderate speeds and feeds.

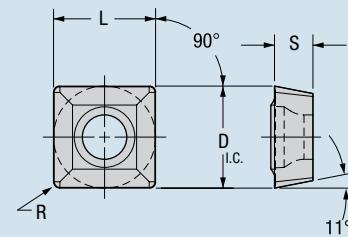


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

### Inserts and Steel Products



### Inserts Only



### Steel Products Only



# Excelerator® Milling Cutters

High-velocity cutters with ceramic inserts for use in high-temp alloys, hard metals, cast irons at high speeds and accelerated feed rates. Precision nests provide multiple insert configurations and body protection.

## Greenleaf Excelerator® Mills Set-Up and Operational Procedures

1. Thoroughly clean all insert pockets.
2. Install the inserts, making sure that they are properly seated in the pocket, and torque the insert clamp screws to the correct torque as indicated on the body of the Excelerator Milling Cutter.
3. Use Greenleaf Excelerator Mills only on machines that have adequate shield guards.
4. Run the Greenleaf Excelerator Mills using cutting parameters as recommended by the Greenleaf Tech Team. Contact Greenleaf at:  
     +814-763-2915 US  
     +31-45-404-1774 EU  
     +86-731-89954796 CN
5. For safety purposes, do not exceed the maximum RPM's etched on the Excelerator Mill. Note: There are two max RPM numbers. One (the lower RPM number) is for using the mill with carbide inserts and the other is for usage with ceramic inserts.



## Application Tips

- Air blast is highly recommended for hard milling applications.
- Maximum insert life can be achieved at a radial width of cut based on 40-60 percent of cutter diameter.
- As the width-of-cut ratio decreases, feed should be increased to maintain acceptable average chip thickness.
- Balanced toolholders are critical when operating at 10,000 RPM and higher.
- Keep tool length overhang as short as possible.
- Ramping or helical interpolation are the preferred methods of entry into the cut.
- Maintain cutter engagement as much as possible; frequent entry and exit into cuts can decrease insert life.
- When using round insert cutters, the effective cutting diameter depends on the actual depth of cut.


## Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# CP4 Series

## Positive Rake Face Mill

Right-Hand  
Face Mill Shown

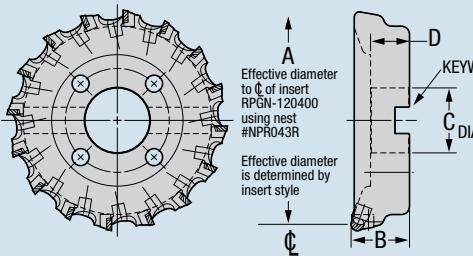

Cutter Part Number		Stock	Dimensions (millimeters)				Keyway	Bolt Circle	No. of Inserts	Standard Components			* Tune-Up Kit
Right Hand	Left Hand		A	B	C	D				Wedge	Wedge Screw	Nest Screw	
CP-4080R	—	●	80	50	27	22	12	—	6	425605	MS-1595	CO-5018	TK-01604
—	CP-4080L	○	80	50	27	22	12	—	6	425605	MS-1595	CO-5018	TK-01604
CP-4100R	—	●	100	50	32	25	14	—	8	425605	MS-1595	CO-5018	TK-01963
—	CP-4100L	○	100	50	32	25	14	—	8	425605	MS-1595	CO-5018	TK-01963
CP-4125R	—	●	125	63	40	28	16	—	10	425605	MS-1595	CO-5018	TK-01593
—	CP-4125L	○	125	63	40	28	16	—	10	425605	MS-1595	CO-5018	TK-01593
CP-4160R	—	○	160	63	40	28	16	66,7	12	425605	MS-1595	CO-5018	TK-01694
—	CP-4160L	○	160	63	40	28	16	66,7	12	425605	MS-1595	CO-5018	TK-01694
CP-4200R	—	○	200	63	60	38	25	101,6	16	425605	MS-1595	CO-5018	TK-01921
—	CP-4200L	○	200	63	60	38	25	101,6	16	425605	MS-1595	CO-5018	TK-01921
CP-4250R	—	○	250	63	60	38	25	101,6	20	425605	MS-1595	CO-5018	TK-01962
—	CP-4250L	○	250	63	60	38	25	101,6	20	425605	MS-1595	CO-5018	TK-01962
CP-4315R	—	○	315	80	60	38	25	101,6 177,8	24	425605	MS-1595	CO-5018	TK-01976
—	CP-4315L	○	315	80	60	38	25	101,6 177,8	24	425605	MS-1595	CO-5018	TK-01976

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.




Cutters are supplied less insert and nest. Nest must be purchased separately. See below.

Insert shape, size and quantity must be determined after choosing cutter and nest.





Left-hand cutters can be built to order.

## CP4 Series

### Nests

Inserts	Nest Part Number		Stock	Gage
	Right Hand	Left Hand		
	NPC043R	—	●	CPGN-120412
	—	NPC043L	○	CPGN-120412
	NPC1543R	—	●	CPGN-120412
	—	NPC1543L	○	CPGN-120412
	NPR043R	—	●	RPGN-120400
	—	NPR043L	○	RPGN-120400

The filler block nest, NPB, will act as a replacement for the inserts and insert nests. The filler block nest must be locked securely in place with the wedge to insure cutter integrity.

Inserts	Nest Part Number		Stock	Gage
	Right Hand	Left Hand		
	NPS143R	—	●	SPGN-120416
	—	NPS143L	○	SPGN-120416
	NPS1543R	—	●	SPGN-120416
	—	NPS1543L	○	SPGN-120416
	NPS4543R	—	●	SPGN-120416
	—	NPS4543L	○	SPGN-120416
	XFNPS8043R	—	●	SPGN-120412
	—	XFNPS8043L	○	SPGN-120412

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> Stocked Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less

# CP4 Series

## Positive Inserts

Inserts	Part Number ISO								Part Number ANSI	Dimensions (millimeters)				
		WG-300	WG-600	XSYTIN™-1	GSN100	G-9230	GA5036	GA5125	G-9120	G-915	D	L	S	R
	CPGN-120412	●	●	●	●	●	○	●	○	○	12,70	12,90	4,76	1,20
	CPGN-120416	●	●	○	○	○	○	●	○	●	12,70	12,90	4,76	1,60
	RPGN-120400	●	●	●	●	●	○	●	●	●	12,70	—	4,76	—
	SPGN-120412	●	●	●	○	○	●	●	●	●	12,70	12,70	4,76	1,20
	SPGN-120416	●	●	○	●	○	●	●	○	●	12,70	12,70	4,76	1,60

**WG-300® and WG-600® (Whiskered Ceramic)**

Used for milling high-temp alloys and hardened material above 45 Rc.

**XSYTIN™-1 (Phase-Toughened)**

Ideal for use in interrupted cuts, scale and milling. Capable of extreme feed rates. Excels at machining steels, cast and ductile irons, high-temp alloys and other challenging materials.

**GSN100™ (Silicon Nitride Ceramic)**

For high-speed turning, grooving and milling of gray and ductile cast irons.

**G-9230 (PVD coated)**

Carbide grade for medium to heavy machining of nickel alloys, cobalt alloys, titanium alloys, stainless steels and alloyed irons.

**GA5036 (MT-CVD coated)**

A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**GA5125 (MT-CVD coated)**

A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

**G-9120 (PVD coated)**


Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

**G-915 (PVD coated)**

Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

For additional nose radii, call Greenleaf Technical Service.

For available edge preps, please reference page ATI19 or contact Greenleaf Technical Service.

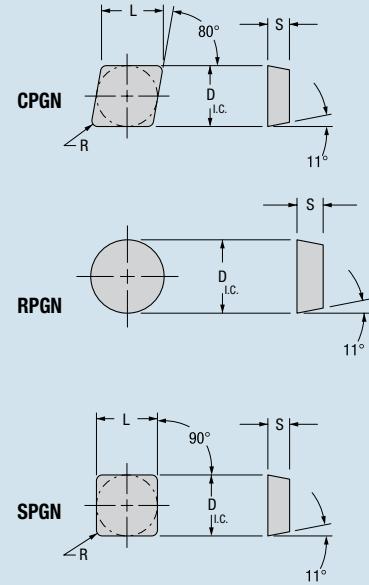

Cutter Part Number	Screw Torque Setting
CP-4080R/L	9,6 Nm
CP-4100R/L	9,6 Nm
CP-4125R/L	9,6 Nm
CP-4160R/L	9,6 Nm
CP-4200R/L	9,6 Nm
CP-4250R/L	9,6 Nm
CP-4315R/L	9,6 Nm


Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked Standard <input checked="" type="checkbox"/> <input type="checkbox"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# C4 Series

## Negative Rake Face Mill

Right-Hand  
Face Mill Shown

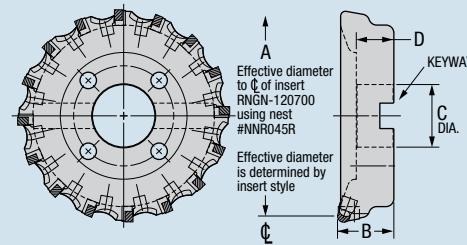

Cutter Part Number		Stock	Dimensions (millimeters)					Bolt Circle	No. of Inserts	Standard Components			* Tune-Up Kit
Right Hand	Left Hand		A	B	C	D	Keyway			Wedge	Wedge Screw	Nest Screw	Includes All Standard Components
C-4080R	-	●	80	50	27	22	12	-	6	425605	MS-1595	CO-5018	TK-01604
-	C-4080L	○	80	50	27	22	12	-	6	425605	MS-1595	CO-5018	TK-01604
C-4100R	-	●	100	50	32	25	14	-	8	425605	MS-1595	CO-5018	TK-01963
-	C-4100L	○	100	50	32	25	14	-	8	425605	MS-1595	CO-5018	TK-01963
C-4125R	-	●	125	63	40	28	16	-	10	425605	MS-1595	CO-5018	TK-01593
-	C-4125L	○	125	63	40	28	16	-	10	425605	MS-1595	CO-5018	TK-01593
C-4160R	-	●	160	63	40	28	16	66,7	12	425605	MS-1595	CO-5018	TK-01694
-	C-4160L	○	160	63	40	28	16	66,7	12	425605	MS-1595	CO-5018	TK-01694
C-4200R	-	●	200	63	60	32	25	101,6	16	425605	MS-1595	CO-5018	TK-01921
-	C-4200L	○	200	63	60	32	25	101,6	16	425605	MS-1595	CO-5018	TK-01921
C-4250R	-	○	250	63	60	32	25	101,6	20	425605	MS-1595	CO-5018	TK-01962
-	C-4250L	○	250	63	60	32	25	101,6	20	425605	MS-1595	CO-5018	TK-01962
C-4315R	-	○	315	80	60	32	25	101,6 177,8	24	425605	MS-1595	CO-5018	TK-01976
-	C-4315L	○	315	80	60	32	25	101,6 177,8	24	425605	MS-1595	CO-5018	TK-01976

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

Cutters are supplied less insert and nest. Nest must be purchased separately. See below.

Insert shape, size and quantity must be determined after choosing cutter and nest.

Left-hand cutters can be built to order.

# C4 Series

## Nests

Inserts	Nest Part Number		Stock	Gage	
	Right Hand	Left Hand	R	L	Insert
	NNC043R	—	●		CNGN-120412
	—	NNC043L	●		CNGN-120412
	NNC045R	—	●		CNGN-120712
	—	NNC045L	●		CNGN-120712
	NNC1543R	—	●		CNGN-120412
	—	NNC1543L	●		CNGN-120412
	NNC1545R	—	●		CNGN-120712
	—	NNC1545L	●		CNGN-120712
	NNR043R	—	●		RNGN-120400
	—	NNR043L	●		RNGN-120400
	NNR045R	—	●		RNGN-120700
	—	NNR045L	●		RNGN-120700

Inserts	Nest Part Number		Stock	Gage	
	Right Hand	Left Hand	R	L	Insert
	NNS143R	—	●		SNGN-120416
	—	NNS143L	●		SNGN-120416
	NNS145R	—	●		SNGN-120716
	—	NNS145L	●		SNGN-120716
	NNS1543R	—	●		SNGN-120416
	—	NNS1543L	○		SNGN-120416
	NNS1545R	—	○		SNGN-120716
	—	NNS1545L	○		SNGN-120716
	NNS4543R	—	●		SNGN-120416
	—	NNS4543L	○		SNGN-120416
	NNS4545R	—	○		SNGN-120716
	—	NNS4545L	○		SNGN-120716

For applications which will not require the maximum number of inserts, the filler block nest, NNB, will act as a replacement for the inserts and insert nests.

The filler block nest must be locked securely in place with the wedge to insure cutter integrity.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less <input checked="" type="checkbox"/> 10 Business Days or Less

# C4 Series

## Negative Inserts

Inserts	Part Number	ISO							Part Number	Dimensions (millimeters)					
		WG-300	WG-600	XSYTIN™-1	GSN100	G-9230	GA5036	GA5125	G-9120	D	L	S	R		
	CNGN-120412	●	●	●	●	●	○	●	●	○	○	12,70	12,90	4,76	1,20
	CNGN-120416	●	●	●	●	●	○	●	●	○	●	12,70	12,90	4,76	1,60
	CNGN-120712	●	●	●	●	●	○	●	●	○	●	12,70	12,90	7,94	1,20
	CNGN-120716	●	●	●	●	●	○	●	●	○	●	12,70	12,90	7,94	1,60
	RNGN-120400	●	●	●	●	●	○	●	●	○	●	12,70	—	4,76	—
	RNGN-120700	●	●	●	●	●	○	●	●	○	●	12,70	—	7,94	—
	SNGN-120412	●	●	●	●	●	○	●	●	●	●	12,70	12,70	4,76	1,20
	SNGN-120416	●	●	●	●	●	○	●	●	○	●	12,70	12,70	4,76	1,60
	SNGN-120712	●	●	●	●	●	○	●	●	○	●	12,70	12,70	7,94	1,20
	SNGN-120716	●	●	●	●	●	○	●	●	○	●	12,70	12,70	7,94	1,60

**WG-300® and WG-600® (Whiskered Ceramic)**

Used for milling high-temp alloys and hardened material above 45 Rc.

**XSYTIN™-1 (Phase-Toughened)**

Ideal for use in interrupted cuts, scale and milling. Capable of extreme feed rates. Excels at machining steels, cast and ductile irons, high-temp alloys and other challenging materials.

**GSN100™ (Silicon Nitride Ceramic)**

For high-speed turning, grooving and milling of gray and ductile cast irons.

**G-9230 (PVD coated)**

Carbide grade for medium to heavy machining of nickel alloys, cobalt alloys, titanium alloys, stainless steels and alloyed irons.

**GA5036 (MT-CVD coated)**

A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**GA5125 (MT-CVD coated)**


A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

**G-9120 (PVD coated)**

Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

**G-9115 (PVD coated)**

Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

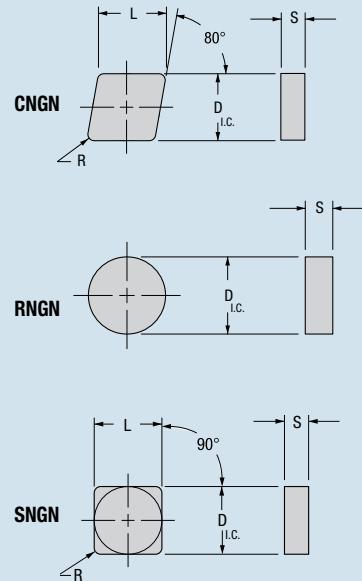

Cutter Part Number	Screw Torque Setting
C-4080R/L	9,6 Nm
C-4100R/L	9,6 Nm
C-4125R/L	9,6 Nm
C-4160R/L	9,6 Nm
C-4200R/L	9,6 Nm
C-4250R/L	9,6 Nm
C-4315R/L	9,6 Nm

For additional nose radii, call Greenleaf Technical Service.


For available edge preps, please reference page ATI19 or contact Greenleaf Technical Service.

Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked Standard <input checked="" type="checkbox"/> <input type="checkbox"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# FMRP-FMRN

## Round Insert Face Mill

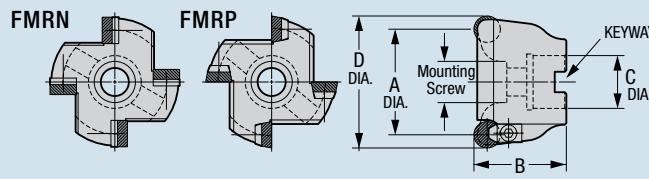

Right-Hand Cutter Shown

Part Number		Gage		Dimensions (millimeters)				† Mounting Screw	No. of Inserts	Keyway	Standard Components				* Tune-Up Kit
Right Hand	Left Hand	Insert	Stock	A	B	C	D				**Anvil	Anvil Screw	Clamp	Clamp Screw	Includes All Std. Components
FMRP-050R		RPGN-120400	●	50	40	22	62,7	M10	4	10	308341	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-01446
	FMRP-050L	RPGN-120400	○	50	40	22	62,7	M10	4	10	308341	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-01446
FMRP-063R		RPGN-120400	●	63	40	22	75,7	M10	4	10	308341	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-01446
	FMRP-063L	RPGN-120400	●	63	40	22	75,7	M10	4	10	308341	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-01446
FMRP-080R		RPGN-120400	●	80	50	27	92,7	M12	5	12	308341	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-01445
	FMRP-080L	RPGN-120400	○	80	50	27	92,7	M12	5	12	308341	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-01445
FMRP-100R		RPGN-120400	○	100	50	32	112,7	M16	6	14	308341	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-01447
	FMRP-100L	RPGN-120400	○	100	50	32	112,7	M16	6	14	308341	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-01447

\*\* For Insert RPGN-120300, use anvil 312780. For insert RPGN-120700, use no anvil.

Part Number		Gage		Dimensions (millimeters)				† Mounting Screw	No. of Inserts	Keyway	Standard Components				* Tune-Up Kit
Right Hand	Left Hand	Insert	Stock	A	B	C	D				**Anvil	Anvil Screw	Clamp	Clamp Screw	Includes All Std. Components
FMRN-050R		RNGN-120400	●	50	40	22	62,7	M10	4	10	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02699
	FMRN-050L	RNGN-120400	○	50	40	22	62,7	M10	4	10	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02699
FMRN-063R		RNGN-120400	●	63	40	22	75,7	M10	4	10	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02699
	FMRN-063L	RNGN-120400	○	63	40	22	75,7	M10	4	10	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02699
FMRN-080R		RNGN-120400	●	80	50	27	92,7	M12	5	12	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02700
	FMRN-080L	RNGN-120400	○	80	50	27	92,7	M12	5	12	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02700
FMRN-100R		RNGN-120400	●	100	50	32	112,7	M16	6	14	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02701
	FMRN-100L	RNGN-120400	○	100	50	32	112,7	M16	6	14	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02701

\*\* For Insert RNGN-120300, use anvil 313596. For insert RNGN-120700, use no anvil.

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

Left-Hand cutters are made to order only.

† Hole to suit.

## RPGN, RNGN Insert

Inserts	Part Number	Dimensions (millimeters)						Part Number	Dimensions (millimeters)			
		WG-300	WG-600	XSYTIN-1	GSN100	GA5036	GA5125	G-9120	G-915			
ISO									ANSI	D	S	
	RPGN-120300	○	○	○	○	●	○	○	●	RPGN-42	12,70	3,18
	RPGN-120400	●	●	●	●	●	●	●	●	RPGN-43	12,70	4,76
	RNGN-120300	○	○	●	○	●	○	○	●	RNGN-42	12,70	3,18
	RNGN-120400	●	●	●	●	●	○	○	●	RNGN-43	12,70	4,76
	RNGN-120700	●	●	●	●	●	○	○	●	RNGN-45	12,70	7,94

WG-300® and WG-600® (Whiskered Ceramic) Used for milling high-temp alloys and hardened material above 45 Rc.

XSYTIN™ -1(Phase-Toughened) Ideal for use in interrupted cuts, scale and milling. Capable of extreme feed rates. Excels at machining steels, cast and ductile irons, high-temp alloys and other challenging materials.


GSN100™ (Silicon Nitride Ceramic) For high-speed turning, grooving and milling of gray and ductile cast irons.

GA5036 (MT-CVD coated) A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

GA5125 (MT-CVD coated) A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

G-9120 (PVD coated) Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

G-915 (PVD coated) Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

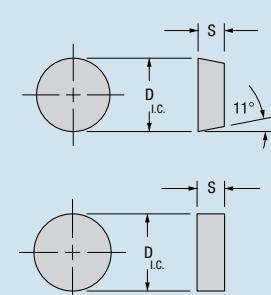


For available edge preps, please reference page AT119 or contact Greenleaf Technical Service.

# WSRP *Excelerator® Mill*

## End Mill: Round Positive Inserts

Right-Hand Cutter Shown

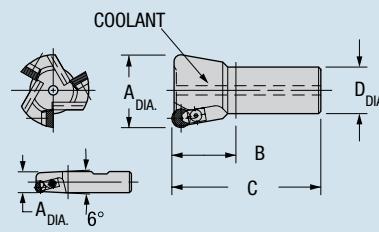

Part Number		Gage Insert	Stock	Dimensions (millimeters)				No. of Inserts	Standard Components				* Tune-Up Kit Includes All Std. Components
Right Hand	Left Hand	Insert	Stock	A	B	C	D	No. of Inserts	Anvil	Anvil Screw	Clamp	Clamp Screw	
† WSRP-1616R		RPGN-060200	●	16	32	80	16	2	—	—	430879	SHCS M2.5-.45x6mm	TK-01335
	† WSRP-1616L	RPGN-060200	○	16	32	80	16	2	—	—	430879	SHCS M2.5-.45x6mm	TK-01335
† WSRP-2020R		RPGN-070300	●	20	32	82	20	2	—	—	429323	MS-1156	TK-01339
	† WSRP-2020L	RPGN-070300	○	20	32	82	20	2	—	—	429323	MS-1156	TK-01339
WSRP-2520RA		RPGN-070300	●	25	32	82	20	3	—	—	429323	MS-1156	TK-01840
	WSRP-2520LA	RPGN-070300	○	25	32	82	20	3	—	—	429323	MS-1156	TK-01840
WSRP-2520R		RPGN-090300	●	25	32	82	20	3	—	—	425716	MS-1156	TK-01325
	WSRP-2520L	RPGN-090300	○	25	32	82	20	3	—	—	425716	MS-1156	TK-01325
WSRP-3225R		RPGN-090300	●	32	32	88	25	3	—	—	425716	MS-1156	TK-01325
	WSRP-3225L	RPGN-090300	○	32	32	88	25	3	—	—	425716	MS-1156	TK-01325
WSRP-4032R		RPGN-120400	●	40	45	105	32	3	—	—	3025-1	438920	TK-01340
	WSRP-4032L	RPGN-120400	○	40	45	105	32	3	—	—	3025-1	438920	TK-01340
WSRP-5040R		RPGN-120400	●	50	45	115	40	3	308341	FHCS M3-0.5x6mm	3025-1	438920	TK-01360
	WSRP-5040L	RPGN-120400	○	50	45	115	40	3	308341	FHCS M3-0.5x6mm	3025-1	438920	TK-01360
WSRP-6340R		RPGN-120400	●	63	45	115	40	4	308341	FHCS M3-0.5x6mm	3025-1	438920	TK-01357
	WSRP-6340L	RPGN-120400	○	63	45	115	40	4	308341	FHCS M3-0.5x6mm	3025-1	438920	TK-01357

† No thru-tool coolant is available on WSRP-1616 and WSRP-2020 cutters

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

\*\* Left-Hand cutters are made to order only.

## RPGN Insert

Inserts	Part Number ISO	Part Number							Dimensions (millimeters)		
		WG-300	WG-600	XSYTIN-1	GSN100	GA5036	GA5125	G-9120	G-915	D	S
RPGN-060200	● ● ● ○ ○ ● ○ ○ ●	RPGN-21.5								6,35	2,38
RPGN-070300	● ● ● ● ● ○ ○ ○ ○	RPGN-2.52								7,94	3,18
RPGN-090300	● ● ● ● ● ○ ○ ○ ○	RPGN-32								9,53	3,18
RPGN-120400	● ● ● ● ● ○ ○ ○ ○	RPGN-43								12,70	4,76

**WG-300® and WG-600® (Whiskered Ceramic)** Used for milling high-temp alloys and hardened material above 45 Rc.

**XSYTIN™ -1 (Phase-Toughened)** Ideal for use in interrupted cuts, scale and milling. Capable of extreme feed rates. Excels at machining steels, cast and ductile irons, high-temp alloys and other challenging materials.


**GSN100™ (Silicon Nitride Ceramic)** For high-speed turning, grooving and milling of gray and ductile cast irons.

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**GA5125 (MT-CVD coated)** A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

**G-915 (PVD coated)** Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

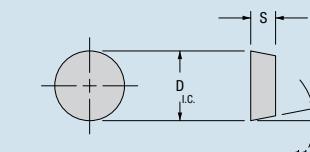

Cutter Part Number	Screw Torque Setting	Max RPM Carbide	Max RPM Ceramic
WSRP-1616R/L	1,7 Nm	15,000	40,000
WSRP-2020R/L	3,4 Nm	12,500	35,000
WSRP-2520R/L	3,4 Nm	9,500	26,000
WSRP-2520RA/LA	3,4 Nm	9,500	26,000
WSRP-3225R/L	3,4 Nm	7,500	21,000
WSRP-4032R/L	3,4 Nm	6,200	19,500
WSRP-5040R/L	3,4 Nm	4,600	13,000
WSRP-6340R/L	13,6 Nm	3,800	10,000


For available edge preps, please reference page AT119 or contact Greenleaf Technical Service.

Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/>	Stocked Standard <input checked="" type="checkbox"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# WSRN *Excelerator® Mill*

## End Mill: Round Negative Inserts

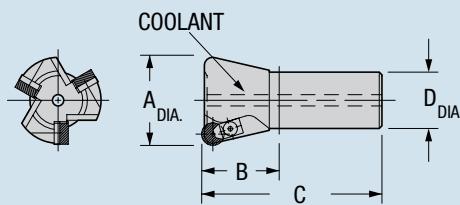

Right-Hand End Mill Shown


Part Number		Gage Insert	Stock	Dimensions (millimeters)				No. Of Inserts	Standard Components	* Tune-Up Kit	Optional Components		
Right Hand	Left Hand	Insert	Stock	A	B	C	D	**Anvil	Anvil Screw	Clamp	Clamp Screw	Insert	Shim
† WSRN-2520R		RNGN-090300	●	25	30	80	20	2	—	—	425716	MS-1156	TK-01321
	† WSRN-2520L	RNGN-090300	○	25	30	80	20	2	—	—	425716	MS-1156	TK-01321
WSRN-3225R		RNGN-090300	●	32	30	86	25	3	—	—	425716	MS-1156	TK-01325
	WSRN-3225L	RNGN-090300	○	32	30	86	25	3	—	—	425716	MS-1156	TK-01325
WSRN-4032R		RNGN-120400	●	40	45	105	32	3	—	—	3025-1	438920	TK-01340
	WSRN-4032L	RNGN-120400	○	40	45	105	32	3	—	—	3025-1	438920	TK-01340
†† WSRN-5040R		RNGN-120400	●	50	45	115	40	3	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02702
	†† WSRN-5040L	RNGN-120400	○	50	45	115	40	3	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02702
†† WSRN-6340R		RNGN-120400	○	63	45	115	40	4	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02699
	†† WSRN-6340L	RNGN-120400	○	63	45	115	40	4	313572	FHCS M3-0.5x6mm	3025-1	SHCS M5-0.8x12mm	TK-02699

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

† This shank does not have any flats.

†† To use insert RNGN-120700, remove the anvil and anvil screw.

RNGN Insert

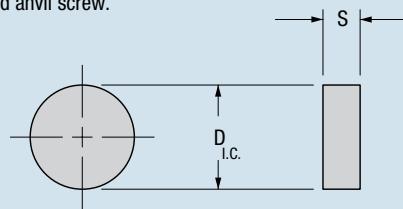

Inserts	Part Number ISO	Part Number ANSI					Dimensions (millimeters)		
		WG-300	WG-600	XSYTIN-1	GSN100	G-9120	G-915	D	S
	RNGN-090300	● ● ● ○ ○ ○						RNGN-32	9,53 3,18
	RNGN-120300	● ○ ● ○ ○ ○						RNGN-42	12,70 3,18
	RNGN-120400	● ● ● ● ○ ○						RNGN-43	12,70 4,76

Cutter Part Number	Screw Torque Setting	Max RPM Carbide	Max RPM Ceramic
WSRN-2520R/L	3,4 Nm	9,500	26,000
WSRN-3225R/L	3,4 Nm	7,500	21,000
WSRN-4032R/L	13,6 Nm	6,200	16,500
WSRN-5040R/L	13,6 Nm	4,600	13,000
WSRN-6340R/L	13,6 Nm	3,800	10,000

**WG-300® and WG-600® (Whiskered Ceramic)** Used for milling high-temp alloys and hardened material above 45 Rc.

**XSYTIN™ -1 (Phase-Toughened)** Ideal for use in interrupted cuts, scale and milling. Capable of extreme feed rates. Excels at machining steels, cast and ductile irons, high-temp alloys and other challenging materials.

**GSN100™ (Silicon Nitride Ceramic)** For high-speed turning, grooving and milling of gray and ductile cast irons.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

**G-915 (PVD coated)** Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

For available edge preps, please reference page ATI19 or contact Greenleaf Technical Service.


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less

# WSTP *Excelerator® Mill*


## End Mill: Triangle Positive Inserts

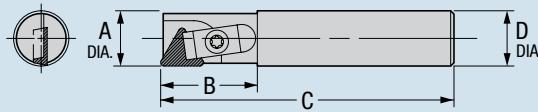

Right-Hand End Mill Shown

Part Number		Gage 	Stock	Dimensions (millimeters)				No. Of Inserts	Standard Components	* Tune-Up Kit	
Right Hand	Left Hand	Insert	Stock	A	B	C	D		Clamp	Clamp Screw	Includes All Standard Components
WSTP-1212R	WSTP-1212L	TPGN-110308	●	12	22	67	12	1	429871	PT-317T	TK-00897
		TPGN-110308	○	12	22	67	12	1	429871	PT-317T	TK-00897
WSTP-1412R	WSTP-1412L	TPGN-110308	●	14	25	70	12	1	429871	PT-317T	TK-00897
		TPGN-110308	○	14	25	70	12	1	429871	PT-317T	TK-00897
WSTP-1616R	WSTP-1616L	TPGN-110308	●	16	25	85	16	1	429871	PT-317T	TK-00897
		TPGN-110308	○	16	25	85	16	1	429871	PT-317T	TK-00897

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

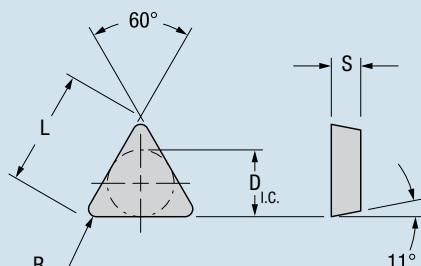

### TPGN Insert

Inserts	Part Number ISO	Dimensions (millimeters)									
		WG-300	GSN100	GA5036	G-9120	G-915	Part Number ANSI	L	D	S	R
	TPGN-110308	● ○	● ○	● ○	● ○	○	TPGN-222	11,0	6,35	3,18	0,80

**WG-300® (Whiskered Ceramic)** Used for milling high-temp alloys and hardened material above 45 Rc.

**GSN100™ (Silicone Nitride Ceramic)** For high-speed turning, grooving and milling of gray and ducile cast irons.

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

**G-915 (PVD coated)** Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

Cutter Part Number	Screw Torque Setting	Max RPM Carbide	Max RPM Ceramic
WSTP-1212R/L	2,3 Nm	19,000	35,000
WSTP-1412R/L	2,3 Nm	17,000	35,000
WSTP-1616R/L	2,3 Nm	15,000	35,000


For available edge preps, please reference page ATI19 or contact Greenleaf Technical Service.

Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input type="checkbox"/> <input checked="" type="checkbox"/>	Stocked or Available Upon Request <input type="checkbox"/> <input checked="" type="checkbox"/>	Stocked Standard <input type="checkbox"/> <input checked="" type="checkbox"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# WSSP *Excelerator® Mill*

## End Mill: Square Positive Inserts

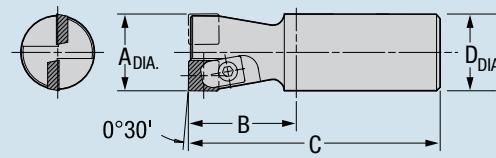

Right-Hand End Mill Shown

Part Number		Gage		Dimensions (millimeters)				No. Of Inserts	Standard Components		* Tune-Up Kit Includes All Standard Components
Right Hand	Left Hand	Insert	Stock	A	B	C	D		Clamp	Clamp Screw	
WSSP-1010R		SPGN-060208	●	10	12	52	10	1	429871	PT-317T	TK-00897
	WSSP-1010L	SPGN-060208	○	10	12	52	10	1	429871	PT-317T	TK-00897
WSSP-1212R		SPGN-060208	●	12	22	67	12	1	429871	PT-317T	TK-00897
	WSSP-1212L	SPGN-060208	○	12	22	67	12	1	429871	PT-317T	TK-00897
WSSP-1616R		SPGN-060308	●	16	25	73	16	2	430879	SHCS M2.5-0.45x6mm	TK-01335
	WSSP-1616L	SPGN-060308	○	16	25	73	16	2	430879	SHCS M2.5-0.45x6mm	TK-01335
WSSP-2020R		SPGN-060308	●	20	25	75	20	2	430879	SHCS M2.5-0.45x6mm	TK-01335
	WSSP-2020L	SPGN-060308	○	20	25	75	20	2	430879	SHCS M2.5-0.45x6mm	TK-01335
WSSP-2520R		SPGN-090308	●	25	32	82	20	2	429706	MS-1156	TK-01336
	WSSP-2520L	SPGN-090308	○	25	32	82	20	2	429706	MS-1156	TK-01336
WSSP-3225R		SPGN-090308	●	32	45	101	25	3	429706	MS-1156	TK-01337
	WSSP-3225L	SPGN-090308	○	32	45	101	25	3	429706	MS-1156	TK-01337
WSSP-4032R		SPGN-120408	●	40	45	105	32	3	3127-C	SHCS M5-0.8x12mm	TK-01338
	WSSP-4032L	SPGN-120408	○	40	45	105	32	3	3127-C	SHCS M5-0.8x12mm	TK-01338

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

## SPGN Insert

Inserts	Part Number ISO	Part Number ANSI				Dimensions (millimeters)			
		D	L	S	R	D	L	S	R
SPGN-060208	WG-300 ● ○ ● ○ ○ ○ ○ ○	SPGN-21.52	6,35	6,35	2,38	0,80			
SPGN-060308	WG-600 ● ● ● ○ ○ ○ ○ ○ ○	SPGN-222	6,35	6,35	3,18	0,80			
SPGN-090308	XSYTIN-1 ● ● ● ○ ○ ○ ○ ○ ○	SPGN-322	9,53	9,53	3,18	0,80			
SPGN-120408	G-9230 ● ● ● ○ ○ ○ ○ ○ ○	SPGN-432	12,70	12,70	4,76	0,80			
SPGN-120412	G-915 ● ○ ● ○ ○ ○ ○ ○ ○	SPGN-433	12,70	12,70	4,76	1,20			

**WG-300® and WG-600® (Whiskered Ceramic)** Used for milling high-temp alloys and hardened material above 45 Rc.

**XSYTIN™ -1 (Phase-Toughened)** Ideal for use in interrupted cuts, scale and milling. Capable of extreme feed rates. Excels at machining steels, cast and ductile irons, high-temp alloys and other challenging materials.

**GSN100™ (Silicon Nitride Ceramic)** For high-speed turning, grooving and milling of gray and ductile cast irons.


**G-9230 (PVD coated)** Carbide grade for medium to heavy machining of nickel alloys, cobalt alloys, titanium alloys, stainless steels and alloyed irons.

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**GA5125 (MT-CVD coated)** A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

**G-915 (PVD coated)** Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

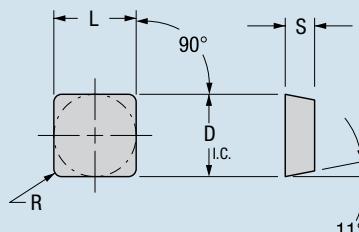

Cutter Part Number	Screw Torque Setting	Max RPM Carbide	Max RPM Ceramic
WSSP-1010R/L	2,3 Nm	25,000	40,000
WSSP-1212R/L	2,3 Nm	19,000	40,000
WSSP-1616R/L	1,7 Nm	15,000	40,000
WSSP-2020R/L	1,7 Nm	12,500	35,000
WSSP-2520R/L	3,4 Nm	9,500	26,000
WSSP-3225R/L	3,4 Nm	7,500	21,000
WSSP-4032R/L	13,6 Nm	6,200	16,500

For available edge preps, please reference page AT119 or contact Greenleaf Technical Service.


Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less <input checked="" type="checkbox"/> 10 Business Days or Less

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# WSAN

## End Mill: Parallelogram Inserts

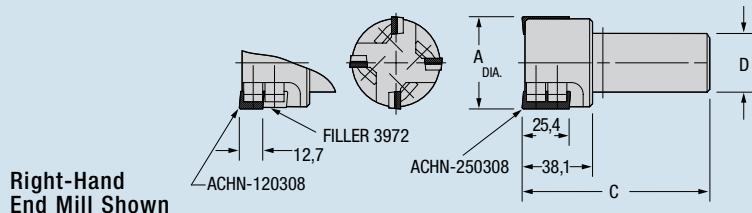

Part Number		Gage Insert		Dimensions (millimeters)			No. Of Inserts	Standard Components			* Tune-Up Kit	Optional Components		
Right Hand	Left Hand	Max 25mm DOC	Stock	A	C	D		Anvil	Anvil Screw	Clamp	Clamp Screw	Includes All Standard Components	Max 12,7 DOC Insert	Filler
<b>WSAN-2520R</b>		ACHN-250308	●	25	95	20	2	—	—	410756		TK-01351	ACHN-120308	3972
	<b>WSAN-2520L</b>	ACHN-250308-LH	○	25	95	20	2	—	—	410756		TK-01351	ACHN-120308-LH	3972
<b>WSAN-2525R</b>		ACHN-250308	○	25	101	25	2	—	—	410756		TK-01351	ACHN-120308	3972
	<b>WSAN-2525L</b>	ACHN-250308-LH	○	25	101	25	2	—	—	410756		TK-01351	ACHN-120308-LH	3972
<b>WSAN-3225R</b>		ACHN-250308	●	32	101	25	2	—	—	410756		TK-01351	ACHN-120308	3972
	<b>WSAN-3225L</b>	ACHN-250308-LH	○	32	101	25	2	—	—	410756		TK-01351	ACHN-120308-LH	3972
<b>WSAN-4032R</b>		ACHN-250308	●	40	105	32	3	AAP-3224	FHCS M3-0.5x6mm	410756		TK-01617	ACHN-120308	3972
	<b>WSAN-4032L</b>	ACHN-250308-LH	○	40	105	32	3	AAP-3224-LH	FHCS M3-0.5x6mm	410756		TK-02229	ACHN-120308-LH	3972
<b>WSAN-5040R</b>		ACHN-250308	●	50	115	40	4	AAP-3224	FHCS M3-0.5x6mm	410756		TK-01616	ACHN-120308	3972
	<b>WSAN-5040L</b>	ACHN-250308-LH	○	50	115	40	4	AAP-3224-LH	FHCS M3-0.5x6mm	410756		TK-02230	ACHN-120308-LH	3972
<b>WSAN-6340R</b>		ACHN-250308	●	63	115	40	4	AAP-3224	FHCS M3-0.5x6mm	410756		TK-01616	ACHN-120308	3972
	<b>WSAN-6340L</b>	ACHN-250308-LH	○	63	115	40	4	AAP-3224-LH	FHCS M3-0.5x6mm	410756		TK-02230	ACHN-120308-LH	3972

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

## ACHN Insert

Inserts	Part Number ISO	Dimensions (millimeters)					Part Number ANSI	S	W	L	R	
		WG-300	XSYTIN-1	GSN100	G-9230	GA5036	G-9120					
	ACHN-250308	● ●	● ● ○ ○	ACHN-3422	3,18	9,50	25,40	0,80				
	ACHN-120308	● ○	● ○ ● ○	ACHN-3222	3,18	9,50	12,70	0,80				
	ACHN-250308LH	○ ○	○ ○ ○ ○	ACHN-3422LH	3,18	9,50	25,40	0,80				
	ACHN-120308LH	○ ○	○ ○ ○ ○	ACHN-3222LH	3,18	9,50	12,70	0,80				

**WG-300® (Whiskered Ceramic)** Used for milling high-temp alloys and hardened material above 45 Rc.


**XSYTIN™ -1 (Phase-Toughened)** Ideal for use in interrupted cuts, scale and milling. Capable of extreme feed rates. Excels at machining steels, cast and ductile irons, high-temp alloys and other challenging materials.

**GSN100™ (Silicon Nitride Ceramic)** For high-speed turning, grooving and milling of gray and ductile cast irons.

**G-9230 (PVD coated)** Carbide grade for medium to heavy machining of nickel alloys, cobalt alloys, titanium alloys, stainless steels and alloyed irons.

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

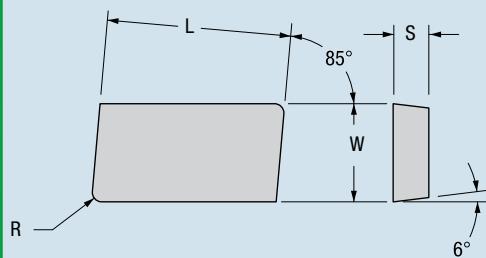

For available edge preps, please reference page ATI19 or contact Greenleaf Technical Service.


Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/>	Stocked Standard <input checked="" type="checkbox"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Excelerator® XF

## Positive High-Feed Mills

Right-Hand End Mill Shown

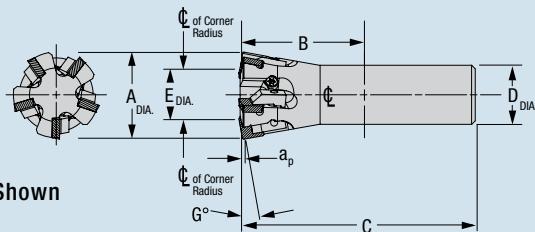


### 25mm and 40mm High-Feed End Mill: Square Positive Inserts

Cutter Order Number	Insert	Stock	Dimensions (millimeters)							No. of Inserts	Standard Components		* Tune-Up Kit Includes All Standard Components	Screw Torque Setting	Max RPM Ceramic	Max RPM Carbide
			A	B	C	D	E	ap	G		Clamp	Clamp Screw				
XFSP-2520-EM	SPGN-060308	●	25	32	82	20	14,0	0,79	10°	4	431402	PT-542-T	TK-01868	1,7 Nm	26,000	9,500
XFSP-4032-EM	SPGN-090308	●	40	45	105	32	22,8	1,32	10°	5	313256	SE02-01	TK-01905	4,0 Nm	16,500	6,200

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

Add L to part number for left-hand cutter.

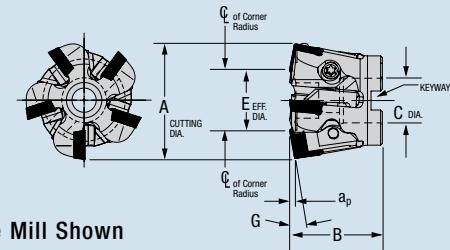

### 55mm High-Feed Face Mill: Square Positive Inserts

Cutter Order Number	Insert	Stock	Dimensions (millimeters)							No. of Inserts	Standard Components			* Tune-Up Kit Includes All Standard Components	Screw Torque Setting	Max RPM Ceramic	Max RPM Carbide
			A	B	C	E	ap	G	Keyway		Clamp	Clamp Screw	Mount Screw				
XFSP-055-FM	SPGN-120408	●	55	40	22	31,52	1,93	10°	10,4	5	431628	SE03-72	SHCS M10-1.5	TK-02228	7,9 Nm	13,300	4,600

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

Add L to part number for left-hand cutter.

## SPGN Insert

Inserts	Part Number ISO	WG-300	WG-600	XSYTIN-1	GSN100	G-9230	GA5036	GA5125	G-9120	G-915	Part Number ANSI	Dimensions (millimeters)			
												D	L	S	R
SPGN-060308	● ● ● ○ ○ ○ ● ○ ● ●	SPGN-222	6,35	6,35	3,18	0,80					SPGN-322	9,53	9,53	3,18	0,80
SPGN-090308	● ● ● ● ○ ○ ● ○ ● ●	SPGN-432	12,70	12,70	4,76	0,80									
SPGN-120408	● ● ● ○ ○ ○ ● ○ ● ●														

**WG-300® and WG-600® (Whiskered Ceramic)** Used for milling high-temp alloys and hardened material above 45 Rc.

**XSYTIN™ -1 (Phase-Toughened)** Ideal for use in interrupted cuts, scale and milling. Capable of extreme feed rates. Excels at machining steels, cast and ductile irons, high-temp alloys and other challenging materials.

**GSN100™ (Silicon Nitride Ceramic)** For high-speed turning, grooving and milling of gray and ductile cast irons.

**G-9230 (PVD coated)** Carbide grade for medium to heavy machining of nickel alloys, cobalt alloys, titanium alloys, stainless steels and alloyed irons.

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**GA5125 (MT-CVD coated)** A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.



**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

**G-915 (PVD coated)** Excellent for high-temp alloys, stainless steel, and low carbon steels. Should be run at moderate speeds and moderate to high feeds.

For available edge preps, please reference page ATI19 or contact Greenleaf Technical Service.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

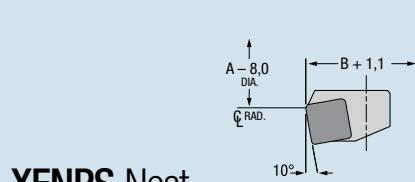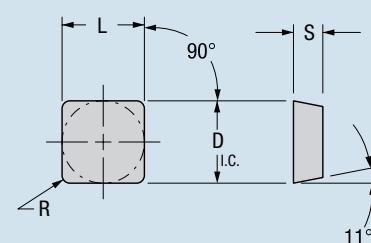

### XFNPS Nest

Nest Part Number	Gage Insert
Right Hand	Left Hand
XFNPS8043R	—
—	SPGN-120412
XFNPS8043L	SPGN-120412
SPGN-120412	SPGN-120412

Nest used with CP4 Series mills shown on M14.

Inserts and Steel Products	Inserts Only	Steel Products Only
● Stocked Standard	Stocked or Available Upon Request	10 Business Days or Less
● Stocked Standard	Stocked or Available Upon Request	10 Business Days or Less

# Performance Calculations

## Starting Speeds and Feeds for Excelerator® XF (M32)

Work Material	Insert Grades	Vc (m/min)	25mm Diameter			40mm Diameter			55mm Diameter			CP4 80-315mm $h_m$
			RPM	v <sub>f</sub>	f <sub>z</sub>	RPM	v <sub>f</sub>	f <sub>z</sub>	RPM	v <sub>f</sub>	f <sub>z</sub>	
Hardened Steel (60-65rc)	WG-600	213	2713	2604	0,24	1696	1950	0,23	1233	1541	0,25	0,050
Hardened Steel (50-59rc)	WG-600	244	3108	4103	0,33	1942	3592	0,37	1412	2612	0,37	0,076
Hardened Steel (40-49rc)	WG-600	427	5439	6744	0,31	3400	6460	0,38	2472	4697	0,38	0,076
Steel (30-39rc)	WG-600	427	5439	7079	0,33	3400	6800	0,40	2472	5438	0,44	0,076
Steel	GA5036 WG-600	183 244	2331 3108	3916 5221	0,42 0,42	1457 1943	3351 4372	0,46 0,45	1060 1413	2332 3250	0,44 0,46	0,127 0,127
High-Strength Alloys	G-915	30	387	584	0,38	243	610	0,50	177	505	0,57	0,10
Cast Iron	GSN100 GA5023	763 365	11850 5688	16865 9245	0,36 0,41	8140 3907	16535 8940	0,41 0,46	6200 2977	14173 7010	0,46 0,47	0,13 0,13
		Maximum Stepover (mm)		14,2			21,8			28,7		
		a <sub>p</sub> Max (mm)		0,8			1,4			1,9		
		a <sub>e</sub> Max (mm)		25mm			40mm			55mm		

## D.O.C. vs Effective Diameter for Excelerator® XF (M32)

Metric	25	40	55	80	100	125	160	200	250	315
a <sub>p</sub> (mm)	0,25	14,3	23,0	31,8	72,2	92,2	117,2	152,2	192,2	242,2
	0,5	17,2	25,9	34,7	75,1	95,1	120,1	155,1	195,1	245,1
	0,75	20,5	28,8	37,5	78,0	98,0	123,0	158,0	198,0	248,0
	1,0		31,7	40,4	80,9	100,9	125,9	160,9	200,9	250,9
	1,27		34,6	43,3	83,8	103,8	128,8	163,8	203,8	253,8
	1,5		37,5	46,2	86,6	106,6	131,6	166,6	206,6	256,6
	1,77			49,1	89,5	109,5	134,5	169,5	209,5	259,5
	2,0			51,9	92,4	112,4	139,9	174,9	214,9	264,9
										329,9

## Hard-Milling Speeds and Feeds for Excelerator® End Mills (M27-M31)

Insert	Recommended Axial Depth (ap=mm)	45-55 R/c 0,08-0,15 mm Starting Feed (fz = mm)		150-275 m/min Starting Speed (v)		55-60 R/c 0,06-0,1 mm Starting Feed (fz = mm)		120-210 m/min Starting Speed (v)		60-62 R/c 0,05-0,9 mm Starting Feed (fz = mm)	
		210-365 m/min Starting Speed (v)	Starting Feed (fz = mm)	Starting Speed (v)	Starting Feed (fz = mm)	Starting Speed (v)	Starting Feed (fz = mm)	Starting Speed (v)	Starting Feed (fz = mm)	Starting Speed (v)	Starting Feed (fz = mm)
ACHN 250308	0,9	260	0,09	210	0,064	170	0,064				
RPGN 060200	0,8	260	0,10	210	0,076	170	0,064				
RPGN 070300	1,0	260	0,10	210	0,076	170	0,064				
RPGN 090300	1,1	260	0,11	210	0,076	170	0,064				
RPGN 120400	1,2	260	0,11	210	0,089	170	0,076				
RNGN 090300	1,1	260	0,13	210	0,076	170	0,064				
RNGN 120400	1,2	260	0,13	210	0,089	170	0,076				
SPGN 060208	0,8	260	0,08	210	0,064	170	0,056				
SPGN 060308	0,9	260	0,09	210	0,064	170	0,064				
SPGN 090308	0,9	260	0,09	210	0,064	170	0,064				
SPGN 120408	1,0	260	0,09	210	0,076	170	0,064				
TPGN 110308	0,8	260	0,08	210	0,064	170	0,056				

**Greenleaf Sales**


 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Excelerator® Ball Nose

## End Mills

U. S. Patent No. 8,177,459 B2

Right-Hand End Mill Shown

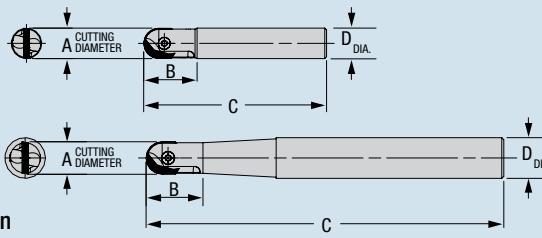

Part Number		Gage Insert	Stock	Dimensions (inches)				Standard Component	* Tune-Up Kit Includes All Standard Components	Screw Torque Setting	Max RPM Ceramic	Max RPM Carbide
Short Series	Extended Series			A	B	C	D	Insert Screw				
SSBN-M010	—	GBN-M010	●	10	17	100	16	SM30-082	TK-02291	2,0 Nm	40,000	40,000
—	SSBN-M010E	GBN-M010	●	10	17	180	16	SM30-082	TK-02291	2,0 Nm	40,000	40,000
SSBN-M012	—	GBN-M012	●	12	19	110	16	SM40-106	TK-02292	2,9 Nm	40,000	40,000
—	SSBN-M012E	GBN-M012	●	12	19	200	16	SM40-106	TK-02292	2,9 Nm	40,000	40,000
SSBN-M016	—	GBN-M016	●	16	25,4	130	20	SM50-138	TK-02293	4,4 Nm	40,000	40,000
—	SSBN-M016E	GBN-M016	●	16	25,4	220	20	SM50-138	TK-02293	4,4 Nm	40,000	40,000
SSBN-M020	—	GBN-M020	●	20	32	140	25	SM60-165	TK-02294	5,8 Nm	40,000	40,000
—	SSBN-M020E	GBN-M020	●	20	32	250	25	SM60-165	TK-02294	5,8 Nm	40,000	40,000
SSBN-M025	—	GBN-M025	●	25	36	150	32	SM70-210	TK-02295	9,2 Nm	40,000	40,000
—	SSBN-M025E	GBN-M025	●	25	36	250	32	SM70-210	TK-02295	9,2 Nm	40,000	40,000

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.  
Add L to part number for left-hand cutter.


## GBN Inserts

U. S. Patent No. 8,177,459 B2

Inserts	Part Number ISO	WG-600 ●	G-925 ●	Part Number ANSI	Dimensions (inches)
		L	T	D	
	GBN-M010	●	●	GBN-0375	12,7    3,18    10
	GBN-M012	●	●	GBN-0500	17,0    4,78    12
	GBN-M016	●	●	GBN-0625	20,3    4,78    16
	GBN-M020	●	●	GBN-0750	22,9    4,78    20
	GBN-M025	●	●	GBN-1000	31,2    4,78    25

**WG-600® (Whiskered Ceramic)** Used for milling high-temp alloys and hardened material above 45 Rc.

**G-925 (Multi-layer CVD coated)** Specifically designed for machining abrasive and difficult-to-machine materials. Should be used when milling high-temp alloys, titanium and other refractory metals, stainless steel and many cast irons. Excellent resistance to notching and deformation makes it suitable for moderate feeds at moderate to high speeds.

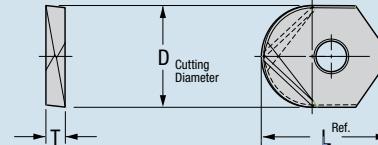

For available edge preps, please reference page ATI19 or contact Greenleaf Technical Service.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less <input checked="" type="checkbox"/> 10 Business Days or Less

# Performance Calculations

## Starting Speeds and Feeds for Excelerator® Ball Nose (M34)

DIN Designation	Work Material Imperial U.S.	Insert Grades	Cutting Speed Vc m/min	Maximum Feed per Tooth fz		
				10mm	Insert Diameter 12-16mm	20-25mm
X40CrMoV5-1	H-13 (40Hrc)	G-925	200-400	0,20	0,25	0,30
X40CrMoV5-1	H-13 (41-55Hrc)	G-925 WG-600	175-300 300-650	0,20	0,25	0,30
X40CrMoV5-1	H-13 (56+Hrc)	G-925 WG-600	150-225 250-450	0,15	0,27	0,27
X100CrMoV5-1	A2 (<40Hrc)	G-925	200-400	0,22	0,25	0,30
X100CrMoV5-1	A2 (41-54Hrc)	G-925 WG-600	200-300 300-650	0,20	0,25	0,30
X100CrMoV5-1	A2 (55+Hrc)	G-925 WG-600	150-275 200-425	0,17	0,22	0,27
40CrMnNiMo8-6-4	P-20 (<40Hrc)	G-925	200-400	0,20	0,30	0,35
40CrMnNiMo8-6-4	P-20 (41-54Hrc)	G-925 WG-600	150-300 300-750	0,20	0,25	0,01
X155CrVMo12-1	D-2 (<40Hrc)	G-925	150-300	0,20	0,25	0,30
X155CrVMo12-1	D-2 (41-54Hrc)	G-925 WG-600	120-250 275-550	0,15	0,20	0,25
X155CrVMo12-1	D-2 (55+Hrc)	G-925 WG-600	110-175 300-500	0,15	0,20	0,25
25CrMo4 - 50CrMo4	4130-4150 (<45Hrc)	G-925	200-425	0,20	0,25	0,30
Ferritic & Martensitic Alloys	400 Series SS (<40Hrc)	G-925	200-400	0,01	0,30	0,35
Ferritic & Martensitic Alloys	400 Series SS (41-55Hrc)	G-925 WG-600	175-300 300-900	0,20	0,25	0,30
Austenitic Alloys	300 Series SS (<41Hrc)	G-925	120-300	0,20	0,30	0,35
ISO-S Material	High-Temp (<42Hrc)	G-925	100-200	0,20	0,25	0,30
ISO-S Material	High-Temp (35-45Hrc)	WG-600	300-1200	0,05 – 0,08 actual chip thickness recommended		
Cast Iron	1691-85 (<40Hrc)	G-925 WG-600	200-450 1000-4000	0,01	0,3	0,35


For roughing operations, maximum recommended Width of Cut (WOC) and Depth of Cut (DOC) are 30 percent of ball diameter.

## DOC vs Effective Diameter for Excelerator® Ball Nose (M34)

Insert Diameter	Metric Depth of Cut (DOC)										
	0,13	0,25	0,38	0,64	0,89	1,27	2,54	3,18	3,81	5,08	6,35
10	2,18	3,07	3,73	4,75	5,54	6,48	8,43	8,99	9,32	9,50	
12	2,51	3,56	4,34	5,54	6,45	7,62	10,1	11,0	11,6	12,4	12,7
16	2,85	3,99	4,85	6,22	7,29	8,61	11,63	12,7	13,6	14,8	15,5
20	3,1	4,37	5,33	6,83	8,03	9,50	13,0	14,2	15,2	16,8	18,0
25	3,58	5,05	6,17	7,92	9,35	11,1	15,2	16,8	18,1	20,3	22,0

**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

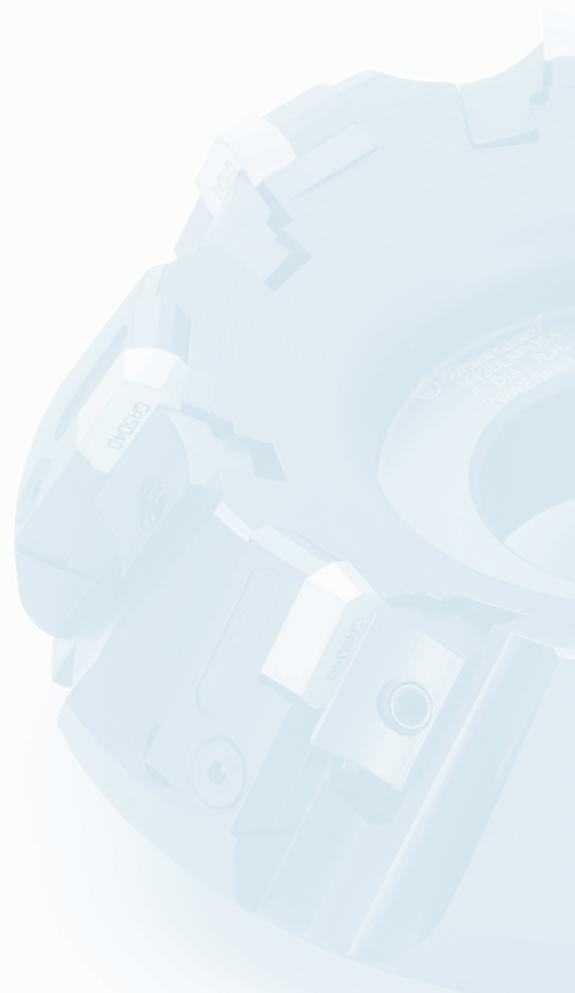

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Powermill® Milling Cutters

Ideal for heavy-duty cutting in severe interruptions and uneven surfaces. Replaceable components maximize cutter life while providing deep depths of cut. Also available as end mills, face mills and sinusoidal.



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)


### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Powermill® M400LNP-A

## 0° Lead, Neg-Pos

Right-Hand Face Mill Shown

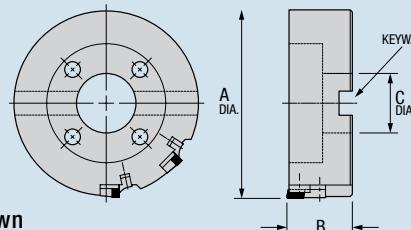

Part Number		Gage		Dimensions (millimeters)					No. of Inserts	Standard Components			* Tune-Up Kit Includes All Std. Components	Optional Components		
Right Hand	Left Hand	Insert	Stock	A	B	C	Keyway	Bolt Circle	Wedge	Wedge Screw	Anvil	Back-Up Plate	Long Insert	Anvil		
M400LNP100AR	-	LNP-335-90R	○	100	63	32	14	-	6	430992	STCM-8	S-90R	-	TK-02206	LNP-34.57-90R	S-91R
-	M400LNP100AL	LNP-335-90L	○	100	63	32	14	-	6	430992	STCM-8	S-90L	-	TK-02205	LNP-34.57-90L	S-91L
M400LNP125AR	-	LNP-335-90R	○	125	63	40	16	-	6	430992	STCM-8	S-90R	303414	TK-02208	LNP-34.57-90R	S-91R
-	M400LNP125AL	LNP-335-90L	○	125	63	40	16	-	6	430992	STCM-8	S-90L	303414	TK-02207	LNP-34.57-90L	S-91L
M400LNP160AR	-	LNP-335-90R	●	160	63	40	16	66,7	8	430992	STCM-8	S-90R	303414	TK-02210	LNP-34.57-90R	S-91R
-	M400LNP160AL	LNP-335-90L	○	160	63	40	16	66,7	8	430992	STCM-8	S-90L	303414	TK-02209	LNP-34.57-90L	S-91L
M400LNP200AR	-	LNP-335-90R	○	200	63	60	25	101,6	10	430992	STCM-8	S-90R	303414	TK-02613	LNP-34.57-90R	S-91R
-	M400LNP200AL	LNP-335-90L	○	200	63	60	25	101,6	10	430992	STCM-8	S-90L	303414	TK-02616	LNP-34.57-90L	S-91L
M400LNP250AR	-	LNP-335-90R	●	250	63	60	25	101,6	12	430992	STCM-8	S-90R	303414	TK-02214	LNP-34.57-90R	S-91R
-	M400LNP250AL	LNP-335-90L	○	250	63	60	25	101,6	12	430992	STCM-8	S-90L	303414	TK-02213	LNP-34.57-90L	S-91L
M400LNP315AR	-	LNP-335-90R	○	315	80	60	25	101,6 177,8	16	430992	STCM-8	S-90R	303414	TK-02061	LNP-34.57-90R	S-91R
-	M400LNP315AL	LNP-335-90L	○	315	80	60	25	101,6 177,8	16	430992	STCM-8	S-90L	303414	TK-02215	LNP-34.57-90L	S-91L

Maximum depth of cut with furnished parts is 17,3mm. When using the optional insert and anvil, the depth of cut is 26,9mm.

† Uses Anvil Screw FHCS M5-0.8x20mm. †† Uses Back-Up Plate Screw FHCS M3-0.5x10mm.

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.


## LNP Insert

Inserts	Part Number ANSI	GA5036	GA5125	G-9120	Part Number ANSI	Dimensions (millimeters)			
						S	W	L	F
	LNP-335-90R	● ● ○	LNP-335-90R	7,94	9,53	19,05	3,18		
	LNP-335-90L	● ● ○	LNP-335-90L	7,94	9,53	19,05	3,18		
	LNP-34.57-90R	● ○ ○	LNP-34.57-90R	11,10	9,53	28,58	3,18		
	LNP-34.57-90L	● ○ ○	LNP-34.57-90L	11,10	9,53	28,58	3,18		

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**GA5125 (MT-CVD coated)** A high-performance milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

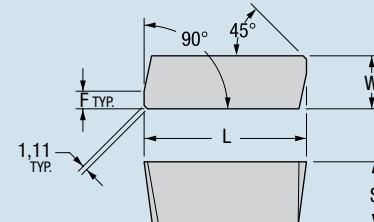

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less

# Powermill® M402LN-A

2° Lead, Neg-Neg

Right-Hand Face Mill Shown

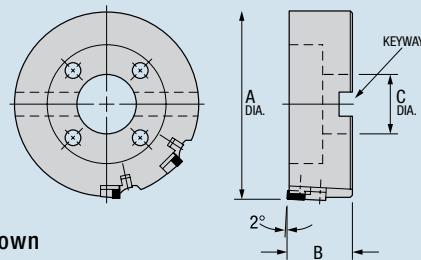

Part Number		Gage		Dimensions (millimeters)						No. of Inserts	Standard Components			* Tune-Up Kit Includes All Standard Components	Optional Components
Right Hand	Left Hand	** Insert	Stock	A	B	C	Keyway	Bolt Circle		Wedge	Wedge Screw	† Anvil	Back-Up Plate††	Long Insert	††† Anvil
M402LN100AR		General Purpose LNE-335	○	100	63	32	14	—	6	430992	STCM-8	S-21M	—	TK-02216	S-2M
	M402LN100AL		○	100	63	32	14	—	6	430992	STCM-8	S-21M	—	TK-02216	S-2M
M402LN125AR			○	125	63	40	16	—	6	430992	STCM-8	S-21M	303414	TK-02217	General Purpose S-2M
	M402LN125AL		○	125	63	40	16	—	6	430992	STCM-8	S-21M	303414	TK-02217	General Purpose S-2M
M402LN160AR			●	160	63	40	16	66.7	8	430992	STCM-8	S-21M	303414	TK-02062	LNE-34.57 S-2M
	M402LN160AL		○	160	63	40	16	66.7	8	430992	STCM-8	S-21M	303414	TK-02062	LNE-34.57 S-2M
M402LN200AR			○	200	63	60	25	101,6	10	430992	STCM-8	S-21M	303414	TK-02218	Finisher S-2M
	M402LN200AL		○	200	63	60	25	101,6	10	430992	STCM-8	S-21M	303414	TK-02218	LNE-34.57F S-2M
M402LN250AR		Powersine® LNES-335	●	250	63	60	25	101,6	12	430992	STCM-8	S-21M	303414	TK-02219	Powersine® S-2M
	M402LN250AL		○	250	63	60	25	101,6	12	430992	STCM-8	S-21M	303414	TK-02219	Powersine® S-2M
M402LN315AR			○	315	80	60	25	101,6 177,8	16	430992	STCM-8	S-21M	303414	TK-02063	LNES-34.57 S-2M
	M402LN315AL		○	315	80	60	25	101,6 177,8	16	430992	STCM-8	S-21M	303414	TK-02063	S-2M

Maximum depth of cut with furnished parts is 17,3mm. When using the optional insert and anvil, the depth of cut is 26,9mm.

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.



\*\* Specify: General Purpose – LNE, Powersine® – LNES, or Finisher – LNEF.

† Uses Anvil Screw FHCS M5-0.8x20mm.

†† Uses Back-Up Plate Screw FHCS M3-0.5x10mm.

††† Used with insert LNE-34.57.

## LNE, LNES Insert


Inserts	Part Number ANSI	GA5036	GA5125	G-9120	Part Number ANSI	Dimensions (millimeters) S      W      L
	LNE-335	●	○	●	LNE-335	7,94      9,53      19,05
	LNE-34.57	●	●	●	LNE-34.57	11,10      9,53      28,58
	LNE-335F	●	○	○	LNE-335F	7,94      9,53      19,05
	LNE-34.57F	●	○	○	LNE-34.57F	11,10      9,53      28,58
	LNES-335	●	●	○	LNES-335	7,94      9,53      19,05
	LNES-34.57	●	○	○	LNES-34.57	11,10      9,53      28,58

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.


**GA5125 (MT-CVD coated)** A high-performance milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

### LNE/LNE-F



### LNES

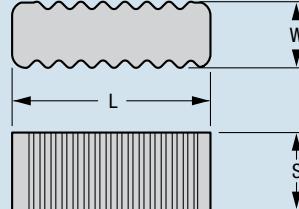

Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/> <input type="checkbox"/>	Stocked Standard <input checked="" type="checkbox"/> <input type="checkbox"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## Finishing Inserts (LNE-F)

Finishing inserts incorporating a 2° approach angle ground on the surface-generating edge of the insert are available to suit certain cutters in this range. When these inserts are an available option, they are listed at the bottom of the page with the standard insert. Finishing inserts should be used in complete sets for optimum results.

This is unlike "wiper" inserts which are designed to be higher on the cutter face and can be used in one or in a limited number of positions.

Finishing inserts will generally insure a better surface finish by their increased progressive wiping action on the surface being generated.

We do not recommend the use of finishing inserts under all conditions. Standard inserts will produce better life between indexes, and in the majority of cases the finish produced will be satisfactory for all but the most demanding situations.

## Sinusoidal Inserts (LNES)

Sinusoidal inserts having a "wavy" or sine wave type edge have been designed to suit the Powermill® cutter line. This concept allows the chip to be produced as a series of small segments rather than as a continuous band of chip.

The effect is a lowering of cutting forces which is especially helpful when dealing with long spindle extensions to reduce deflective forces. This style of insert does not increase productivity under normal rigid conditions versus a standard insert.

Unique to the Greenleaf Powermill® sinusoidal insert design is the fact that all four edge variations are built into a single insert. There is, therefore, only one insert and not a set of inserts as is common with other manufacturers. The inserts are simply placed into the body with the clearly visible indicator dots in sequence:

- , ••, •••, ••••.

### **Greenleaf Sales**


**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard	<input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less
<input checked="" type="checkbox"/> Stocked Standard	<input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less

# Powermill® M430LNP-A

## 30° Lead, Neg-Pos

Right-Hand Face Mill Shown

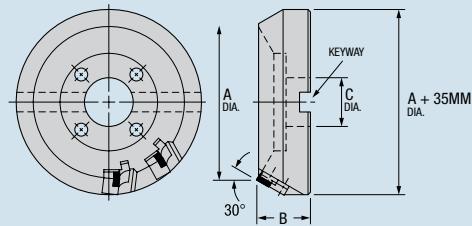

Part Number		Gage Insert	No. of Inserts	Wiper ** Insert	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit Includes All Std. Components	Optional Components	
Right Hand	Left Hand	Insert	No.	** Insert	Stock	A	B	C	Keyway	Bolt Circle	Wedge	Wedge Screw	†Anvil	Back-Up Plate††	Long Insert	†††Anvil
M430LNP100AR		LNP-335R	6	LNP-335RW	○	100	63	32	14	-	430992	STCM-8	S-21M	303414	TK-02217	S-2M
	M430LNP100AL	LNP-335L	6	LNP-335LW	○	100	63	32	14	-	430992	STCM-8	S-21M	303414	TK-02217	S-2M
M430LNP125AR		LNP-335R	6	LNP-335RW	○	125	63	40	16	-	430992	STCM-8	S-21M	303414	TK-02217	General
	M430LNP125AL	LNP-335L	6	LNP-335LW	○	125	63	40	16	-	430992	STCM-8	S-21M	303414	TK-02217	Purpose
M430LNP160AR		LNP-335R	8	LNP-335RW	●	160	63	40	16	66,7	430992	STCM-8	S-21M	303414	TK-02062	LNP-34.57
	M430LNP160AL	LNP-335L	8	LNP-335LW	○	160	63	40	16	66,7	430992	STCM-8	S-21M	303414	TK-02062	R or L
M430LNP200AR		LNP-335R	10	LNP-335RW	○	200	63	60	25	101,6	430992	STCM-8	S-21M	303414	TK-02218	S-2M
	M430LNP200AL	LNP-335L	10	LNP-335LW	○	200	63	60	25	101,6	430992	STCM-8	S-21M	303414	TK-02218	Wiper
M430LNP250AR		LNP-335R	12	LNP-335RW	●	250	63	60	25	101,6	430992	STCM-8	S-21M	303414	TK-02219	LNP-34.57F
	M430LNP250AL	LNP-335L	12	LNP-335LW	○	250	63	60	25	101,6	430992	STCM-8	S-21M	303414	TK-02219	RW or LW
M430LNP315AR		LNP-335R	16	LNP-335RW	○	315	80	60	25	101,6 177,8	430992	STCM-8	S-21M	303414	TK-02063	S-2M
	M430LNP315AL	LNP-335L	16	LNP-335LW	○	315	80	60	25	101,6 177,8	430992	STCM-8	S-21M	303414	TK-02063	S-2M

Maximum depth of cut with standard parts is 12,7 mm. When using the optional insert and anvil, the depth of cut is 22,3 mm.

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter. \*\* See below for explanation of wiper insert.

† Uses Anvil Screw FHCS M5-0.8x20mm. †† Uses Back-Up Plate Screw FHCS M3-0.5x10mm. ††† Used with insert LNP34.57R/L.


## LNP Insert

Inserts	Part Number ANSI	Part Number			Dimensions (millimeters)					
		GA5036	GA5125	G-9120		ANSI	S	W	L	F
	LNP-335R	●	○	●	LNP-335R	7,94	9,53	19,05	2,54	
	LNP-335L	●	○	●	LNP-335L	7,94	9,53	19,05	2,54	
	LNP-335RW	●	○	●	LNP-335RW	7,94	9,02	21,54	N/A	
	LNP-335LW	●	○	●	LNP-335LW	7,94	9,02	21,54	N/A	
	LNP-34.57R	●	○	●	LNP-34.57R	11,10	9,53	28,58	2,54	
	LNP-34.57L	●	●	●	LNP-34.57L	11,10	9,53	28,58	2,54	
	LNP-34.57RW	●	○	○	LNP-34.57RW	11,10	9,02	31,19	N/A	
	LNP-34.57LW	●	○	○	LNP-34.57LW	11,10	9,02	31,19	N/A	

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**GA5125 (MT-CVD coated)** A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

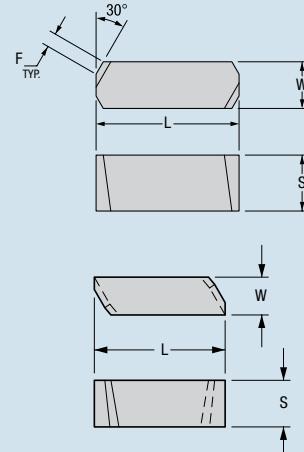

## Wiper Inserts (LNP-RW/LW)

A wiper insert is designed to be higher above the face of the cutter compared to standard inserts and has a broader wiping flat or radius to effectively wipe out any tool marks produced by the tolerance differences in the standard inserts.

Wiper inserts can be used effectively in a single pocket in smaller diameter cutters and in multiples of two or three in larger cutters to produce a superior finish.

The grades selected for wiper inserts will generally be harder (higher 'C' classification) to combat the trend toward more rapid wear caused by the increased surface contact. Wiper inserts should only be used when the required RMS value is very low.

Always bear in mind that the majority of finish problems in milling come from lack of rigidity of the set-up, deflection of the part piece or machine spindle, excessive overhangs, and poor cleanliness and assembly practices in the cutter body. Wiper inserts cannot be expected to resolve these problems.


Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/>	Stocked Standard <input checked="" type="checkbox"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Powermill® C430LNP-H

## 30° Lead, Neg-Pos, Heavy Duty

Right-Hand Face Mill Shown

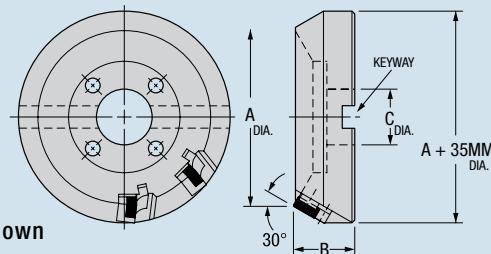

Part Number		Gage Insert	Stock	Dimensions (millimeters)					No. of Inserts	Standard Components			* Tune-Up Kit	
Right Hand	Left Hand	Insert	Stock	A	B	C	Keyway	Bolt Circle		Wedge	Wedge Screw	† Anvil	Back-Up Plate ††	Includes All Standard Components
C430LNP200HR	-	LNP-44.57R	○	200	63	60	25	101,6	8	430992	STCM-8	S-24M	303414	TK-02220
-	C430LNP200HL	LNP-44.57L	○	200	63	60	25	101,6	8	430992	STCM-8	S-24M	303414	TK-02220
C430LNP250HR	-	LNP-44.57R	○	250	63	60	25	101,6	10	430992	STCM-8	S-24M	303414	TK-02221
-	C430LNP250HL	LNP-44.57L	○	250	63	60	25	101,6	10	430992	STCM-8	S-24M	303414	TK-02221
C430LNP315HR	-	LNP-44.57R	○	315	80	60	25	101,6 177,8	12	430992	STCM-8	S-24M	303414	TK-02222
-	C430LNP315HL	LNP-44.57L	○	315	80	60	25	101,6 177,8	12	430992	STCM-8	S-24M	303414	TK-02222

Maximum depth is 22.4mm.

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter.

† Uses Anvil Screw FHCS M5-0.8x25mm. †† Uses Back-Up Plate Screw FHCS M3-0.5x10mm.


## LNP Insert

Inserts	Part Number ANSI	GA5036	GA5125	G-9120	Part Number ANSI	Dimensions (millimeters)			
						S	W	L	F
	LNP-44.57R	●	○	●	LNP-44.57R	11,10	12,70	28,58	2,54
	LNP-44.57L	●	○	●	LNP-44.57L	11,10	12,70	28,58	2,54

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**GA5125 (MT-CVD coated)** A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

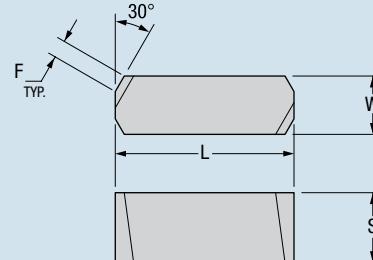

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Inserts and Steel Products	Inserts Only	Steel Products Only
<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> Stocked Standard <input checked="" type="checkbox"/> Stocked or Available Upon Request	<input checked="" type="checkbox"/> 10 Business Days or Less <input checked="" type="checkbox"/> 10 Business Days or Less

# Powermill® C430LNP-W

## 30° Lead, Neg-Pos, Finishing

Right-Hand Face Mill Shown

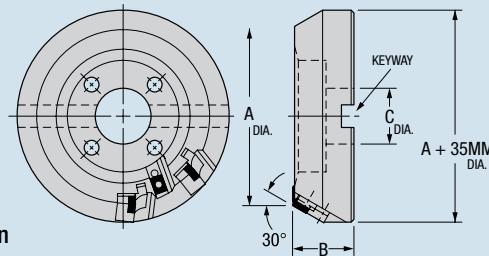

Part Number		Gage	No. of Inserts	** Wiper	No. of Inserts	Stock	Dimensions (millimeters)					Standard Components	*Tune-Up Kit Includes All Std. Components	Optional Components			
Right Hand	Left Hand	Insert	No. of Inserts	Insert	No. of Inserts	Stock	A	B	C	Keyway	Bolt Circle	Wedge	Wedge Screw	Back-Up Plate	Wiper Insert Screw	++ Anvil	
C430LNP200WR		LNP-335R	8	YCE-434-01	2	○	200	63	60	25	101,6	430992	STCM-8	S-21M	303414	SE03-70	TK-02223 S-2M
	C430LNP200WL	LNP-335L	8	YCE-434-01	2	○	200	63	60	25	101,6	430992	STCM-8	S-21M	303414	SE03-70	TK-02223 S-2M
C430LNP250WR		LNP-335R	10	YCE-434-01	2	○	250	63	60	25	101,6	430992	STCM-8	S-21M	303414	SE03-70	TK-02224 S-2M
	C430LNP250WL	LNP-335L	10	YCE-434-01	2	○	250	63	60	25	101,6	430992	STCM-8	S-21M	303414	SE03-70	TK-02224 S-2M
C430LNP315WR		LNP-335R	12	YCE-434-01	4	○	315	80	60	25	101,6 177,8	430992	STCM-8	S-21M	303414	SE03-70	TK-02225 S-2M
	C430LNP315WL	LNP-335L	12	YCE-434-01	4	○	315	80	60	25	101,6 177,8	430992	STCM-8	S-21M	303414	SE03-70	TK-02225 S-2M

The effective finish diameter is 25,4 mm less than the "A" diameter.

Maximum depth is 22,4 mm.

\* Tune-Up Kits include all standard components and necessary wrenches to allow you to completely refurbish cutter. \*\* See below for explanation of wiper insert.

† Uses Anvil Screw FHCS M5-0.8x20mm. †† Uses Back-Up Plate Screw FHCS M3-0.5x10mm. ††† Used with insert LNP34.57R/L.

## LNP, YCE Insert


Inserts	Order Number ANSI	Order Number ANSI				Order Number ANSI	Dimensions (millimeters)			
		GA5036	GA5125	G-9120	G-60		S	W	L	F
  	LNP-335R	●	●	●		LNP-335R	7,94	9,53	19,05	2,54
	LNP-335L	●	●	○	●	LNP-335L	7,94	9,53	19,05	2,54
	LNP-34.57R	●	●	●	●	LNP-34.57R	11,10	9,53	28,58	2,54
	LNP-34.57L	●	●	●	●	LNP-34.57L	11,10	9,53	28,58	2,54
	YCE-434-01				●	YCE-434-01	14,28	6,35	19,05	N/A

**GA5036 (MT-CVD coated)** A high-performance grade for milling steels at high speed. Should be used when milling forged and cast steels and selected ductile irons. A unique combination of toughness and heat resistance makes it suitable for heavy- and light-duty milling at high speeds.

**GA5125 (MT-CVD coated)** A high-performance carbide milling grade especially suited for manganese steel. Also applicable on chrome-moly steel, tool steel and similar high alloy steels.

**G-9120 (PVD coated)** Carbide grade engineered for milling steel castings and steel forgings. Should be run at moderate to heavy feed rates and depths of cut.

**G-60 (uncoated)** Finishing of steel and steel castings under favorable conditions in the wiper configuration.

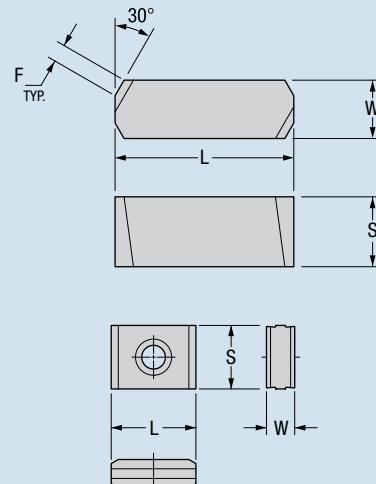

Wiper Insert

## Wiper Inserts (YCE)

A wiper insert is designed to be higher above the face of the cutter compared to standard inserts and has a broader wiping flat or radius to effectively wipe out any tool marks produced by the tolerance differences in the standard inserts.


The grades selected for wiper inserts will generally be harder (higher 'C' classification) to combat the trend toward more rapid wear caused by the increased surface contact.

Wiper inserts should only be used when the required RMS value is very low.

Always bear in mind that the majority of finish problems in milling come from lack of rigidity of the set-up, deflection of the part piece or machine spindle, excessive overhangs, and poor cleanliness and assembly practices in the cutter body. Wiper inserts cannot be expected to resolve these problems.

Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input checked="" type="checkbox"/>	Stocked or Available Upon Request <input checked="" type="checkbox"/>	Stocked Standard <input checked="" type="checkbox"/>

## Additional Greenleaf Milling Inserts



CDE 313L32  
(418470)

CDE 313L51  
(419469)

CDE 313R41  
(419155)

CDE 313L41  
(419156)

CDE 313R01  
(418991)

CDE 313R51  
(419648)

CDE 313R52  
(424817)

CDE 313L52  
(424818)

CDE 322L02  
(308859)

CDE 313R30  
(418647)

CDE 314L39  
(429251)

CDE 322R02  
(306908)

CDE 322R04  
(428334)

CDE 322L03  
(427241)

CDE 322R03  
(427240)

CDE 322L05  
(306968)

CDE 322R05  
(306871)

CDE 323L05  
(312338)

CDE 323R04  
(424081)

CDE 323R23  
(419375)

CDE 323L23  
(427812)

CDE 323R05  
(307715)

CDE 323L30  
(311843)

CDE 323R30  
(311842)

CDE 323R31  
(310840)

CDE 323L31  
(310841)


CDE 323R32  
(311014)

CDE 323L32  
(311015)

CDE 424L01  
(418969)

CDE 424R01  
(418338)

GDE 323R04  
(426277)



LNE 323-02  
(36767)

LNE 324-01  
(418796)

LNE 324-05  
(302414)

LNE 414-08  
(309917)

LNE 424-20  
(306518)

LNE 434-02  
(36768)

LNE 434-05  
(418967)

LNE 434-20  
(306242)

LNE 443-01  
(307357)

LNE 443-20  
(418641)

LNE 446-01  
(38548)




FPE-21.521  
(418104)



DXE 314-03  
(427721)

DXE 324-007  
(427719)



LSE 323L02  
(311143)

LSE 323R02  
(311142)

LSE 434R01  
(418956)

LSE 444R02  
(426244)

LSE 446L01  
(418959)

LSE 446R01  
(418958)


### **Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com


EU +31-45-404-1774 • eurooffice@greenleafcorporation.com

CN +86-731-89954796 • info@greenleafcorporation.com.cn


www.greenleafglobalsupport.com • www.greenleafcorporation.com




**SEKR 42AFN**  
(419318)




SNCN43A2  
SNCN43A4  
SNCN63A6  
SNCN63A8  
SNCN64A8  
SNCN84A8




SNCN63D8




SNCN43E4  
SNCN63E8



**SPE 33R01**  
(418993)  
**SPE 55L04**  
(421410)



**TPK-43P2R**  
(426296)



**YCE 434-01**  
(417787)  
**YCE 446-01**  
(423783)

#### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## CARBIDE

**Greenleaf offers a comprehensive line of carbide inserts in grades ranging from sub-micron C-1 through C-8 classifications. An industry pioneer in coated carbide, Greenleaf offers a variety of uncoated, MT-CVD coated and PVD-coated grades. Carbide inserts are available in ANSI standard geometries with multi-purpose chip-breakers for heavy roughing through finishing.**

### COATED

**GA5036** A high-performance MT-CVD coated grade for milling steels at high speed. GA5036 should be used when milling forged and cast steels and selected ductile irons. GA5036 has a unique combination of toughness and heat resistance making it suitable for heavy- and light-duty milling at high cutting speeds.

**GA5125** New high-performance MT-CVD coated carbide milling grade especially suited for manganese steel. GA5125 is also applicable on chrome-moly steel, tool steel and similar high alloy steels. GA5125 provides excellent resistance to abrasion, crater wear, thermal shock, deformation and edge build-up. GA5125 should be applied at high speeds with moderate feed rates.

**G-910** PVD-coated grade for milling high-temp alloys, stainless steel, and low carbon steels. G-910 is a medium-speed grade and should be applied at moderate to high feed rates.

**G-9120** PVD-coated grade for milling and turning steel castings and steel forgings. G-9120 is engineered to maximize productivity at moderate to heavy feed rates and depths of cut.

**G-915** Multi-layer PVD-coated grade, excellent for milling and turning high-temp alloys, stainless steel, and low-carbon steels. The multi-layer PVD coating adds heat and abrasion resistance to the tough, shock-resistant substrate. G-915 should be run at moderate speeds and moderate to high feeds in milling and interrupted turning applications.

**G-9230** PVD-coated grade developed for medium to heavy machining of nickel alloys, cobalt alloys, titanium alloys, stainless steels and alloyed irons. G-9230 has superior wear resistance and toughness and is excellent for cast and forged scale machining conditions.

**G-935** Multi-layer PVD-coated grade for steel milling and turning applications requiring additional resistance to mechanical and thermal shock. The multi-layered PVD coating increases the speed capability and wear resistance in tough milling and interrupted turning applications.

### UNCOATED

**G-53** Excellent general-purpose milling grade for steel and steel alloys at moderate speeds and feeds. Good combination of toughness and wear resistance for milling, or as an all-around grade for mixed production applications. G-53 is not recommended for continuous turning.

**G-60** Heavy, rough turning of steel, steel castings, and steel forgings. Apply G-60 at moderate speeds and heavy feed rates and depths of cut. More wear resistant than G-50, but lower in toughness.

### CERAMIC

**Greenleaf is the industry leader in the development and manufacture of ceramic and coated ceramic inserts in ANSI standard and special geometries. Some of the most prominent include:**

#### WG-300®

Whisker-reinforced ceramic with excellent wear and shock resistance at high surface speeds. WG-300 is very effective at machining nickel- and cobalt-based super alloys, and other hard materials at metal removal rates up to 10 times higher than carbide.

#### WG-600®

Coated whisker-reinforced ceramic offering longer tool life and better performance over uncoated ceramics due to outstanding thermal properties and shock-resistance at high cutting speeds. Application areas include rough and finish turning, as well as high-performance milling of high-strength alloys, hardened steels and select stainless steels. U.S. Patent No. 6,447,896 B1.

**XSYTIN™-1** New phase-toughened ceramic capable of extreme feed rates. XSYTIN™-1 excels at machining a wide variety of materials including steels, cast and ductile irons, high-temperature alloys and other challenging metals. XSYTIN™-1 is ideal for use in interrupted cuts, scale, abrasive casting materials and milling.


#### GSN100™

New engineered blend of silicon nitride and proprietary toughening agents that redefines productivity in the machining of cast iron. GSN100 delivers outstanding tool life at high cutting speeds in turning, grooving and milling applications.

#### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

## Insert Grade Reference for Milling

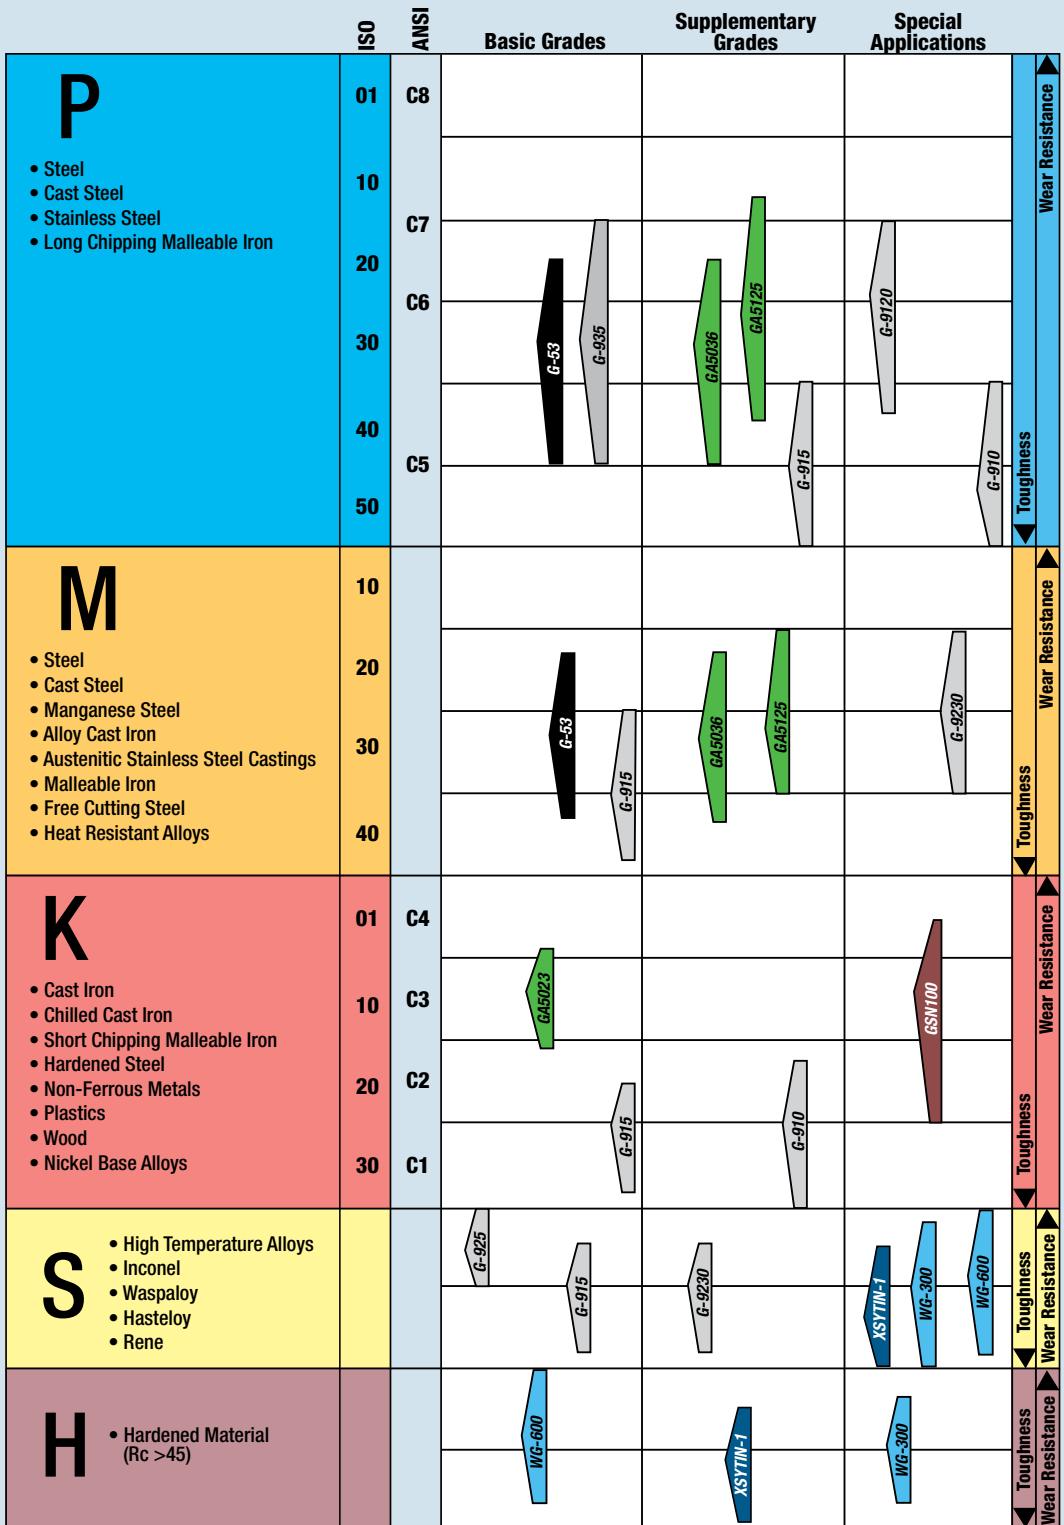


- PVD Coated Grades 
- Uncoated Grades 
- MT-CVD Coated Grades 
- Whiskered Ceramic 
- Phase-Toughened 
- Silicon Nitride 

## Selection of Correct Cutter Diameter

Select a cutter diameter greater than the workpiece width by a ratio of approximately 1.5 to 1. This will ensure that each insert enters the cut without the frictional, no-chip phase which occurs when attempting to cut the full cutter diameter. Also, the insert leaves the part without reducing the chip down to zero. These benefits can greatly extend the insert life.


With smaller, low-power machines it will be better to select a smaller cutter and take two passes rather than a large diameter cutter forced to operate at low tooth loads (feed rates) to avoid stalling of the spindle.

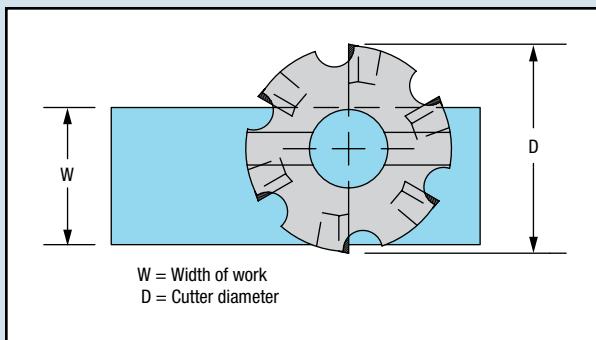


Choose a cutter diameter approximately 1.5 times the workpiece width.

## Hand of Cutters

A *right-hand cutter* is one which, when viewed from above, rotates clockwise relative to the workpiece.

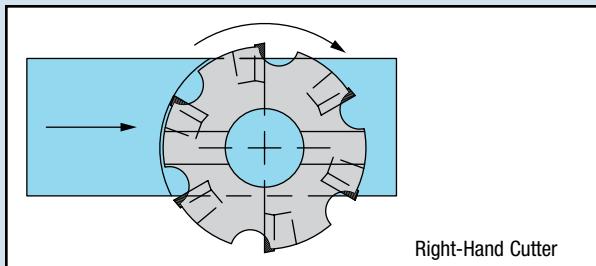

A *left-hand cutter* is one which, when viewed from above, rotates counterclockwise relative to the workpiece.

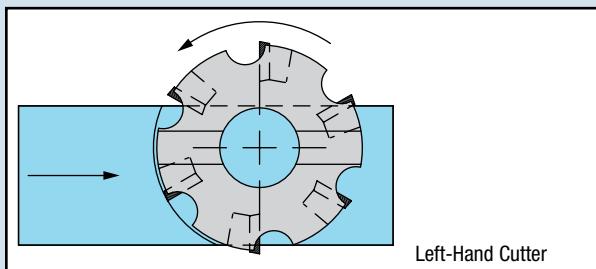


## Lead Angle

The lead angle of a milling cutter is not intended for producing a specific angle on the work. In fact, because of compound angles, a given lead angle will not produce that angle exactly.

The purpose of lead angle is to thin the chip while absorbing a given depth of cut over a greater portion of the insert edge. This results in improved tool life and, for a given horsepower, a greater depth potential.

For example, 30° lead angle is a good choice for face milling in general purpose applications.

The exception to the previous statement is the 0° lead cutter, sometimes called a 90° cutter, which is designed for milling to square shoulders and producing a 90° corner.

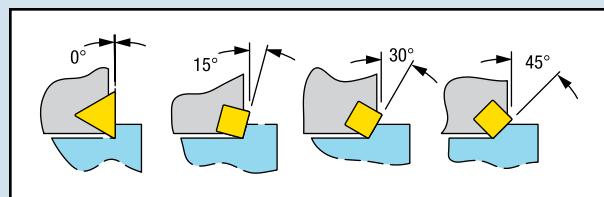


## Lead Angles and Cutting Forces

The lead angle of a milling cutter has a direct effect upon the cutting forces being presented to the workpiece, cutting tool, and machine.


The resultant force is always directly perpendicular to the cutting edge. A lead angle may, therefore, be a major consideration in how we want to direct the forces.

For example, in a thin section workpiece, a high lead angle may cause deflection since there is more tendency to "push" the part away from the cutter. On the other hand, a 0° lead cutter has more deflective force on the machine spindle.

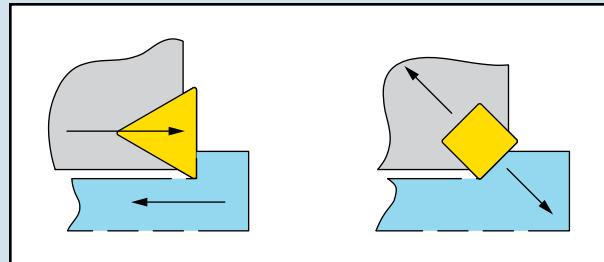


## The Round Insert Cutter

The exception to the rule in lead angle cutting forces is the round insert. With a round insert, the lead angle is entirely dependent upon the depth of cut. As the depth increases, the lead angle decreases. If cutting half the diameter deep, there is effectively 0° lead angle.

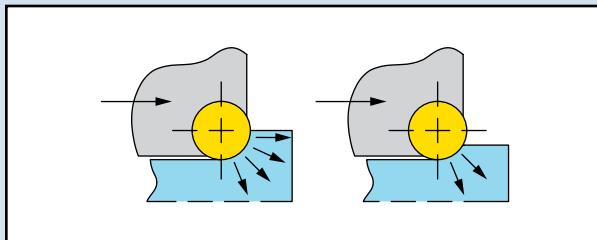

In the milling of work hardening materials such as Inconel, and using a round insert cutter, there will be a direct relationship between depth of cut and speed of development of notch wear. The shallower the cut, the slower the notch wear.

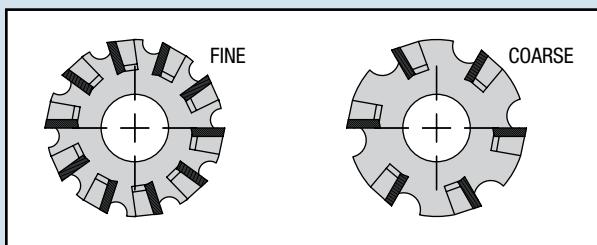

## Pitch

The pitch of a milling cutter refers to the numbers of inserts placed into a given diameter.

Cutters for cast iron are often closer pitch to allow the maximum number of teeth to be engaged at one time for smoother cutting, and because cast iron does not need large gullet for the discontinuous chips produced.

For general use, choose a fairly coarse pitch.


## Negative Versus Positive Geometry

In an indexable cutter, the negative insert is the only one which permits the insert to be turned over and used on both sides. It is the most economical style. Also, it is the strongest insert because all edges are 90° to the faces.

On the minus side, the negative rake tool produces higher cutting forces when compared to the positive rake.


In general, use negative rakes for cast iron, interrupted cuts, and on rigid high-power machining for steels.

Use positive rakes for aluminum, titanium, copper, most stainless steels, thin or easily deflected parts, steels, and nickel alloys.

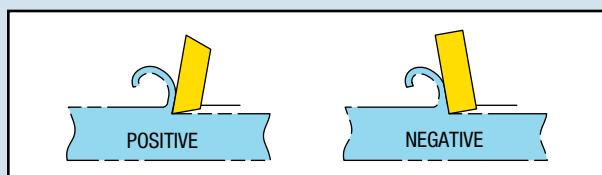


There are many milling cutters with a combination of positive and negative rakes often called shear-angle design. These cutters offer some of both worlds, although inserts are essentially like positive inserts and cannot be turned over. Shear angle cutters do provide continuous chip ejection since the axial rake behaves much like a helix in a flute and takes the chip up and away from the finished surface.

These cutters work well in heavy duty operations with wide widths of cut—especially if combined with a 30° lead angle.

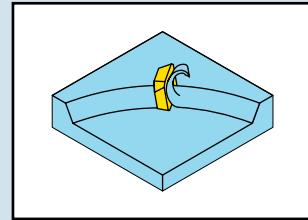

## Depth of Cut

It is a good general rule not to allow depth of cut to exceed 2/3 of the cutting edge length. Remember that in lead angle cutters the cutting edge length in use is not the same as the depth of cut.

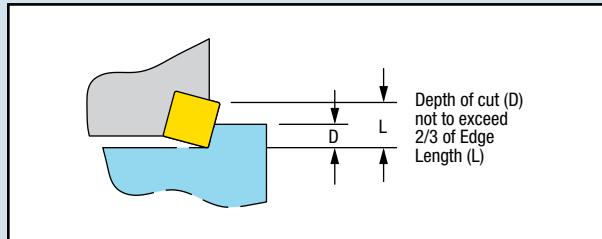


### Greenleaf Sales

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Up Milling and Down Milling

This refers to direction of rotation relative to the feed.

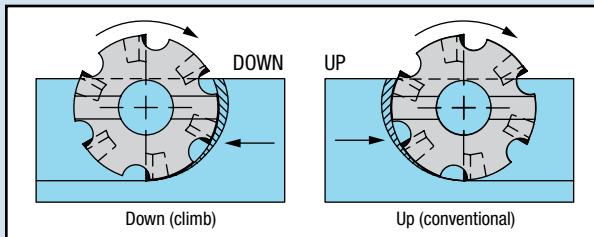


With a modern machine in good condition, down milling will give the best results. This is because the thickest section of the chip is against the insert to avoid welding, and pressure is progressively relieved towards the finished surface.


In up milling, friction and pressure build up before the chip starts to form, causing premature edge wear. It should be in rare cases that up milling is needed. This could be, for example, on an older machine with backlash in the table feed.

## Cutter Positioning

Central positioning of the cutter can give rise to vibration if any spindle play is present. This is because of an alternating radial force pushing against the spindle.

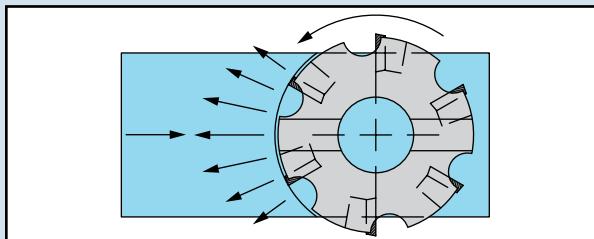

Placing the cutter off center will always be a better situation to avoid chatter and vibration and also to improve tool life.

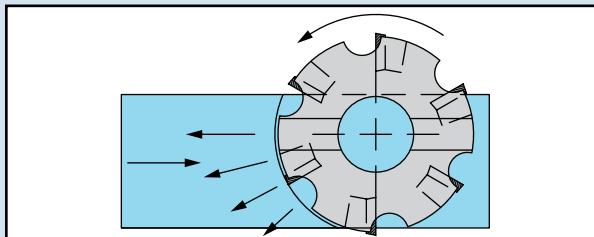


When moving off center, the path of cut is longer since each insert now sweeps a longer arc with each revolution. This may have a measureable impact on tool life, and cutting temperature will tend to increase.

Seek a happy medium by moving off center in small increments until vibration is controlled.

## Surface Finish

In a milling cutter the finish is produced by the highest insert. Since variations exist in the body and the inserts, it is inevitable that some inserts will be higher than others. If the inserts have small corner radii, for example, the highest insert will cut the track and this will determine the finish.

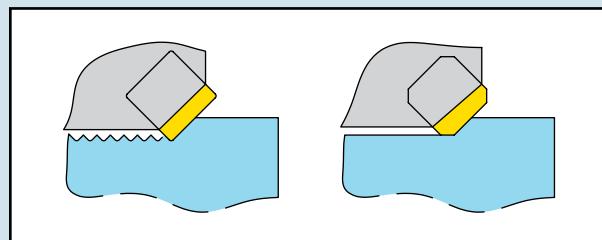

For this reason, most inserts designed especially for milling, use flats on the insert rather than a radius. In this way, the highest insert produces a wiping effect removing the variances of the other inserts and leaving a much improved finish. "Wiper" inserts installed in a few stations can be used for this purpose as well as "finishing" inserts which are available for certain cutters in the Greenleaf line.

## Speed Calculations

Recommended cutting speeds are usually given in surface meters per minute (m/min). Sometimes it is necessary to convert m/min to the correct RPM (rev/min) for a given cutter diameter. The following formulas can be used to make this conversion:

$$V_c = \text{Cutting speed} \quad \text{m/min}$$

$$D = \text{Cutting diameter} \quad \text{mm}$$

$$n = \text{Spindle speed} \quad \text{rev/min}$$

$$\text{Cutting speed} \quad V_c = \frac{\pi * D * n}{1000}$$

$$\text{Spindle speed} \quad n = \frac{V_c * 1000}{\pi * D}$$

Cutting speed recommendations are based upon the material to be machined and the cutting tool material which will be used – such as carbide, coated carbide, ceramic, silicon nitride, etc.

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)

**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)

**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Feed Rate Calculation

One problem encountered in milling cutter feed rate considerations is that while most milling cutter manufacturers make recommendations in load per tooth or feed per tooth, the machine is calibrated in *millimeters per minute*. It is, therefore, necessary to do a little simple math to get the answers required.

In turning, these problems do not exist since only one insert is involved, and the machine is calibrated in feed per revolution. Feed per revolution is the same as feed per tooth when there is only one insert, so we simply plug in the recommended feed.

With a milling cutter, the feed per tooth is controlled by three factors. These are:

1. The feed rate or table advance in mm per minute.
2. The spindle speed in revolutions per minute.
3. The number of inserts in the milling cutter.

We must make a calculation in order to find out the really critical information needed, such as the feed per tooth or how much work we are asking each insert to perform. Too little work is more often a problem than too much.

If the feed per tooth is very small, let us say less than 0,08mm, then abrasive wear is accelerated. No real chip is produced to take away the heat.

On the other hand, if high feed rates are used and the cutter has many teeth, then power available may be insufficient. This is an important consideration in selecting a cutter, especially larger diameter cutters with fine pitch. Here are the equations you will need to make your calculations:

<b>D = Cutting diameter</b>	mm
<b>L = Machined length</b>	mm
<b>De = Effective diameter</b>	mm
<b>a<sub>p</sub> = Depth of cut</b>	mm
<b>ae = Working engagement</b>	mm
<b>Vc = Cutting speed</b>	m/min
<b>Q = Metal removal rate</b>	cm <sup>3</sup> /min
<b>T = Period of engagement</b>	min
<b>z = Number of teeth</b>	Piece
<b>fz = Feed per tooth</b>	mm
<b>fn = Feed per revolution</b>	mm/rev
<b>Vf = Table feed</b>	mm/min
<b>hex = Maximum chip thickness</b>	mm
<b>hm = Average chip thickness</b>	mm
<b>Kc = Specific cutting force</b>	N/mm <sup>2</sup>
<b>n = Spindle speed</b>	rev/min
<b>Pc = Cutting power net</b>	Kw
<b>η = Efficiency</b>	
<b>Kr = Major cutting edge angle</b>	Degrees

**Table feed:**  $Vf = fz * n * z$

**Feed per revolution:**  $Fn = \frac{Vf}{n}$

**Removal rate:**  $Q = \frac{a_p * ae * Vf}{1000}$

**Average chip thickness:**  $hm = \frac{\sqrt{ae}}{D}$

**Machining time:**  $T = \frac{L}{Vf}$


**Net power:**  $Pc = \frac{a_p * ae * Vf * Kc}{60000000 * \eta}$

### Greenleaf Sales

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


## Angle of Entry

In face milling operations, the angle of entry can have a significant impact upon insert performance. A positive angle of entry can cause breakage or chipping, especially when using positive inserts. Positive angle of entry will occur when the path of cut is narrow relative to cutter diameter.

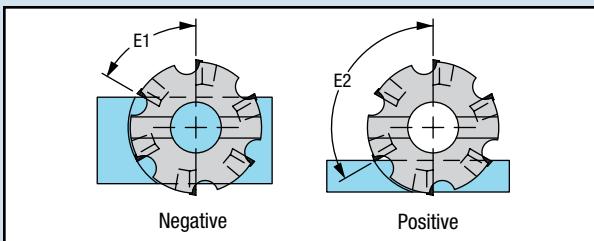


- When the angle of entry (E1) is less than 90°, the initial impact occurs at a position behind the point of the tool. The insert has a greater section and is stronger here and better able to withstand the impacts.
- When the angle of entry (E2) is greater than 90°, the initial impact between the insert and the part piece occurs at the point of the tool, which, especially in a positive rake milling cutter, is the weakest section of the insert. This can lead to insert failure.

## Entering and Exiting the Cut

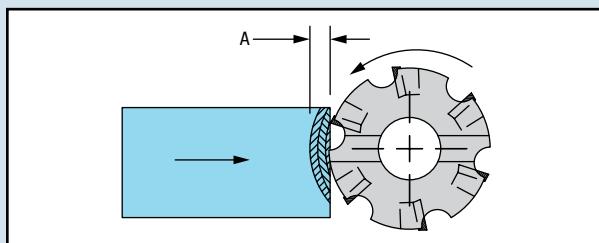

The angle of entry is always adverse as the cut commences. In the illustration, we can see that as the cutter travels through zone A, the angle of entry is changing. It starts out positive as the inserts first start to cut. As the cut progresses, it becomes less and less positive and eventually negative.

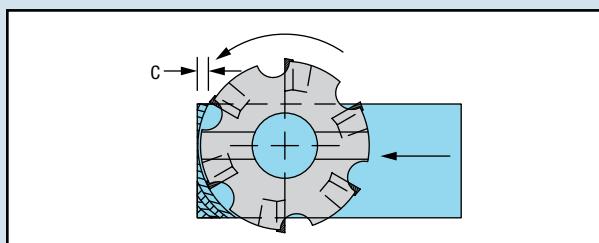

With a CNC machine, it is a worthwhile exercise to slow down the feed rate in zone A, especially with positive rake tools and hard to cut materials. As the cutter starts to break through at the end of the cut, another problem area is created in zone C. At this point, the cutter breaks through in the center, leaving two islands of material. Changes of entry angle occur which can result in insert problems. As in entry into the part, a reduction of feed rate can help alleviate chipping or breakage problems if they arise.


### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Interruptions

Milling is by definition an interrupted operation. In addition, as the cutter crosses voids in the part, changes of entry angle occur. This situation is usually too complex to define in absolute terms relative to a targeted solution. Recognizing this in interrupted parts, try to include some of the following features in the set-up to reduce impact:

1. Negative or negative/positive geometry
2. Use a lead-angle cutter ( $30^\circ$  or  $45^\circ$ ) if possible
3. Use an impact-resistant carbide grade
4. Use a cutter with medium or fine pitch
5. Keep the load per tooth on the low end

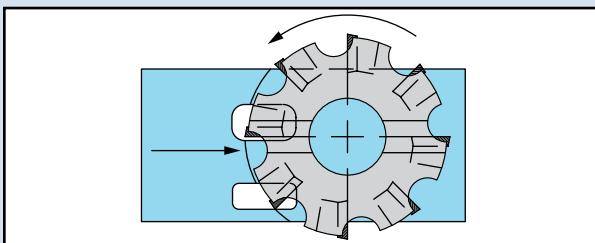

## A Milling Cutter is a Series of Single-Point Tools

It is easy to lose sight of the fact that a milling cutter is nothing more than a series of single-point tools clamped into a rotating holder. If you always keep this in mind, you will be constantly reminded that what is most important to know is what is happening to each tool or insert.

The feed rate in millimeters per minute of machine table travel does not tell you anything important unless or until you calculate the feed per tooth. You cannot calculate the feed per tooth until you know the speed in revolutions per minute and how many teeth are in the cutter. Therefore, it should become second nature to ask, know, and consider the three "golden" variables:

- 1. How many inserts?**
- 2. How many RPM?**
- 3. What feed in millimeters per minute?**

Use this formula to find feed per tooth:

$$\text{Feed per tooth: } f_z = \frac{V_f}{n * z}$$

<b>f<sub>z</sub></b> = Feed per tooth	mm
<b>V<sub>f</sub></b> = Table feed	mm/min
<b>n</b> = Spindle speed	rev/min
<b>z</b> = Number of teeth	Piece

Once you know the feed per tooth, as a very broad general guide, try to keep the feed above 0,08mm per tooth and remember that power limitations usually come into play long before most cutters reach the upper limit. Efficient metal removal will usually dictate working in the 0,1mm to 0,25mm per tooth range.

Some heavy-duty cutters can be used as high as 0,75mm or more per tooth, but this will need a machine in the 40+ Kw class – and a larger cutter could well use over 75Kw.


## Greenleaf Excelerator® Mills Setup and Operational Procedures

1. Thoroughly clean all insert pockets.
2. Install the inserts, making sure that they are properly seated in the pocket, and torque the insert clamp screws to the correct torque as indicated on the body of the Excelerator Milling Cutter.
3. Use Greenleaf Excelerator Mills only on machines that have adequate shield guards.
4. Run the Greenleaf Excelerator Mills using cutting parameters as recommended by the Greenleaf Tech Team. Contact Greenleaf at:  
 +814-763-2915 US  
 +31-45-404-1774 EU  
 +86-731-84658507 CN
5. For safety purposes, do not exceed the maximum RPM's etched on the Excelerator Mill. Note: There are two max RPM numbers. One (the lower RPM number) is for using the mill with carbide inserts and the other is for usage with ceramic inserts.



**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

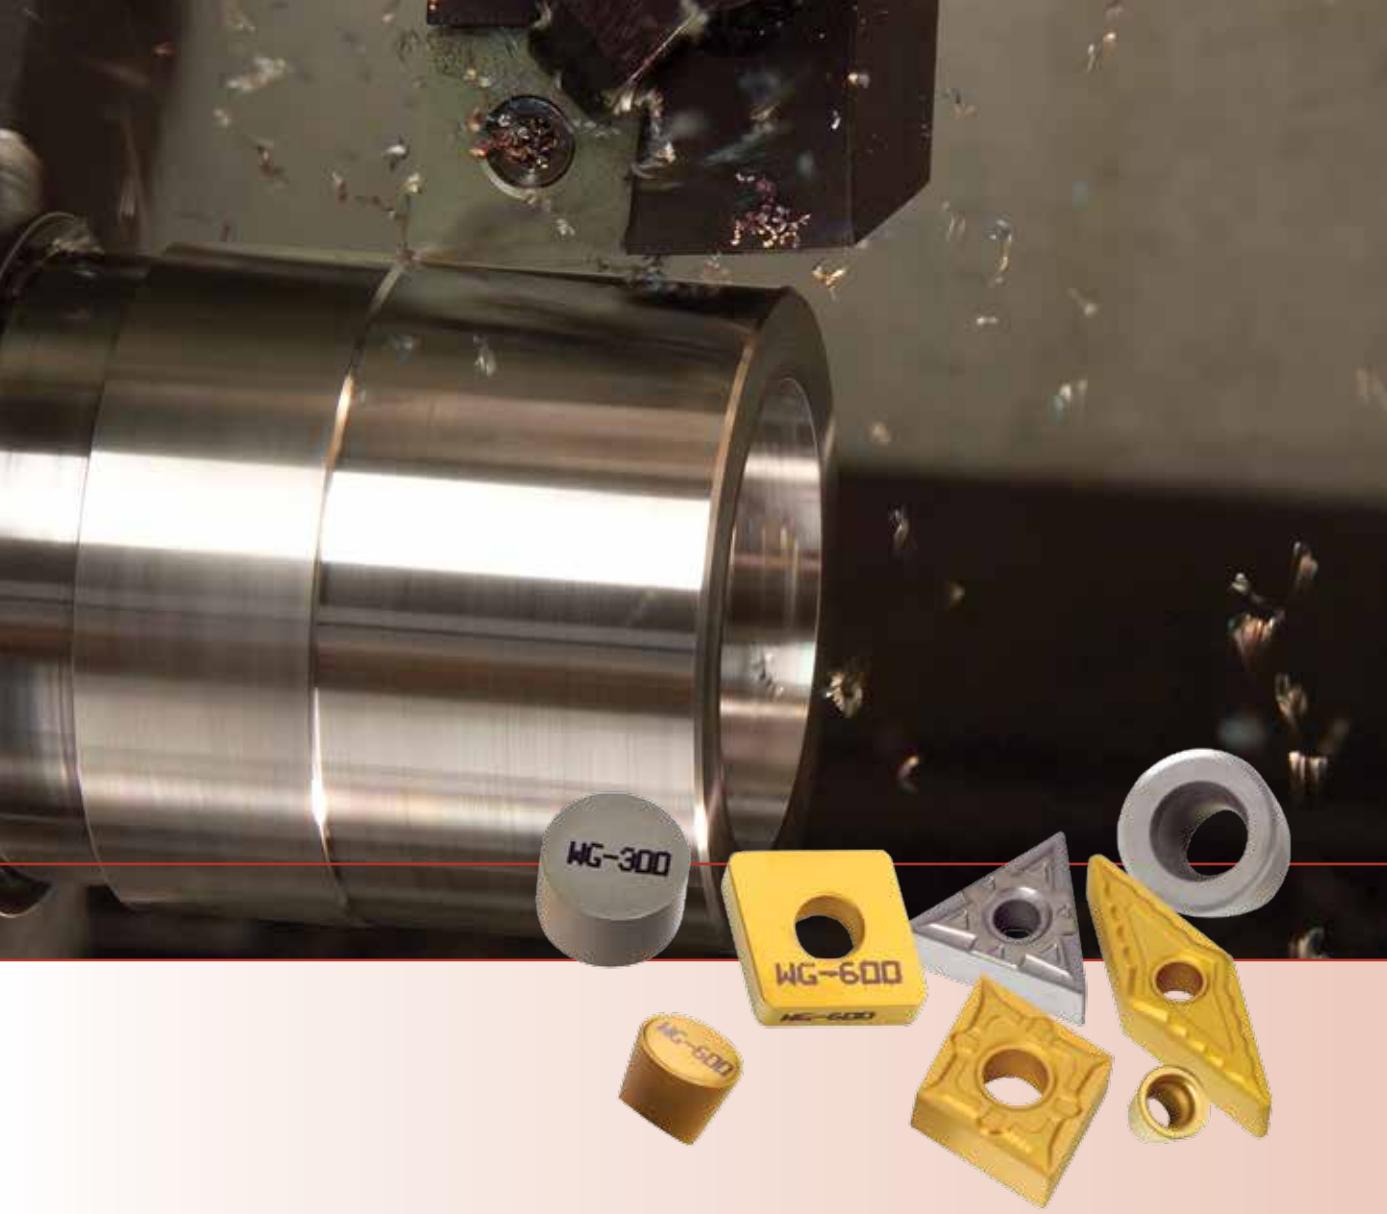

<i><b>Carbide Inserts</b></i> .....	<i><b>T 02-39</b></i>
<i><b>Ceramic Inserts</b></i> .....	<i><b>T 40-70</b></i>
<i><b>Industry-Standard Toolholders</b></i> .....	<i><b>T 71-96</b></i>
<i><b>Ceramic Toolholders</b></i> .....	<i><b>T 97-119</b></i>
<i><b>Industry-Standard Boring Bars for Carbide Inserts</b></i> .....	<i><b>T 120-133</b></i>
<i><b>Ceramic-Insert Boring Bars</b></i> .....	<i><b>T 134-146</b></i>
<i><b>Additional Greenleaf Turning Inserts</b></i> .....	<i><b>T 147</b></i>




**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Advanced Carbide Inserts

Greenleaf offers a comprehensive line of carbide inserts in grades ranging from sub-micron C-1 through C-8 classifications. An industry pioneer in coated carbide, Greenleaf offers a variety of uncoated, MT-CVD coated and PVD-coated grades. Carbide inserts are available in ANSI standard geometries with multi-purpose chipbreakers for heavy roughing through finishing.

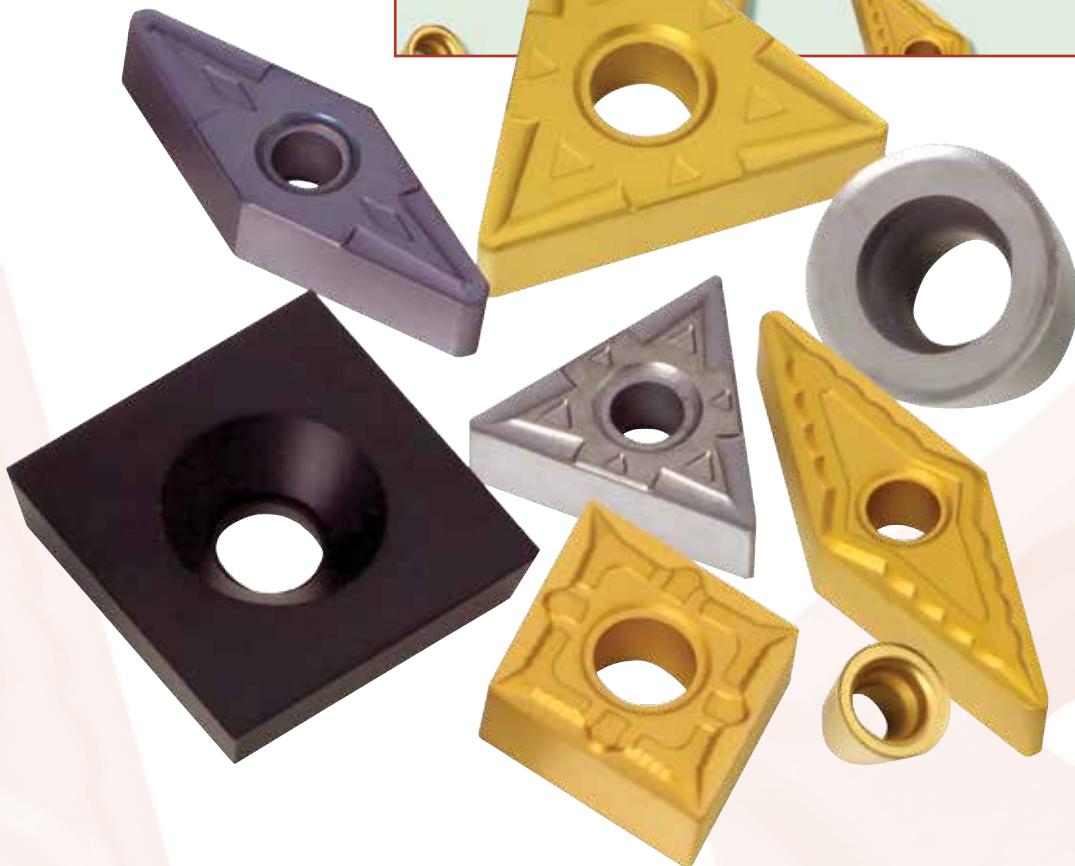

*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



# Carbide Insert Grade Description

## CARBIDE

**Greenleaf offers a comprehensive line of carbide inserts in grades ranging from sub-micron C-1 through C-8 classifications. An industry pioneer in coated carbide, Greenleaf offers a variety of uncoated, MT-CVD coated and PVD-coated grades. Carbide inserts are available in ANSI standard geometries with multi-purpose chipbreakers for heavy roughing through finishing.**

### COATED – MT-CVD

**GA5023** A high-speed performance grade for turning and milling cast iron. GA5023 features an advanced MT-CVD coating specifically developed for abrasive wear resistance. Application ranges from roughing to finishing on most cast iron materials including gray iron, ductile, nodular and other alloyed irons. The high wear and shock resistance of GA5023 allows machining at high speeds and a variety of feeds.

**GA5025** A high-speed MT-CVD coated grade for turning, light roughing and finishing of carbon and alloy steels, as well as selected stainless steels.

**GA5026** A high-speed grade developed for turning nickel- and cobalt-based super-alloys, stainless steels, and refractory metals. The advanced MT-CVD coating over a micro-grain substrate offers high wear resistance. GA5026 has exceptional resistance to the notching and deformation common to machining high strength materials. Apply at high speeds and light feeds in turning and selected milling applications.

**GA5035** A high-performance MT-CVD coated grade for turning all types of steels, and selected stainless steels. GA5035 can be used in rough, semi-finish, and finish turning situations requiring resistance to heat deformation, thermal shock, and abrasion. GA5035 should be applied at high speeds and a range of feeds.

**GA5036** A high-performance MT-CVD coated grade for milling steels at high speed. GA5036 should be used when milling forged and cast steels and selected ductile irons. GA5036 has a unique combination of toughness and heat resistance making it suitable for heavy- and light-duty milling at high cutting speeds.

**GA5125** New high-performance MT-CVD coated carbide milling grade especially suited for manganese steel. GA5125 is also applicable on chrome-moly steel, tool steel and similar high alloy steels. GA5125 provides excellent resistance to abrasion, crater wear, thermal shock, deformation and edge build-up. GA5125 should be applied at high speeds with moderate feed rates.

### COATED – PVD

**G-915** Multi-layer PVD-coated grade, excellent for cut off, milling and turning high-temp alloys, stainless steel, and low carbon steels. The multi-layer PVD coating adds heat and abrasion resistance to the tough, shock-resistant substrate. G-915 should be run at moderate speeds and moderate to high feeds in milling and interrupted turning applications.

**G-920** PVD-coated grade for turning and milling high-strength materials such as high-temp alloys, titanium and stainless steel. G-920 is also an excellent grade for aluminum and refractory metals. This grade has the resistance to deformation and notching required for higher speeds than G-910.

**G-9230** PVD-coated grade developed for medium to heavy machining of nickel alloys, cobalt alloys, titanium alloys, stainless steels and alloyed irons. G-9230 has superior wear resistance and toughness and is excellent for cast and forged scale machining conditions.

**G-925** Multi-layer PVD-coated grade specifically designed for machining abrasive and difficult-to-machine materials. Typical applications include high-temp alloys, titanium and other refractory metals, stainless steel, and many cast irons. G-925 exhibits excellent resistance to notching and deformation. Apply at moderate to high speeds and moderate feeds.

### UNCOATED

**G-02** An excellent general-purpose grade for all types of machining of cast irons. G-02 should be used at moderate speeds and feeds. Also good for light roughing and finishing of high-temperature alloys, stainless steels, and aluminums.

**G-60** Used for heavy, rough turning of steel, steel castings, and steel forgings. G-60 should be used at moderate speeds and feeds.

**G-20M** A sub-micron C-2 carbide grade suited for use in turning and milling titanium and nickel-based super-alloys. G-20M has the strength and edge wear characteristics to resist notching when turning high-strength materials.

#### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com

EU +31-45-404-1774 • eurooffice@greenleafcorporation.com

CN +86-731-89954796 • info@greenleafcorporation.com.cn

www.greenleafglobalsupport.com • www.greenleafcorporation.com






# Insert Grade Reference for Turning

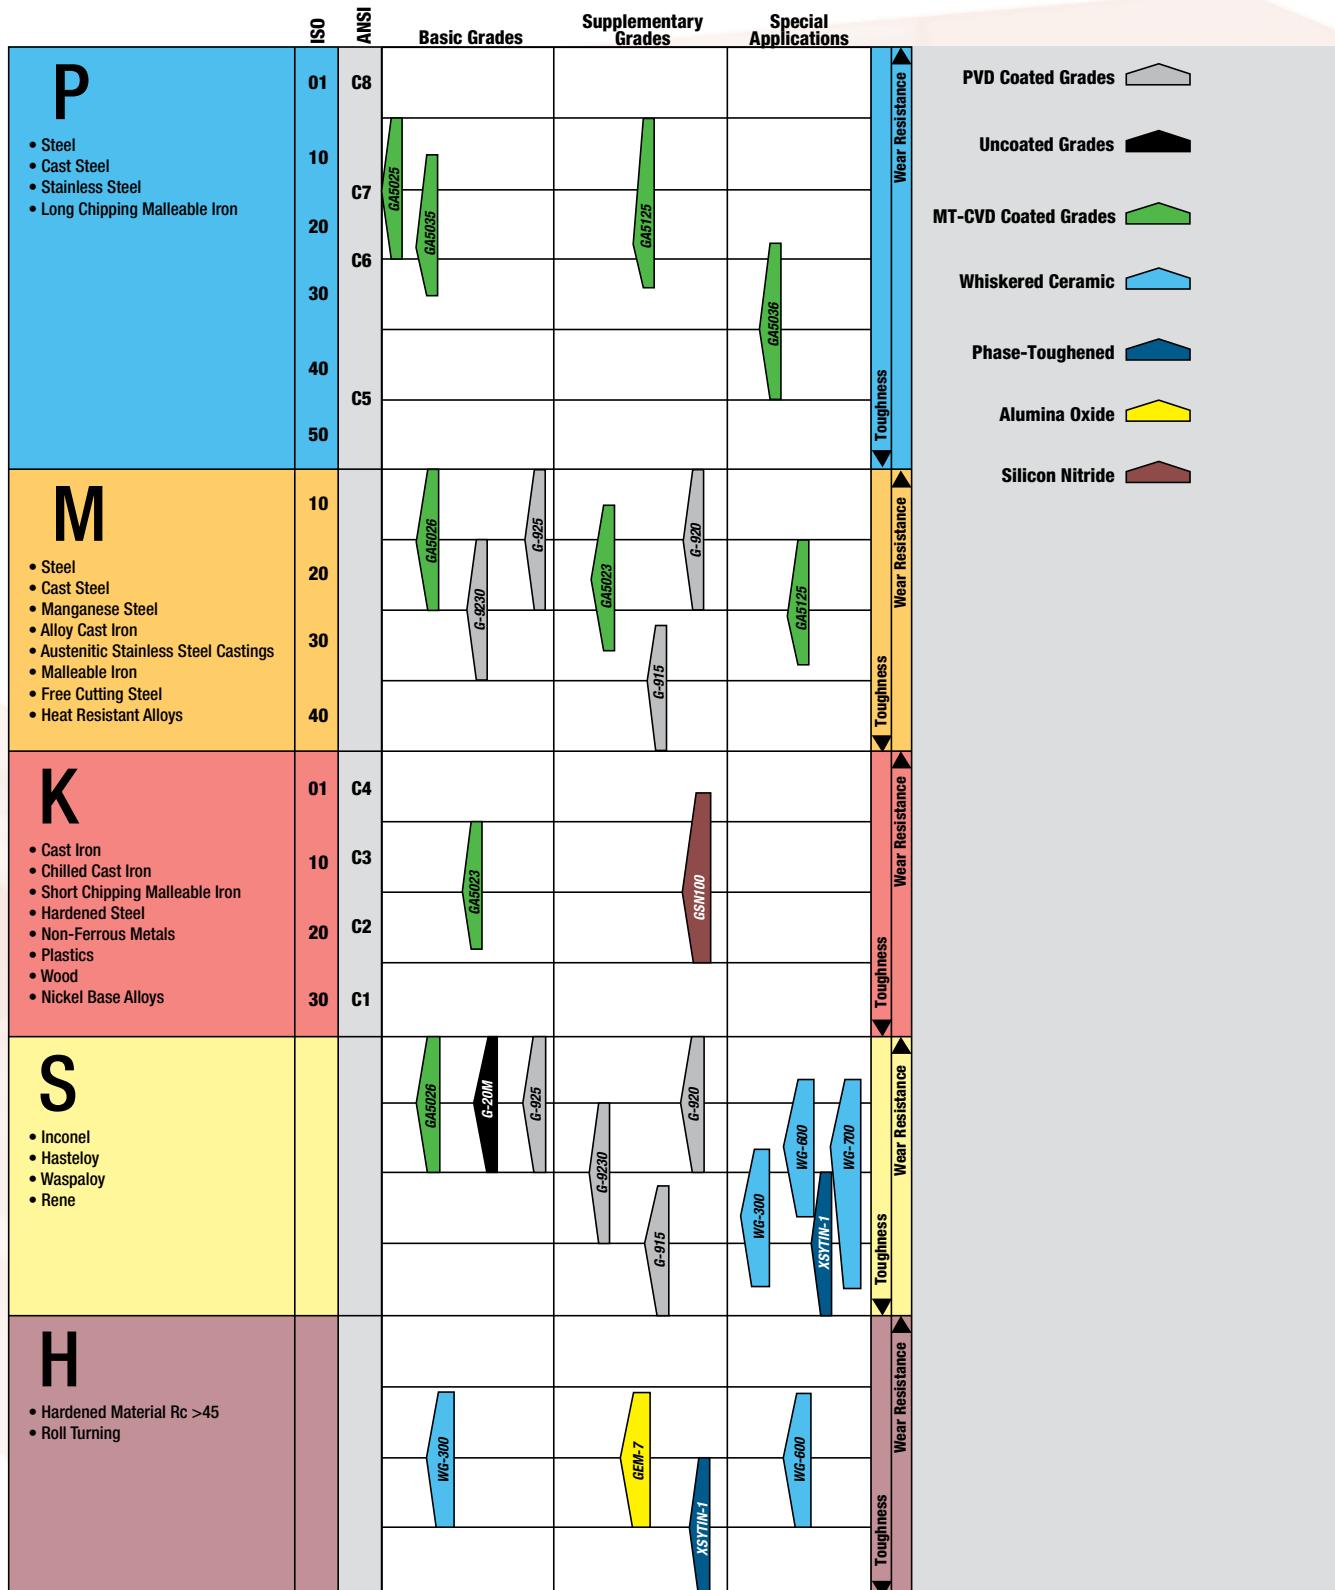



**Greenleaf Sales**  
US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Chipform Application Range
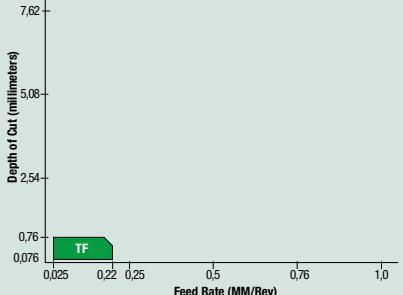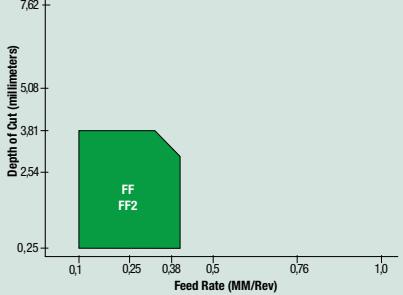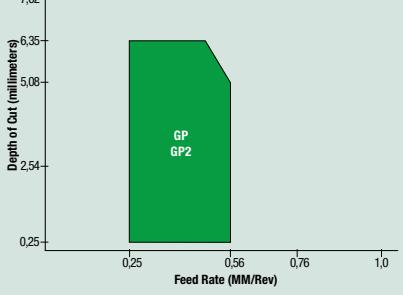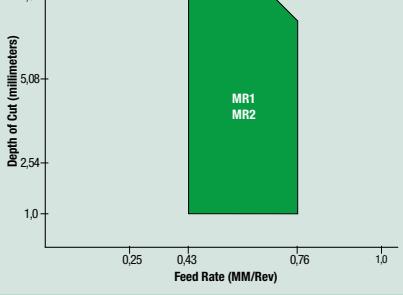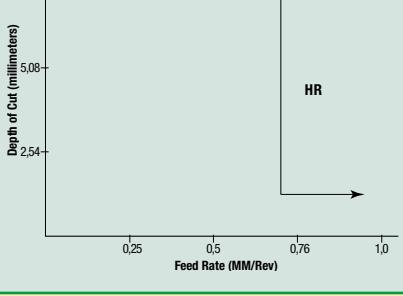
<b>PRECISION FINISHING</b>		<b>TF</b> Precision ground chipbreaker for nickel alloys. Good for feeds up to 0,22/rev and depths to 0,76. 
<b>FINISHING</b>		<b>FF and FF2</b> For finishing all types of material. Designed for feeds up to 0,47/rev and 3,81 depth of cut. 
<b>GENERAL PURPOSE</b>		<b>GP and GP2</b> General purpose chipbreaker. Feed rates up to 0,56/rev and 6,35 depth of cut. 
<b>MEDIUM ROUGHING</b>		<b>MR and MR2</b> Used for medium roughing of all material. Feeds up to 0,71/rev and depths up to 7,62. 
<b>HEAVY ROUGHING</b>		<b>HR</b> Heavy roughing for all materials. Feeds above 0,58/rev. One-sided chipbreaker for heaviest feeds (MM). <i>Example: CNMM-190612 HR</i> 

# I.S.O. Identification for Turning and Boring Inserts

<b>A</b>	85° parallelogram
<b>B</b>	82° parallelogram
<b>C</b>	80° diamond
<b>D</b>	55° diamond
<b>H</b>	hexagon
<b>K</b>	55° parallelogram
<b>L</b>	90° rectangle
<b>M</b>	86° diamond
<b>O</b>	octagon
<b>P</b>	pentagon
<b>R</b>	round
<b>S</b>	square
<b>T</b>	triangle
<b>V</b>	35° diamond
<b>W</b>	80° Trigon

## Shape


**T**
**N**

## Tolerance Class ( $\pm$ mm)


**M**
**G**

## Clearances

- A** 3°
- B** 5°
- C** 7°
- D** 15°
- E** 20°
- F** 25°
- G** 30°
- N** 0°
- P** 11°

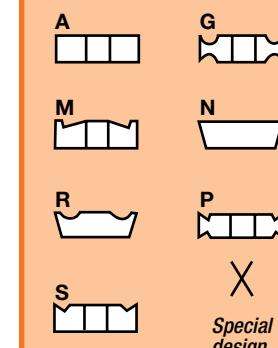

## Type

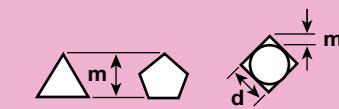


	<b>Dimensions</b>	
<b>A</b>	<b>m</b>	<b>s</b>
<b>A</b>	0.005	0.025
<b>B</b>	0.005	0.025
<b>C</b>	0.013	0.025
<b>D</b>	0.013	0.025
<b>E</b>	0.025	0.025
<b>G</b>	0.025	0.130
<b>J</b>	0.005	0.025
<b>K</b>	0.013	0.025
<b>L</b>	0.025	0.025
<b>M</b>	0.080-0.180	0.130
<b>U</b>	0.130-0.380	0.130
		0.050-0.130
		0.050-0.130
		0.050-0.130
		0.080-0.250

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Comparison cutting edge length in mm – IC in inches

$\Delta$	06	09	11	16	22	27	33	44
$\square \circ$				09	12	15	19	25
55°					15	19		
80°					12	16	19	25
35°					16	22		
$IC = d$		$5/32''$	$7/32''$	$1/4''$	$3/8''$	$1/2''$	$5/8''$	$3/4''$
1"								

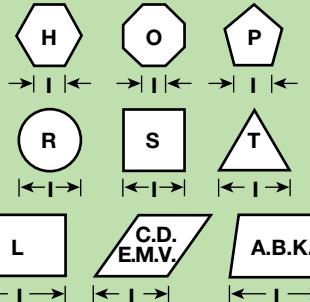


Integers to be preceded by a 0.  
Example: 9,52 mm indicated by 09.

### Cutting Edge Length

**22**

**04**




01	$s= 1,59$
T1	$s= 1,98$
02	$s= 2,38$
03	$s= 3,18$
T3	$s= 3,97$
04	$s= 4,76$
05	$s= 5,56$
06	$s= 6,35$
07	$s= 7,94$
09	$s= 9,52$
10	$s= 10,00$
12	$s= 12,00$

### Thickness

Radius in terms of 0.1 mm	
00	Round insert
00	sharp point
02	0.2
04	0.4
05	0.5
08	0.8
10	1.0
12	1.2
15	1.5
16	1.6
24	2.4
32	3.2
40	4.0

### Cutting Point Configuration

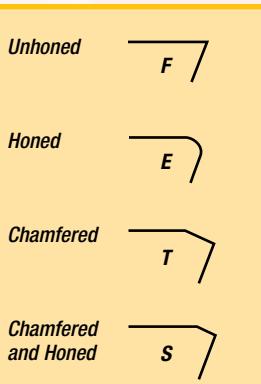


### Cutting Edge

**E**

**Greenleaf Sales**


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## A.N.S.I. Identification for Turning and Boring Inserts

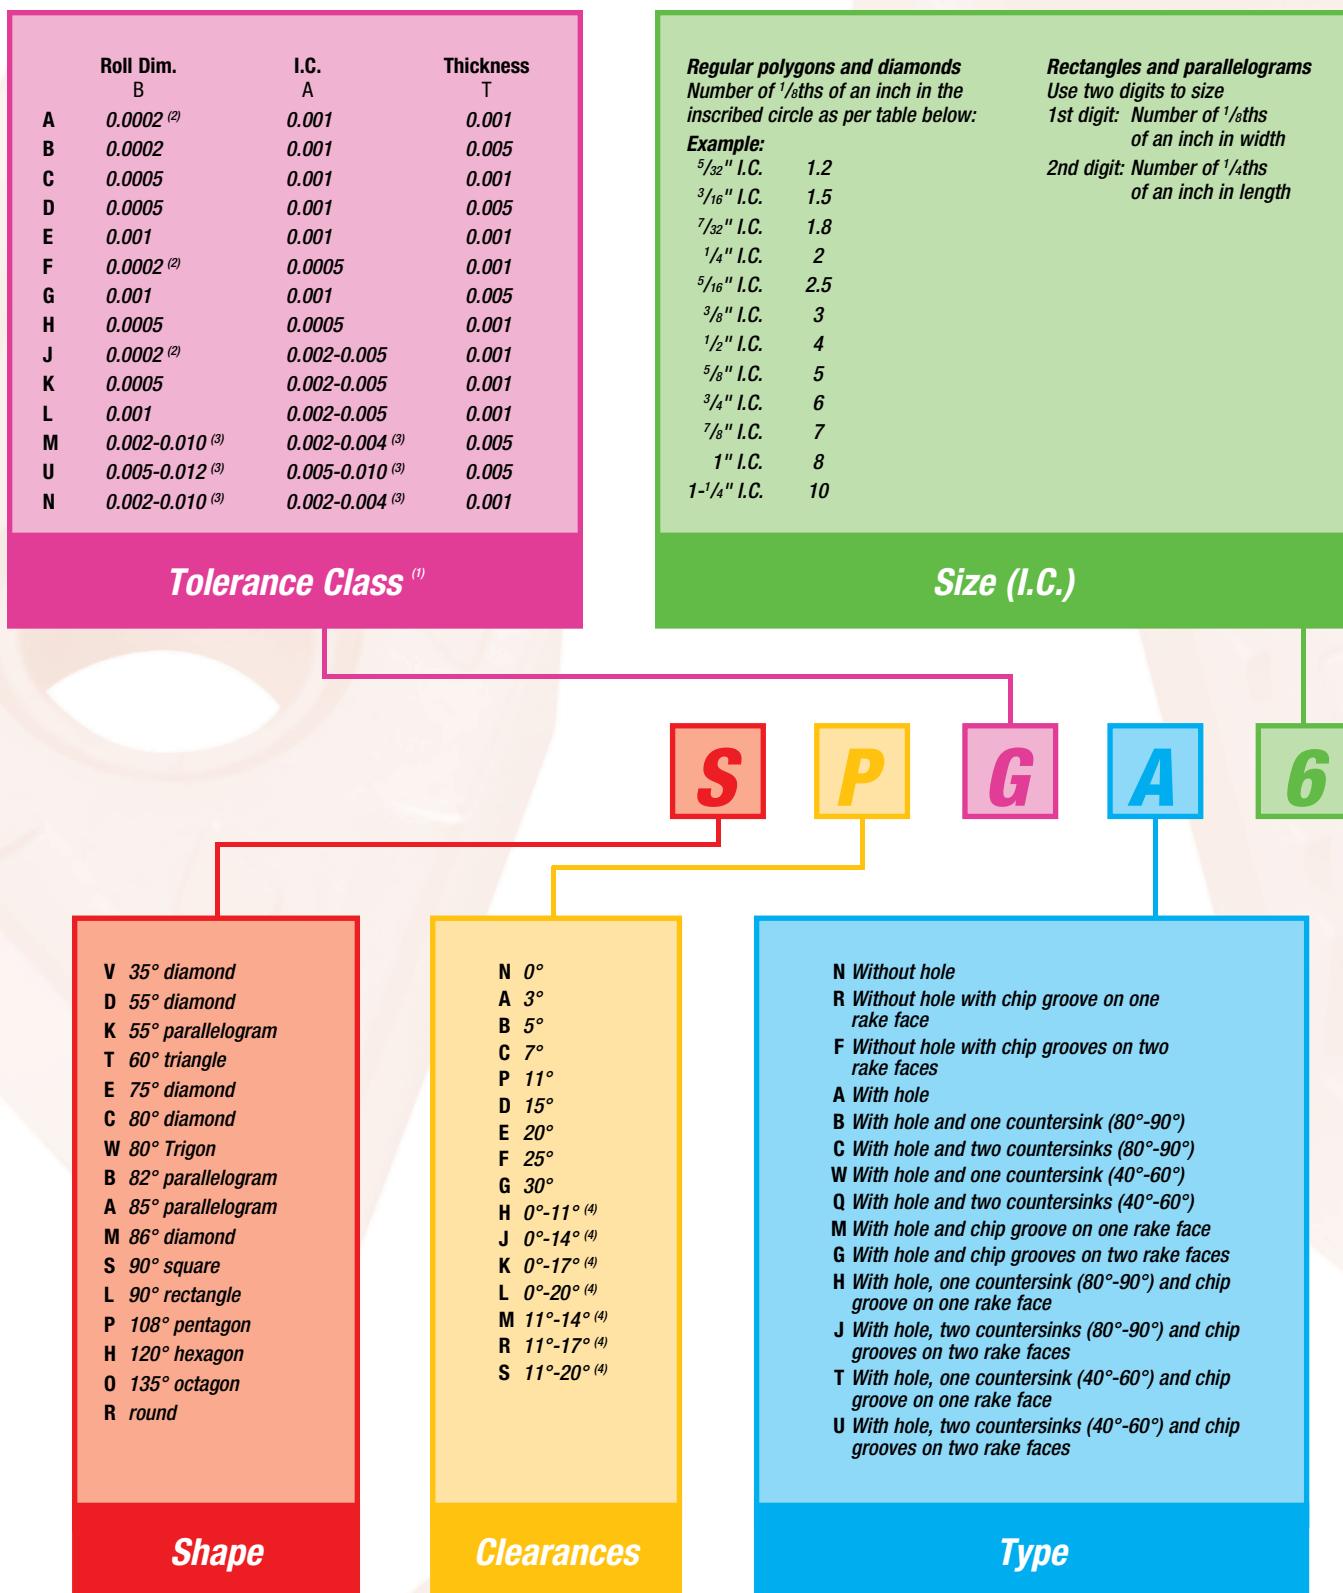

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

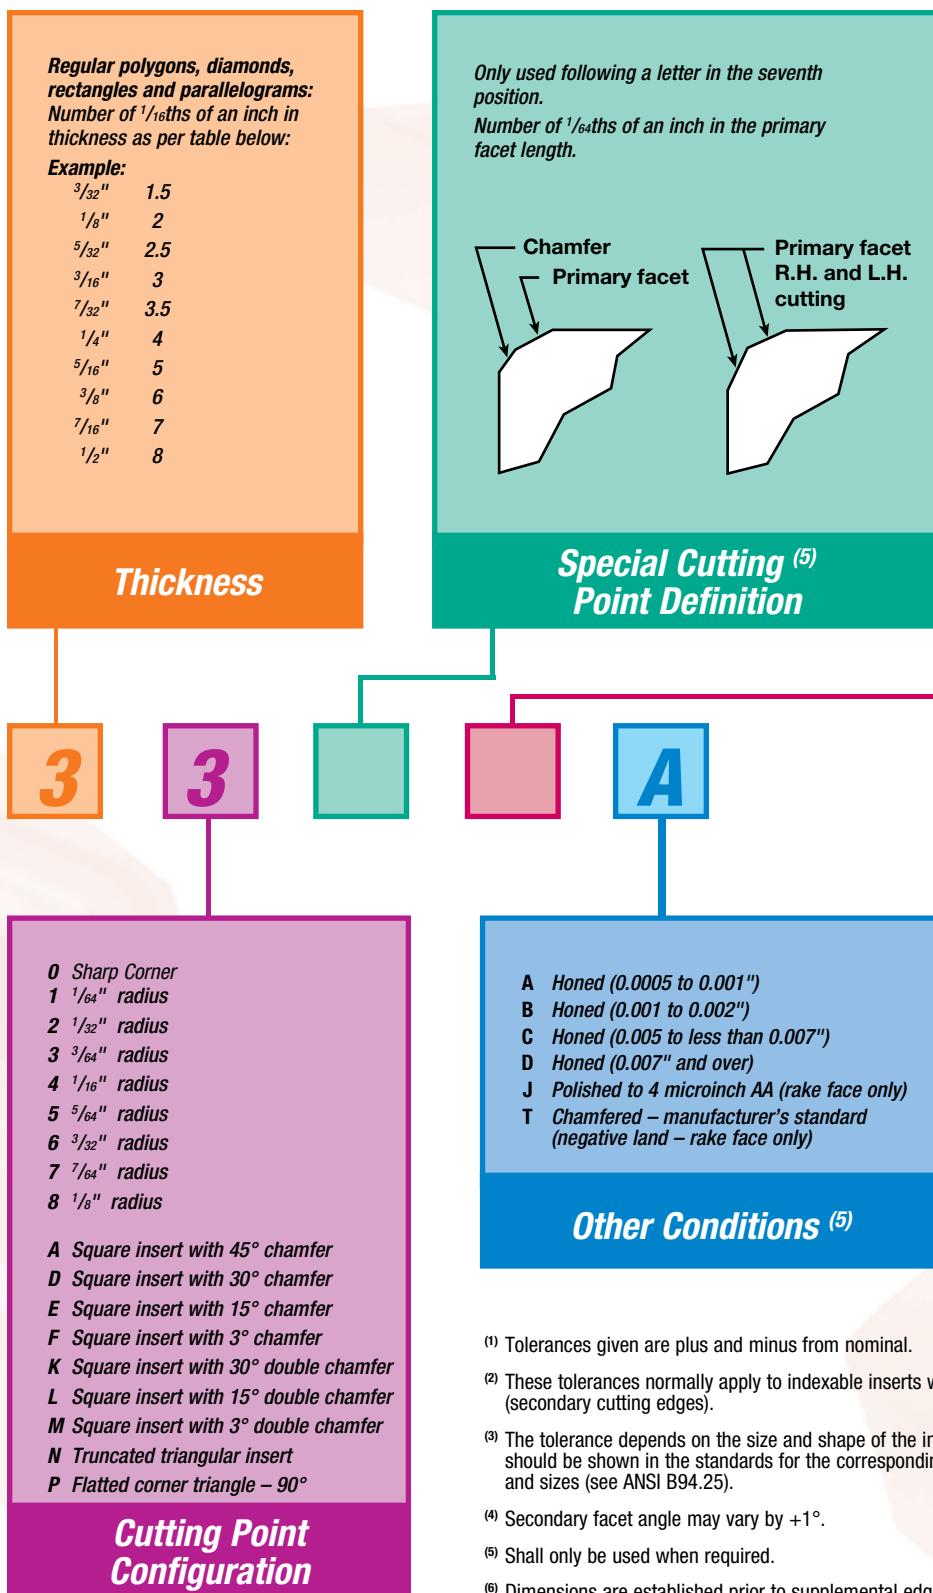

<sup>(1)</sup> Tolerances given are plus and minus from nominal.

<sup>(2)</sup> These tolerances normally apply to indexable inserts with facets (secondary cutting edges).

<sup>(3)</sup> The tolerance depends on the size and shape of the insert and should be shown in the standards for the corresponding shapes and sizes (see ANSI B94.25).

<sup>(4)</sup> Secondary facet angle may vary by +1°.

<sup>(5)</sup> Shall only be used when required.

<sup>(6)</sup> Dimensions are established prior to supplemental edge or coating modification.

#### Greenleaf Sales

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Carbide Insert Usage Reference Guide

**Insert Type**

**Geometry**

**Coating Options**

**Insert Geometry**

**Stocking**

**Part Number**

**Dimensions**

**Stocking Status**

**Grade with Application Range**

**Chipform Application**

**Dimensions**

**Stocking Status**

**Carbide Coatings**

**MT-CVD Coated**

**PVD Coated**

**Uncoated**

**80° Diamond Inserts Chip Control**

**80° Diamond Inserts Flat Top (CNMA)**

**80° Diamond Inserts Flat Top (CNGN)**

**Greenleaf Sales**

**US +814-763-2915 • sales@greenleafcorporation.com**  
**EU +31-45-404-1774 • eurooffice@greenleafcorporation.com**  
**CN +86-731-89954796 • info@greenleafcorporation.com.cn**  
**www.greenleafglobalsupport.com • www.greenleafcorporation.com**

**Greenleaf Sales**

**US +814-763-2915 • sales@greenleafcorporation.com**  
**EU +31-45-404-1774 • eurooffice@greenleafcorporation.com**  
**CN +86-731-89954796 • info@greenleafcorporation.com.cn**  
**www.greenleafglobalsupport.com • www.greenleafcorporation.com**

**Greenleaf Sales**

**US +814-763-2915 • sales@greenleafcorporation.com**  
**EU +31-45-404-1774 • eurooffice@greenleafcorporation.com**  
**CN +86-731-89954796 • info@greenleafcorporation.com.cn**  
**www.greenleafglobalsupport.com • www.greenleafcorporation.com**

**80° Diamond Inserts Chip Control**

**80° Diamond Inserts Flat Top (CNMA)**

**80° Diamond Inserts Flat Top (CNGN)**

**Carbide Coatings**

**MT-CVD Coated**

**PVD Coated**

**Uncoated**

**80°**

**80°**

**T 14**

**T 15**

**Negative Inserts**



**80° Diamond**  
Chip Control  
page: T 14



**80° Diamond**  
Flat Top  
page: T 15



**80° Diamond**  
Flat Top  
page: T 15



**55° Diamond**  
Chip Control  
page: T 16



**55° Diamond**  
Flat Top  
page: T 17



**Round**  
Chip Control  
page: T 18



**Round**  
Flat Top  
page: T 19



**Round**  
Flat Top  
page: T 19

**Negative Inserts *continued***


**Square**  
Chip Control  
page: T 20



**Square**  
Flat Top  
page: T 21



**Square**  
Flat Top  
page: T 22-23



**Triangle**  
Chip Control  
page: T 24-25



**Triangle**  
Flat Top  
page: T 26



**Triangle**  
Flat Top  
page: T 27-28



**35° Diamond**  
Chip Control  
page: T 29



**35° Diamond**  
Flat Top  
page: T 30



**80° Trigon**  
Chip Control  
page: T 31



**80° Trigon**  
Flat Top  
page: T 32

**Positive Inserts**


**80° Diamond**  
Positive Flat Top  
page: T 33



**Round**  
Positive Flat Top  
page: T 33



**Round**  
Positive Chip Control  
page: T 34



**Round**  
Positive Chip Control  
page: T 34



**Square**  
Positive Flat Top  
page: T 35



**Triangle**  
Positive Flat Top  
page: T 36-37



**Triangle**  
Positive Flat Top  
page: T 38




**80° Trigon**  
Chip Control: Screw On  
page: T 39

**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# 80° Diamond Inserts

## Chip Control

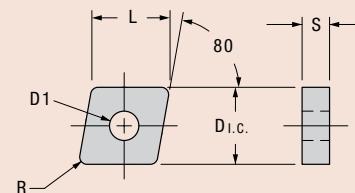

		Part Number ISO	Steel			Stainless Steel			Cast Iron		High-Temp Alloys			Part Number ANSI	Dimensions (millimeters)																														
Shape: 80° Diamond			G A 5025	P 15	P 25	G A 5035	P 25	P 35	M 15	M 15	M 15	M 15	M 20	K 15	G 915	G 20M	D I.C.	L	S	D1	R																								
PRECISION FINISHING		CNGG-120401.3-TF				○	○	●	○					○			CNGG-430.3-TF	12,70	12,88	4,75	5,16	0,13																							
		CNGG-120402.6-TF				○	●	●	○					○			CNGG-430.6-TF	12,70	12,88	4,75	5,16	0,25																							
		CNGG-120404-TF				●	●	●	●					●	●	●	CNGG-431-TF	12,70	12,88	4,75	5,16	0,38																							
		CNGG-120408-TF				●	●	●	●					●	●	●	CNGG-432-TF	12,70	12,88	4,75	5,16	0,79																							
		CNGG-120412-TF				●	●	●	●					○			CNGG-433-TF	12,70	12,88	4,75	5,16	1,19																							
FINISHING		CNMG-120404-FF2	●	●	○	○	●	●	○	●	○	●	○	●	●	○	CNMG-431-FF2	12,70	12,88	4,75	5,16	0,38																							
		CNMG-120408-FF2					●	●	○	○				●	●	○	CNMG-432-FF2	12,70	12,88	4,75	5,16	0,79																							
GENERAL PURPOSE		CNMG-120412-FF2	○	○	○		●	●	○	●	○	○	○	●	●	○	CNMG-433-FF2	12,70	12,88	4,75	5,16	1,19																							
		CNMG-120416-FF2	○	○	○		○	○	○	○	○	○	○	○	○	○	CNMG-434-FF2	12,70	12,88	4,75	5,16	1,57																							
MEDIUM ROUGHING		CNMG-160608-FF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CNMG-542-FF	15,88	16,13	6,35	6,35	0,79																							
		CNMG-160612-FF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CNMG-543-FF	15,88	16,13	6,35	6,35	1,19																							
HEAVY ROUGHING		CNMG-190612-FF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CNMG-643-FF	19,05	19,33	6,35	7,92	1,19																							
		CNMG-120408-MR2	●	●	○	○	●	●	●	○	●	○	●	●	○	●	CNMG-432-MR2	12,70	12,88	4,75	5,16	0,79																							
		CNMG-120412-MR2	●	●	○	○	○	○	○	○	●	○	○	○	○	●	CNMG-433-MR2	12,70	12,88	4,75	5,16	1,19																							
		CNMG-120416-MR2	●	●	○	○	○	○	○	○	○	○	○	○	○	○	CNMG-434-MR2	12,70	12,88	4,75	5,16	1,57																							
		CNMG-160608-MR2	●	○	○	○	○	○	○	○	○	○	○	○	○	○	CNMG-542-MR2	15,88	16,13	6,35	6,35	0,79																							
		CNMG-160612-MR2	●	●	○	●	○	○	○	○	○	○	○	○	○	○	CNMG-543-MR2	15,88	16,13	6,35	6,35	1,19																							
		CNMG-190608-MR	○	○	○	○											CNMG-642-MR	19,05	19,33	6,35	7,92	0,79																							
		CNMG-190612-MR	●	●	○	●	○	○	○	●	●	●	○	○	○	●	CNMG-643-MR	19,05	19,33	6,35	7,92	1,19																							
		CNMG-190616-MR	○	○	○	●					○	○	●	○	○	●	CNMG-644-MR	19,05	19,33	6,35	7,92	1,57																							
		CNMM-190612-HR	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CNMM-643-HR	19,05	19,33	6,35	7,92	1,19																							
		CNMM-250924-HR	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CNMM-866-HR	25,40	25,78	9,53	9,12	2,39																							
		Carbide Coatings		 MT-CVD Coated	 PVD Coated	 Uncoated	G A 5025			G A 5035			G A 5125			G A 5036			G A 5026			G 925			G 920			G 9230			G 915			G 20M											
							P 25			P 25			P 35			M 15			M 15			M 15			M 15			M 20			M 35			K 15			G A 5023								
							Steel			Stainless Steel			Cast Iron			High-Temp Alloys			Stocked Standard			Stocked or Available Upon Request			Not Recommended																				


Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## CARBIDE INSERTS


# 80° Diamond Inserts

## Flat Top (CNMA)

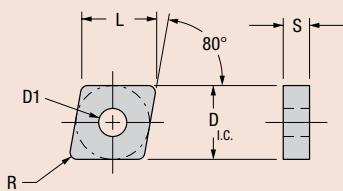

# 80° Diamond Inserts

## Flat Top (CNGN)

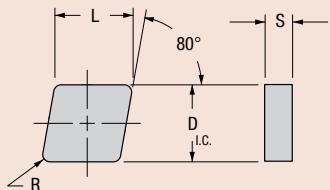


Shape: 80° Diamond	Part Number ISO	Steel				Stainless Steel				Cast Iron	High-Temp Alloys	Part Number ANSI	Dimensions (millimeters)					
		P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M35 K15	S	G-20M	D I.C.	L	S	R	
	CNGN-120308	○	○	○	○	○	○	○	○	○	○	○	○	CNGN-422	12,70	12,88	3,18	0,79
	CNGN-120408	○	○	○	○	○	○	○	○	○	○	○	○	CNGN-432	12,70	12,88	4,75	0,79
	CNGN-190408	○	○	○	○	○	○	○	○	○	○	○	○	CNGN-632	19,05	19,33	4,75	0,79
	CNGN-190412	○	○	○	○	○	○	○	○	○	○	○	○	CNGN-633	19,05	19,33	4,75	1,19
	CNGN-190416	○	○	○	○	○	○	○	○	○	○	○	○	CNGN-634	19,05	19,33	4,75	1,57
	CNGN-190612	○	○	○	○	○	○	○	○	○	○	○	○	CNGN-643	19,05	19,33	6,35	1,19
	CNGN-190616	○	○	○	○	○	○	○	○	○	○	○	○	CNGN-644	19,05	19,33	6,35	1,57
Carbide Coatings		GA5025	GA5035	GA5125	GA5036	GA5026	G-925	G-920	G-9230	GA5023	K15	GA5026	G-20M					
MT-CVD Coated	PVD Coated	Uncoated	P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M35 K15	S	G-20M					
			Steel		Stainless Steel		Cast Iron	High-Temp Alloys										



Not Recommended Stocked or Available Upon Request Stocked Standard

**Greenleaf Sales**  
**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

# 55° Diamond Inserts

## Chip Control

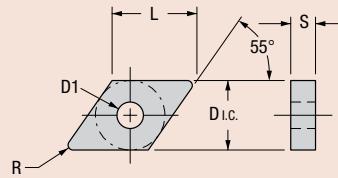

		Part Number	Steel			Stainless Steel			Cast Iron		High-Temp Alloys			Part Number	Dimensions (millimeters)										
Shape: 55° Diamond			ISO	P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M15 GA5023	M20 M35 K15 GA5023	S	G-915 G-920M	D I.C.	L	S	D1	R					
PRECISION FINISHING		DNGG-150401.3-TF												●	DNNG-430.3-TF	12,70	15,49	4,75	5,16	0,13					
		DNGG-150402.6-TF												●	DNNG-430.6-TF	12,70	15,49	4,75	5,16	0,25					
		DNGG-150404-TF			●	●	●	○						●	DNGG-431-TF	12,70	15,49	4,75	5,16	0,38					
		DNGG-150408-TF			●	●	●	○						●	DNGG-432-TF	12,70	15,49	4,75	5,16	0,79					
		DNGG-150412-TF			●	●	●	○						●	DNGG-433-TF	12,70	15,49	4,75	5,16	1,19					
		DNGG-190608-TF			○	○	○	○						○	DNGG-542-TF	15,88	19,38	6,35	6,35	0,79					
		DNGG-190612-TF			○	○	○	○						○	DNGG-543-TF	15,88	19,38	6,35	6,35	1,19					
FINISHING		DNMG-150404-FF2	●	●	○	○	●	●	○	●	●	○	●	●	DNMG-431-FF2	12,70	15,49	4,75	5,16	0,38					
		DNMG-150408-FF2	●	●	○	○	●	●	○	●	●	○	●	●	DNMG-432-FF2	12,70	15,49	4,75	5,16	0,79					
		DNMG-150412-FF2	○	○	○	○	○	○	○	○	○	○	○	○	DNMG-433-FF2	12,70	15,49	4,75	5,16	1,19					
		DNMG-150604-FF2	○	○	○	○	●	○	○	○	○	○	●	○	DNMG-441-FF2	12,70	15,49	6,35	5,16	0,38					
		DNMG-150608-FF2	○	○	○	○	○	○	○	○	○	○	○	○	DNMG-442-FF2	12,70	15,49	6,35	5,16	0,79					
		DNMG-150612-FF2	○	○	○	○	○	○	○	○	○	○	○	○	DNMG-443-FF2	12,70	15,49	6,35	5,16	1,19					
		DNMG-190608-FF2	○	○	○	○	○	○	○	○	○	○	○	○	DNMG-542-FF2	15,88	19,38	6,35	6,35	0,79					
		DNMG-190612-FF2	○	○	○	○	○	○	○	○	○	○	○	○	DNMG-543-FF2	15,88	19,38	6,35	6,35	1,19					
GENERAL PURPOSE		DNMG-150408-GP2	●	●	○	○	●	●	○	●	●	○	●	●	DNMG-432-GP2	12,70	15,49	4,75	5,16	0,79					
		DNMG-150412-GP2	○	○	○	○	●	○	○	●	●	○	●	●	DNMG-433-GP2	12,70	15,49	4,75	5,16	1,19					
		DNMG-150608-GP2	○	○	○	○	○	○	○	○	●	○	○	○	DNMG-442-GP2	12,70	15,49	6,35	5,16	0,79					
		DNMG-150612-GP2	○	○	○	○	●	○	○	○	○	●	○	○	DNMG-443-GP2	12,70	15,49	6,35	5,16	1,19					
		DNMG-190608-GP2	○	○	○	○	○	○	○	○	○	○	○	○	DNMG-542-GP2	15,88	19,38	6,35	6,35	0,79					
		DNMG-190612-GP2	●	○	○	○	○	○	○	○	○	○	○	○	DNMG-543-GP2	15,88	19,38	6,35	6,35	1,19					
MEDIUM ROUGHING		DNMG-150408-MR	○	○	○	○	○	○	○	○	○	○	○	○	DNMG-432-MR	12,70	15,49	4,75	5,16	0,79					
		DNMG-150608-MR	○	○	○	○	○	○	○	○	○	○	○	○	DNMG-442-MR	12,70	15,49	6,35	5,16	0,79					
		DNMG-190608-MR2	○	●	○	○	○	○	○	○	○	○	○	○	DNMG-542-MR	15,88	19,38	6,35	6,35	0,79					
		DNMG-190612-MR2	●	○	○	○	○	○	○	○	○	○	○	○	DNMG-543-MR2	15,88	19,38	6,35	6,35	1,19					
		Carbide Coatings		 MT-CVD Coated	 PVD Coated	 Uncoated	P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M15 GA5023	M20 M35 K15 GA5023	G-925 G-920 G-9230	S	G-915 G-920M						
		Steel					Stainless Steel			Cast Iron		High-Temp Alloys													


**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard  
  Stocked Upon Request  
  Not Recommended

# 55° Diamond Inserts

## Flat Top

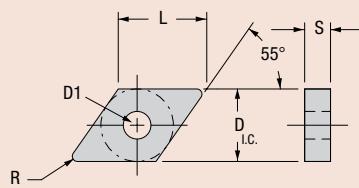


Shape: 55° Diamond	Part Number ISO	Material Selection					Part Number ANSI	Dimensions (millimeters)										
		Steel	Stainless Steel	Cast Iron	High-Temp Alloys			D_I.C.	L	S	D1	R						
	DNMA-150404	P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	K15 GA5023	M20 G-915	M35 G-20M	DNMA-431	12,70	15,49	4,75	5,16	0,13
	DNMA-150408	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	DNMA-432	12,70	15,49	4,75	5,16	0,79
	DNMA-150412	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	DNMA-433	12,70	15,49	4,75	5,16	1,19
	DNMA-150416	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	DNMA-434	12,70	15,49	4,75	5,16	1,57
	DNMA-190412	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	DNMA-533	15,88	19,38	4,75	6,35	1,19
	DNMA-190608	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	DNMA-542	15,88	19,38	6,35	6,35	0,79
	DNMA-190612	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	DNMA-543	15,88	19,38	6,35	6,35	1,19
	DNMA-190616	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	DNMA-544	15,88	19,38	6,35	6,35	1,57
Carbide Coatings		P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	K15 GA5023	M20 G-915	M35 G-20M						
MT-CVD Coated		MT-CVD Coated	PVD Coated	Uncoated	Steel	Stainless Steel	Cast Iron	High-Temp Alloys										

Not Recommended  Stocked or Available Upon Request  Stocked Standard 

# Round Inserts

## Chip Control

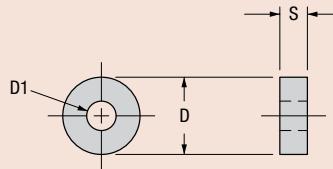

*Greenleaf Sales*

**US +814-763-2915 • sales@greenleafcorporation.com**

**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com


**ES** +31 43 404 1774 • [customers@greenleafcorporation.com](mailto:customers@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)

www.greenleafglobalsupport.com • www.greenleafcorporation.com



# Round Inserts


## Flat Top (RNMA)

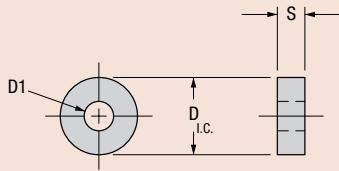

Shape: Round	Part Number ISO	Steel					Stainless Steel		Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)				
		P15	GA5025	P25	GA5035	P25	GA5125	P25	GA5036	P35	GA5026	M15	M15	M15	S	D_i.c.	S	D1
	RNMA-090300	○	○	○	○	○	○	○	○	○	○	○	○	○	○	9,53	3,18	3,81
	RNMA-090400	○	○	○	○	○	○	○	○	○	○	○	○	○	○	9,53	4,75	3,81
	RNMA-120400	○	○	○	○	○	○	○	○	○	○	○	○	○	○	12,70	4,75	5,16
	RNMA-150600	○	○	○	○	○	○	○	○	○	○	○	○	○	○	15,88	6,35	6,35
	RNMA-190600	○	○	○	○	○	○	○	○	○	○	○	○	○	○	19,05	6,35	7,92
	RNMA-250900	○	○	○	○	○	○	○	○	○	○	○	○	○	○	25,40	9,53	9,12
	RNMA-310900	○	○	○	○	○	○	○	○	○	○	○	○	○	○	31,75	9,53	12,70
Carbide Coatings		P15	GA5025	P25	GA5035	P25	GA5125	P35	GA5036	M15	GA5026	M15	M15	M15	S			
MT-CVD Coated										P15	M15	M15	M15	M15		9,53	3,18	3,81
PVD Coated										P25	M15	M15	M15	M15		9,53	4,75	3,81
Uncoated										P25	M15	M15	M15	M15		12,70	4,75	5,16
Steel										P35	M15	M20	M20	M20		15,88	6,35	6,35
Stainless Steel										M35	K15	GA5023	K15	K15		19,05	6,35	7,92
Cast Iron										GA5026	M15	M15	M15	M15		25,40	9,53	9,12
High-Temp Alloys											G-925	G-925	G-925	G-925				
G-20M																		

# Round Inserts

## Flat Top (RNGN)

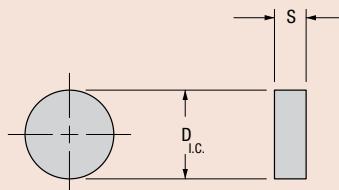


Shape: Round	Part Number ISO	Steel					Stainless Steel		Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)				
		P15	GA5025	P25	GA5035	P25	GA5125	P25	GA5036	P35	GA5026	M15	M15	M15	S	D_i.c.	S	
	RNGN-090300	○	○	○	○	○	○	○	○	○	○	○	○	○	○	9,53	3,18	3,81
	RNGN-120300	○	○	○	●	○	○	○	○	○	○	●	○	○	○	12,70	3,18	3,81
	RNGN-120400	○	○	○	●	○	○	○	○	○	○	●	○	○	○	12,70	4,75	
	RNGN-120700	○	○	○	●	○	○	○	○	○	○	●	○	○	○	12,70	7,92	
	RNGN-150400	○	○	○	○	○	○	○	○	○	○	○	○	○	○	15,88	4,75	
	RNGN-190400	○	○	○	○	○	○	○	○	○	○	○	○	○	○	19,05	4,75	
	RNGN-250600	○	○	○	○	○	○	○	○	○	○	○	○	○	○	25,40	6,35	
Carbide Coatings		P15	GA5025	P25	GA5035	P25	GA5125	P25	GA5036	M15	GA5026	M15	M15	M15	S			
MT-CVD Coated										P25	M15	M15	M15	M15		9,53	3,18	3,81
PVD Coated										P25	M15	M15	M15	M15		12,70	3,18	3,81
Uncoated										P35	M15	M20	M20	M20		15,88	4,75	
Steel										M35	G-915	GA5023	K15	K15		19,05	4,75	
Stainless Steel										GA5026	M15	M15	M15	M15		25,40	6,35	
Cast Iron											G-925	G-925	G-925	G-925				
High-Temp Alloys																		
G-20M																		

Not Recommended Stocked or Available Upon Request Stocked Standard

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Square Inserts

## Chip Control

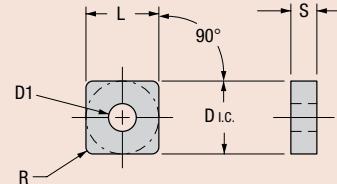

		Part Number ISO	Steel				Stainless Steel				Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)													
Shape: Square			GA5025	P15	P25	GA5035	P25	GA5125	P35	M115	M115	M115	M115	M115	M20	K15	S	D I.C.	L	S	D1	R							
FINISHING		SNMG-090308-FF2	● ○ ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-322-FF2	9,53	9,53	3,18	3,81	0,79							
		SNMG-120408-FF2	● ○ ○ ○ ○	● ○ ○ ○ ○						○ ○ ○ ○ ○	● ○ ○ ○ ○				○ ○ ○ ○ ○		SNMG-432-FF2	12,70	12,70	4,75	5,16	0,79							
		SNMG-120412-FF	○ ○ ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-433-FF	12,70	12,70	4,75	5,16	1,19							
		SNMG-150612-FF	○ ○ ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-543-FF	15,88	15,88	6,35	6,35	1,19							
GENERAL PURPOSE		SNMG-090308-GP	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	SNMG-322-GP	9,53	9,53	3,18	3,81	0,79							
		SNMG-120408-GP2	● ○ ○ ○ ○							○ ○ ○ ○ ○	● ○ ○ ○ ○				○ ○ ○ ○ ○		SNMG-432-GP2	12,70	12,70	4,75	5,16	0,79							
		SNMG-120412-GP2	● ● ○ ○ ○	● ● ○ ○ ○						○ ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○			● ○ ○ ○ ○		SNMG-433-GP2	12,70	12,70	4,75	5,16	1,19							
		SNMG-120416-GP	○ ○ ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-434-GP	12,70	12,70	4,75	5,16	1,57							
		SNMG-150612-GP2	● ● ○ ○ ○	● ● ○ ○ ○						○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-543-GP2	15,88	15,88	6,35	6,35	1,19							
		SNMG-190612-GP2	○ ● ○ ○ ○	● ● ○ ○ ○						○ ○ ○ ○ ○	● ○ ○ ○ ○				○ ○ ○ ○ ○		SNMG-643-GP2	19,05	19,05	6,35	7,92	1,19							
		SNMG-190616-GP2	○ ○ ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-644-GP2	19,05	19,05	6,35	7,92	1,57							
MEDIUM ROUGHING		SNMG-120408-MR2	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	SNMG-432-MR2	12,70	12,70	4,75	5,16	0,79							
		SNMG-120608-MR	○ ○ ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-442-MR	12,70	12,70	6,35	5,16	0,79							
		SNMG-150612-MR2	● ● ○ ○ ○	● ○ ○ ○ ○						○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-543-MR2	15,88	15,88	6,35	6,35	1,19							
		SNMG-190612-MR	○ ● ○ ○ ○	● ○ ○ ○ ○						○ ○ ○ ○ ○	● ○ ○ ○ ○				○ ○ ○ ○ ○		SNMG-643-MR	19,05	19,05	6,35	7,92	1,19							
		SNMG-190616-MR	○ ○ ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-644-MR	19,05	19,05	6,35	7,92	1,57							
		SNMG-250924-MR	○ ● ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMG-866-MR	25,40	25,40	9,53	9,12	2,39							
HEAVY ROUGHING		SNMM-190612-HR	○ ○ ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMM-643-HR	19,05	19,05	6,35	7,92	1,19							
		SNMM-190616-HR	○ ○ ○ ○ ○							○ ○ ○ ○ ○					○ ○ ○ ○ ○		SNMM-644-HR	19,05	19,05	6,35	7,92	1,57							
		Carbide Coatings																											
			P15	GA5025	P25	GA5035	P25	GA5125	P35	M115	GA5026	M115	G-925	M115	G-920	M115	G-9230	M20	GA5023	M35	G-915	G-915	G-20M						
			P25	GA5035	P25	GA5125	P35	GA5026	M115	G-925	M115	G-920	M115	G-9230	M20	GA5023	M35	G-915	GA5023	G-915	S								
			P25	GA5035	P25	GA5125	P35	GA5026	M115	G-925	M115	G-920	M115	G-9230	M20	GA5023	M35	G-915	G-915	S									
			Steel							Stainless Steel																			


**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Stocked Standard  
 Stocked Upon Request  
 Not Recommended

# Square Inserts

## Flat Top (SNMA)

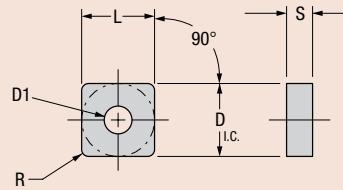


Shape: Square	Part Number ISO	Steel					Stainless Steel		Cast Iron		High-Temp Alloys		Part Number ANSI						
		GA5025	P15	GA5035	P25	GA5125	P25	GA5036	P35	GA5026	M15	M15	M15	GA5023	M20	K15	M35	G-20M	
	SNMA-090304	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-321
	SNMA-090308	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-322
	SNMA-090312	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-323
	SNMA-120404	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-431
	SNMA-120408	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-432
	SNMA-120412	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-433
	SNMA-120416	○	○	○	○	○	○	○	○	●	○	○	●	○	○	○	○	○	SNMA-434
	SNMA-150608	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-542
	SNMA-150612	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-543
	SNMA-150616	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-544
	SNMA-190612	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-643
	SNMA-190616	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-644
	SNMA-250916	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-864
	SNMA-250924	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNMA-866
Carbide Coatings		P15	GA5025	P25	GA5035	P25	GA5125	P35	GA5036	M15	M15	M15	M15	GA5026	M20	K15	M35	G-20M	
MT-CVD Coated		MT-CVD Coated	PVD Coated	PVD Coated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Steel	Steel	Steel	Steel	Stainless Steel	Stainless Steel	Cast Iron	Cast Iron	High-Temp Alloys	

Not Recommended  Stocked or Available Upon Request  Stocked Standard 

# Square Inserts

## Flat Top (SNGN)

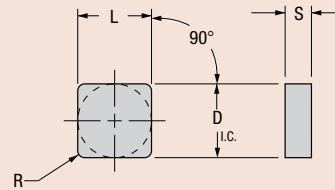

Shape: Square	Part Number ISO	P15	Steel	P25	P25	P25	P35	M15	Stainless Steel	M15	Cast Iron	M15	High-Temp Alloys	K15		Part Number ANSI	Dimensions (millimeters)				
		GA5025	GA5035	GA5125	GA5036	GA5026	G-925	G-920	G-9230	GA5023	M15	M20	M35	S	G-915	G-20M	D_I.C.	L	S	R	
	SNGN-090304	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-321	9,53	9,53	3,18	0,38
	SNGN-090308	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-322	9,53	9,53	3,18	0,79
	SNGN-120308	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-422	12,70	12,70	3,18	0,79
	SNGN-120312	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-423	12,70	12,70	3,18	1,19
	SNGN-120400	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-430	12,70	12,70	4,75	0,13
	SNGN-120404	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-431	12,70	12,70	4,75	0,38
	SNGN-120408	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-432	12,70	12,70	4,75	0,79
	SNGN-120412	○	○	●	●	○	○	○	○	●	○	○	○	○	○	●	SNGN-433	12,70	12,70	4,75	1,19
	SNGN-120416	○	○	○	●	○	○	○	○	●	○	○	○	○	○	●	SNGN-434	12,70	12,70	4,75	1,57
	SNGN-150412	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-533	15,88	15,88	4,75	1,19
	SNGN-150416	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-534	15,88	15,88	4,75	1,57
	SNGN-150612	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-543	15,88	15,88	6,35	1,19
	SNGN-190404	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-631	19,05	19,05	4,75	0,38
	SNGN-190408	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-632	19,05	19,05	4,75	0,79
	SNGN-190412	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-633	19,05	19,05	4,75	1,19
	SNGN-190416	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-634	19,05	19,05	4,75	1,57
	SNGN-190432	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-638	19,05	19,05	4,75	3,18
	SNGN-190612	○	○	●	●	○	○	○	○	○	○	○	○	○	○	○	SNGN-643	19,05	19,05	6,35	1,19
	SNGN-190616	○	○	●	●	○	○	○	○	○	○	○	○	○	○	○	SNGN-644	19,05	19,05	6,35	1,57
	SNGN-190624	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-646	19,05	19,05	6,35	2,39
	SNGN-250616	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-844	25,40	25,40	6,35	1,57
	SNGN-250716	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-854	25,40	25,40	7,92	1,57
	SNGN-310648	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-10412	31,75	31,75	6,35	4,75
	SNGN-310924	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-1066	31,75	31,75	9,53	2,39
	SNGN-310932	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-1068	31,75	31,75	9,53	3,18
	SNGN-381232	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNGN-1288	38,10	38,10	12,70	3,18
Carbide Coatings		P15	GA5025	P25	GA5035	P25	GA5125	P35	GA5036	M15	GA5026	M15	G-925	G-920	G-9230	GA5023	K15				
		MT-CVD Coated	PVD Coated	Uncoated	Steel	Stainless Steel	Cast Iron				G-925	G-920	G-9230	G-915		G-20M					

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard  
  Stocked or Available Upon Request  
  Not Recommended

## CARBIDE INSERTS

# Square Inserts

## Flat Top (SNUN)

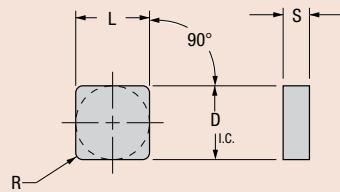

Shape: Square	Part Number ISO	Steel				Stainless Steel				Cast Iron		High-Temp Alloys				Part Number ANSI	Dimensions (millimeters)										
		P15	GA5025	GA5035	P25	GA5125	P25	GA5036	P35	M15	M15	M15	M15	M15	M20	M35	K15	S	D I.C.	L	S	R					
	SNUN-090308	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-322	9,53	9,53	3,18	0,79				
	SNUN-090312	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-323	9,53	9,53	3,18	1,19				
	SNUN-120308	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-422	12,70	12,70	3,18	0,79				
	SNUN-120312	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-423	12,70	12,70	3,18	1,19				
	SNUN-120316	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-424	12,70	12,70	3,18	1,57				
	SNUN-120408	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-432	12,70	12,70	4,75	0,79				
	SNUN-120412	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-433	12,70	12,70	4,75	1,19				
	SNUN-120416	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-434	12,70	12,70	4,75	1,57				
	SNUN-150412	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-533	15,88	15,88	4,75	1,19				
	SNUN-190408	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-632	19,05	19,05	4,75	0,79				
	SNUN-190412	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-633	19,05	19,05	4,75	1,19				
	SNUN-190416	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-634	19,05	19,05	4,75	1,57				
	SNUN-250616	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-844	25,40	25,40	6,35	1,57				
	SNUN-250632	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-848	25,40	25,40	6,35	3,18				
	SNUN-250716	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-854	25,40	25,40	7,92	1,57				
	SNUN-310924	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-1066	31,75	31,75	9,53	2,39				
	SNUN-310932	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-1068	31,75	31,75	9,53	3,18				
	SNUN-381232	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SNUN-1288	38,10	38,10	12,70	3,18				
<b>Carbide Coatings</b>  MT-CVD Coated		 PVD Coated	 Uncoated	P15	GA5025	GA5035	P25	GA5125	P25	GA5036	P35	M15	M15	G-925	M15	G-920	M15	G-9230	M20	GA5023	K15	G-915	G-925	G-920	G-9230	G-915	G-20M
				P25	GA5025	GA5035	P25	GA5125	P25	GA5036	P35	M15	M15	G-925	M15	G-920	M15	G-9230	M20	GA5023	K15	S	S	S	S	G-20M	

Not Recommended	<input checked="" type="checkbox"/>	Stocked or Available Upon Request	<input type="radio"/>	<input type="radio"/>	Stocked Standard	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
-----------------	-------------------------------------	-----------------------------------	-----------------------	-----------------------	------------------	-------------------------------------	-------------------------------------


**Greenleaf Sales**  
**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

60°



# Triangle Inserts

## Chip Control

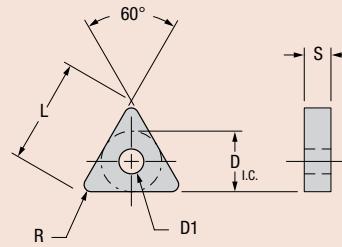

		Part Number ISO	Steel		Stainless Steel		Cast Iron	High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)												
Shape: Triangle			P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036		M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M15 GA5023	M20 G-915	K15 GA5023	G-915 G-20M	D I.C.	L	S	D1	R			
PRECISION FINISHING		TNGG-160401.3-TF				○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNGG-330.3-TF	9,53	16,51	4,75	3,81	0,13			
		TNGG-160402.6-TF				○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNGG-330.6-TF	9,53	16,51	4,75	3,81	0,25			
		TNGG-160404-TF				○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNGG-331-TF	9,53	16,51	4,75	3,81	0,38			
		TNGG-160408-TF				● ○ ○ ○ ○						● ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNGG-332-TF	9,53	16,51	4,75	3,81	0,79			
		TNGG-220401.3-TF				○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNGG-430.3-TF	12,70	22,00	4,75	5,16	0,13			
		TNGG-220402.6-TF				○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNGG-430.6-TF	12,70	22,00	4,75	5,16	0,25			
		TNGG-220404-TF				○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNGG-431-TF	12,70	22,00	4,75	5,16	0,38			
		TNGG-220408-TF				● ● ○ ○ ○						● ● ○ ○ ○	○ ○ ○ ○ ○	○	TNGG-432-TF	12,70	22,00	4,75	5,16	0,79			
FINISHING		TNMG-160304-FF2	●	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-321-FF2	9,53	16,51	3,18	3,81	0,38			
		TNMG-160308-FF2	●	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-322-FF2	9,53	16,51	3,18	3,81	0,79			
		TNMG-160312-FF2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-323-FF2	9,53	16,51	3,18	3,81	1,19			
		TNMG-160316-FF2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-324-FF2	9,53	16,51	3,18	3,81	1,57			
		TNMG-160404-FF2				○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-331-FF2	9,53	16,51	4,75	3,81	0,38			
		TNMG-160408-FF2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-332-FF2	9,53	16,51	4,75	3,81	0,79			
		TNMG-160416-FF2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-334-FF2	9,53	16,51	4,75	3,81	1,19			
		TNMG-220404-FF2	● ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-431-FF2	9,53	16,51	4,75	3,81	1,57			
		TNMG-220408-FF2	● ● ○ ○ ○	● ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-432-FF2	12,70	22,00	4,75	5,16	0,38			
		TNMG-220412-FF2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-433-FF2	12,70	22,00	4,75	5,16	0,79			
		TNMG-220416-FF2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ● ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-434-FF2	12,70	22,00	4,75	5,16	1,19			
		TNMG-270608-FF2	● ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-542-FF2	12,70	22,00	4,75	5,16	1,57			
		TNMG-270612-FF2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-543-FF2	15,88	27,51	6,35	6,35	0,79			
GENERAL PURPOSE		TNMG-160304-GP2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-321-GP2	15,88	27,51	6,35	6,35	1,19			
		TNMG-160308-GP2	● ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-322-GP2	9,53	16,51	3,18	3,81	0,38			
		TNMG-160312-GP2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-323-GP2	9,53	16,51	3,18	3,81	0,79			
		TNMG-160316-GP2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-324-GP2	9,53	16,51	3,18	3,81	1,19			
		TNMG-160412-GP2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-333-GP2	9,53	16,51	3,18	3,81	1,57			
		TNMG-220408-GP2	● ● ○ ○ ○	● ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○	TNMG-432-GP2	9,53	16,51	4,75	3,81	1,19			
		TNMG-220412-GP2	● ○ ○ ○ ○	● ● ○ ○ ○		○ ○ ○ ○ ○						● ○ ○ ○ ○	● ○ ○ ○ ○	● ○	TNMG-433-GP2	12,70	22,00	4,75	5,16	0,79			
		TNMG-220416-GP2	○ ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ● ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-434-GP2	12,70	22,00	4,75	5,16	1,19			
		TNMG-270608-GP2	● ○ ○ ○ ○	○ ○ ○ ○ ○		○ ○ ○ ○ ○						○ ○ ○ ○ ○	○ ○ ○ ○ ○	○	TNMG-542-GP2	12,70	22,00	4,75	5,16	1,57			
															15,88	27,51	6,35	6,35	0,79				
															15,88	27,51	6,35	6,35	1,19				
		Carbide Coatings		MT-CVD Coated	PVD Coated	Uncoated	P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M20 G-915	K15 GA5023	G-915 G-20M					
		Steel		Stainless Steel		Cast Iron		High-Temp Alloys															

Continued on next page.


**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard    Stocked or Available Upon Request    Not Recommended

# Triangle Inserts

## Chip Control *Continued*

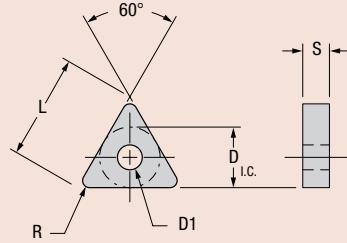


		Part Number ISO	Steel					Stainless Steel		Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)												
Shape: Triangle			P15	GA5025	P25	GA5035	P25	GA5125	P35	GA5036	M15	GA5026	M15	GA5026	M15	GA5023	M20	K15	G-20M	D I.C.	L	S	D1	R			
<b>MEDIUM ROUGHING</b>		TNMG-110308-MR2	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMG-222-MR2	6,35	11,00	3,18	2,36	0,79		
		TNMG-220412-MR2	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMG-433-MR2	12,70	22,00	4,75	5,16	1,19		
		TNMG-220416-MR2	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMG-434-MR2	12,70	22,00	4,75	5,16	1,57		
		TNMG-220432-MR2	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMG-438-MR2	12,70	22,00	4,75	5,16	3,18		
		TNMG-270608-MR2	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMG-542-MR2	15,88	27,51	6,35	6,35	0,79		
		TNMG-270612-MR2	● ● ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMG-543-MR2	15,88	27,51	6,35	6,35	1,19		
		TNMG-270616-MR2	○ ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMG-544-MR2	15,88	27,51	6,35	6,35	1,57		
		TNMG-270624-MR2	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMG-546-MR2	15,88	27,51	6,35	6,35	2,39		
		TNMG-330924-MR	○ ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMG-666-MR	19,05	32,99	9,53	7,92	2,39		
<b>HEAVY ROUGHING</b>		TNMM-220412-HR	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMM-433-HR	12,70	22,00	4,75	5,16	1,19		
		TNMM-270616-HR	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TNMM-544-HR	15,88	27,51	6,35	6,35	1,57		
		<b>Carbide Coatings</b>																									
		MT-CVD Coated     PVD Coated     Uncoated																									
		P15	GA5025	P25	GA5035	P25	GA5125	P35	GA5036	M15	GA5026	M15	GA5026	M15	GA5026	M20	K15	G-20M	GA5026	G-925	S	G-920	G-9230	G-915	G-20M		
		Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Cast Iron	High-Temp Alloys									

Not Recommended or Available Upon Request Stocked Standard

# Triangle Inserts

## Flat Top (TNMA)

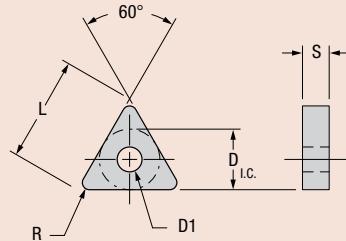

Shape: Triangle	Part Number ISO	Material Properties										Part Number ANSI	Dimensions (millimeters)							
		Steel			Stainless Steel			Cast Iron		High-Temp Alloys			D. I.C.	L	S	D1	R			
		P15	P25	P25	P25	M15	M15	M15	M15	M20	M35	K15	S		G-915	GA5026	G-920	G-9230	G-915	G-20M
	TNMA-110308	○	○	○	○	○	○	○	○	○	○	○			TNMA-222	6,35	11,00	3,18	2,36	0,79
	TNMA-160304	○	○	○	○	○	○	○	○	○	○	○			TNMA-321	9,53	16,51	3,18	3,81	0,38
	TNMA-160308	○	○	○	○	○	○	○	○	○	○	○			TNMA-322	9,53	16,51	3,18	3,81	0,79
	TNMA-160312	○	○	○	○	○	○	○	○	○	○	○			TNMA-323	9,53	16,51	3,18	3,81	1,19
	TNMA-160316	○	○	○	○	○	○	○	○	○	○	○			TNMA-324	9,53	16,51	3,18	3,81	1,57
	TNMA-160408	○	○	○	○	○	○	○	○	○	○	○			TNMA-332	9,53	16,51	4,75	3,81	0,79
	TNMA-160412	○	○	○	○	○	○	○	●	○	●	○			TNMA-333	9,53	16,51	4,75	3,81	1,19
	TNMA-220404	○	○	○	○	○	○	○	○	○	○	○			TNMA-431	12,70	22,00	4,75	5,16	0,38
	TNMA-220408	○	○	○	○	○	○	○	○	○	○	○			TNMA-432	12,70	22,00	4,75	5,16	0,79
	TNMA-220412	○	○	○	○	○	○	○	○	○	○	○			TNMA-433	12,70	22,00	4,75	5,16	1,19
	TNMA-220416	○	○	○	○	○	○	○	○	○	○	○			TNMA-434	12,70	22,00	4,75	5,16	1,57
	TNMA-270608	○	○	○	○	○	○	○	○	○	○	○			TNMA-542	15,88	27,51	6,35	6,35	0,79
	TNMA-270612	○	○	○	○	○	○	○	○	○	○	○			TNMA-543	15,88	27,51	6,35	6,35	1,19
	TNMA-270616	○	○	○	○	○	○	○	○	○	○	○			TNMA-544	15,88	27,51	6,35	6,35	1,57
	TNMA-270632	○	○	○	○	○	○	○	○	○	○	○			TNMA-548	15,88	27,51	6,35	6,35	3,18
	TNMA-270724	○	○	○	○	○	○	○	○	○	○	○			TNMA-556	15,88	27,51	7,92	6,35	2,39
	TNMA-270924	○	○	○	○	○	○	○	○	○	○	○			TNMA-566	15,88	27,51	9,53	6,35	2,39
	TNMA-330608	○	○	○	○	○	○	○	○	○	○	○			TNMA-642	19,05	32,99	6,35	7,92	0,79
	TNMA-330612	○	○	○	○	○	○	○	○	○	○	○			TNMA-643	19,05	32,99	6,35	7,92	1,19
	TNMA-330616	○	○	○	○	○	○	○	○	○	○	○			TNMA-644	19,05	32,99	6,35	7,92	1,57
	TNMA-330916	○	○	○	○	○	○	○	○	○	○	○			TNMA-664	19,05	32,99	9,53	7,92	1,57
	TNMA-330924	○	○	○	○	○	○	○	○	○	○	○			TNMA-666	19,05	32,99	9,53	7,92	2,39
	TNMA-330932	○	○	○	○	○	○	○	○	○	○	○			TNMA-668	19,05	32,99	9,53	7,92	3,18
Carbide Coatings		Material Properties										R	Dimensions (millimeters)							
MT-CVD Coated		Steel			Stainless Steel			Cast Iron		High-Temp Alloys			D. I.C.	L	S	D1	R			
PVD Coated		P15	GA5025	GA5035	GA5125	GA5036	GA5026	G-925	GA5023	GA5026	G-915	K15	S		G-920	G-9230	G-915	G-20M		
Uncoated		P25	P25	P25	P25	M15	M15	M15	M15	M20	M35	K15	S		G-925	G-920	G-9230	G-915	G-20M	

**Greenleaf Sales**


**greenleaf-cases** *US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com*





# Triangle Inserts

## Flat Top (TNGN)

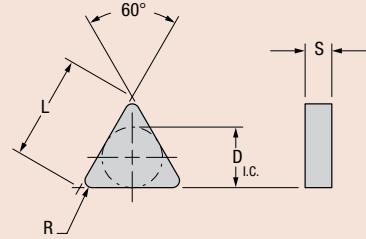

Shape: Triangle	Part Number ISO	Steel				Stainless Steel				Cast Iron	High-Temp Alloys				R									
		P15	P25	P25	P35	M15	M15	M15	M15		K15	M20	M35	S										
		GA5025	GA5035	GA5125	GA5036	GA5026	G-925	G-920	G-9230	GA5023	GA5026	G-925	G-920	G-9230	G-915									
	TNGN-110308	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-222	6,35	11,00	3,18	0,79					
	TNGN-110312	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-223	6,35	11,00	3,18	1,19					
	TNGN-160300	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-320	9,53	16,51	3,18	0,13					
	TNGN-160304	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-321	9,53	16,51	3,18	0,38					
	TNGN-160308	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-322	9,53	16,51	3,18	0,79					
	TNGN-160312	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-323	9,53	16,51	3,18	1,19					
	TNGN-160316	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-324	9,53	16,51	3,18	1,57					
	TNGN-160404	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-331	9,53	16,51	4,75	0,38					
	TNGN-160408	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-332	9,53	16,51	4,75	0,79					
	TNGN-160412	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-333	9,53	16,51	4,75	1,19					
	TNGN-160416	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-334	9,53	16,51	4,75	1,57					
	TNGN-220404	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-431	12,70	22,00	4,75	0,38					
	TNGN-220408	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-432	12,70	22,00	4,75	0,79					
	TNGN-220412	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-433	12,70	22,00	4,75	1,19					
	TNGN-220416	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-434	12,70	22,00	4,75	1,57					
	TNGN-220432	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-438	12,70	22,00	4,75	3,18					
	TNGN-220608	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-442	12,70	22,00	6,35	0,79					
	TNGN-220612	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-443	12,70	22,00	6,35	1,19					
	TNGN-220616	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-444	12,70	22,00	6,35	1,57					
	TNGN-270408	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-532	15,88	27,51	4,75	0,79					
	TNGN-270432	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-538	15,88	27,51	4,75	3,18					
	TNGN-270604	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-541	15,88	27,51	6,35	0,38					
	TNGN-270608	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-542	15,88	27,51	6,35	0,79					
	TNGN-270612	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-543	15,88	27,51	6,35	1,19					
	TNGN-270616	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-544	15,88	27,51	6,35	1,57					
	TNGN-270716	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-554	15,88	27,51	7,92	1,57					
	TNGN-270724	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-556	15,88	27,51	7,92	2,39					
	TNGN-330716	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-654	19,05	32,99	7,92	1,57					
	TNGN-330724	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-656	19,05	32,99	7,92	2,39					
	TNGN-330916	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-664	19,05	32,99	9,53	1,57					
	TNGN-330924	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-666	19,05	32,99	9,53	2,39					
	TNGN-330932	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-668	19,05	32,99	9,53	3,18					
	TNGN-381124	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-776	22,23	38,51	11,10	2,39					
	TNGN-381132	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-778	22,23	38,51	11,10	3,18					
	TNGN-381140	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-7710	22,23	38,51	11,10	3,96					
	TNGN-441132	○	○	○	○	○	○	○	○	○	○	○	○	○	TNGN-878	25,40	43,99	11,10	3,18					
Carbide Coatings		GA5025	GA5035	GA5125	GA5036	GA5026	M15	M15	M15	M15	M15	M20	M35	K15	GA5023	GA5026	G-925	G-920	G-9230	G-915	G-20M	R		
MT-CVD Coated		■	□	■	□	■	P15	P25	P25	P35	M15	M15	M15	M15	M15	M20	M35	S	G-925	G-920	G-9230	G-915	G-20M	R
PVD Coated		Steel				Stainless Steel				Cast Iron		High-Temp Alloys				Dimensions (millimeters)								


Not Recommended		Stocked or Available Upon Request		Stocked Standard	
-----------------	--	-----------------------------------	--	------------------	--

**Greenleaf Sales**  
**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com



# Triangle Inserts

## Flat Top (TNUN)

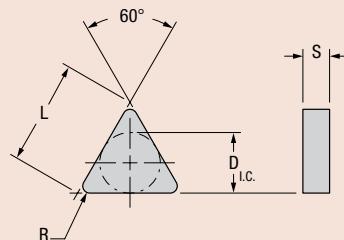

Shape: Triangle	Part Number ISO	Material Options										Part Number ANSI	Dimensions (millimeters)					
		P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M15 GA5023	M20 G-915	M35 GA5023	S	D_I.C.	L	S	R	
	TNUN-160304	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-321	9,53	16,51	3,18	0,38
	TNUN-160308	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-322	9,53	16,51	3,18	0,79
	TNUN-160312	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-323	9,53	16,51	3,18	1,19
	TNUN-160408	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-332	9,53	16,51	4,75	0,79
	TNUN-160412	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-333	9,53	16,51	4,75	1,19
	TNUN-160416	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-334	9,53	16,51	4,75	1,57
	TNUN-220408	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-432	12,70	22,00	4,75	0,79
	TNUN-220412	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-433	12,70	22,00	4,75	1,19
	TNUN-220416	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-434	12,70	22,00	4,75	1,57
	TNUN-220432	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-438	12,70	22,00	4,75	3,18
	TNUN-220604	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-441	12,70	22,00	6,35	0,38
	TNUN-220608	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-442	12,70	22,00	6,35	0,79
	TNUN-220612	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-443	12,70	22,00	6,35	1,19
	TNUN-220616	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-444	12,70	22,00	6,35	1,57
	TNUN-220632	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-448	12,70	22,00	6,35	3,18
	TNUN-270608	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-542	15,88	27,51	6,35	0,79
	TNUN-270612	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-543	15,88	27,51	6,35	1,19
	TNUN-270616	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-544	15,88	27,51	6,35	1,57
	TNUN-270624	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-546	15,88	27,51	6,35	2,39
	TNUN-270708	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-552	15,88	27,51	7,92	0,79
	TNUN-270712	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-553	15,88	27,51	7,92	1,19
	TNUN-270716	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-554	15,88	27,51	7,92	1,57
	TNUN-270724	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-556	15,88	27,51	7,92	2,39
	TNUN-330716	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-654	19,05	32,99	7,92	1,57
	TNUN-330724	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-656	19,05	32,99	7,92	2,39
	TNUN-330916	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-664	19,05	32,99	9,53	1,57
	TNUN-330924	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-666	19,05	32,99	9,53	2,39
	TNUN-330932	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-668	19,05	32,99	9,53	3,18
	TNUN-381124	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-776	22,23	38,51	11,10	2,39
	TNUN-381132	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-778	22,23	38,51	11,10	3,18
	TNUN-381140	○	○	○	○	○	○	○	○	○	○	○	○	TNUN-770	22,23	38,51	11,10	3,96
Carbide Coatings		MT-CVD Coated      PVD Coated      Uncoated																
		P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M15 GA5023	M20 G-915	M35 GA5023	S	G-915 G-20M				
		Steel	Stainless Steel	Cast Iron	High-Temp Alloys													


## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

- Stocked Standard
- Stocked or Available Upon Request
- Not Recommended

# 35° Diamond Inserts

## Chip Control

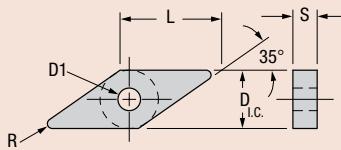


		Part Number ISO	Steel				Stainless Steel		Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)						
Shape: 35° Diamond			P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M35 K15	K15 G-915	M20 GA5026	D I.C.	L	S	D1	R	
PRECISION FINISHING		VNGG-160401.3-TF	○	○	○	○	○	●	●	○	○	○	○	VNGG-330.3-TF	9,53	16,61	4,75	3,81	0,13	
		VNGG-160402.6-TF	○	○	○	○	○	○	●	○	○	○	○	VNGG-330.6-TF	9,53	16,61	4,75	3,81	0,25	
		VNGG-160404-TF	○	●	●	●	●	●	●	●	●	●	●	VNGG-331-TF	9,53	16,61	4,75	3,81	0,38	
		VNGG-160408-TF	○	●	●	●	○	●	●	●	●	●	●	VNGG-332-TF	9,53	16,61	4,75	3,81	0,79	
		VNGG-160412-TF	○	●	●	○	○	●	●	○	○	○	○	VNGG-333-TF	9,53	16,61	4,75	3,81	1,19	
FINISHING		VNMG-160404-FF2	●	●	○	○	○	●	○	●	○	○	●	VNMG-331-FF2	9,53	16,61	4,75	3,81	0,38	
		VNMG-160408-FF2	●	●	○	○	●	○	○	○	●	○	●	VNMG-332-FF2	9,53	16,61	4,75	3,81	0,79	
		VNMG-160412-FF2	○	○	○	○	○	○	○	○	○	○	○	VNMG-333-FF2	9,53	16,61	4,75	3,81	1,19	
		VNMG-220408-FF2	○	●	○	○	○	○	○	○	○	○	○	VNMG-432-FF2	12,70	22,15	4,75	5,16	0,79	
GENERAL PURPOSE		VNMG-160408-GP2	●	○	○	○	●	○	○	○	○	○	●	VNMG-332-GP2	9,53	16,61	4,75	3,81	0,79	
		VNMG-160412-GP2	○	○	○	○	○	○	○	○	○	○	○	VNMG-333-GP2	9,53	16,61	4,75	3,81	1,19	
		VNMG-220408-GP2	●	○	○	○	○	○	○	○	○	○	○	VNMG-432-GP2	12,70	22,15	4,75	5,16	0,79	
Carbide Coatings		MT-CVD Coated				PVD Coated				Uncoated										
		P15 GA5025	GA5026	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M35 G-915	K15 GA5023	G-925	G-920	G-9230	G-915	G-925	G-920	G-9230	G-915	G-20M	
		P25 GA5035	GA5035	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M35 G-915	K15 GA5023	S	S	S	S						
		P25 GA5125	GA5125	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M35 G-915	K15 GA5023										
		P35 GA5036	GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M35 G-915	K15 GA5023										

Not Recommended Stocked or Available Upon Request Stocked Standard

# 35° Diamond Inserts

## Flat Top

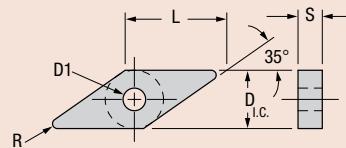

Shape: 35° Diamond	Part Number ISO	Material Options										Part Number ANSI	Dimensions (millimeters)																																									
		Steel P15 GA5025	Steel P25 GA5035	Steel P25 GA5125	Steel P25 GA5036	Stainless Steel M15 GA5026	Stainless Steel M15 GA5026	Stainless Steel M15 GA5026	Cast Iron M15 GA5023	Cast Iron M15 GA5023	Cast Iron M20 GA5023		D I.C. G-915 GA5026	L G-925 GA5026	S G-920 GA5026	D1 G-915 GA5026	R G-20M GA5026																																					
	VNMA-160404	○	○	○	○	○	○	○	○	○	○	VNMA-331	9,53	16,61	4,75	3,81	0,38																																					
	VNMA-160408	○	○	○	○	○	○	○	○	○	○	VNMA-332	9,53	16,61	4,75	3,81	0,79																																					
	VNMA-220404	○	○	○	○	○	○	○	○	○	○	VNMA-431	12,70	22,15	4,75	5,16	0,38																																					
	VNMA-220408	○	○	○	○	○	○	○	○	○	○	VNMA-432	12,70	22,15	4,75	5,16	0,79																																					
Carbide Coatings		 MT-CVD Coated																																																				
		 PVD Coated																																																				
		 Uncoated																																																				
		<table border="1"> <thead> <tr> <th>Steel P15 GA5025</th> <th>Steel P25 GA5035</th> <th>Steel P25 GA5125</th> <th>Steel P25 GA5036</th> <th>Stainless Steel M15 GA5026</th> <th>Stainless Steel M15 GA5026</th> <th>Stainless Steel M15 GA5026</th> <th>Cast Iron M15 GA5023</th> <th>Cast Iron M15 GA5023</th> <th>Cast Iron M20 GA5023</th> <th>High-Temp Alloys M35 K15</th> <th>High-Temp Alloys S</th> <th>Steel P15 GA5025</th> <th>Steel P25 GA5035</th> <th>Steel P25 GA5125</th> <th>Steel P25 GA5036</th> <th>Stainless Steel M15 GA5026</th> <th>Stainless Steel M15 GA5026</th> </tr> </thead> <tbody> <tr> <td>P15 GA5025</td><td>P25 GA5035</td><td>P25 GA5125</td><td>P25 GA5036</td><td>M15 GA5026</td><td>M15 GA5026</td><td>M15 GA5026</td><td>K15</td><td>K15</td><td>K15</td><td>G-915 GA5023</td><td>G-915 GA5023</td><td>G-915 GA5023</td><td>G-915 GA5023</td><td>G-915 GA5023</td><td>G-915 GA5023</td><td>G-915 GA5023</td><td>G-915 GA5023</td></tr> </tbody> </table>											Steel P15 GA5025	Steel P25 GA5035	Steel P25 GA5125	Steel P25 GA5036	Stainless Steel M15 GA5026	Stainless Steel M15 GA5026	Stainless Steel M15 GA5026	Cast Iron M15 GA5023	Cast Iron M15 GA5023	Cast Iron M20 GA5023	High-Temp Alloys M35 K15	High-Temp Alloys S	Steel P15 GA5025	Steel P25 GA5035	Steel P25 GA5125	Steel P25 GA5036	Stainless Steel M15 GA5026	Stainless Steel M15 GA5026	P15 GA5025	P25 GA5035	P25 GA5125	P25 GA5036	M15 GA5026	M15 GA5026	M15 GA5026	K15	K15	K15	G-915 GA5023													
Steel P15 GA5025	Steel P25 GA5035	Steel P25 GA5125	Steel P25 GA5036	Stainless Steel M15 GA5026	Stainless Steel M15 GA5026	Stainless Steel M15 GA5026	Cast Iron M15 GA5023	Cast Iron M15 GA5023	Cast Iron M20 GA5023	High-Temp Alloys M35 K15	High-Temp Alloys S	Steel P15 GA5025	Steel P25 GA5035	Steel P25 GA5125	Steel P25 GA5036	Stainless Steel M15 GA5026	Stainless Steel M15 GA5026																																					
P15 GA5025	P25 GA5035	P25 GA5125	P25 GA5036	M15 GA5026	M15 GA5026	M15 GA5026	K15	K15	K15	G-915 GA5023	G-915 GA5023	G-915 GA5023	G-915 GA5023	G-915 GA5023	G-915 GA5023	G-915 GA5023	G-915 GA5023																																					

*Greenleaf Sales*

**US +814-763-2915 • sales@greenleafcorporation.com**

**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com

**CN** +86-731-89954796 • info@greenleafcorporation.com.cn


www.greenleafglobalsupport.com • www.greenleafcorporation.com





# 80° Trigon Inserts

## Chip Control

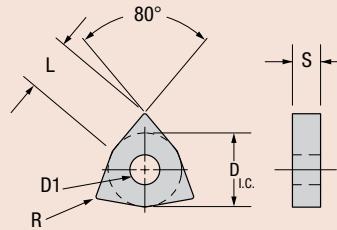


Not Recommended	<input type="checkbox"/>
Stocked or Available Upon Request	<input type="radio"/> <input type="radio"/>
Stocked Standard	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>

**Greenleaf Sales**  
**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com



# 80° Trigon Inserts Flat Top

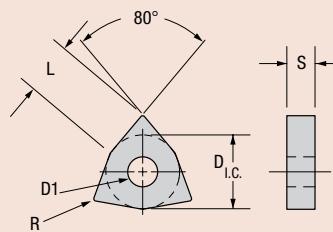

Shape: 80° Trigon	Part Number ISO	Steel			Stainless Steel		Cast Iron	High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)										
		P15 GA5025	P25 GA5035	P25 GA5125	M15 GA5026	M15 GA5036	M15 GA5035	M15 GA5125	M20 GA5023	M35 GA5023	D I.C.	L	S	D1	R						
	WNMA-060404	○	○	○	○	○	○	○	○	○	WNMA-331	9,53	6,53	4,75	3,81	0,38					
	WNMA-060408	○	○	○	○	○	○	○	○	○	WNMA-332	9,53	6,53	4,75	3,81	0,79					
	WNMA-060412	○	○	○	○	○	○	○	○	○	WNMA-333	9,53	6,53	4,75	3,81	1,19					
	WNMA-080404	○	○	○	○	○	○	○	○	○	WNMA-431	12,70	8,69	4,75	5,16	0,38					
	WNMA-080408	○	○	○	○	○	○	●	●	○	WNMA-432	12,70	8,69	4,75	5,16	0,79					
	WNMA-080412	○	○	○	○	○	○	●	●	○	WNMA-433	12,70	8,69	4,75	5,16	1,19					
	WNMA-080416	○	○	○	○	○	○	●	●	○	WNMA-434	12,70	8,69	4,75	5,16	1,57					
Carbide Coatings		MT-CVD Coated	PVD Coated	Uncoated	P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M35 G-915	K15 GA5023	G-915 G-20M					
		Steel			Steel			Stainless Steel		Cast Iron		High-Temp Alloys									

**Greenleaf Sales**


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Stocked Standard  
 Stocked or Available Upon Request  
 Not Recommended



# 80° Diamond Inserts


## Positive Flat Top

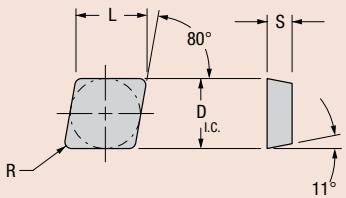

Shape: 80° Diamond	Part Number ISO	Steel				Stainless Steel			Cast Iron		High-Temp Alloys			Part Number ANSI	Dimensions (millimeters)												
		P15	GA5025	P25	GA5035	P25	GA5125	P25	GA5036	P35	M15	GA5026	M15	GA5025	M15	GA5023	M20	K15	M35	G-20M	S	D I.C.	L	S	R		
	CPGN-120308	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CPGN-422	12,70	12,88	3,18	0,79	
	CPGN-120316	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CPGN-424	12,70	12,88	3,18	1,57
	CPGN-120324	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CPGN-426	12,70	12,88	3,18	2,39
	CPGN-120412	○	○	○	●	○	○	○	○	○	○	●	○	○	○	○	○	○	○	○	●	○	CPGN-433	12,70	12,88	4,75	1,19
	CPGN-120416	○	○	○	●	○	○	○	○	○	●	○	○	○	○	○	○	○	○	●	○	○	CPGN-434	12,70	12,88	4,75	1,57
	CPGN-190408	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CPGN-632	19,05	19,33	4,75	0,79
	CPGN-190412	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	CPGN-633	19,05	19,33	4,75	1,19
<b>Carbide Coatings</b> MT-CVD Coated    PVD Coated    Uncoated		P15	GA5025	P25	GA5035	P25	GA5125	P25	GA5036	P35	M15	GA5026	M15	GA5025	M15	GA5023	M20	K15	M35	G-20M	S						
		Steel	Steel	Steel	Stainless Steel	Stainless Steel	Cast Iron	Cast Iron	High-Temp Alloys	High-Temp Alloys	M15	M15	M15	M15	M15	M20	K15	M35	G-20M	S							

# Round Inserts

## Positive Flat Top

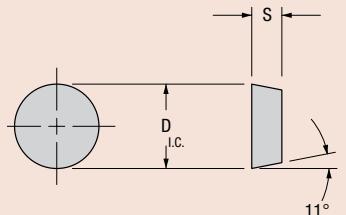


Shape: Round	Part Number ISO	Steel				Stainless Steel			Cast Iron		High-Temp Alloys			Part Number ANSI	Dimensions (millimeters)											
		P15	GA5025	P25	GA5035	P25	GA5125	P25	GA5036	P35	M15	GA5026	M15	GA5025	M15	GA5023	M20	K15	M35	G-20M	S	D I.C.	L	S		
		RPGN-120400	○	○	●	●	○	●	○	○	○	○	○	○	○	○	●	○	○	●	●					
		Steel	Steel	Steel	Stainless Steel	Stainless Steel	Cast Iron	Cast Iron	High-Temp Alloys	High-Temp Alloys	M15	GA5026	M15	GA5025	M15	GA5023	M20	K15	M35	G-20M	S					
		P15	GA5025	P25	GA5035	P25	GA5125	P25	GA5036	P35	M15	GA5026	M15	GA5025	M15	GA5023	M20	K15	M35	G-20M	S					
		Steel	Steel	Steel	Stainless Steel	Stainless Steel	Cast Iron	Cast Iron	High-Temp Alloys	High-Temp Alloys	M15	GA5026	M15	GA5025	M15	GA5023	M20	K15	M35	G-20M	S					
		P25	GA5025	P25	GA5035	P25	GA5125	P25	GA5036	P35	M15	GA5026	M15	GA5025	M15	GA5023	M20	K15	M35	G-20M	S					
		Steel	Steel	Steel	Stainless Steel	Stainless Steel	Cast Iron	Cast Iron	High-Temp Alloys	High-Temp Alloys	M15	GA5026	M15	GA5025	M15	GA5023	M20	K15	M35	G-20M	S					
		P35	GA5025	P25	GA5035	P25	GA5125	P25	GA5036	P35	M15	GA5026	M15	GA5025	M15	GA5023	M20	K15	M35	G-20M	S					
<b>Carbide Coatings</b> MT-CVD Coated    PVD Coated    Uncoated																										

Not Recommended Stocked or Available Upon Request Stocked Standard

## Round Inserts


### Positive Chip Control (RCGT/RPGT)

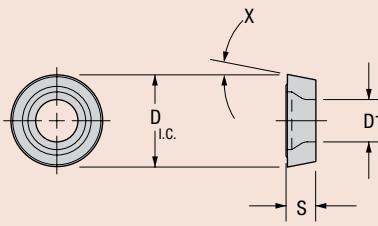

Shape: Round	Part Number ISO	Steel				Stainless Steel				Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)								
		P15	P25	P25	P35	M15	M15	M15	M15	M15	M15	M15	M20	M35	K15	G-915	G-20M	D I.C.	S	D1	X		
	RCGT-060300-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RCGT-22-TF	6,35	3,18	3,40	7°	
	RCGT-09T300-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RCGT-32.5-TF	9,53	3,96	4,39	7°	
	RCGT-120400-TF	○	○	●	○	○	○	○	○	○	○	○	○	○	○	●	○	RCGT-43-TF	12,70	4,75	5,51	7°	
	RPGT-060300-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RPGT-22-TF	6,35	3,18	3,40	11°	
	RPGT-09T300-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RPGT-32.5-TF	9,53	3,96	4,39	11°	
	RPGT-120400-TF	○	●	●	○	○	○	○	○	○	○	○	○	○	●	●	○	RPGT-43-TF	12,70	4,75	5,51	11°	
<b>Carbide Coatings</b>  MT-CVD Coated      PVD Coated      Uncoated		P15	GA5025	P25	GA5035	P25	GA5125	P35	M15	GA5026	M15	GA5036	M15	M20	M35	K15	G-915	G-20M					
		P25	GA5026	P25	GA5036	P25	GA5125	P35	M15	GA5026	M15	GA5036	M15	M20	M35	K15	G-915	G-20M					
		P25	GA5026	P25	GA5036	P25	GA5125	P35	M15	GA5026	M15	GA5036	M15	M20	M35	K15	G-915	G-20M					
		Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel						
		MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated					

## Round Inserts

### Positive Chip Control (RCGR/RPGR)

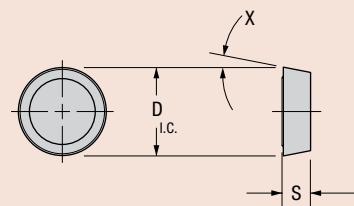

Shape: Round	Part Number ISO	Steel				Stainless Steel				Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)								
		P15	P25	P25	P35	M15	M15	M15	M15	M15	M15	M15	M20	M35	K15	G-915	G-20M	D I.C.	S	D1	X		
	RCGR-060300-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RCGR-22-TF	6,35	3,18	7°		
	RCGR-09T300-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RCGR-32.5-TF	9,53	3,96	7°		
	RCGR-120400-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RCGR-43-TF	12,70	4,75	7°		
	RPGR-060300-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RPGR-22-TF	6,35	3,18	11°		
	RPGR-09T300-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RPGR-32.5-TF	9,53	3,96	11°		
	RPGR-120400-TF	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	RPGR-43-TF	12,70	4,75	11°		
<b>Carbide Coatings</b>  MT-CVD Coated      PVD Coated      Uncoated		P15	GA5025	P25	GA5035	P25	GA5125	P35	M15	GA5026	M15	GA5036	M15	M20	M35	K15	G-915	G-20M					
		P25	GA5026	P25	GA5036	P25	GA5125	P35	M15	GA5026	M15	GA5036	M15	M20	M35	K15	G-915	G-20M					
		P25	GA5026	P25	GA5036	P25	GA5125	P35	M15	GA5026	M15	GA5036	M15	M20	M35	K15	G-915	G-20M					
		Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel						
		MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated	Uncoated	MT-CVD Coated	PVD Coated					

#### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

● Stocked Standard     
 ○ Stocked or Available Upon Request     
 ■ Not Recommended

## CARBIDE INSERTS

# Square Inserts

## Positive Flat Top

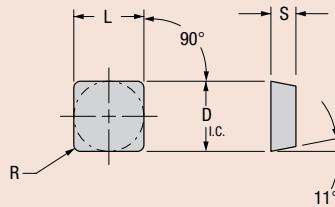

Shape: Square	Part Number ISO	Steel				Stainless Steel				Cast Iron		High-Temp Alloys				Part Number ANSI	Dimensions (millimeters)					
		P15	P25	P25	P35	M15	M15	M15	M15	M20	M20	K15	G-915	G-915	G-915	S	D I.C.	L	S	R		
		GA5025	GA5035	GA5125	GA5036	GA5026	G-925	G-920	G-9230	GA5023	GA5023	GA5026	G-925	G-920	G-9230	G-915	G-20M					
	SPGN-090308	○	○	○	●	○	○	○	○	○	○	●	○	○	○	○	SPGN-322	9,53	9,53	3,18	0,79	
	SPGN-090312	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPGN-323	9,53	9,53	3,18	1,19	
	SPGN-120308	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPGN-422	12,70	12,70	3,18	0,79	
	SPGN-120312	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPGN-423	12,70	12,70	3,18	1,19	
	SPGN-120316	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPGN-424	12,70	12,70	3,18	1,57	
	SPGN-120408	○	○	○	●	○	○	○	○	●	○	○	○	○	○	●	SPGN-432	12,70	12,70	4,75	0,79	
	SPGN-120412	○	○	●	●	○	○	○	○	●	○	○	○	○	○	●	SPGN-433	12,70	12,70	4,75	1,19	
	SPGN-120416	○	○	○	●	○	○	○	○	●	●	●	○	○	○	●	SPGN-434	12,70	12,70	4,75	1,57	
	SPGN-150408	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPGN-532	15,88	15,88	4,75	0,79	
	SPGN-150416	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPGN-534	15,88	15,88	4,75	1,57	
	SPGN-190404	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPGN-631	19,05	19,05	4,75	0,38	
	SPGN-190408	○	○	○	●	○	○	○	○	○	○	○	○	○	○	○	SPGN-632	19,05	19,05	4,75	0,79	
	SPGN-190412	○	○	○	●	○	○	○	○	○	○	○	○	○	○	○	SPGN-633	19,05	19,05	4,75	1,19	
	SPGN-190416	○	○	●	●	○	○	○	○	○	○	○	○	○	○	○	SPGN-634	19,05	19,05	4,75	1,57	
	SPGN-190424	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPGN-636	19,05	19,05	4,75	2,39	
	SPGN-190432	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPGN-638	19,05	19,05	4,75	3,18	
	SPUN-120308	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-422	12,70	12,70	3,18	0,79	
	SPUN-120312	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-423	12,70	12,70	3,18	1,19	
	SPUN-120316	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-424	12,70	12,70	3,18	1,57	
	SPUN-120408	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-432	12,70	12,70	4,75	0,79	
	SPUN-120412	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-433	12,70	12,70	4,75	1,19	
	SPUN-190412	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-633	19,05	19,05	4,75	1,19	
	SPUN-190416	○	○	○	●	○	○	○	○	○	○	○	○	○	○	○	SPUN-634	19,05	19,05	4,75	1,57	
	SPUN-190612	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-643	19,05	19,05	6,35	1,19	
	SPUN-190616	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-644	19,05	19,05	6,35	1,57	
	SPUN-250916	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-864	25,40	25,40	9,53	1,57	
	SPUN-250924	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-866	25,40	25,40	9,53	2,39	
	SPUN-250932	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-868	25,40	25,40	9,53	3,18	
	SPUN-310932	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-1068	31,75	31,75	9,53	3,18	
	SPUN-381232	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	SPUN-1288	38,10	38,10	12,70	3,18	
Carbide Coatings		GA5025				GA5026				G-925		GA5023				GA5026				G-925		
MT-CVD Coated		P15	P25	P25	P35	M15	M15	M15	M15	M15	M15	K15	G-915	G-915	G-915	G-915	G-915	G-915	G-915	G-915	G-915	G-915
PVD Coated		Steel				Stainless Steel				Cast Iron		High-Temp Alloys				S				G-20M		
Uncoated		GA5025				GA5026				G-925		GA5023				GA5026				G-925		

Carbide Coatings



MT-CVD  
Coated



PDF Co



ted

Not Recommended


Stocked  
or Available—

## Stocked Standard

**Greenleaf Sales**  
**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

# Triangle Inserts

## Positive Flat Top (TPGN)

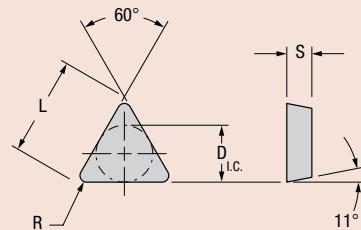


Shape: Triangle	Part Number ISO	High-Temp Alloys										Part Number ANSI	Dimensions (millimeters)				
		P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M15 GA5023	M35 K15		D_I.C.	L	S	R	
	TPGN-110304	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	TPGN-221	6,35	11,00	3,18	0,38	
	TPGN-110308	○ ○ ○ ○ ●	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-222	6,35	11,00	3,18	0,79	
	TPGN-110312	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-223	6,35	11,00	3,18	1,19	
	TPGN-110316	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-224	6,35	11,00	3,18	1,57	
	TPGN-160300	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-320	9,53	16,51	3,18	0,13	
	TPGN-160304	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	TPGN-321	9,53	16,51	3,18	0,38	
	TPGN-160308	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	TPGN-322	9,53	16,51	3,18	0,79	
	TPGN-160312	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	TPGN-323	9,53	16,51	3,18	1,19	
	TPGN-160316	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	TPGN-324	9,53	16,51	3,18	1,57	
	TPGN-160416	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-334	9,53	16,51	4,75	1,57	
	TPGN-160424	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-336	9,53	16,51	4,75	2,39	
	TPGN-220404	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	TPGN-431	12,70	22,00	4,75	0,38	
	TPGN-220408	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	TPGN-432	12,70	22,00	4,75	0,79	
	TPGN-220412	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	TPGN-433	12,70	22,00	4,75	1,19	
	TPGN-220416	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-434	12,70	22,00	4,75	1,57	
	TPGN-220424	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-436	12,70	22,00	4,75	2,39	
	TPGN-270408	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-532	15,88	27,51	4,75	0,79	
	TPGN-270412	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-533	15,88	27,51	4,75	1,19	
	TPGN-270416	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-534	15,88	27,51	4,75	1,57	
	TPGN-270604	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-541	15,88	27,51	6,35	0,38	
	TPGN-270608	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-542	15,88	27,51	6,35	0,79	
	TPGN-270612	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-543	15,88	27,51	6,35	1,19	
	TPGN-270616	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-544	15,88	27,51	6,35	1,57	
	TPGN-270632	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-548	15,88	27,51	6,35	3,18	
	TPGN-270716	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-554	15,88	27,51	7,92	1,57	
	TPGN-270724	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-556	15,88	27,51	7,92	2,39	
	TPGN-330924	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	TPGN-666	19,05	32,99	9,53	2,39	
Carbide Coatings																	
 MT-CVD Coated																	
 PVD Coated																	
 Uncoated																	
		P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	M20 GA5023	M35 G-915	K15 GA5023	GA5026 G-925	G-920 G-9230	G-915 G-20M		
		Steel				Stainless Steel	Cast Iron						S				

**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Triangle Inserts

## Positive Flat Top (TPUN)

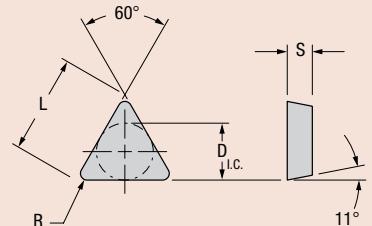


Shape: Triangle	Part Number ISO	Material Options								Part Number ANSI	Dimensions (millimeters)					
		Steel	Stainless Steel		Cast Iron	High-Temp Alloys			D I.C.	L	S	R				
	TPUN-160304	P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	K15 GA5023	M20 G-915	S G-20M	TPUN-321	9,53 16,51 3,18 0,38		
	TPUN-160308	O	O	O	O	O	O	O	O	O	O	O	TPUN-322	9,53 16,51 3,18 0,79		
	TPUN-160312	O	O	O	O	O	O	O	O	O	O	O	TPUN-323	9,53 16,51 3,18 1,19		
	TPUN-220404	O	O	O	O	O	O	O	O	O	O	O	TPUN-431	12,70 22,00 4,75 0,38		
	TPUN-220408	O	O	O	O	O	O	O	O	O	O	O	TPUN-432	12,70 22,00 4,75 0,79		
	TPUN-220412	O	O	O	O	O	O	O	O	O	O	O	TPUN-433	12,70 22,00 4,75 1,19		
	TPUN-220416	O	O	O	O	O	O	O	O	O	O	O	TPUN-434	12,70 22,00 4,75 1,57		
	TPUN-270608	O	O	O	O	O	O	O	O	O	O	O	TPUN-542	15,88 27,51 6,35 0,79		
	TPUN-270612	O	O	O	O	O	O	O	O	O	O	O	TPUN-543	15,88 27,51 6,35 1,19		
	TPUN-270616	O	O	O	O	O	O	O	O	O	O	O	TPUN-544	15,88 27,51 6,35 1,57		
	TPUN-270708	O	O	O	O	O	O	O	O	O	O	O	TPUN-552	15,88 27,51 7,92 0,79		
	TPUN-270712	O	O	O	O	O	O	O	O	O	O	O	TPUN-553	15,88 27,51 7,92 1,19		
	TPUN-270716	O	O	O	O	O	O	O	O	O	O	O	TPUN-554	15,88 27,51 7,92 1,57		
	TPUN-270724	O	O	O	O	O	O	O	O	O	O	O	TPUN-556	15,88 27,51 7,92 2,39		
	TPUN-330916	O	O	O	O	O	O	O	O	O	O	O	TPUN-664	19,05 32,99 9,53 1,57		
	TPUN-330924	O	O	O	O	O	O	O	O	O	O	O	TPUN-666	19,05 32,99 9,53 2,39		
Carbide Coatings		P15 GA5025	P25 GA5035	P25 GA5125	P35 GA5036	M15 GA5026	M15 G-925	M15 G-920	M15 G-9230	K15 GA5023	M20 G-915	S G-20M				
MT-CVD Coated						P15 Steel	P25 Stainless Steel	P25 Cast Iron	P35 High-Temp Alloys							

Not Recommended Stocked or Available Upon Request Stocked Standard



# Triangle Inserts

## Positive Flat Top (TP/TPGA)

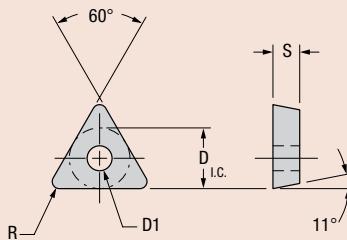

Shape: Triangle	Part Number	Steel										Stainless Steel			Cast Iron		High-Temp Alloys			Part Number	Dimensions (millimeters)								
		P15	P25	P25	P25	P35	M15	M15	M15	M15	G-925	G-920	G-9230	M15	M20	M35	K15	GA5023	GA5026	G-925	G-920	G-9230	G-915	G-20M	ANSI	D I.C.	S	D1	R
	TP-41	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	TP-41	6,35	2,36	3,48	0,38					
	TP-42	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	TP-42	6,35	2,36	3,48	0,79					
	TP-62	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	TP-62	9,53	3,18	4,14	0,79					
	TP-64	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	TP-64	9,53	3,18	4,14	1,57					
	TP-82	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	TP-82	12,70	4,75	5,16	0,79					
	TPGA-160304	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	TPGA-321	9,53	3,18	3,8	0,38					
	TPGA-160308	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	TPGA-322	9,53	3,18	3,8	0,79					
	TPGA-160312	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	TPGA-323	9,53	3,18	3,8	1,19					
Carbide Coatings		MT-CVD Coated	PVD Coated	Uncoated	P15	GA5025	GA5035	GA5125	GA5036	M15	GA5026	M15	G-925	M15	G-920	M15	G-9230	M20	GA5023	GA5026	G-925	G-920	G-9230	G-915	G-20M				
		Steel			P25	P25	P25	P35	M15	M15	M15	M15	M15	M15	M15	M15	M20	M35	K15	GA5023	G-925	G-920	G-9230	G-915	G-20M				


**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Stocked Standard   Stocked or Available Upon Request   Not Recommended

# 80° Trigon Inserts

## Chip Control: Screw On

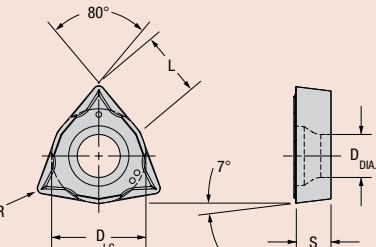

Shape: 80° Trigon	Part Number ISO	High-Temp Alloys										Part Number ANSI	Dimensions (millimeters)					
		Steel	Stainless Steel		Cast Iron								D I.C.	L	S	D1	R	
	WCMT-060202-X3	P15	GA5025	P25	M15	GA5026	M15	M15	M15	M20	K15		WCMT-21.5.5-X3	6,35	4,34	2,36	2,79	0,20
	WCMT-060204-X3	● P25	GA5035	P25	G-925		G-920	M15					WCMT-21.51-X3	6,35	4,34	2,36	2,79	0,38
	WCMT-09T304-X3	○ P25	GA5125	P25	G-920		G-9230	M15	GA5023	S			WCMT-32.51-X3	9,53	6,50	3,96	4,39	0,38
	WCMT-09T308-X3	● P35	GA5036	P35	G-915		G-915	M35	GA5023	G-20M			WCMT-32.52-X3	9,53	6,50	3,96	4,39	0,79
<b>Carbide Coatings</b>  MT-CVD Coated  PVD Coated  Uncoated	P15	GA5025	M15	GA5026	M15	G-925	M15	G-925	GA5026									
	P25	GA5035	P25	GA5125	P25	G-920	M15	G-920	GA5023	S								
	P35	GA5036	M15	GA5026	M15	G-9230	M15	G-9230	GA5023	G-20M								
			Steel		Stainless Steel		Cast Iron		High-Temp Alloys									

Not Recommended  Stocked or Available Upon Request  Stocked Standard 



**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Ceramic Inserts

Greenleaf is the industry leader in the development and manufacture of ceramic and coated ceramic inserts in ANSI standard and special geometries.



Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Ceramic Insert Grade Description

### CERAMIC

**Greenleaf is the industry leader in the development and manufacture of ceramic and coated ceramic inserts in ANSI standard and special geometries. Some of the most prominent include:**

**WG-300®** Whisker-reinforced ceramic with excellent wear and shock resistance at high surface speeds. WG-300 is very effective at machining nickel and cobalt based super-alloys, and other hard materials at metal removal rates up to 10 times higher than carbide.

**WG-600®** Coated whisker-reinforced ceramic offering longer tool life and better performance over uncoated ceramics due to outstanding thermal properties and shock-resistance at high cutting speeds. Application areas include rough and finish turning, as well as high-performance milling of high-strength alloys, hardened steels and select stainless steels. *U.S. Patent No. 6,447,896 B1.*

**WG-700™** New whisker-reinforced Al<sub>2</sub>O<sub>3</sub> ceramic substrate featuring improved toughness and a unique high-speed coating. WG-700 is ideal for machining nickel- and cobalt-based super alloys and other difficult-to-machine materials. WG-700 exhibits high metal-removal rates with exceptional tool life. *U.S. Patent No. 6,447,896 B1.*

**XSYTIN™-1** New phase-toughened ceramic capable of extreme feed rates. XSYTIN™-1 excels at machining a wide variety of materials including steels, cast and ductile irons, high-temperature alloys and other challenging metals. XSYTIN™-1 is ideal for use in interrupted cuts, scale, abrasive casting materials and milling.

**GSN100™** New engineered blend of silicon nitride and proprietary toughening agents that redefines productivity in the machining of cast iron. GSN100 delivers outstanding tool life at high cutting speeds in turning, grooving and milling applications.


**GEM-7™** Al<sub>2</sub>O<sub>3</sub> + TiC composite ceramic with a high degree of predictability in roll turning and hard alloy (up to 65 R/c) machining.

**GEM-19™** Cold pressed and sintered Al<sub>2</sub>O<sub>3</sub> ceramic for economical roughing and finishing of cast iron grades application range on severe interruption or old machinery.

#### **Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

# Insert Grade Reference for Turning



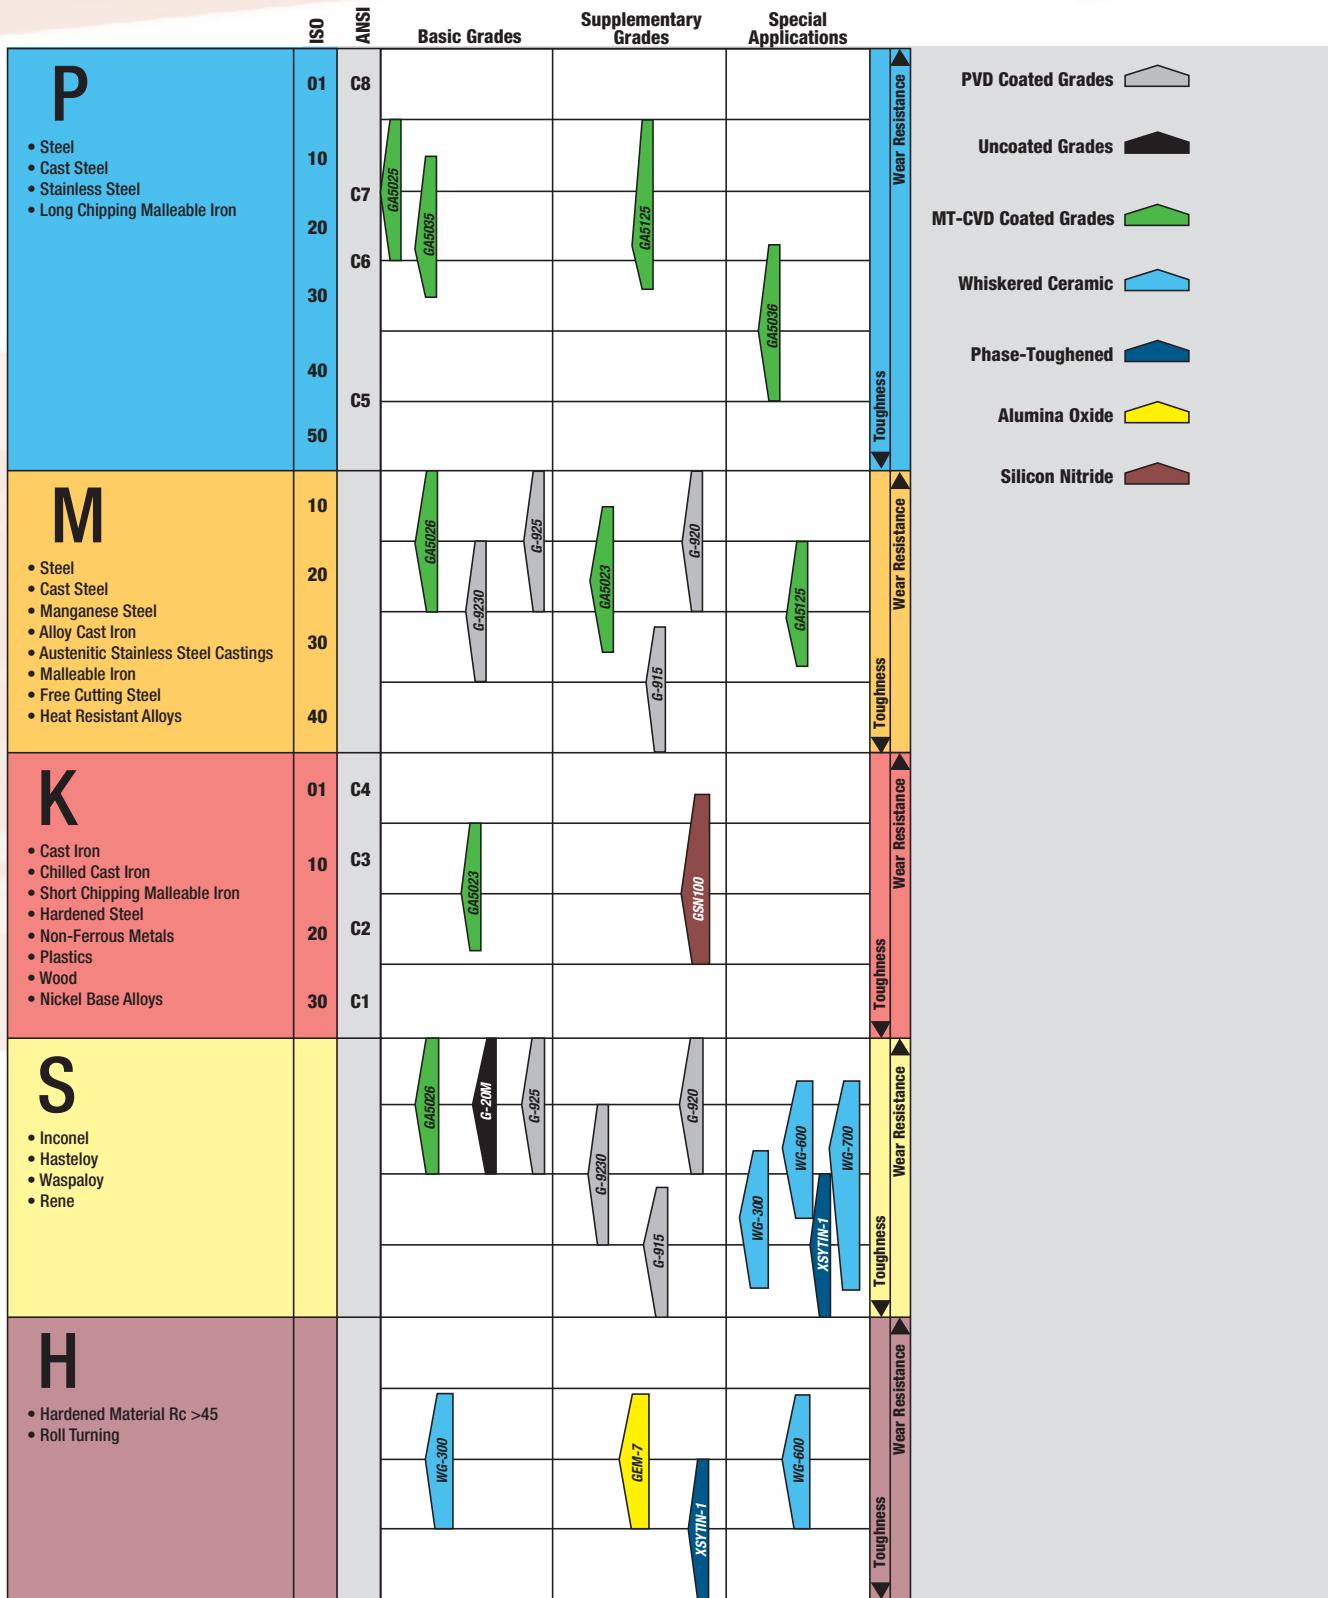




**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Edge Preparation and Application Guide

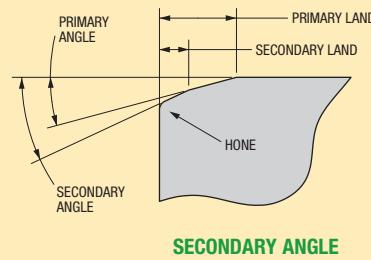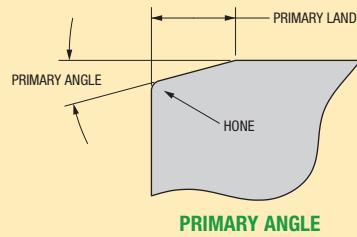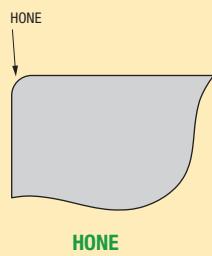

Edge Prep	Hone	Primary Land	Primary Angle	Application
<b>A</b>	0,015 R	–	–	For light finishing and grooving, also added to designated negative lands (i.e. T1, T2, T9).
<b>T1</b>	–	0,07	20°	General purpose for turning and light milling in clean high-temp. alloys and materials <50R/C.
<b>T1A</b>	0,015 R	0,07	20°	Used where more protection is needed than T1 such as in scale and light interruptions, hard turning.
<b>T2</b>	–	0,17	20°	General purpose chamfer for light to medium feed rates, cast-iron machining.
<b>T2A</b>	0,015 R	0,17	20°	Scale applications, light interruptions, weld overlays, finish turning and milling of hardened materials.

See page ATI 19 for other Greenleaf edge preps or call Greenleaf Technical Service for application concerns.

# I.S.O. Identification for Turning and Boring Inserts

<b>Shape</b>	A 85° parallelogram B 82° parallelogram C 80° diamond D 55° diamond H hexagon K 55° parallelogram L 90° rectangle M 86° diamond O octagon P pentagon R round S square T triangle V 35° diamond W 80° Trigon
--------------	---

<b>Clearances</b>	T  N  M  G	
	<table border="1"> <tbody> <tr> <td>A 3° B 5° C 7° D 15° E 20° F 25° G 30° N 0° P 11°</td> </tr> </tbody> </table>	A 3° B 5° C 7° D 15° E 20° F 25° G 30° N 0° P 11°
A 3° B 5° C 7° D 15° E 20° F 25° G 30° N 0° P 11°		

<b>Dimensions</b>		
	m	s
A	0,005 <sup>(2)</sup>	0,025
B	0,005	0,025
C	0,013	0,025
D	0,013	0,025
E	0,025	0,025
G	0,025	0,130
J	0,005 <sup>(2)</sup>	0,025
K	0,013	0,025
L	0,025	0,025
M	0,080-0,180 <sup>(3)</sup>	0,130 <sup>(3)</sup>
U	0,130-0,380 <sup>(3)</sup>	0,130 <sup>(3)</sup>
		0,080-0,250

<b>Tolerance Class (<math>\pm mm</math>) <sup>(1)</sup></b>		
T	N	M

<b>Type</b>		
A	G	
M	N	R
S	P	X
		Special design

<sup>(1)</sup> Tolerances given are plus and minus from nominal.

<sup>(2)</sup> These tolerances normally apply to indexable inserts with facets (secondary cutting edges).

<sup>(3)</sup> The tolerance depends on the size and shape of the insert and should be shown in the standards for the corresponding shapes and sizes (see ANSI B94.25).

<sup>(4)</sup> Shall only be used when required.


<sup>(5)</sup> Dimensions are established prior to supplemental edge or coating modification.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

## Comparison cutting edge length in mm – IC in inches

	06	09	11	16	22	27	33	44
				09	12	15	19	25
55°					15	19		
80°					12	16	19	25
35°				16	22			

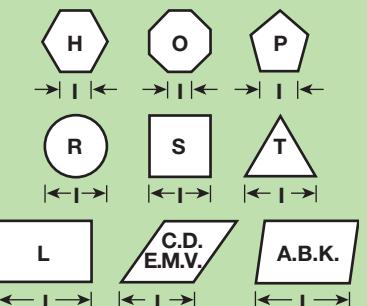


Integers to be preceded by a 0.  
Example: 9,52 mm indicated by 09.

**Cutting Edge Length**
**22**
**04**


01	s= 1,59
T1	s= 1,98
02	s= 2,38
03	s= 3,18
T3	s= 3,97
04	s= 4,76
05	s= 5,56
06	s= 6,35
07	s= 7,94
09	s= 9,52
10	s= 10,00
12	s= 12,00

**Thickness**

Radius in terms of 0.1 mm	
00	Round insert
00	sharp point
02	0.2
04	0.4
05	0.5
08	0.8
10	1.0
12	1.2
15	1.5
16	1.6
24	2.4
32	3.2
40	4.0

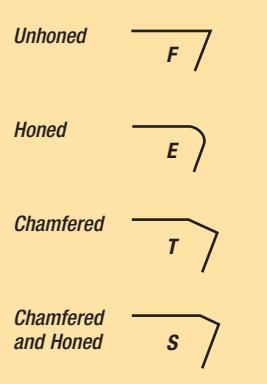
**Cutting Point Configuration**

**Cutting Edge**
**E**
**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




**Greenleaf®**
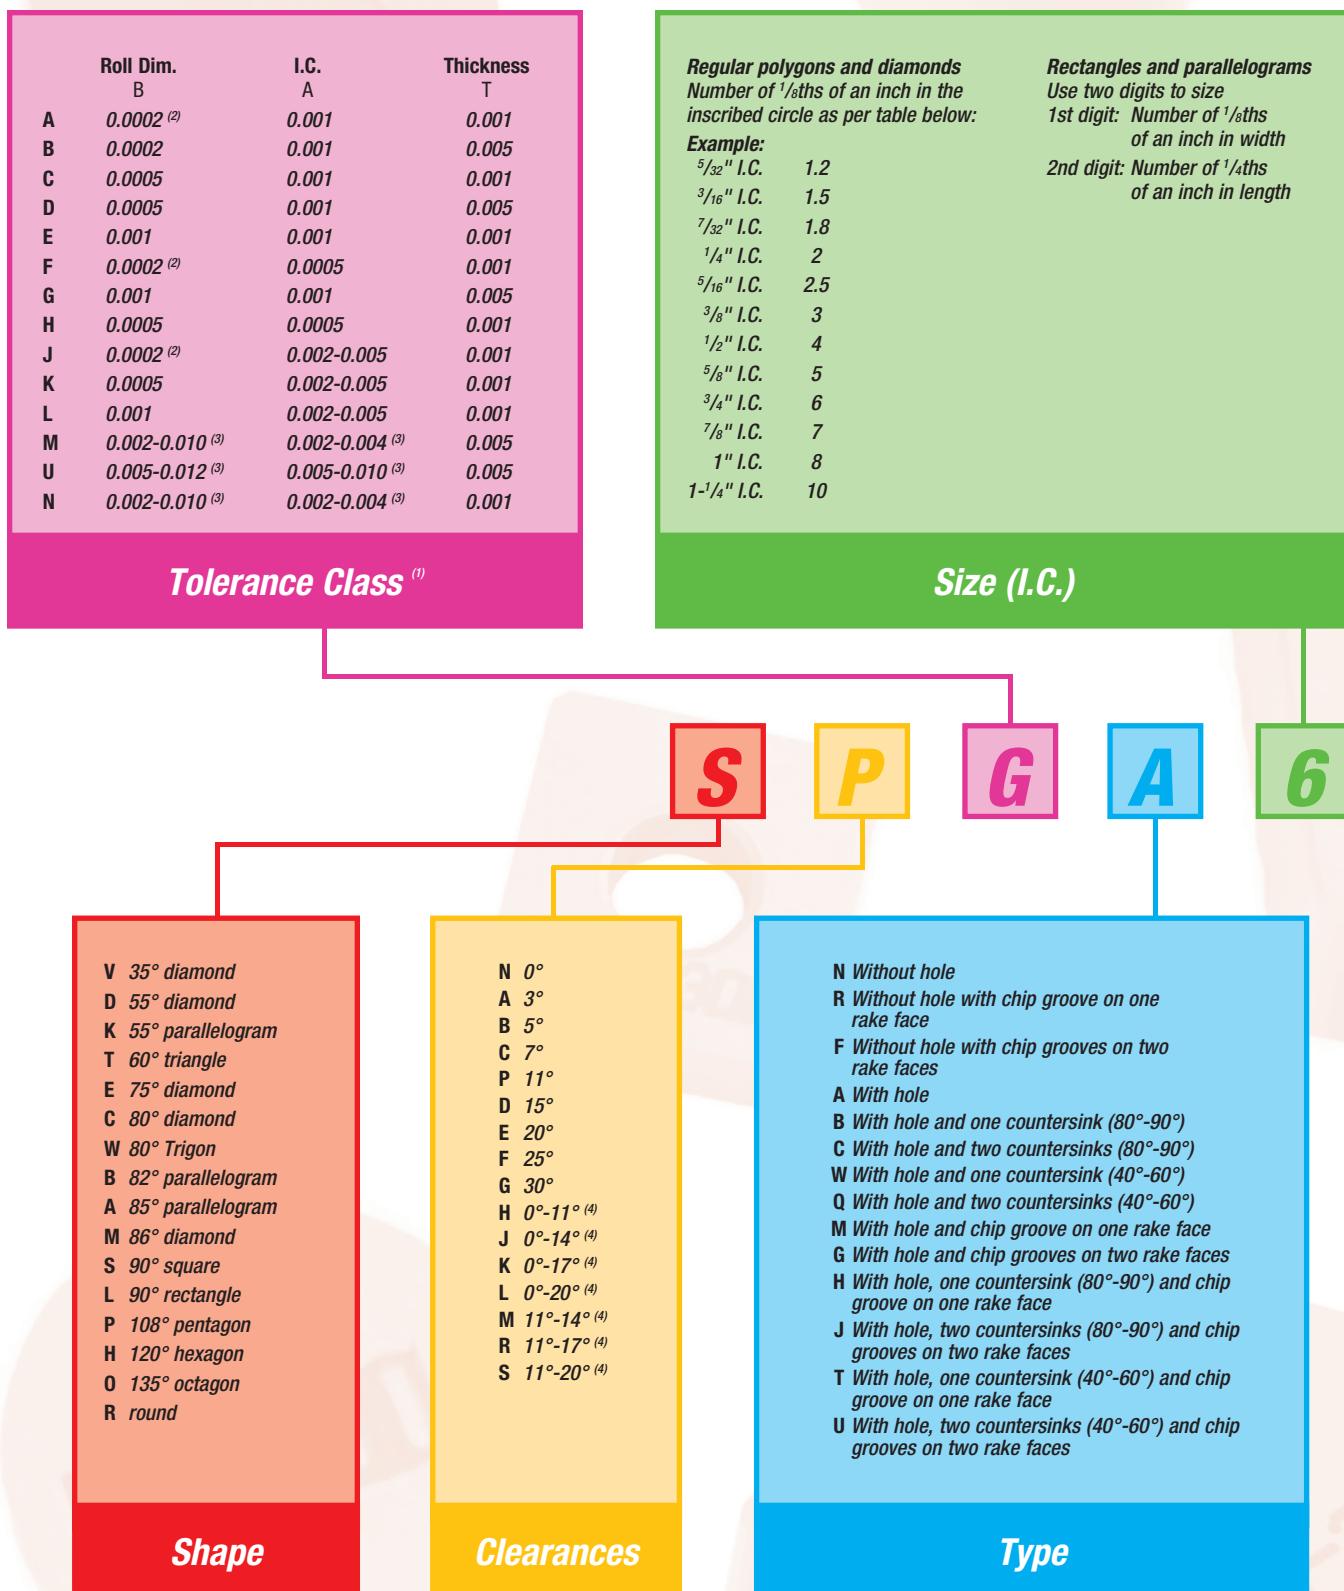
## A.N.S.I. Identification for Turning and Boring Inserts



### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

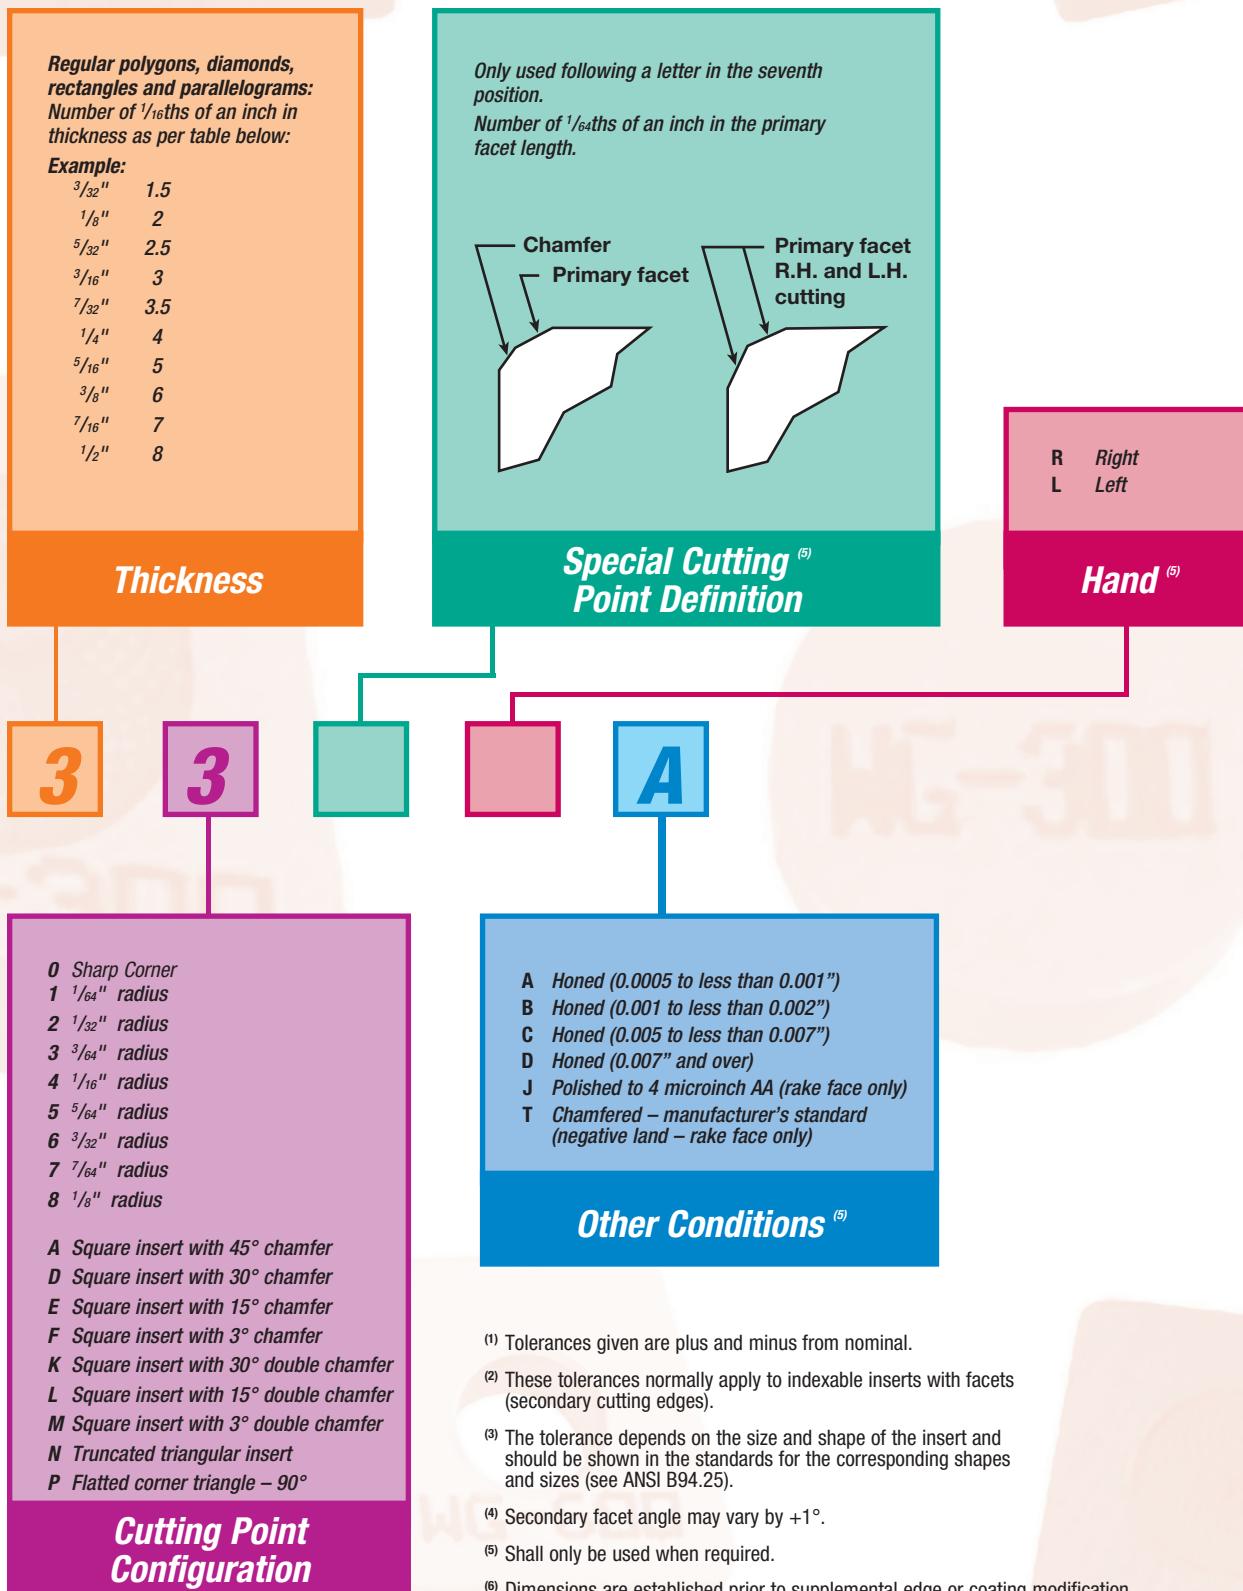

<sup>(1)</sup> Tolerances given are plus and minus from nominal.

<sup>(2)</sup> These tolerances normally apply to indexable inserts with facets (secondary cutting edges).

<sup>(3)</sup> The tolerance depends on the size and shape of the insert and should be shown in the standards for the corresponding shapes and sizes (see ANSI B94.25).

<sup>(4)</sup> Secondary facet angle may vary by +1°.

<sup>(5)</sup> Shall only be used when required.

<sup>(6)</sup> Dimensions are established prior to supplemental edge or coating modification.

#### Greenleaf Sales

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Ceramic Insert Usage Reference Guide

*Greenleaf Sales*

**greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Negative Inserts**

 80° Diamond  
page: T 52

 80° Diamond  
page: T 53

 80° Diamond  
Rough Stuff®  
page: T 54

 55° Diamond  
page: T 55

 55° Diamond  
page: T 56

 Round  
page: T 57

 Round  
page: T 58

**Negative Inserts *continued***

 Square  
page: T 59

 Square  
page: T 60

 Square  
Rough Stuff®  
page: T 61

 Triangle  
page: T 62

 Triangle  
page: T 63

 35° Diamond  
page: T 64

 Trigon  
page: T 65

**Positive Inserts**

 80° Diamond  
Positive Flat Top  
page: T 66

 Round  
Positive Flat Top  
page: T 66

 Round  
V-Bottom  
page: T 67

 Square  
Positive Flat Top  
page: T 68


 Triangle  
Positive Flat Top  
page: T 69

 Triangle  
page: T 70

**Greenleaf Sales**

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# 80° Diamond Inserts Negative (CNGA)

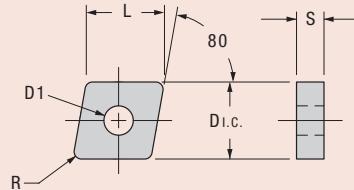


Shape: 80° Diamond	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)						
			WG-300	WG-600	WG-700	XSYTIN-1	Si3N4	GEM-7	Al2O-TiC	GEM-19	Al2O	D I.C.	L	S	D1	R	
	CNGA-120404	T1	●	○	●	○	○	○				CNGA-431	T1	12,70	12,90	4,75	5,16 0,38
		T1A	●	○	●	○	○	○	○	○			T1A	12,70	12,90	4,75	5,16 0,38
		T2	●	○	●	○	○						T2	12,70	12,90	4,75	5,16 0,38
		T2A	●	○	●	○	○	●	○				T2A	12,70	12,90	4,75	5,16 0,38
		A	○	○	○	○	○	○	○	○			A	12,70	12,90	4,75	5,16 0,38
	CNGA-120408	T1	●	●	●	●	○	○				CNGA-432	T1	12,70	12,90	4,75	5,16 0,79
		T1A	●	●	●	○	○	●	○				T1A	12,70	12,90	4,75	5,16 0,79
		T2	●	●	●	○	●						T2	12,70	12,90	4,75	5,16 0,79
		T2A	●	○	●	○	●	●	○				T2A	12,70	12,90	4,75	5,16 0,79
		A	○	○	○	○	○	○	○	○			A	12,70	12,90	4,75	5,16 0,79
	CNGA-120412	T1	●	○	●	○	○	○				CNGA-433	T1	12,70	12,90	4,75	5,16 1,19
		T1A	●	●	●	●	○	○	○	○			T1A	12,70	12,90	4,75	5,16 1,19
		T2	●	○	●	○	●	●		○			T2	12,70	12,90	4,75	5,16 1,19
		T2A	●	○	●	○	○	●	○	○			T2A	12,70	12,90	4,75	5,16 1,19
		A	○	○	○	○	●	○	○	○			A	12,70	12,90	4,75	5,16 1,19
	CNGA-120416	T1	●	○	●	○	○	○				CNGA-434	T1	12,70	12,90	4,75	5,16 1,57
		T1A	●	●	●	●	●	○	○	○			T1A	12,70	12,90	4,75	5,16 1,57
		T2	○	○	○	○	●	●	○	○			T2	12,70	12,90	4,75	5,16 1,57
		T2A	●	○	●	○	○	○	○	○			T2A	12,70	12,90	4,75	5,16 1,57
		T3A	○	○	○	○	●	●	○	○			T3A	12,70	12,90	4,75	5,16 1,57
	CNGA-120712	T1	●	○	●	○	○	○				CNGA-453	T1	12,70	12,90	7,92	5,16 1,19
		T2	○	○	○	○	●	●	○	○			T2	12,70	12,90	7,92	5,16 1,19
	CNGA-120716	T2	○	○	○	○	●	●	○	○		CNGA-454	T2	12,70	12,90	7,92	5,16 1,57
		T2A	●	○	●	○	○	○	○	○		CNGA-542	T2A	15,88	16,13	6,35	6,35 0,79
	CNGA-160608	T1	●	○	●	○	○	○				CNGA-543	T1	15,88	16,13	6,35	6,35 1,19
		T2A	●	○	●	○	○	○	○	○		CNGA-544	T2A	15,88	16,13	6,35	6,35 1,57
	CNGA-160612	T1	●	○	●	○	○	○				CNGA-643	T2A	19,05	19,35	6,35	7,92 1,19
		T2A	●	○	●	○	○	○	○	○		CNGA-644	T2A	19,05	19,35	6,35	7,92 1,57
	CNGA-160616	T2A	●	○	●	○	○	○				CNGA-652	T2A	19,05	19,35	7,92	7,92 0,79
		T2A	●	●	●	○	○	○	○	○		CNGA-653	T2A	19,05	19,35	7,92	7,92 1,19
	CNGA-190612	T2A	○	○	○	○	○	○	○	○		CNGA-654	T2A	19,05	19,35	7,92	7,92 1,57
		T2A	○	○	○	○	○	○	○	○							
	CNGA-190716	T2A	○	○	○	○	○	○	○	○							
		T2A	○	○	○	○	○	○	○	○							

## Ceramic Classification

	Whisker Ceramic		Phase Toughened		Silicon Nitride		Alumina TiC		Al <sub>2</sub> O <sub>3</sub>
---	-----------------	---	-----------------	---	-----------------	---	-------------	---	--------------------------------

Whisker	Phase Toughened	Si3N4	GEM-7	GEM-19	Al2O-TiC	Al2O
WG-300	XSYTIN-1	GSN100				

## Additional Edge Preps – page T 45

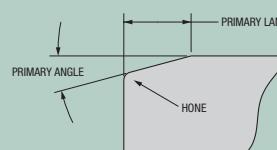


Page T 42 – grade description

**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

-  Stocked Standard
-  Stocked or Available Upon Request
-  Not Recommended

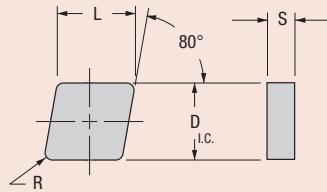

# 80° Diamond Inserts

## Negative (CNGN)

Shape: 80° Diamond	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)				
			WG-300	WG-600	WG-700	Phase Toughened	XSYTN-1	GSM100	AlMn-TiC		D_i.c.	L	S	R	
<b>CNGN</b> 	<b>CNGN-120404</b>	T1	●	○	●	○	○	○	○	<b>CNGN-431</b>	T1	12,70	12,90	4,75	0,38
	<b>CNGN-120408</b>	T1	●	●	●	●	○	○	○	<b>CNGN-432</b>	T1	12,70	12,90	4,75	0,79
		T1A	●	○	●	○	○	○	○		T1A	12,70	12,90	4,75	0,79
		T2	●	○	●	○	●	●	○		T2	12,70	12,90	4,75	0,79
		T2A	●	○	●	○	○	○	●		T2A	12,70	12,90	4,75	0,79
		A	○	○	○	○	○	○	○		A	12,70	12,90	4,75	0,79
	<b>CNGN-120412</b>	T1	●	○	●	○	○	○	○	<b>CNGN-433</b>	T1	12,70	12,90	4,75	1,19
		T1A	●	○	●	●	○	○	○		T1A	12,70	12,90	4,75	1,19
		T2	○	○	○	○	●	●	○		T2	12,70	12,90	4,75	1,19
		T2A	●	○	○	○	○	○	●		T2A	12,70	12,90	4,75	1,19
		T9	○	○	○	○	●	○	○		T9	12,70	12,90	4,75	1,19
		A	○	○	○	●	○	○	○	<b>CNGN-434</b>	T1	12,70	12,90	4,75	1,57
	<b>CNGN-120416</b>	T1	●	●	●	○	○	○	○		T2	12,70	12,90	4,75	1,57
		T1A	○	○	○	●	○	○	○		T2A	12,70	12,90	4,75	1,57
		T2	●	○	○	○	●	●	○	<b>CNGN-451</b>	T1	12,70	12,90	7,92	0,38
		T2A	●	○	○	○	●	○	○	<b>CNGN-452</b>	T1	12,70	12,90	7,92	0,79
		A	○	○	○	●	○	○	○		T2	12,70	12,90	7,92	0,79
	<b>CNGN-120704</b>	T1	○	○	○	○	○	○	○		T2A	12,70	12,90	7,92	0,79
	<b>CNGN-120708</b>	T1	●	○	●	○	○	○	○	<b>CNGN-453</b>	T1	12,70	12,90	7,92	1,19
		T2	○	○	○	○	○	○	○		T1A	12,70	12,90	7,92	1,19
		T2A	●	○	○	○	○	○	○		T2	12,70	12,90	7,92	1,19
	<b>CNGN-120712</b>	T1	●	●	●	○	○	○	○		T2A	12,70	12,90	7,92	1,19
		T1A	○	○	○	●	●	●	○	<b>CNGN-454</b>	T1	12,70	12,90	7,92	1,57
		T2	○	○	○	○	●	●	○		T1A	12,70	12,90	7,92	1,57
		T2A	●	○	○	○	○	○	○		T2	12,70	12,90	7,92	1,57
		A	○	○	○	●	○	○	○		T2A	12,70	12,90	7,92	1,57
	<b>CNGN-120716</b>	T1	●	●	○	○	○	○	○	<b>CNGN-542</b>	T1	15,88	16,13	6,35	0,79
		T1A	○	○	○	●	●	●	○	<b>CNGN-543</b>	T1	15,88	16,13	6,35	1,19
		T2	○	○	○	○	●	●	○		T2A	15,88	16,13	6,35	1,19
		T2A	●	○	○	○	●	○	○	<b>CNGN-642</b>	T1	19,05	19,35	6,35	0,79
		A	○	○	○	●	○	○	○	<b>CNGN-643</b>	T1	19,05	19,35	6,35	1,19
	<b>CNGN-160608</b>	T1	●	○	○	○	○	○	○		T2	19,05	19,35	6,35	1,19
	<b>CNGN-160612</b>	T1	●	○	○	○	○	○	○		T2A	19,05	19,35	6,35	1,19
		T2A	○	○	○	○	○	○	○	<b>CNGN-644</b>	T2A	19,05	19,35	6,35	1,57
	<b>CNGN-190608</b>	T1	○	○	○	○	○	○	○	<b>CNGN-658</b>	T2A	19,05	19,35	7,92	3,18
	<b>CNGN-190612</b>	T1	●	○	●	○	○	○	○						
		T2	○	○	○	○	○	○	○						
		T2A	●	○	●	○	○	○	○						
	<b>CNGN-190616</b>	T2A	○	○	○	○	○	○	○						
	<b>CNGN-190732</b>	T2A	○	○	○	○	○	○	○						


## Ceramic Classification

	Whisker Ceramic		Phase Toughened		Silicon Nitride		Alumina TiC		Al <sub>2</sub> O <sub>3</sub>
--	-----------------	--	-----------------	--	-----------------	--	-------------	--	--------------------------------

WG-300	WG-600	WG-700	Phase Toughened	XSYTN-1	GSM100	AlMn-TiC	Al <sub>2</sub> O <sub>3</sub>	Whisker	Phase Toughened	XSYTN-1	GSM100	AlMn-TiC	Al <sub>2</sub> O <sub>3</sub>
--------	--------	--------	-----------------	---------	--------	----------	--------------------------------	---------	-----------------	---------	--------	----------	--------------------------------

Page T 42 – grade description

## Additional Edge Preps – page T 45

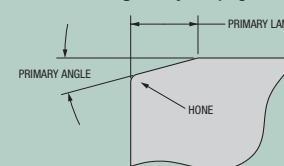
**Greenleaf Sales**


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Not Recommended Stocked or Available Upon Request Stocked Standard Stocked

# 80° Diamond Inserts

## Rough Stuff®

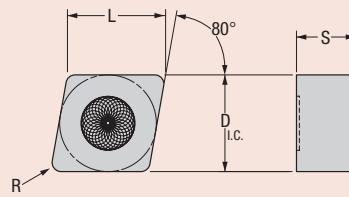


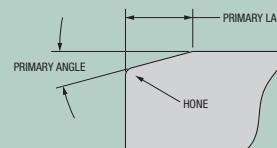Shape: 80° Diamond	Part Number ISO	Edge Prep	Whisker			SiAlN	Part Number ANSI	Edge Prep	Dimensions (millimeters)			
			WG-300	WG-600	WG-700				D_I.C.	L	S	R
	CNGX-120708-RS	T2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	CNGX-452-RS	T2	12,70	12,90	7,92	0,79
		T2A	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		T2A	12,70	12,90	7,92	0,79
	CNGX-120712-RS	T2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	CNGX-453-RS	T2	12,70	12,90	7,92	1,19
		T2A	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		T2A	12,70	12,90	7,92	1,19
	CNGX-120716-RS	T2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	CNGX-454-RS	T2	12,70	12,90	7,92	1,57
		T2A	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		T2A	12,70	12,90	7,92	1,57
Ceramic Classification				WG-300	WG-600	WG-700	GSN100	Additional Edge Preps – page T 45				
				Whisker	SiAlN							
Page T 42 – grade description												

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

-  Stocked Standard
-  Stocked Upon Request
-  Not Recommended

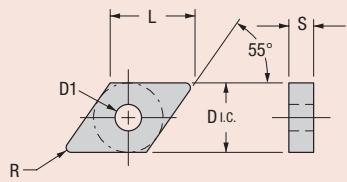

# 55° Diamond Inserts


## Negative (DNGA)


Shape: 55° Diamond	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)					
			WG-300	WG-600	WG-700	Phase Toughened	XSYTN-1	Si3N4	Al2O-TiC		D I.C.	L	S	D1	R	
<b>DNGA</b> 	DNGA-110308	T1	○	○	○	○	○	○	○	DNGA-322	T1	9,53	11,63	3,18	3,81	0,79
	DNGA-110312	T1	○	○	○	○	○	○	○	DNGA-323	T1	9,53	11,63	3,18	3,81	1,19
	DNGA-110316	T1	○	○	○	○	○	○	○	DNGA-324	T1	9,53	11,63	3,18	3,81	1,57
	DNGA-110408	T1	○	○	○	○	○	○	○	DNGA-332	T1	9,53	11,63	4,75	3,81	0,79
	DNGA-150404	T1	●	○	○	○	○	○	○	DNGA-431	T1	12,70	15,49	4,75	5,16	0,38
		T2	●	○	○	○	○	○	○		T2	12,70	15,49	4,75	5,16	0,38
	DNGA-150408	T1	●	○	○	○	○	○	○	DNGA-432	T1	12,70	15,49	4,75	5,16	0,79
		T1A	●	○	○	○	○	○	○		T1A	12,70	15,49	4,75	5,16	0,79
		T2	●	○	○	○	○	●	○		T2	12,70	15,49	4,75	5,16	0,79
		T2A	●	○	○	○	○	○	●		T2A	12,70	15,49	4,75	5,16	0,79
		A	○	○	○	○	○	○	○		A	12,70	15,49	4,75	5,16	0,79
	DNGA-150412	T1	●	○	○	○	○	○	○	DNGA-433	T1	12,70	15,49	4,75	5,16	1,19
		T1A	●	○	○	○	○	○	○		T1A	12,70	15,49	4,75	5,16	1,19
		T2	●	○	○	○	●	○	○		T2	12,70	15,49	4,75	5,16	1,19
		T2A	●	○	○	○	○	●	○		T2A	12,70	15,49	4,75	5,16	1,19
	DNGA-150416	T1	●	○	○	○	○	○	○	DNGA-434	T1	12,70	15,49	4,75	5,16	1,57
		T1A	●	○	○	○	○	○	○		T1A	12,70	15,49	4,75	5,16	1,57
		T2A	●	○	○	○	○	○	○		T2A	12,70	15,49	4,75	5,16	1,57
	DNGA-150612	T1	○	○	○	○	○	○	○	DNGA-443	T1	12,70	15,49	6,35	5,16	1,19
	DNGA-190612	T2A	●	○	○	○	○	○	○	DNGA-543	T2A	15,88	19,38	6,35	6,35	1,19
<b>Ceramic Classification</b>																
 Whisker Ceramic  Phase Toughened  Silicon Nitride  Alumina TiC  Al <sub>2</sub> O <sub>3</sub>																
Page T 42 – grade description																
<b>Additional Edge Preps – page T 45</b>																

Not Recommended  Stocked or Available Upon Request  Stocked Standard 

# 55° Diamond Inserts

## Negative (DNGN)

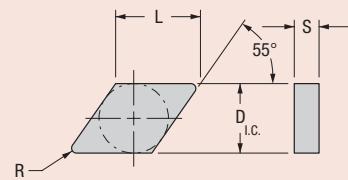

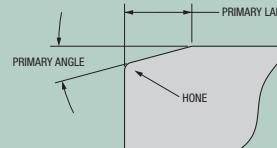Shape: 55° Diamond	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)					
			WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened Si3N4	GSM100	Ald-TiC	GEM-7	Ald-Al2O3	GEM-19				
DNGN	DNGN-110308	T1	○	○	○	○	○	○	○	DNGN-322	T1	9,53	11,63	3,18	0,79	
	DNGN-110312	T1	○	○	○	○	○	○	○	DNGN-323	T1	9,53	11,63	3,18	1,19	
	DNGN-110316	T1	○	○	○	○	○	○	○	DNGN-324	T1	9,53	11,63	3,18	1,57	
	DNGN-150408	T1	●	○	●	○	○	○	○	DNGN-432	T1	12,70	15,49	4,75	0,79	
		T2A	○	○	○	○	○	○	○		T2A	12,70	15,49	4,75	0,79	
	DNGN-150412	T1	●	○	●	○	○	○	○	DNGN-433	T1	12,70	15,49	4,75	1,19	
	DNGN-150416	T1	●	○	○	○	○	○	○	DNGN-434	T1	12,70	15,49	4,75	1,57	
		T2A	○	○	○	○	○	○	○		T2A	12,70	15,49	4,75	1,57	
<b>Ceramic Classification</b>			Whisker	WG-300	WG-600	WG-700	XSYTIN-1	Si3N4	GSM100	Ald-TiC	GEM-7	Ald-Al2O3	GEM-19	Additional Edge Preps – page T 45		
Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>												

Page T 42 – grade description

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

-  Stocked Standard
-  Stocked or Available Upon Request
-  Not Recommended




# Round Inserts

## Negative (RNGA)

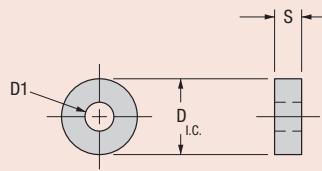

Shape: Round	Part Number ISO	Edge Prep	Whisker							Part Number ANSI	Edge Prep	Dimensions (millimeters)			
			WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened	Si3N4	Al40-TiC			D I.C.	S	D1	
<b>RNGA</b> 	RNGA-090300	T1	<input type="radio"/>	RNGA-32	T1	9,53	3,18	3,81							
	RNGA-090400	T1	<input type="radio"/>	RNGA-33	T1	9,53	4,75	3,81							
	RNGA-120400	T1	<input type="radio"/>	RNGA-43	T1	12,70	4,75	5,16							
	RNGA-120700	T1	<input type="radio"/>	RNGA-45	T1	12,70	7,92	5,16							
	RNGA-150700	T2A	<input type="radio"/>	RNGA-55	T2A	15,88	7,92	6,35							
	RNGA-190700	T2A	<input type="radio"/>	RNGA-65	T2A	19,05	7,92	7,92							
	RNGA-250700	T2A	<input type="radio"/>	RNGA-85	T2A	25,40	7,92	9,12							
<b>Ceramic Classification</b>															
Whisker Ceramic			Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>									
Page T 42 – grade description															


Additional Edge Preps – page T 45

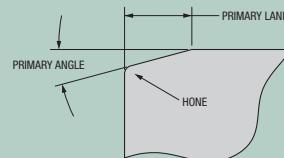

Not Recommended  Stocked or Available Upon Request  Stocked Standard 

# Round Inserts

## Negative (RNGN)

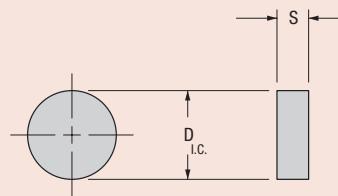

Shape: Round	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)		
			WG-300	WG-600	WG-700	XSYTIN-1 Phase Augmented	GSM100 Si3N <sub>4</sub>	GEM-7 Al <sub>2</sub> O <sub>3</sub> -TC	GEM-19 Al <sub>2</sub> O <sub>3</sub>		D I.C.	S	
RNGN	RNGN-090300	T1	●	○	○	○	○	○	○	RNGN-32	T1	9,53	3,18
		T1A	●	●	●	●	○	○	○		T1A	9,53	3,18
		T2A	●	○	○	○	○	○	○		T2A	9,53	3,18
		A	○	○	○	●	○	○	○		A	9,53	3,18
	RNGN-090400	T1	●	○	●	○	○	○	○	RNGN-33	T1	9,53	4,75
		T1A	●	○	●	○	○	○	○		T1A	9,53	4,75
		T2A	●	○	●	○	○	○	○		T2A	9,53	4,75
	RNGN-120300	T1A	●	○	○	●	○	○	○	RNGN-42	T1A	12,70	3,18
		T2A	○	○	○	○	○	○	○		T2A	12,70	3,18
		A	○	○	○	●	○	○	○		T2A	12,70	3,18
RNGN	RNGN-120400	T1	●	○	●	●	○	○	○		A	12,70	4,75
		T1A	●	●	●	○	○	○	○		T1A	12,70	4,75
		T2	●	○	●	●	●	○	○		T2	12,70	4,75
		T2A	●	●	●	○	○	○	●		T2A	12,70	4,75
		A	○	○	○	○	○	○	○		A	12,70	4,75
	RNGN-120700	T1	●	●	●	●	●	○	○	RNGN-45	T1	12,70	7,92
		T1A	●	●	●	●	●	●	○		T1A	12,70	7,92
		T2	●	○	●	●	●	●	○		T2	12,70	7,92
		T2A	●	●	●	○	●	●	●		T2A	12,70	7,92
		T5A	○	○	○	○	●	○	○		T5A	12,70	7,92
RNGN		A	●	○	○	●	●	○	○		A	12,70	7,92
	RNGN-150700	T1	●	○	○	○	○	○	○	RNGN-55	T1	15,88	7,92
		T2A	○	○	○	○	○	○	○		T2A	15,88	7,92
	RNGN-190600	T2A	○	○	○	○	○	○	○	RNGN-64	T2A	19,05	6,35
	RNGN-190700	T1	●	○	○	●	○	○	○	RNGN-65	T1	19,05	7,92
		T1A	○	○	○	○	○	○	○		T1A	19,05	7,92
		T2A	●	○	●	○	○	○	○		T2A	19,05	7,92
		A	○	○	○	●	○	○	○		A	19,05	7,92
	RNGN-250600	T2A	○	○	○	○	○	○	○	RNGN-84	T2A	25,40	6,35
	RNGN-250700	T2A	○	○	○	○	○	○	○	RNGN-85	T2A	25,40	7,92
RNGN	RNGN-250900	T2A	○	○	○	○	○	○	○	RNGN-86	T2A	25,40	9,53
	RNGN-310900	T2A	○	○	○	○	○	○	○	RNGN-106	T2A	31,75	9,53


## Ceramic Classification



Silicon Nitride	Alumina $TiC$	$Al_2O_3$




**Additional Edge Preps** – page T 45

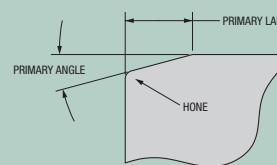


Page T 42 – grade description

*Greenleaf Sales*

**greenleaf Sales** US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



Stocked or Available Upon Request




Stocked  
or Available  
Upon Request



Not Recommended

# Square Inserts Negative (SNGA)

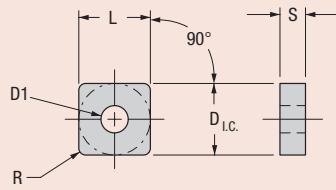


Shape: Square	Part Number ISO	Edge Prep	Whisker							Part Number ANSI	Edge Prep	Dimensions (millimeters)					
			WG-300	WG-600	WG-700	Phase Toughened	XSYTN-1	GSN100	Si3N <sub>4</sub>	Al <sub>4</sub> O <sub>3</sub> -TiC		D_I.C.	L	S	D1	R	
<b>SNGA</b> 	SNGA-120408	T2	●	○	○	○	○	○	○	○	SNGA-432	T2	12,70	12,70	4,75	5,16	0,79
	SNGA-120412	T1	●	○	○	○	○	○	○	○	SNGA-433	T1	12,70	12,70	4,75	5,16	1,19
		T2	○	○	○	○	●	○	○	○		T2	12,70	12,70	4,75	5,16	1,19
		T2A	○	○	○	○	○	○	○	○		T2A	12,70	12,70	4,75	5,16	1,19
	SNGA-120416	T1	○	○	○	○	○	○	○	○	SNGA-434	T1	12,70	12,70	4,75	5,16	1,57
		T2	○	○	○	○	○	●	○	○		T2	12,70	12,70	4,75	5,16	1,57
	SNGA-120708	T1	○	○	○	○	○	○	○	○	SNGA-452	T1	12,70	12,70	7,92	5,16	0,79
	SNGA-120712	T1	○	○	○	○	○	○	○	○	SNGA-453	T1	12,70	12,70	7,92	5,16	1,19
		T2	○	○	○	○	○	●	○	○		T2	12,70	12,70	7,92	5,16	1,19
	SNGA-120716	T1	○	○	○	○	○	○	○	○	SNGA-454	T1	12,70	12,70	7,92	5,16	1,57
		T2	○	○	○	○	○	●	○	○		T2	12,70	12,70	7,92	5,16	1,57
	SNGA-150608	T2A	○	○	○	○	○	○	○	○	SNGA-542	T2A	15,88	15,88	6,35	6,35	0,79
	SNGA-150612	T2A	○	○	○	○	○	○	○	○	SNGA-543	T2A	15,88	15,88	6,35	6,35	1,19
	SNGA-150616	T2A	○	○	○	○	○	○	○	○	SNGA-544	T2A	15,88	15,88	6,35	6,35	1,57
	SNGA-190608	T2A	○	○	○	○	○	○	○	○	SNGA-642	T2A	19,05	19,05	6,35	7,92	0,79
	SNGA-190612	T2A	○	○	○	○	○	○	○	○	SNGA-643	T2A	19,05	19,05	6,35	7,92	1,19
	SNGA-190616	T2A	○	○	○	○	○	○	○	○	SNGA-644	T2A	19,05	19,05	6,35	7,92	1,57
<b>Ceramic Classification</b>																	
Whisker Ceramic             Phase Toughened             Silicon Nitride             Alumina TiC             Al <sub>2</sub> O <sub>3</sub>					WG-300	WG-600	WG-700	XSYTN-1	GSN100	GEM-7	Al <sub>2</sub> O <sub>3</sub>	Additional Edge Preps – page T 45					

Page T 42 – grade description




Additional Edge Preps – page T 45

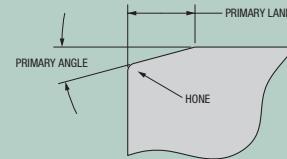

Not Recommended Stocked or Available Upon Request Stocked Standard

# Square Inserts

## Negative (SNGN)

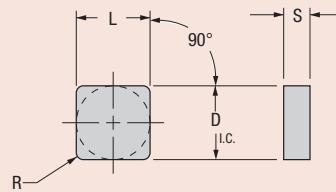


Shape: Square	Part Number ISO	Edge Prep	Whisker				Part Number ANSI	Edge Prep	Dimensions (millimeters)			
			WG-300	WG-600	WG-700	XSYTIN-1			Phase Toughened Si3N4	GEM-7 Al2O3-TiC	GEM-19 Al2O3	
SNGN	SNGN-090308	T2A	○	○	○	○	SNGN-322	T2A	9,53	9,53	3,18	0,79
	SNGN-090412	T2	○	○	○	○	SNGN-333	T2	9,53	9,53	4,75	1,19
	SNGN-120408	T1	●	○	○	○	SNGN-432	T1	12,70	12,70	4,75	0,79
		T1A	●	○	○	○		T1A	12,70	12,70	4,75	0,79
		T2	○	○	○	○		T2	12,70	12,70	4,75	0,79
		T2A	●	○	○	○		T2A	12,70	12,70	4,75	0,79
		A	○	○	○	○		A	12,70	12,70	4,75	0,79
	SNGN-120412	T1	●	○	●	○	SNGN-433	T1	12,70	12,70	4,75	1,19
		T1A	○	○	○	●		T1A	12,70	12,70	4,75	1,19
		T2	●	○	●	●		T2	12,70	12,70	4,75	1,19
		T2A	●	○	●	○		T2A	12,70	12,70	4,75	1,19
		A	○	○	○	●		A	12,70	12,70	4,75	1,19
	SNGN-120416	T1	●	○	○	○	SNGN-434	T1	12,70	12,70	4,75	1,57
		T1A	○	○	○	●		T1A	12,70	12,70	4,75	1,57
		T2	●	○	○	●		T2	12,70	12,70	4,75	1,57
		T2A	●	○	○	○		T2A	12,70	12,70	4,75	1,57
		A	○	○	○	●		A	12,70	12,70	4,75	1,57
	SNGN-120708	T1	●	○	●	○	SNGN-452	T1	12,70	12,70	7,92	0,79
		T2	●	○	○	○		T2	12,70	12,70	7,92	0,79
	SNGN-120712	T1	●	○	●	○	SNGN-453	T1	12,70	12,70	7,92	1,19
		T1A	○	○	○	●		T1A	12,70	12,70	7,92	1,19
		T2	●	○	○	●		T2	12,70	12,70	7,92	1,19
		T2A	●	○	○	○		T2A	12,70	12,70	7,92	1,19
		A	○	○	○	●		A	12,70	12,70	7,92	1,19
	SNGN-120716	T1	●	○	○	○	SNGN-454	T1	12,70	12,70	7,92	1,57
		T1A	○	○	○	●		T1A	12,70	12,70	7,92	1,57
		T2	○	○	○	●		T2	12,70	12,70	7,92	1,57
		T2A	●	○	○	○		T2A	12,70	12,70	7,92	1,57
		A	○	○	○	●		A	12,70	12,70	7,92	1,57
	SNGN-150608	T2A	○	○	○	○	SNGN-542	T2A	15,88	15,88	6,35	0,79
		T1	●	○	●	○	SNGN-543	T1	15,88	15,88	6,35	1,19
	SNGN-150612	T2A	○	○	○	○		T2A	15,88	15,88	6,35	1,19
		T1	○	○	○	○		T1	15,88	15,88	6,35	1,57
	SNGN-150616	T1	○	○	○	○	SNGN-544	T1	15,88	15,88	6,35	1,57
		T2A	○	○	○	○	SNGN-6416	T2A	19,05	19,05	6,35	6,35
	SNGN-190663	T2A	○	○	○	○	SNGN-642	T2A	19,05	19,05	6,35	0,79
		T1	●	○	●	●	SNGN-643	T1	19,05	19,05	6,35	1,19
	SNGN-190608	T2A	●	○	○	○		T2A	19,05	19,05	6,35	1,19
		T1	●	○	●	●		A	19,05	19,05	6,35	1,19
	SNGN-190612	T1	●	○	●	●		T2A	19,05	19,05	6,35	1,19
		T2A	●	○	○	○		A	19,05	19,05	6,35	1,19
		A	○	○	○	●						

## Ceramic Classification

	Whisker Ceramic		Phase Toughened		Silicon Nitride		Alumina TiC		Al2O3
--	-----------------	--	-----------------	--	-----------------	--	-------------	--	-------

WG-300 Whisker	WG-600 Whisker	WG-700 Whisker	XSYTIN-1 Phase Toughened Si3N4	GEM-19 Al2O3	GEM-7 Al2O3-TiC
-------------------	-------------------	-------------------	---	-----------------	--------------------

## Additional Edge Preps – page T 45

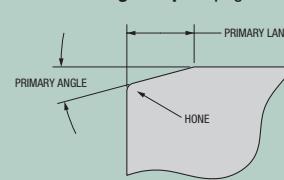

Page T 42 – grade description

Continued on next page.


**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

- Stocked Standard
- Stocked or Available Upon Request
- Not Recommended

# Square Inserts


## Negative (SNGN) *(continued)*

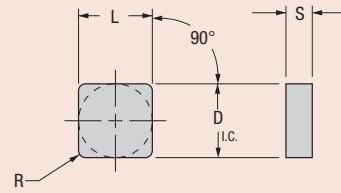

Shape: Square	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)				
			WG-300	WG-600	WG-700	XSYTIN-1	GSN100	GEM-7			D I.C.	L	S	R	
<b>SNGN</b> 	SNGN-190616	T1	●	○	●	●	○	○	SNGN-644	T1	19,05	19,05	6,35	1,57	
		T1A	●	○	○	○	○	○		T1A	19,05	19,05	6,35	1,57	
		T2A	●	○	○	○	○	○		T2A	19,05	19,05	6,35	1,57	
		A	○	○	○	●	○	○		A	19,05	19,05	6,35	1,57	
	SNGN-190708	T2A	○	○	●	○	○	○	SNGN-652	T2A	19,05	19,05	7,92	0,79	
		T2A	○	○	○	○	○	○		T2A	19,05	19,05	7,92	1,19	
		T2A	○	○	○	○	○	○		T1	19,05	19,05	7,92	1,57	
	SNGN-190716	T1	●	○	●	●	○	○	SNGN-654	T2A	19,05	19,05	7,92	1,57	
		T2A	○	○	○	○	○	○		A	19,05	19,05	7,92	1,57	
		A	○	○	○	●	○	○		T2A	19,05	19,05	7,92	1,57	
Ceramic Classification	SNGN-190720	T2A	○	○	○	○	○	○	SNGN-655	T2A	19,05	19,05	7,92	1,98	
		A	○	○	○	●	○	○		A	19,05	19,05	7,92	2,39	
		T2A	○	○	○	○	○	○		T2A	25,40	25,40	9,53	2,39	
		T2A	○	○	○	○	○	○		T2A	25,40	25,40	9,53	2,39	
Page T 42 – grade description															
Additional Edge Preps – page T 45															

# Square Inserts

## Rough Stuff®

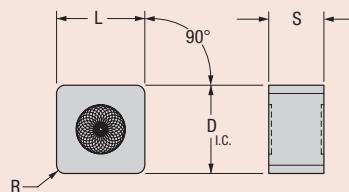


Shape: Square	Part Number ISO	Edge Prep	Whisker				Part Number ANSI	Edge Prep	Dimensions (millimeters)					
			WG-300	WG-600	WG-700	GSN100			D I.C.	L	S	R		
<b>SNGX</b> 	SNGX-120708-RS	T2	○	○	○	○	SNGX-452-RS	T2	12,70	12,70	7,92	0,79		
		T2A	○	○	○	○		T2A	12,70	12,70	7,92	0,79		
	SNGX-120712-RS	T2	○	○	○	○	SNGX-453-RS	T2	12,70	12,70	7,92	1,19		
		T2A	○	○	○	○		T2A	12,70	12,70	7,92	1,19		
	SNGX-120716-RS	T2	○	○	○	○	SNGX-454-RS	T2	12,70	12,70	7,92	1,57		
		T2A	○	○	○	○		T2A	12,70	12,70	7,92	1,57		
<img alt="Additional Edge Preps - Page T 45 diagram showing Primary														

60°



# Triangle Inserts

## Negative (TNGA)

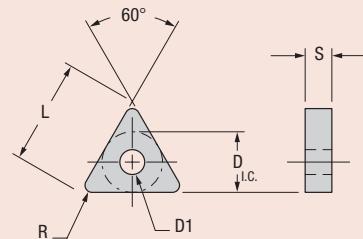


Shape: Triangle	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)																	
			WG-300	WG-600	WG-700	XSY/TIN-1	Phase Toughened Si3N4	GSM100	GEM-7	Al2o-TiC	GEM-19	Al2o	D I.C.	L	S	D1	R											
TNGA	TNGA-160404	T1	○	○	○	○	○	○	○	TNGA-331	T1	9,53	16,51	4,75	3,81	0,38												
	TNGA-160408	T1	●	○	○	○	○	○	○	TNGA-332	T1	9,53	16,51	4,75	3,81	0,38												
		T2A	○	○	○	○	○	○	○		T2A	9,53	16,51	4,75	3,81	0,38												
	TNGA-160412	T1	○	○	○	○	○	○	○	TNGA-333	T1	9,53	16,51	4,75	3,81	1,19												
	TNGA-160416	T1	○	○	○	○	○	○	○	TNGA-334	T1	9,53	16,51	4,75	3,81	1,57												
	TNGA-220408	T1	●	○	●	○	○	○	○	TNGA-432	T1	12,70	22,00	4,75	5,16	0,38												
		T1A	●	○	○	○	○	○	○		T1A	12,70	22,00	4,75	5,16	0,38												
		T2A	●	○	○	○	○	●	○		T2A	12,70	22,00	4,75	5,16	0,38												
	TNGA-220412	T2A	○	○	○	○	○	○	○	TNGA-433	T2A	12,70	22,00	4,75	5,16	1,19												
	TNGA-220416	T1	●	○	○	○	○	○	○	TNGA-434	T1	12,70	22,00	4,75	5,16	1,57												
		A	○	○	○	○	○	○	○		A	12,70	22,00	4,75	5,16	1,57												
	TNGA-220716	T1	○	○	○	○	○	○	○	TNGA-454	T1	12,70	22,00	7,92	5,16	1,57												
<b>Ceramic Classification</b>																												
Whisker Ceramic     Phase Toughened     Silicon Nitride     Alumina TiC     Al2O3					WG-300     WG-600     WG-700     XSY/TIN-1     Phase Toughened Si3N4     GSM100						GEM-7     Al2o-TiC     GEM-19     Al2o																	
Additional Edge Preps – page T 45																												

Page T 42 – grade description

**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

	Stocked Standard		Stocked or Available Upon Request		Not Recommended
--	------------------	--	-----------------------------------	--	-----------------

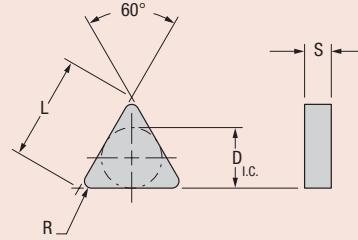

# Triangle Inserts


## Negative (TNGN)

Shape: Triangle	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)				
			WG-300	WG-600	WG-700	Phase Toughened	XSY/TIN-1 Si3N <sub>4</sub>	GSN100 Al <sub>2</sub> O-TiC			D I.C.	L	S	R	
<b>TNGN</b> 	TNGN-110308	T2A	○	○	○	○	○	○	○	TNGN-222	T2A	6,35	11,00	3,18	0,79
	A	○	○	○	○	○	○	○	○		A	6,35	11,00	3,18	0,79
	TNGN-160304	T1	○	○	○	○	○	○	○	TNGN-321	T1	9,53	16,51	3,18	0,38
	TNGN-160308	T1	○	○	○	○	○	○	○	TNGN-322	T1	9,53	16,51	3,18	0,79
		T2	○	○	○	○	○	○	○		T2	9,53	16,51	3,18	0,79
	TNGN-160404	T2A	○	○	○	○	○	○	○	TNGN-331	T1	9,53	16,51	4,75	0,38
		T1	○	○	○	○	○	○	○		T2	9,53	16,51	4,75	0,38
	TNGN-160408	T1	○	○	○	○	○	○	○	TNGN-332	T1	9,53	16,51	4,75	0,79
		T2	○	○	○	○	○	○	○		T2	9,53	16,51	4,75	0,79
		T2A	●	○	○	○	○	○	○		T2A	9,53	16,51	4,75	0,79
	TNGN-160412	T1	○	○	○	○	○	○	○	TNGN-333	T1	9,53	16,51	4,75	1,19
		T2A	●	○	○	○	○	○	○		T2A	9,53	16,51	4,75	1,19
	TNGN-160416	T1	○	○	○	○	○	○	○	TNGN-334	T1	9,53	16,51	4,75	1,57
	TNGN-220404	T1	●	○	○	○	○	○	○	TNGN-431	T1	12,70	22,00	4,75	0,38
	TNGN-220408	T1	●	○	○	○	○	○	○	TNGN-432	T1	12,70	22,00	4,75	0,79
		T2A	●	○	○	○	○	○	●		T2A	12,70	22,00	4,75	0,79
		A	○	○	○	○	○	○	○		A	12,70	22,00	4,75	0,79
	TNGN-220412	T1	●	○	●	○	○	○	○	TNGN-433	T1	12,70	22,00	4,75	1,19
	TNGN-220416	T1	●	○	●	○	○	○	○	TNGN-434	T1	12,70	22,00	4,75	1,57
	TNGN-220432	T2A	○	○	○	○	○	○	○	TNGN-438	T2A	12,70	22,00	4,75	3,18
	TNGN-220708	T2A	○	○	○	○	○	○	○	TNGN-452	T2A	12,70	22,00	7,92	0,79
	TNGN-220712	T1	●	○	○	○	○	○	○	TNGN-453	T1	12,70	22,00	7,92	1,19
		T2A	○	○	○	○	○	○	○		T2A	12,70	22,00	7,92	1,19
	TNGN-220716	T1	●	○	○	○	○	○	○	TNGN-454	T1	12,70	22,00	7,92	1,57
		T2A	○	○	○	○	○	○	○		T2A	12,70	22,00	7,92	1,57
	TNGN-270612	T2A	○	○	○	○	○	○	○	TNGN-543	T2A	15,88	27,51	6,35	1,19
	TNGN-270616	T1	○	○	○	○	○	○	○	TNGN-544	T1	15,88	27,51	6,35	1,57
		T2	○	○	○	○	○	○	○		T2	15,88	27,51	6,35	1,57
	TNGN-270632	T2	○	○	○	○	○	○	○	TNGN-548	T2	15,88	27,51	6,35	3,18
	TNGN-330924	T2A	○	○	○	○	○	○	○	TNGN-666	T2A	19,05	32,99	9,53	2,39
	TNGN-440932	T2A	○	○	○	○	○	○	○	TNGN-868	T2A	25,40	43,99	9,53	3,18
<b>Ceramic Classification</b>															
 Whisker Ceramic  Phase Toughened  Silicon Nitride  Alumina TiC  Al <sub>2</sub> O <sub>3</sub>															
 WG-300  WG-600  WG-700  Phase Toughened  XSY/TIN-1  Si <sub>3</sub> N <sub>4</sub>  GSN100  Al <sub>2</sub> O-TiC  GEM-7  Al <sub>2</sub> O															
<b>Additional Edge Preps – page T 45</b>															
Page T 42 – grade description															

Not Recommended  Stocked or Available Upon Request  Stocked Standard 

# 35° Diamond Inserts


## Negative

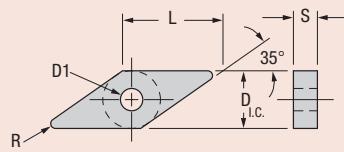

Shape: 35° Diamond	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)						
			WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened Si3N4	GSM100	Al2O3-TiC	GEM-7	Al2O3	D I.C.	L	S	D1	R	
	VNGA-160408	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	VNGA-332	T1	9,53	16,61	4,75	3,81	0,79			
		T2A	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		T2A	9,53	16,61	4,75	3,81	0,79			
	VNGA-160412	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	VNGA-333	T1	9,53	16,61	4,75	3,81	1,19			
	VNGA-220408	T2A	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	VNGA-432	T2A	12,70	22,15	4,75	5,16	0,79			
	VNGA-220424	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	VNGA-436	T1	12,70	22,15	4,75	5,16	2,39			
Ceramic Classification					WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened Si3N4	GSM100	Al2O3-TiC	GEM-7	GEM-19	Al2O3	Additional Edge Preps – page T 45		
Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>	WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened Si3N4	GSM100	Al2O3-TiC	GEM-7	GEM-19	Al2O3	Additional Edge Preps – page T 45		

Page T 42 – grade description

Additional Edge Preps – page T 45

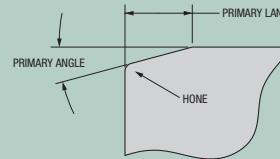


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

-  Stocked Standard
-  Stocked Upon Request
-  Not Recommended


# Trigon Inserts

## Negative

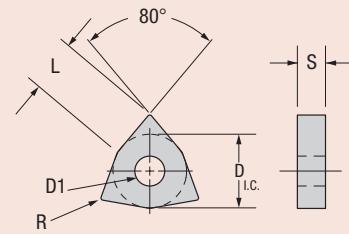


Shape: Trigon	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)					
			WG-300	WG-600	WG-700	Phase TagBend	XSYTIN-1	Si3N <sub>4</sub>	Al <sub>2</sub> O <sub>3</sub> -TiC		D_I.C.	L	S	D1	R	
<b>WNGA</b> 	WNGA-060404	T1	○	○	○	○	○	○	○	WNGA-331	T1	9,53	6,53	4,75	3,86	0,38
	WNGA-060408	T1	●	●	●	○	○	○	○	WNGA-332	T1	9,53	6,53	4,75	3,86	0,79
	WNGA-060412	T1	○	○	○	○	○	○	○	WNGA-333	T1	9,53	6,53	4,75	3,86	1,19
	WNGA-080404	T1	●	○	○	○	○	○	○	WNGA-431	T1	12,70	8,69	4,75	5,16	0,38
		T1A	○	○	○	○	○	○	○		T1A	12,70	8,69	4,75	5,16	0,38
	WNGA-080408	T1	●	○	●	○	○	○	○	WNGA-432	T1	12,70	8,69	4,75	5,16	0,79
		T1A	●	○	○	○	○	○	○		T1A	12,70	8,69	4,75	5,16	0,79
		T2A	●	○	○	○	○	○	○		T2A	12,70	8,69	4,75	5,16	0,79
	WNGA-080412	T2	○	○	○	○	●	○	○	WNGA-433	T2	12,70	8,69	4,75	5,16	1,19
		T2A	○	○	○	○	○	○	○		T2A	12,70	8,69	4,75	5,16	1,19
<b>Ceramic Classification</b>																
Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>	WG-300	WG-600	WG-700	Phase TagBend	XSYTIN-1	Si3N <sub>4</sub>	Al <sub>2</sub> O <sub>3</sub> -TiC	GEM-7	GEM-19	Additional Edge Preps – page T 45		

Page T 42 – grade description

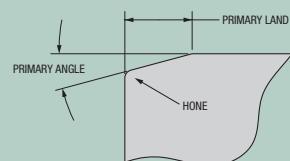

Not Recommended  Stocked or Available Upon Request  Stocked Standard 

# 80° Diamond Inserts Positive Flat Top

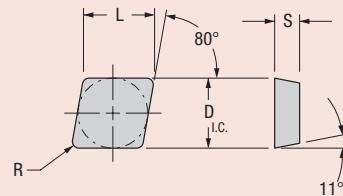



Shape: 80° Diamond	Part Number ISO	Edge Prep	Whisker					Part Number ANSI	Edge Prep	Dimensions (millimeters)							
			WG-300	WG-600	WG-700	XSY/TIN-1	GSN100	GEM-7	Al2o3-TiC	GEM-19	Al2o3	D_I.C.	L	S	R		
CPGN	CPGN-090304	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	CPGN-321	T1	9,53	9,65	3,18	0,38
	CPGN-090308	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	CPGN-322	T1	9,53	9,65	3,18	0,79
	CPGN-090312	T1	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	CPGN-323	T1	9,53	9,65	3,18	1,19
	CPGN-120308	T1	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	CPGN-422	T1	12,70	12,90	3,18	0,79
	CPGN-120316	T2A	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	CPGN-424	T2A	12,70	12,90	3,18	1,57
	CPGN-120408	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	CPGN-432	T1	12,70	12,90	4,75	0,79
	CPGN-120412	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	CPGN-433	T1	12,70	12,90	4,75	1,19
		T1A	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		T1A	12,70	12,90	4,75	1,19
		T2	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		T2	12,70	12,90	4,75	1,19
		T2A	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		T2A	12,70	12,90	4,75	1,19
		A	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		A	12,70	12,90	4,75	1,19
	CPGN-120416	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	CPGN-434	T1	12,70	12,90	4,75	1,57
<b>Ceramic Classification</b>														Additional Edge Preps – page T 45			
Page T 42 – grade description																	

Shape: Round	Part Number ISO	Edge Prep	Whisker					Part Number ANSI	Edge Prep	Dimensions (millimeters)								
			WG-300	WG-600	WG-700	XSY/TIN-1	GSN100	GEM-7	Al2o3-TiC	GEM-19	Al2o3	D_I.C.	S					
RPGN	RPGN-090300	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	RPGN-32	T1	9,53	3,18			
		T1A	● ○ ● ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		T1A	9,53	3,18			
		T2A	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		T2A	9,53	3,18			
		A	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		A	9,53	3,18			
	RPGN-120400	T1	● ○ ● ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	RPGN-43	T1	12,70	4,75			
		T1A	● ○ ● ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		T1A	12,70	4,75			
		T2	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		T2	12,70	4,75			
		T2A	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		T2A	12,70	4,75			
		A	○ ○ ○ ○ ○	○ ○ ○ ○ ○	● ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		A	12,70	4,75			
<b>Ceramic Classification</b>														Additional Edge Preps – page T 45				
Page T 42 – grade description																		




# Round V-Bottom Inserts Positive (RCGN-V)

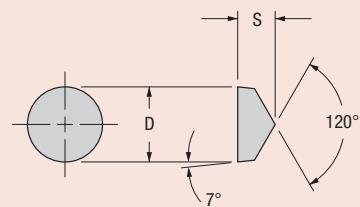

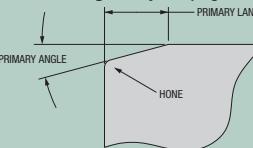Shape: Round V-Bottom	Part Number ISO	Edge Prep	Whisker							Part Number ANSI	Edge Prep	Dimensions (millimeters)			
			WG-300	WG-600	WG-700	Phase Toughened	XSYTIN-1	GSM100	Si3N4	Al2O3-TiC	GEM-7	Al2O3	D I.C.	S	
<b>RCGN</b> 	RCGX-060400	T1	●	●	●	●	○	○	●	●	○	○	6,35	4,75	
		T2A	●	○	○	○	○	○	●	●	○	○	6,35	4,75	
		A	○	○	○	●	●	○	○	○	○	○	6,35	4,75	
	RCGX-090700	T1	●	●	●	●	●	●	●	●	●	○	9,53	7,92	
		T1A	○	○	○	○	○	○	○	○	○	○	9,53	7,92	
		T2A	●	●	○	○	○	○	●	●	○	○	9,53	7,92	
		A	○	○	○	●	●	○	○	○	○	○	9,53	7,92	
	RCGX-120700	T1	●	●	●	●	●	●	●	●	●	○	12,70	7,92	
		T1A	●	●	●	●	○	○	○	○	○	○	12,70	7,92	
		T2	●	○	●	●	○	○	○	○	○	○	12,70	7,92	
	RCGX-191200	T2A	●	●	●	●	●	●	●	●	●	○	12,70	7,92	
		A	○	○	○	●	●	○	○	○	○	○	12,70	7,92	
<b>Ceramic Classification</b>															
 Whisker Ceramic  Phase Toughened  Silicon Nitride  Alumina TiC  Al <sub>2</sub> O <sub>3</sub>															
Page T 42 – grade description															
<b>Additional Edge Preps – page T 45</b>															
															

# Round V-Bottom Inserts Positive (RPGN-V)

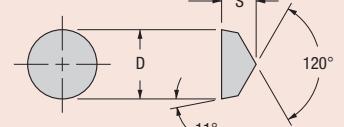



Shape: Round V-Bottom	Part Number ISO	Edge Prep	Whisker							Part Number ANSI	Edge Prep	Dimensions (millimeters)			
			WG-300	WG-600	WG-700	Phase Toughened	XSYTIN-1	GSM100	Si3N4	Al2O3-TiC	GEM-7	Al2O3	D I.C.	S	
<b>RPGN</b> 	RPGX-060400	T1	●	●	●	●	●	○	●	●	○	○	6,35	4,75	
		T2	○	○	○	○	○	●	●	●	●	○	6,35	4,75	
		T2A	●	○	●	●	○	○	○	○	○	○	6,35	4,75	
	RPGX-090700	A	○	○	○	●	●	●	○	○	○	○	6,35	4,75	
		T1	●	●	●	●	○	○	○	○	○	○	9,53	7,92	
		T1A	○	○	○	○	○	●	●	●	○	○	9,53	7,92	
		T2	○	○	○	○	○	●	●	●	○	○	9,53	7,92	
	RPGX-120700	T2A	●	●	●	●	○	○	○	○	○	○	9,53	7,92	
		A	○	○	○	●	●	○	○	○	○	○	9,53	7,92	
		T1	○	●	●	●	○	○	○	○	○	○	12,70	7,92	
<b>Ceramic Classification</b>															
 Whisker Ceramic  Phase Toughened  Silicon Nitride  Alumina TiC  Al <sub>2</sub> O <sub>3</sub>															
Page T 42 – grade description															
<b>Additional Edge Preps – page T 45</b>															
															

Not Recommended  Stocked or Available Upon Request  Stocked Standard 

# Square Inserts

## Positive Flat Top

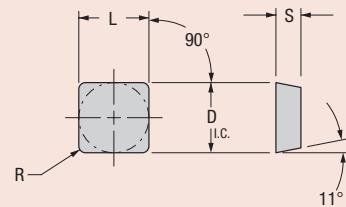

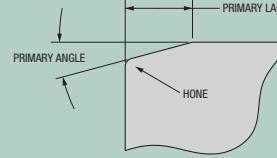Shape: Square	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)			
			WG-300	WG-600	WG-700	XSY/TIN-1	Phase Toughened Si3N <sub>4</sub>	GEM-7 Al <sub>2</sub> TiC Al <sub>2</sub> d <sub>3</sub>			D I.C.	L	S	R
SPGN	SPGN-090308	T1	●	○	○	○	○	○	SPGN-322	T1	9,53	9,53	3,18	0,79
		T1A	○	○	○	●	●	○		T1A	9,53	9,53	3,18	0,79
		A	○	○	○	●	○	○		A	9,53	9,53	3,18	0,79
	SPGN-120308	T1	●	○	○	○	○	○	SPGN-422	T1	12,70	12,70	3,18	0,79
		T2A	○	○	○	○	○	○		T2A	12,70	12,70	3,18	0,79
	SPGN-120312	T1	○	○	○	○	○	○	SPGN-423	T1	12,70	12,70	3,18	1,19
		A	○	○	○	○	○	○		A	12,70	12,70	3,18	1,19
	SPGN-120408	T1	●	○	●	○	○	○	SPGN-432	T1	12,70	12,70	4,75	0,79
		T1A	○	○	●	●	○	○		T1A	12,70	12,70	4,75	0,79
		T2	○	○	○	●	○	○		T2	12,70	12,70	4,75	0,79
		T2A	●	○	○	○	○	○		T2A	12,70	12,70	4,75	0,79
		A	○	○	○	●	○	○		A	12,70	12,70	4,75	0,79
	SPGN-120412	T1	●	○	●	○	○	○	SPGN-433	T1	12,70	12,70	4,75	1,19
		T1A	○	○	●	●	○	○		T1A	12,70	12,70	4,75	1,19
		T2	○	○	○	●	○	○		T2	12,70	12,70	4,75	1,19
		T2A	○	○	○	○	○	○		T2A	12,70	12,70	4,75	1,19
		A	○	○	○	●	○	○		A	12,70	12,70	4,75	1,19
	SPGN-120416	T1	●	○	●	○	○	○	SPGN-434	T1	12,70	12,70	4,75	1,57
		T2	○	○	○	○	○	○		T2	12,70	12,70	4,75	1,57
		T2A	●	○	○	○	●	○		T2A	12,70	12,70	4,75	1,57
	SPGN-190408	T2A	○	○	○	○	○	○	SPGN-632	T2A	19,05	19,05	4,75	0,79
	SPGN-190412	T2A	○	○	○	○	○	○	SPGN-633	T2A	19,05	19,05	4,75	1,19
	SPGN-190416	T2A	○	○	○	○	○	○	SPGN-634	T2A	19,05	19,05	4,75	1,57
	SPGN-190608	T1A	○	○	○	○	○	○	SPGN-642	T1A	19,05	19,05	6,35	0,79
<b>Ceramic Classification</b>														
														
														
<b>Additional Edge Preps – page T 45</b>														
														

Page T 42 – grade description


**Greenleaf Sales**



US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

 Stocked Standard	 Stocked or Available Upon Request	 Not Recommended
---	---	---

# Triangle Inserts

## Positive Flat Top

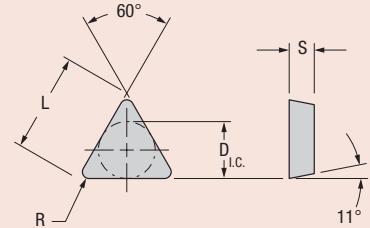

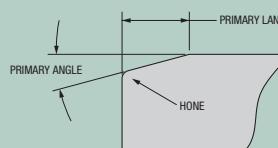
Shape: Triangle	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)										
			WG-300	WG-600	WG-700	Phase Toughened	XSYTIN-1	GSN100	SiAlN	Al2O-TiC	GEM-7	GEM-19	D I.C.	L	S	R					
	TPGN-110304	T1	●	○	●	○	○	○	○	○	○	○	TPGN-221	T1	6,35	11,00	3,18	0,38			
	TPGN-110308	T1	●	○	●	○	○	○	○	○	○	○	TPGN-222	T1	6,35	11,00	3,18	0,79			
		T1A	●	○	○	○	○	○	○	○	○	○		T1A	6,35	11,00	3,18	0,79			
		T2A	●	○	○	○	○	○	○	○	○	○		T2A	6,35	11,00	3,18	0,79			
	TPGN-160304	T1	●	○	●	○	○	○	○	○	○	○	TPGN-321	T1	9,53	16,51	3,18	0,38			
		T2A	○	○	○	○	○	○	○	○	○	○		T2A	9,53	16,51	3,18	0,38			
	TPGN-160308	T1	●	○	●	○	○	○	○	○	○	○	TPGN-322	T1	9,53	16,51	3,18	0,79			
		T1A	○	○	○	○	○	○	○	○	○	○		T1A	9,53	16,51	3,18	0,79			
		T2A	●	○	○	○	●	●	○	○	○	○		T2A	9,53	16,51	3,18	0,79			
		A	○	○	○	○	○	○	○	○	○	○		A	9,53	16,51	3,18	0,79			
	TPGN-160312	T1	●	○	●	○	○	○	○	○	○	○	TPGN-323	T1	9,53	16,51	3,18	1,19			
		T1A	○	○	○	○	○	○	●	○	○	○		T1A	9,53	16,51	3,18	1,19			
		A	○	○	○	○	○	○	○	○	○	○		A	9,53	16,51	3,18	1,19			
<b>Ceramic Classification</b>	Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>	Whisker	WG-300	WG-600	WG-700	XSYTIN-1	GSN100	SiAlN	Al <sub>2</sub> O-TiC	GEM-7	GEM-19	TPGN-324	T1	9,53	16,51	3,18	1,57
						Phase Toughened										TPGN-431	T1	12,70	22,00	4,75	0,38
	TPGN-220404	T1	●	○	●	○	○	○	○	○	○	○	TPGN-432	T1	12,70	22,00	4,75	0,79			
		T2A	○	○	●	○	○	○	○	○	○	○		T2A	12,70	22,00	4,75	0,79			
	TPGN-220408	T1	●	○	●	○	○	○	○	○	○	○	TPGN-433	T1	12,70	22,00	4,75	1,19			
		T2A	○	○	○	○	○	○	○	○	○	○	TPGN-434	T1	12,70	22,00	4,75	1,57			
	TPGN-220412	T1	●	○	●	○	○	○	○	○	○	○									
		T2A	○	○	○	○	○	○	○	○	○	○									
	TPGN-220416	T1	●	○	●	○	○	○	○	○	○	○									
		T2A	○	○	○	○	○	○	○	○	○	○									
		A	○	○	○	○	○	○	○	○	○	○									
<b>Additional Edge Preps – page T 45</b>																					
Page T 42 – grade description																					

Not Recommended  Stocked or Available Upon Request  Stocked Standard 

60°

# Triangle Inserts


## Positive (TP)

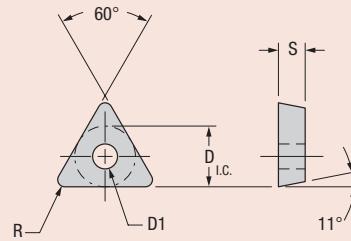

Shape: Triangle	Part Number	Edge Prep	Whisker									Part Number	Edge Prep	Dimensions (millimeters)									
			WG-300	WG-600	WG-700	XSYTIN-1	GSN100	GEM-7	Al2O3-TiC	Al2O3	D_I.C.			S	D1	R							
TP	TP-41	A	●	○	○	○	○	○	○	○	TP-41	A	6,35	2,36	3,48	0,38							
	TP-42	A	○	○	○	○	○	○	○	○	TP-42	A	6,35	2,36	3,48	0,79							
	TP-62	A	○	○	○	○	○	○	○	○	TP-62	A	9,53	3,18	4,14	0,79							
	TP-64	A	○	○	○	○	○	○	○	○	TP-64	A	9,53	3,18	4,14	1,57							
	TP-82	A	○	○	○	○	○	○	○	○	TP-82	A	12,70	4,75	5,16	0,79							
Ceramic Classification			WG-300	WG-600	WG-700	XSYTIN-1	GSN100	GEM-7	Al2O3-TiC	Al2O3	Additional Edge Preps – page T 45												
			Whisker	Phase	Toughened	Si3N <sub>4</sub>	GSN100	GEM-7	Al2O <sub>3</sub> -TiC	Al2O <sub>3</sub>													
			Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>															Page T 42 – grade description	

# Triangle Inserts

## Positive (TPGA)

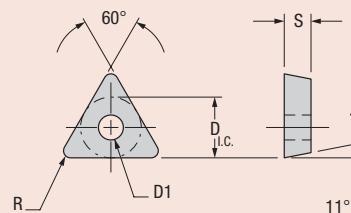

Shape: Triangle	Part Number	Edge Prep	Whisker									Part Number	Edge Prep	Dimensions (millimeters)									
			WG-300	WG-600	WG-700	XSYTIN-1	GSN100	GEM-7	Al2O3-TiC	Al2O3	D			S	D1	R							
TPGA	TPGA-160304	T1	○	○	○	○	○	○	○	○	TPGA-321	T1	9,53	3,18	3,81	0,38							
		T1A	○	○	○	○	○	○	○	○	TPGA-321	T1A	9,53	3,18	3,81	0,38							
	TPGA-160308	T1A	○	○	○	○	○	○	○	○	TPGA-322	T1A	9,53	3,18	3,81	0,38							
Ceramic Classification			WG-300	WG-600	WG-700	XSYTIN-1	GSN100	GEM-7	Al2O <sub>3</sub> -TiC	Al2O <sub>3</sub>	Additional Edge Preps – page T 45												
			Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>															Page T 42 – grade description	


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

-  Stocked Standard
-  Stocked or Available Upon Request
-  Not Recommended

## Industry-Standard Toolholders

Greenleaf manufactures a complete line of industry-standard toolholders in conformance with ANSI specifications in 4140 and 4150 alloy steel, hardened up to 42 Rc and oxide coated.

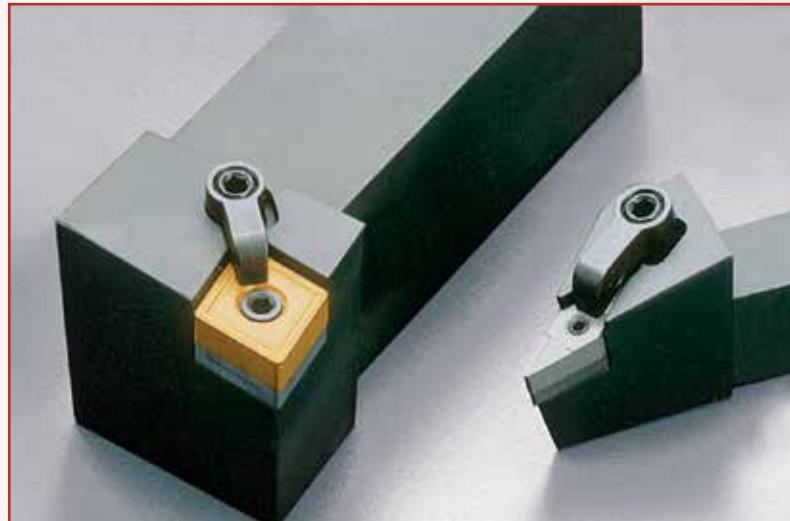

### Greenleaf Tune-Up Kits

A Tune-Up Kit consists of all the standard hardware to refurbish a particular toolholder, boring bar, or milling cutter. A toolholder will have a readily visible, laser-inscribed Tune-Up Kit number on it for ease in ordering. This number will prevent any confusion created by searching a catalog for hardware, and it will help reduce downtime.

Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


## Toolholder Identification System



† Greenleaf standard.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



*Integers to be preceded by 0.  
Example: 8mm = 08*

### Toolholder Shank Width

**32**
**32**
**P**


### Cutting Edge Length

**12**


*Integers to be preceded by 0.  
Example: 8mm = 08*

### Toolholder Shank Height

A = 32	N = 160
B = 40	P = 170
C = 50	Q = 180
D = 60	R = 200
E = 70	S = 250
F = 80	T = 300
G = 90	U = 350
H = 100	V = 400
J = 110	W = 450
K = 125	Y = 500
L = 140	X = Special Length
M = 150	

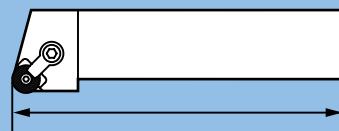


### Toolholder Length

#### NOTE:

All toolholders are qualified to  $\pm 0.07$  over gage insert radius on the "C" and "F" dimensions as standard. Some toolholders are qualifiable on the "C" length dimension only.





































# Industry-Standard Toolholder Usage Reference Guide

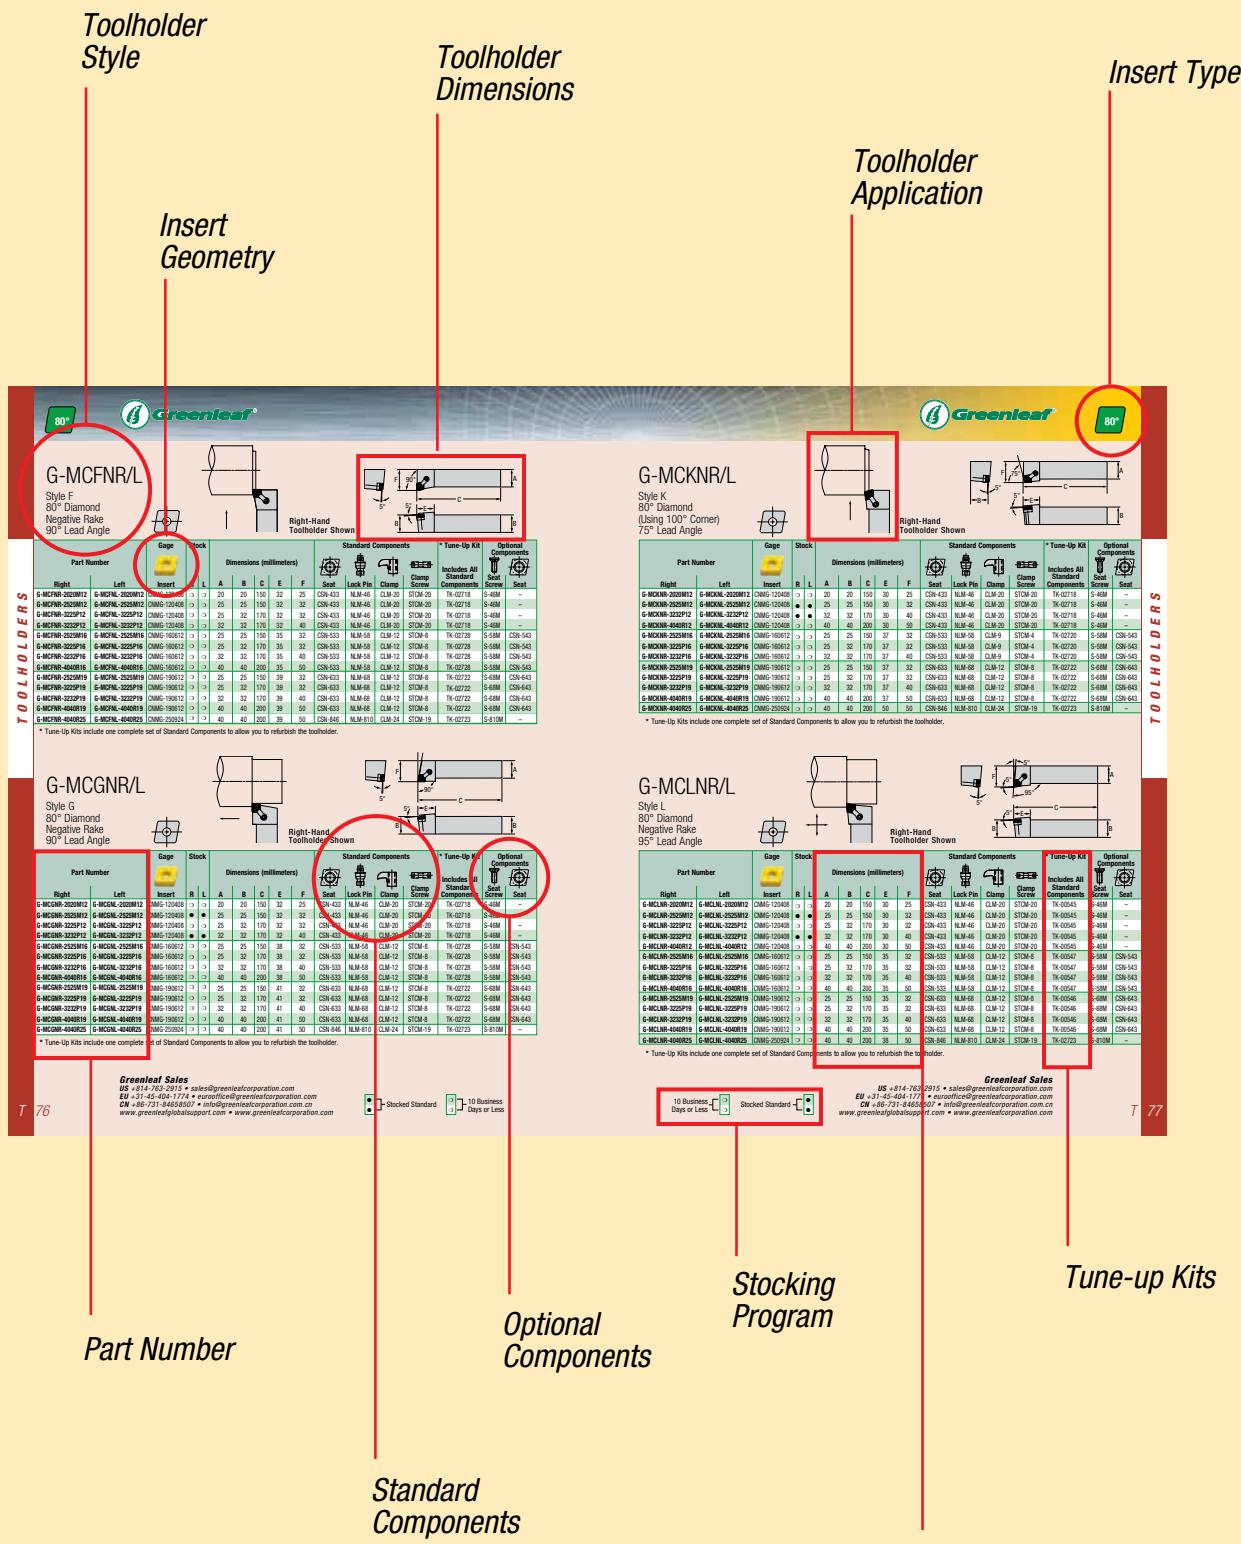

*Greenleaf Sales*

**Greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


<b>80° Diamond – Negative</b>	<b>Round – Negative</b>	<b>Triangle – Negative contd.</b>	<b>35° Diamond – Negative</b>	<b>Triangle – Positive</b>
 <p><b>G-MCFNR/L</b> Style F 80° Diamond Negative Rake 90° Lead Angle page: T 76</p>	 <p><b>G-MRANR/L</b> Style A Round Negative Rake page: T 80</p>	 <p><b>G-MTBNR/L</b> Style B Triangle Negative Rake 75° Lead Angle page: T 84</p>	 <p><b>G-MVTNR/L</b> Style T 35° Diamond Negative Rake 117,5° Lead Angle page: T 89</p>	 <p><b>G-CTAPR/L</b> Style A Triangle Positive Rake 90° Lead Angle page: T 94</p>
 <p><b>G-MCGNR/L</b> Style G 80° Diamond Negative Rake 90° Lead Angle page: T 76</p>	 <p><b>G-MRGNR/L</b> Style G Round Negative Rake page: T 80</p>	 <p><b>G-MTENNS</b> Style E Triangle Negative Rake 60° Lead Angle page: T 85</p>	 <p><b>G-MVVNN</b> Style V 35° Diamond Negative Rake 72,5° Lead Angle page: T 90</p>	 <p><b>G-CTBPR/L</b> Style B Triangle Positive Rake 75° Lead Angle page: T 94</p>
 <p><b>G-MCKNR/L</b> Style K 80° Diamond (Using 100° Corner) Negative Rake 75° Lead Angle page: T 77</p>	<b>Square – Negative</b>	 <p><b>G-MSBNR/L</b> Style B Square Negative Rake 75° Lead Angle page: T 81</p>	 <p><b>G-MTFNR/L</b> Style F Triangle Negative Rake 90° Lead Angle page: T 86</p>	 <p><b>G-MWLNR/L</b> Style L Trigon Negative Rake 95° Lead Angle page: T 90</p>
 <p><b>G-MCLNLR/L</b> Style L 80° Diamond Negative Rake 95° Lead Angle page: T 77</p>	 <p><b>G-MSDNN</b> Style D Square Negative Rake 45° Lead Angle page: T 82</p>	 <p><b>G-MTGNR/L</b> Style G Triangle Negative Rake 90° Lead Angle page: T 87</p>	 <p><b>G-MTJNRS</b> Style J Triangle Negative Rake 93° Lead Angle page: T 87</p>	 <p><b>G-CTCPN</b> Style C Triangle Positive Rake 90° Lead Angle page: T 95</p>
 <p><b>G-MCRNR/L</b> Style R 80° Diamond (Using 100° Corner) Negative Rake 75° Lead Angle page: T 78</p>	 <p><b>G-MSKNR/L</b> Style K Square Negative Rake 75° Lead Angle page: T 82</p>	 <p><b>G-MTLNRL</b> Style L Triangle Negative Rake 95° Lead Angle page: T 88</p>	 <p><b>G-CCLPR/L</b> Style L 80° Diamond Positive Rake 95° Lead Angle page: T 91</p>	 <p><b>G-CTEOR/L</b> Style E Triangle Positive Rake 60° Lead Angle page: T 95</p>
<b>55° Diamond – Negative</b>	 <p><b>G-MDJNR/L</b> Style J 55° Diamond Negative Rake 93° Lead Angle page: T 79</p>	 <p><b>G-MSRNR/L</b> Style R Square Negative Rake 75° Lead Angle page: T 83</p>	 <p><b>G-MTRNRL</b> Style R Triangle Negative Rake 95° Lead Angle page: T 88</p>	 <p><b>G-CCRPL</b> Style R 80° Diamond (Using 100° Corner) Positive Rake 75° Lead Angle page: T 91</p>
 <p><b>G-MDPNN</b> Style P 55° Diamond Negative Rake 62,5° Lead Angle page: T 79</p>	 <p><b>G-MSSNR/L</b> Style S Square Negative Rake 45° Lead Angle page: T 83</p>	 <p><b>G-MTRNRL</b> Style R Triangle Negative Rake 75° Lead Angle page: T 88</p>	 <p><b>G-CSBPR/L</b> Style B Square Positive Rake 75° Lead Angle page: T 92</p>	 <p><b>G-CTFPR/L</b> Style F Triangle Positive Rake 90° Lead Angle page: T 96</p>
<b>Triangle – Negative</b>	 <p><b>G-MTANR/L</b> Style A Triangle Negative Rake 90° Lead Angle page: T 84</p>	 <p><b>G-MVJNRL</b> Style J 35° Diamond Negative Rake 93° Lead Angle page: T 89</p>	 <p><b>G-CSDPN</b> Style D Square Positive Rake 45° Lead Angle page: T 92</p>	 <p><b>G-CSKPR/L</b> Style K Square Positive Rake 75° Lead Angle page: T 93</p>

80°




## G-MCFNR/L

Style F  
80° Diamond  
Negative Rake  
90° Lead Angle

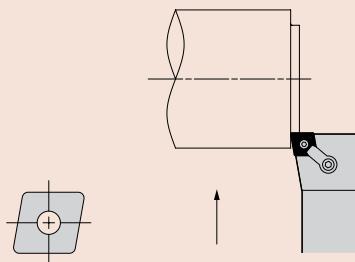

Right-Hand Toolholder Shown

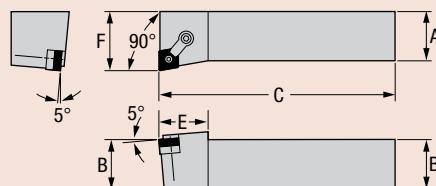

TOOLHOLDERS

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Components				
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MCFNR-2020M12	G-MCFNL-2020M12	CNMG-120408		○	○	20	20	150	32	25	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—
G-MCFNR-2525M12	G-MCFNL-2525M12	CNMG-120408		○	○	25	25	150	32	32	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—
G-MCFNR-3225P12	G-MCFNL-3225P12	CNMG-120408		○	○	25	32	170	32	32	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—
G-MCFNR-3232P12	G-MCFNL-3232P12	CNMG-120408		○	○	32	32	170	32	40	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—
G-MCFNR-2525M16	G-MCFNL-2525M16	CNMG-160612		○	○	25	25	150	35	32	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543
G-MCFNR-3225P16	G-MCFNL-3225P16	CNMG-160612		○	○	25	32	170	35	32	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543
G-MCFNR-3232P16	G-MCFNL-3232P16	CNMG-160612		○	○	32	32	170	35	40	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543
G-MCFNR-4040R16	G-MCFNL-4040R16	CNMG-160612		○	○	40	40	200	35	50	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543
G-MCFNR-2525M19	G-MCFNL-2525M19	CNMG-190612		○	○	25	25	150	39	32	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643
G-MCFNR-3225P19	G-MCFNL-3225P19	CNMG-190612		○	○	25	32	170	39	32	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643
G-MCFNR-3232P19	G-MCFNL-3232P19	CNMG-190612		○	○	32	32	170	39	40	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643
G-MCFNR-4040R19	G-MCFNL-4040R19	CNMG-190612		○	○	40	40	200	39	50	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643
G-MCFNR-4040R25	G-MCFNL-4040R25	CNMG-250924		○	○	40	40	200	39	50	CSN-846	NLM-810	CLM-24	STCM-19	TK-02723	S-810M	—


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## G-MCGNR/L

Style G  
80° Diamond  
Negative Rake  
90° Lead Angle



Right-Hand Toolholder Shown

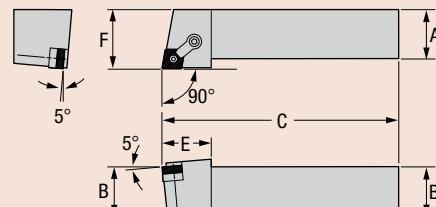

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Components				
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MCGNR-2020M12	G-MCGNL-2020M12	CNMG-120408		○	○	20	20	150	32	25	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—
G-MCGNR-2525M12	G-MCGNL-2525M12	CNMG-120408	●	●	25	25	150	32	32	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—	
G-MCGNR-3225P12	G-MCGNL-3225P12	CNMG-120408		○	○	25	32	170	32	32	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—
G-MCGNR-3232P12	G-MCGNL-3232P12	CNMG-120408	●	●	32	32	170	32	40	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—	
G-MCGNR-2525M16	G-MCGNL-2525M16	CNMG-160612		○	○	25	25	150	38	32	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543
G-MCGNR-3225P16	G-MCGNL-3225P16	CNMG-160612		○	○	25	32	170	38	32	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543
G-MCGNR-3232P16	G-MCGNL-3232P16	CNMG-160612		○	○	32	32	170	38	40	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543
G-MCGNR-4040R16	G-MCGNL-4040R16	CNMG-160612		○	○	40	40	200	38	50	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543
G-MCGNR-2525M19	G-MCGNL-2525M19	CNMG-190612		○	○	25	25	150	41	32	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643
G-MCGNR-3225P19	G-MCGNL-3225P19	CNMG-190612	○	○	25	32	170	41	32	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643	
G-MCGNR-3232P19	G-MCGNL-3232P19	CNMG-190612	○	○	32	32	170	41	40	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643	
G-MCGNR-4040R19	G-MCGNL-4040R19	CNMG-190612	○	○	40	40	200	41	50	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643	
G-MCGNR-4040R25	G-MCGNL-4040R25	CNMG-250924	○	○	40	40	200	41	50	CSN-846	NLM-810	CLM-24	STCM-19	TK-02723	S-810M	—	

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard


10 Business Days or Less

# G-MCKNR/L

Style K  
80° Diamond  
(Using 100° Corner)  
75° Lead Angle

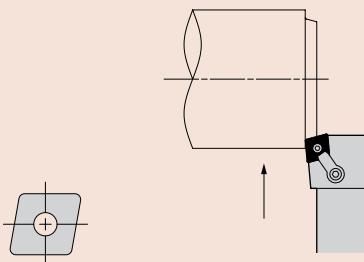

Right-Hand  
Toolholder Shown

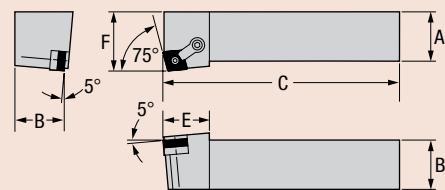


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components			
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MCKNR-2020M12	G-MCKNL-2020M12	CNMG-120408	○ ○	20	20	150	30	25	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—		
G-MCKNR-2525M12	G-MCKNL-2525M12	CNMG-120408	● ●	25	25	150	30	32	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—		
G-MCKNR-3232P12	G-MCKNL-3232P12	CNMG-120408	● ●	32	32	170	30	40	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—		
G-MCKNR-4040R12	G-MCKNL-4040R12	CNMG-120408	○ ○	40	40	200	30	50	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—		
G-MCKNR-2525M16	G-MCKNL-2525M16	CNMG-160612	○ ○	25	25	150	37	32	CSN-533	NLM-58	CLM-9	STCM-4	TK-02720	S-58M	CSN-543		
G-MCKNR-3225P16	G-MCKNL-3225P16	CNMG-160612	○ ○	25	32	170	37	32	CSN-533	NLM-58	CLM-9	STCM-4	TK-02720	S-58M	CSN-543		
G-MCKNR-3232P16	G-MCKNL-3232P16	CNMG-160612	○ ○	32	32	170	37	40	CSN-533	NLM-58	CLM-9	STCM-4	TK-02720	S-58M	CSN-543		
G-MCKNR-2525M19	G-MCKNL-2525M19	CNMG-190612	○ ○	25	25	150	37	32	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643		
G-MCKNR-3225P19	G-MCKNL-3225P19	CNMG-190612	○ ○	25	32	170	37	32	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643		
G-MCKNR-3232P19	G-MCKNL-3232P19	CNMG-190612	○ ○	32	32	170	37	40	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643		
G-MCKNR-4040R19	G-MCKNL-4040R19	CNMG-190612	○ ○	40	40	200	37	50	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643		
G-MCKNR-4040R25	G-MCKNL-4040R25	CNMG-250924	○ ○	40	40	200	50	50	CSN-846	NLM-810	CLM-24	STCM-19	TK-02723	S-810M	—		


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# G-MCLNR/L

Style L  
80° Diamond  
Negative Rake  
95° Lead Angle

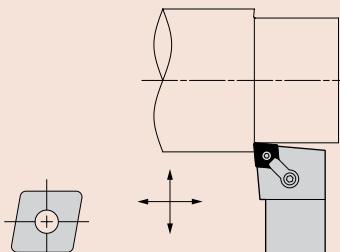

Right-Hand  
Toolholder Shown

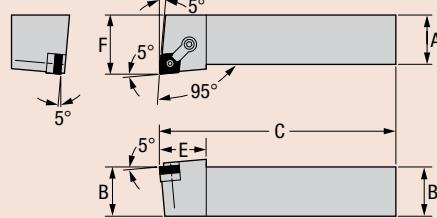

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components			
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MCLNR-2020M12	G-MCLNL-2020M12	CNMG-120408	○ ○	20	20	150	30	25	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—		
G-MCLNR-2525M12	G-MCLNL-2525M12	CNMG-120408	● ●	25	25	150	30	32	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—		
G-MCLNR-3225P12	G-MCLNL-3225P12	CNMG-120408	○ ○	25	32	170	30	32	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—		
G-MCLNR-3232P12	G-MCLNL-3232P12	CNMG-120408	● ●	32	32	170	30	40	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—		
G-MCLNR-4040R12	G-MCLNL-4040R12	CNMG-120408	○ ○	40	40	200	30	50	CSN-433	NLM-46	CLM-20	STCM-20	TK-02718	S-46M	—		
G-MCLNR-2525M16	G-MCLNL-2525M16	CNMG-160612	○ ○	25	25	150	35	32	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543		
G-MCLNR-3225P16	G-MCLNL-3225P16	CNMG-160612	○ ○	25	32	170	35	32	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543		
G-MCLNR-3232P16	G-MCLNL-3232P16	CNMG-160612	○ ○	32	32	170	35	40	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543		
G-MCLNR-4040R16	G-MCLNL-4040R16	CNMG-160612	○ ○	40	40	200	35	50	CSN-533	NLM-58	CLM-12	STCM-8	TK-02728	S-58M	CSN-543		
G-MCLNR-2525M19	G-MCLNL-2525M19	CNMG-190612	○ ○	25	25	150	35	32	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643		
G-MCLNR-3225P19	G-MCLNL-3225P19	CNMG-190612	○ ○	25	32	170	35	32	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643		
G-MCLNR-3232P19	G-MCLNL-3232P19	CNMG-190612	○ ○	32	32	170	35	40	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643		
G-MCLNR-4040R19	G-MCLNL-4040R19	CNMG-190612	○ ○	40	40	200	35	50	CSN-633	NLM-68	CLM-12	STCM-8	TK-02722	S-68M	CSN-643		
G-MCLNR-4040R25	G-MCLNL-4040R25	CNMG-250924	○ ○	40	40	200	38	50	CSN-846	NLM-810	CLM-24	STCM-19	TK-02723	S-810M	—		

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

10 Business Days or Less


Stocked Standard

# G-MCRNR/L

Style R, 80° Diamond  
(Using 100° Corner)  
Negative Rake  
75° Lead Angle



Right-Hand Toolholder Shown

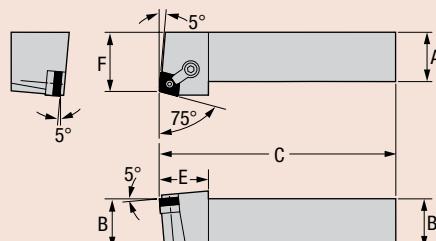

Part Number		Gage	Stock		Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components	
Right	Left	Insert	R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MCRNR-2020M12	G-MCRNL-2020M12	CNMG-120708	○	○	20	20	150	32	25	CSN-433	NLM-46	CLM-9	STCM-4	TK-02719	S-46M	—
G-MCRNR-2525M12	G-MCRNL-2525M12	CNMG-120708	●	●	25	25	150	32	32	CSN-433	NLM-46	CLM-9	STCM-4	TK-02719	S-46M	—
G-MCRNR-3232P12	G-MCRNL-3232P12	CNMG-120708	●	●	32	32	170	32	40	CSN-433	NLM-46	CLM-9	STCM-4	TK-02719	S-46M	—
G-MCRNR-4040R12	G-MCRNL-4040R12	CNMG-120708	○	○	40	40	200	32	50	CSN-433	NLM-46	CLM-9	STCM-4	TK-02719	S-46M	—
G-MCRNR-2525M16	G-MCRNL-2525M16	CNMG-160612	○	○	25	25	150	34	32	CSN-533	NLM-58	CLM-9	STCM-4	TK-02720	S-58M	CSN-543
G-MCRNR-3225P16	G-MCRNL-3225P16	CNMG-160612	○	○	25	32	170	34	32	CSN-533	NLM-58	CLM-9	STCM-4	TK-02720	S-58M	CSN-543
G-MCRNR-3232P16	G-MCRNL-3232P16	CNMG-160612	○	○	32	32	170	34	40	CSN-533	NLM-58	CLM-9	STCM-4	TK-02720	S-58M	CSN-543
G-MCRNR-3225M19	G-MCRNL-3225M19	CNMG-196012	○	○	25	32	150	38	32	CSN-633	NLM-68	CLM-12	STCM-4	TK-02721	S-68M	CSN-643
G-MCRNR-3232P19	G-MCRNL-3232P19	CNMG-196012	○	○	32	32	170	38	40	CSN-633	NLM-68	CLM-12	STCM-4	TK-02721	S-68M	CSN-643
G-MCRNR-4040R19	G-MCRNL-4040R19	CNMG-196012	○	○	40	40	200	38	50	CSN-633	NLM-68	CLM-12	STCM-4	TK-02721	S-68M	CSN-643
G-MCRNR-4040R25	G-MCRNL-4040R25	CNMG-250923	○	○	40	40	200	42	50	CSN-846	NLM-810	CLM-24	STCM-19	TK-02723	S-810M	—

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

 Stocked Standard

 10 Business Days or Less



# G-MDJNR/L

Style J

55° Diamond

Negative Rake

93° Lead Angle

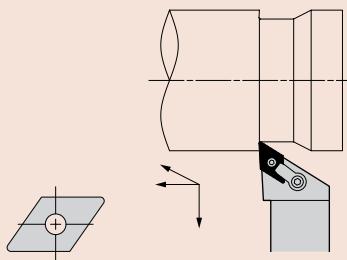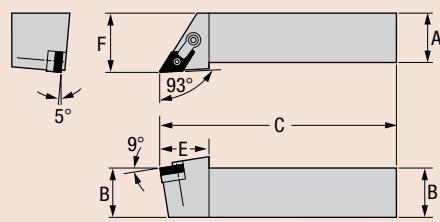Right-Hand  
Toolholder Shown

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components			
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MDJNR-2020M15	G-MDJNL-2020M15	DNMG-150408	○ ○	20	20	150	35	25			DSN-433	NLM-46	CLM-20	STCM-26	TK-02724	S-46M	DSN-423**
G-MDJNR-2525M15	G-MDJNL-2525M15	DNMG-150408	● ●	25	25	150	35	32			DSN-433	NLM-46	CLM-20	STCM-26	TK-02724	S-46M	DSN-423**
G-MDJNR-3225P15	G-MDJNL-3225P15	DNMG-150408	○ ○	25	32	170	35	32			DSN-433	NLM-46	CLM-20	STCM-26	TK-02724	S-46M	DSN-423**
G-MDJNR-3232P15	G-MDJNL-3232P15	DNMG-150408	● ●	32	32	170	35	40			DSN-433	NLM-46	CLM-20	STCM-26	TK-02724	S-46M	DSN-423**
G-MDJNR-4040R15	G-MDJNL-4040R15	DNMG-150408	○ ○	40	40	200	35	50			DSN-433	NLM-46	CLM-20	STCM-26	TK-02724	S-46M	DSN-423**
G-MDJNR-2525M19	G-MDJNL-2525M19	DNMG-190612	○ ○	25	25	150	38	32			DSN-533	NLM-58	CLM-12	STCM-4	TK-02726	S-58M	DSN-543
G-MDJNR-3225P19	G-MDJNL-3225P19	DNMG-190612	○ ○	25	32	170	38	32			DSN-533	NLM-58	CLM-12	STCM-4	TK-02726	S-58M	DSN-543
G-MDJNR-3232P19	G-MDJNL-3232P19	DNMG-190612	○ ○	32	32	170	38	40			DSN-533	NLM-58	CLM-12	STCM-4	TK-02726	S-58M	DSN-543
G-MDJNR-4040R19	G-MDJNL-4040R19	DNMG-190612	○ ○	40	40	200	38	50			DSN-533	NLM-58	CLM-12	STCM-4	TK-02726	S-58M	DSN-543

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

\*\* Cannot be used with lock pin.


# G-MDPNN

Style P

55° Diamond

Negative Rake

62,5° Lead Angle

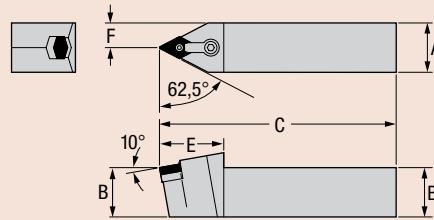Neutral  
Toolholder Shown

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components		
Neutral		Insert		N	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MDPNN-2020M15		DNMG-150408	○	20	20	150	42	10		DSN-433	NLM-46	CLM-12	STCM-4	TK-02725	S-46M	DSN-423**
G-MDPNN-2525M15		DNMG-150408	●	25	25	150	42	12,5		DSN-433	NLM-46	CLM-12	STCM-4	TK-02725	S-46M	DSN-423**
G-MDPNN-3225P15		DNMG-150408	○ ○	25	32	170	42	12,5		DSN-433	NLM-46	CLM-12	STCM-4	TK-02725	S-46M	DSN-423**
G-MDPNN-3232P15		DNMG-150408	● ●	32	32	170	42	16		DSN-433	NLM-46	CLM-12	STCM-4	TK-02725	S-46M	DSN-423**
G-MDPNN-4040R15		DNMG-150408	○ ○	40	40	200	42	20		DSN-433	NLM-46	CLM-12	STCM-4	TK-02725	S-46M	DSN-423**
G-MDPNN-2525M19		DNMG-190612	○ ○	25	25	150	49	12,5		DSN-533	NLM-58	CLM-12	STCM-4	TK-02726	S-58M	DSN-543
G-MDPNN-3225P19		DNMG-190612	○ ○	25	32	170	49	12,5		DSN-533	NLM-58	CLM-12	STCM-4	TK-02726	S-58M	DSN-543
G-MDPNN-3232P19		DNMG-190612	○ ○	32	32	170	49	16		DSN-533	NLM-58	CLM-12	STCM-4	TK-02726	S-58M	DSN-543
G-MDPNN-4040R19		DNMG-190612	○ ○	40	40	200	49	20		DSN-533	NLM-58	CLM-12	STCM-4	TK-02726	S-58M	DSN-543

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

\*\* Cannot be used with lock pin.


10 Business Days or Less

Stocked Standard




## G-MRANR/L

Style A  
Round  
Negative Rake



Right-Hand  
Toolholder Shown

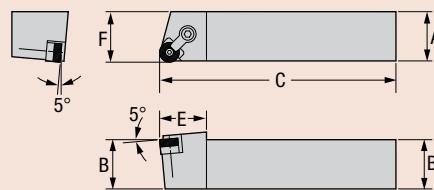


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components	
Right	Left	Insert	R L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MRANR-2525M12	G-MRANL-2525M12	RNMG-120400	○ ○	25	25	150	30	26	IRSN-43	NLM-46	CLM-9	STCM-4	TK-02705	S-46M	IRSN-44
G-MRANR-3225P12	G-MRANL-3225P12	RNMG-120400	○ ○	25	32	170	30	26	IRSN-43	NLM-46	CLM-9	STCM-4	TK-02705	S-46M	IRSN-44
G-MRANR-3232P12	G-MRANL-3232P12	RNMG-120400	○ ○	32	32	170	30	33	IRSN-43	NLM-46	CLM-9	STCM-4	TK-02705	S-46M	IRSN-44
G-MRANR-2525M15	G-MRANL-2525M15	RNMG-150600	○ ○	25	25	150	33	26	RSN-53	NLM-58	CLM-9	STCM-4	TK-02706	S-58M	-
G-MRANR-3225P15	G-MRANL-3225P15	RNMG-150600	○ ○	25	32	170	33	26	RSN-53	NLM-58	CLM-9	STCM-4	TK-02706	S-58M	-
G-MRANR-3232P15	G-MRANL-3232P15	RNMG-150600	○ ○	32	32	170	33	33	RSN-53	NLM-58	CLM-9	STCM-4	TK-02706	S-58M	-
G-MRANR-2525M19	G-MRANL-2525M19	RNMG-190600	○ ○	25	25	150	40	26	RSN-63	NLM-68	CLM-12	STCM-4	TK-02707	S-68M	-
G-MRANR-3225P19	G-MRANL-3225P19	RNMG-190600	○ ○	25	32	170	40	26	RSN-63	NLM-68	CLM-12	STCM-4	TK-02707	S-68M	-
G-MRANR-3232P19	G-MRANL-3232P19	RNMG-190600	○ ○	32	32	170	40	33	RSN-63	NLM-68	CLM-12	STCM-4	TK-02707	S-68M	-
G-MRANR-4040R25	G-MRANL-4040R25	RNMG-250900	○ ○	40	40	200	43	41	RSN-84	NLM-810	CLM-24	STCM-20	TK-02708	S-810M	-


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## G-MRGNR/L

Style G  
Round  
Negative Rake



Right-Hand  
Toolholder Shown

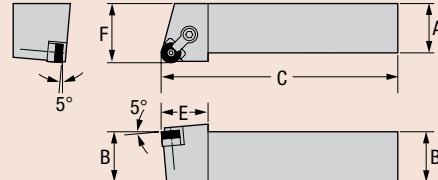

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components	
Right	Left	Insert	R L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MRGNR-2020M09	G-MRGNL-2020M09	RNMG-090300	○ ○	20	20	150	25	25	-	NLM-33	CLM-6	STCM-25	TK-02727	-	-
G-MRGNR-2020M12	G-MRGNL-2020M12	RNMG-120400	○ ○	20	20	150	30	25	IRSN-43	NLM-46	CLM-9	STCM-4	TK-02705	S-46M	IRSN-44
G-MRGNR-2525M12	G-MRGNL-2525M12	RNMG-120400	● ●	25	25	150	30	32	IRSN-43	NLM-46	CLM-9	STCM-4	TK-02705	S-46M	IRSN-44
G-MRGNR-3225P12	G-MRGNL-3225P12	RNMG-120400	○ ○	25	32	170	30	32	IRSN-43	NLM-46	CLM-9	STCM-4	TK-02705	S-46M	IRSN-44
G-MRGNR-3232P12	G-MRGNL-3232P12	RNMG-120400	● ●	32	32	170	30	40	IRSN-43	NLM-46	CLM-9	STCM-4	TK-02705	S-46M	IRSN-44
G-MRGNR-2525M15	G-MRGNL-2525M15	RNMG-150600	○ ○	25	25	150	35	32	RSN-53	NLM-58	CLM-9	STCM-4	TK-02706	S-58M	-
G-MRGNR-3225P15	G-MRGNL-3225P15	RNMG-150600	○ ○	25	32	170	35	32	RSN-53	NLM-58	CLM-9	STCM-4	TK-02706	S-58M	-
G-MRGNR-3232P15	G-MRGNL-3232P15	RNMG-150600	○ ○	32	32	170	35	40	RSN-53	NLM-58	CLM-9	STCM-4	TK-02706	S-58M	-
G-MRGNR-2525M19	G-MRGNL-2525M19	RNMG-190600	○ ○	25	25	150	39	32	RSN-63	NLM-68	CLM-12	STCM-4	TK-02707	S-68M	-
G-MRGNR-3225P19	G-MRGNL-3225P19	RNMG-190600	○ ○	25	32	170	39	32	RSN-63	NLM-68	CLM-12	STCM-4	TK-02707	S-68M	-
G-MRGNR-3232P19	G-MRGNL-3232P19	RNMG-190600	○ ○	32	32	170	39	40	RSN-63	NLM-68	CLM-12	STCM-4	TK-02707	S-68M	-
G-MRGNR-4040R25	G-MRGNL-4040R25	RNMG-250900	○ ○	40	40	200	43	50	RSN-84	NLM-810	CLM-24	STCM-20	TK-02708	S-810M	-


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

# G-MSBNR/L

Style B  
Square  
Negative Rake  
75° Lead Angle

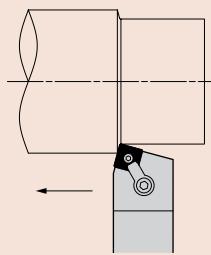

Right-Hand  
Toolholder Shown

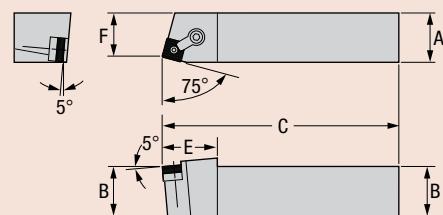

Part Number		Gage	Stock	Dimensions (millimeters)						Standard Components				* Tune-Up Kit	Optional Components		
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MSBNR-1616M09	G-MSBNL-1616M09	SNMG-090308	○ ○	16	16	150	27	12			ISSN-322	NLM-34	CLM-6	STCM-25	TK-02710	S-34M	—
G-MSBNR-2020M09	G-MSBNL-2020M09	SNMG-090308	○ ○	20	20	150	27	16			ISSN-322	NLM-34	CLM-6	STCM-25	TK-02710	S-34M	—
G-MSBNR-2525M09	G-MSBNL-2525M09	SNMG-090308	○ ○	25	25	150	27	22			ISSN-322	NLM-34	CLM-6	STCM-25	TK-02710	S-34M	—
G-MSBNR-2020M12	G-MSBNL-2020M12	SNMG-120408	○ ○	20	20	150	36	20			ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSBNR-2525M12	G-MSBNL-2525M12	SNMG-120408	● ●	25	25	150	36	22			ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSBNR-3225P12	G-MSBNL-3225P12	SNMG-120408	○ ○	25	32	170	36	22			ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSBNR-3232P12	G-MSBNL-3232P12	SNMG-120408	● ●	32	32	170	36	28			ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSBNR-2525M15	G-MSBNL-2525M15	SNMG-150612	○ ○	25	25	150	40	21			SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSBNR-3225P15	G-MSBNL-3225P15	SNMG-150612	○ ○	25	32	170	40	21			SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSBNR-3232P15	G-MSBNL-3232P15	SNMG-150612	○ ○	32	32	170	40	28			SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSBNR-4040R15	G-MSBNL-4040R15	SNMG-150612	○ ○	40	40	200	40	34			SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSBNR-3232P19	G-MSBNL-3232P19	SNMG-190612	○ ○	32	32	170	40	26			ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643
G-MSBNR-4040R19	G-MSBNL-4040R19	SNMG-190612	○ ○	40	40	200	40	33			ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643
G-MSBNR-4040R25	G-MSBNL-4040R25	SNMG-250924	○ ○	40	40	200	50	32			SSN-844	NLM-810	CLM-24	STCM-19	TK-02647	S-810M	—

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

10 Business Days or Less


Stocked Standard

90°




## G-MSDNN

Style D  
Square  
Negative Rake  
45° Lead Angle

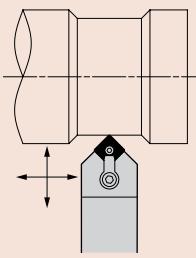

Neutral  
Toolholder Shown

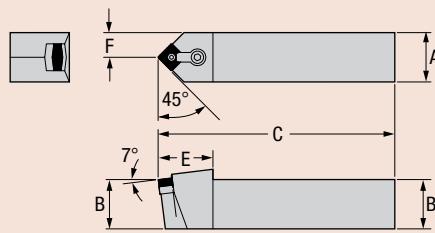


**TOOLHOLDERS**

Part Number	Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components	
	Insert		N	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw		
G-MSDNN-1616M09	SNMG-090308	○	16	16	150	29	8	ISSN-322	NLM-34	CLM-6	STCM-25	TK-02710	S-34M	-
G-MSDNN-2020M09	SNMG-090308	○	20	20	150	29	10	ISSN-322	NLM-34L	CLM-6	STCM-25	TK-02711	S-34M	-
G-MSDNN-2020M12	SNMG-120408	○	20	20	150	35	10	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSDNN-2525M12	SNMG-120408	●	25	25	150	35	12,5	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSDNN-3225P12	SNMG-120408	○	25	32	170	35	12,5	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSDNN-3232P12	SNMG-120408	●	32	32	170	35	16	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSDNN-2525M15	SNMG-150612	○	25	25	150	41	12,5	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSDNN-3225P15	SNMG-150612	○	25	32	170	41	12,5	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSDNN-3232P15	SNMG-150612	○	32	32	170	41	16	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSDNN-4040R15	SNMG-150612	○	40	40	200	41	20	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSDNN-3225P19	SNMG-190612	○	25	32	170	44	12,5	ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643
G-MSDNN-3232P19	SNMG-190612	○	32	32	170	44	16	ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643
G-MSDNN-4040R19	SNMG-190612	○	40	40	200	44	20	ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643
G-MSDNN-4040R25	SNMG-250924	○	40	40	200	57	20	SSN-844	NLM-810	CLM-24	STCM-19	TK-02647	S-810M	-


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## G-MSKNR/L

Style K  
Square  
Negative Rake  
75° Lead Angle



Right-Hand  
Toolholder Shown

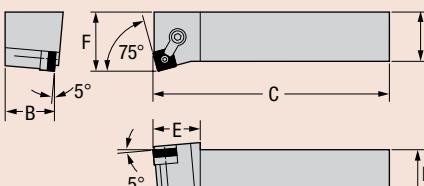

Part Number	Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components			
	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw			
G-MSKNR-1616M09	G-MSKNL-1616M09	SNMG-090308	○	○	16	16	150	25	20	ISSN-322	NLM-34	CLM-6	STCM-25	TK-02710	S-34M	-
G-MSKNR-2020M09	G-MSKNL-2020M09	SNMG-090308	○	○	20	20	150	25	25	ISSN-322	NLM-34	CLM-6	STCM-25	TK-02710	S-34M	-
G-MSKNR-2525M09	G-MSKNL-2525M09	SNMG-090308	○	○	25	25	150	25	32	ISSN-322	NLM-34	CLM-6	STCM-25	TK-02710	S-34M	-
G-MSKNR-2020M12	G-MSKNL-2020M12	SNMG-120408	○	○	20	20	150	31	25	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSKNR-2525M12	G-MSKNL-2525M12	SNMG-120408	○	○	25	25	150	31	32	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSKNR-3225P12	G-MSKNL-3225P12	SNMG-120408	○	○	25	32	170	31	32	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSKNR-3232P12	G-MSKNL-3232P12	SNMG-120408	○	○	32	32	170	31	40	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443
G-MSKNR-2525M15	G-MSKNL-2525M15	SNMG-150612	○	○	25	25	150	37	32	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSKNR-3225P15	G-MSKNL-3225P15	SNMG-150612	○	○	25	32	170	37	32	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSKNR-3232P15	G-MSKNL-3232P15	SNMG-150612	○	○	32	32	170	37	40	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543
G-MSKNR-3225P19	G-MSKNL-3225P19	SNMG-190612	○	○	25	32	170	40	32	ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643
G-MSKNR-3232P19	G-MSKNL-3232P19	SNMG-190612	○	○	32	32	170	40	40	ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643
G-MSKNR-4040R19	G-MSKNL-4040R19	SNMG-190612	○	○	40	40	200	40	50	ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643
G-MSKNR-4040R25	G-MSKNL-4040R25	SNMG-250924	○	○	40	40	200	50	50	SSN-844	NLM-810	CLM-24	STCM-19	TK-02647	S-810M	-

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com




# G-MSRNR/L

Style R  
Square  
Negative Rake  
75° Lead Angle

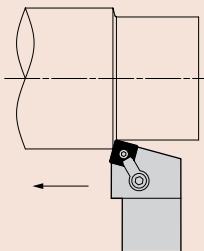

Right-Hand  
Toolholder Shown

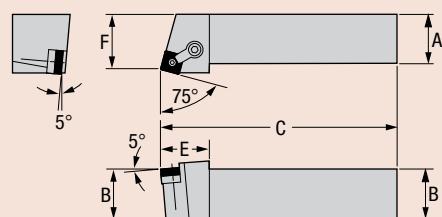


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components			
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MSRNR-1616M09	G-MSRNL-1616M09	SNMG-090308	○ ○	16	16	150	27	20	ISSN-322	NLM-34	CLM-6	STCM-25	TK-02710	S-34M	—		
G-MSRNR-2020M09	G-MSRNL-2020M09	SNMG-090308	○ ○	20	20	150	27	23	ISSN-322	NLM-34L	CLM-6	STCM-25	TK-02711	S-34M	—		
G-MSRNR-2020M12	G-MSRNL-2020M12	SNMG-120408	○ ○	20	20	150	31	22	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443		
G-MSRNR-2525M12	G-MSRNL-2525M12	SNMG-120408	● ●	25	25	150	31	29	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443		
G-MSRNR-3225P12	G-MSRNL-3225P12	SNMG-120408	○ ○	25	32	170	31	29	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443		
G-MSRNR-3232P12	G-MSRNL-3232P12	SNMG-120408	● ●	32	32	170	31	35	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443		
G-MSRNR-2525M15	G-MSRNL-2525M15	SNMG-150612	○ ○	25	25	150	37	28	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543		
G-MSRNR-3225P15	G-MSRNL-3225P15	SNMG-150612	○ ○	25	32	170	37	28	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543		
G-MSRNR-3232P15	G-MSRNL-3232P15	SNMG-150612	○ ○	32	32	170	37	34	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543		
G-MSRNR-4040R15	G-MSRNL-4040R15	SNMG-150612	○ ○	40	40	200	37	47	SSN-533	NLM-58	CLM-12	STCM-4	TK-02713	S-58M	ISSN-543		
G-MSRNR-3225P19	G-MSRNL-3225P19	SNMG-190612	○ ○	25	32	170	38	27	ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643		
G-MSRNR-3232P19	G-MSRNL-3232P19	SNMG-190612	○ ○	32	32	170	38	33	ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643		
G-MSRNR-4040R19	G-MSRNL-4040R19	SNMG-190612	○ ○	40	40	200	38	46	ISSN-633	NLM-68	CLM-12	STCM-4	TK-02714	S-68M	ISSN-643		
G-MSRNR-4040R25	G-MSRNL-4040R25	SNMG-250924	○ ○	40	40	200	41	45	SSN-844	NLM-810	CLM-24	STCM-19	TK-02647	S-810M	—		


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# G-MSSNR/L

Style S  
Square  
Negative Rake  
45° Lead Angle

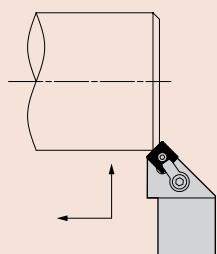

Right-Hand  
Toolholder Shown

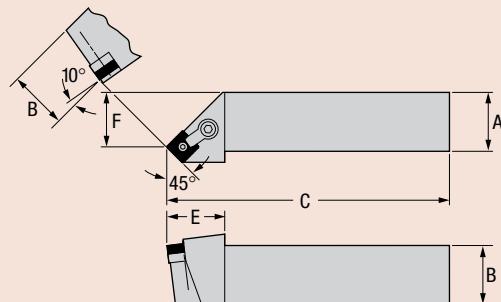

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components			
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MSSNR-2020M12	G-MSSNL-2020M12	SNMG-120408	○ ○	20	20	150	31	17	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443		
G-MSSNR-2525M12	G-MSSNL-2525M12	SNMG-120408	● ●	25	25	150	31	23	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443		
G-MSSNR-3225P12	G-MSSNL-3225P12	SNMG-120408	○ ○	25	32	170	31	23	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443		
G-MSSNR-3232P12	G-MSSNL-3232P12	SNMG-120408	● ●	32	32	170	31	30	ISSN-433	NLM-46	CLM-9	STCM-4	TK-02712	S-46M	ISSN-443		
G-MSSNR-2525M15	G-MSSNL-2525M15	SNMG-150612	○ ○	25	25	150	35	21	SSN-533	NLM-58	CLM-9	STCM-4	TK-02688	S-58M	ISSN-543		
G-MSSNR-3225P15	G-MSSNL-3225P15	SNMG-150612	○ ○	25	32	170	35	21	SSN-533	NLM-58	CLM-9	STCM-4	TK-02688	S-58M	ISSN-543		
G-MSSNR-3232P15	G-MSSNL-3232P15	SNMG-150612	○ ○	32	32	170	35	27	SSN-533	NLM-58	CLM-9	STCM-4	TK-02688	S-58M	ISSN-543		
G-MSSNR-4040R15	G-MSSNL-4040R15	SNMG-150612	○ ○	40	40	200	35	34	SSN-533	NLM-58	CLM-9	STCM-4	TK-02688	S-58M	ISSN-543		
G-MSSNR-3225P19	G-MSSNL-3225P19	SNMG-190612	○ ○	25	32	170	38	20	ISSN-633	NLM-68	CLM-9	STCM-4	TK-02735	S-68M	ISSN-643		
G-MSSNR-3232P19	G-MSSNL-3232P19	SNMG-190612	○ ○	32	32	170	38	25	ISSN-633	NLM-68	CLM-9	STCM-4	TK-02735	S-68M	ISSN-643		
G-MSSNR-4040R19	G-MSSNL-4040R19	SNMG-190612	○ ○	40	40	200	38	40	ISSN-633	NLM-68	CLM-9	STCM-4	TK-02735	S-68M	ISSN-643		

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com


10 Business Days or Less

Stocked Standard




## G-MTANR/L

Style A  
Triangle  
Negative Rake  
90° Lead Angle

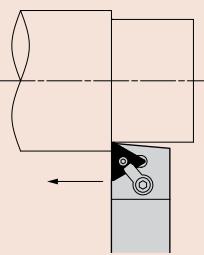

Right-Hand Toolholder Shown

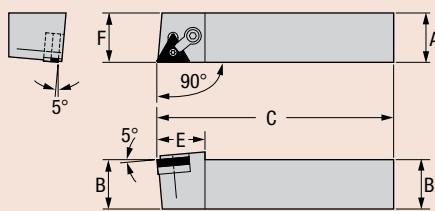


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Components		
Right	Left	Insert	R L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MTANR-1616M11	G-MTANL-1616M11	TNMG-110304	○ ○	16	16	150	25	16	-	NLM-23	CLM-19	STCM-25	TK-02762	-	-
G-MTANR-1616M16	G-MTANL-1616M16	TNMG-160308	○ ○	16	16	150	29	16	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTANR-2020M16	G-MTANL-2020M16	TNMG-160308	○ ○	20	20	150	29	20	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTANR-2525M16	G-MTANL-2525M16	TNMG-160308	○ ○	25	25	150	29	25	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTANR-3225P16	G-MTANL-3225P16	TNMG-160308	○ ○	25	32	170	29	25	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTANR-2525M22	G-MTANL-2525M22	TNMG-220408	● ●	25	25	150	29	25	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02763	S-46M	ITSN-424
G-MTANR-3225P22	G-MTANL-3225P22	TNMG-220408	○ ○	25	32	170	29	25	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02763	S-46M	ITSN-424
G-MTANR-3232P22	G-MTANL-3232P22	TNMG-220408	● ●	32	32	170	29	32	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02763	S-46M	ITSN-424
G-MTANR-4040R22	G-MTANL-4040R22	TNMG-220408	○ ○	40	40	200	29	40	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02763	S-46M	ITSN-424
G-MTANR-2525M27	G-MTANL-2525M27	TNMG-270612	○ ○	25	25	150	37	25	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTANR-3225P27	G-MTANL-3225P27	TNMG-270612	○ ○	25	32	170	37	25	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTANR-3232P27	G-MTANL-3232P27	TNMG-270612	○ ○	32	32	170	37	32	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTANR-4040R27	G-MTANL-4040R27	TNMG-270612	○ ○	40	40	200	37	40	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTANR-4040R33	G-MTANL-4040R33	TNMG-330912	○ ○	40	40	200	50	40	TSN-637	NLM-68L	CLM-12	STCM-4	TK-02756	S-68M	TSN-657

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.


\*\* Cannot be used with lock pin.

## G-MTBNR/L

Style B  
Triangle  
Negative Rake  
75° Lead Angle

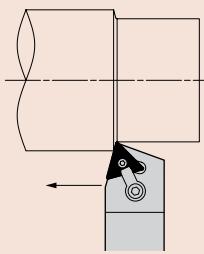

Right-Hand Toolholder Shown

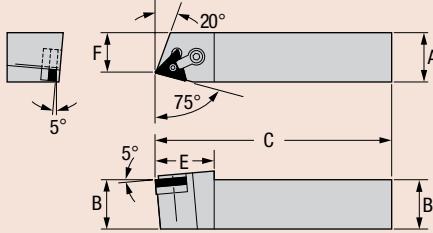

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Components		
Right	Left	Insert	R L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MTBNR-1616M11	G-MTBNL-1616M11	TNMG-110304	○ ○	16	16	150	23	13	-	NLM-23	CLM-6	STCM-25	TK-02764	-	-
G-MTBNR-1616M16	G-MTBNL-1616M16	TNMG-160308	○ ○	16	16	150	34	11	ITSN-333	NLM-34L	CLM-20	STCM-32	TK-02765	S-34M	ITSN-323
G-MTBNR-2020M16	G-MTBNL-2020M16	TNMG-160308	○ ○	20	20	150	34	15	ITSN-333	NLM-34L	CLM-20	STCM-32	TK-02765	S-34M	ITSN-323
G-MTBNR-2525M16	G-MTBNL-2525M16	TNMG-160308	○ ○	25	25	150	34	21	ITSN-333	NLM-34L	CLM-20	STCM-32	TK-02765	S-34M	ITSN-323
G-MTBNR-3225P16	G-MTBNL-3225P16	TNMG-160308	○ ○	25	32	170	34	21	ITSN-333	NLM-34L	CLM-20	STCM-32	TK-02765	S-34M	ITSN-323
G-MTBNR-2525M22	G-MTBNL-2525M22	TNMG-220408	○ ○	25	25	150	38	20	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTBNR-3225P22	G-MTBNL-3225P22	TNMG-220408	○ ○	25	32	170	38	20	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTBNR-3232P22	G-MTBNL-3232P22	TNMG-220408	○ ○	32	32	170	38	26	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTBNR-4040R22	G-MTBNL-4040R22	TNMG-220408	○ ○	40	40	200	38	32	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTBNR-2525M27	G-MTBNL-2525M27	TNMG-270612	○ ○	25	25	150	43	18	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTBNR-3225P27	G-MTBNL-3225P27	TNMG-270612	○ ○	25	32	170	43	18	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTBNR-3232P27	G-MTBNL-3232P27	TNMG-270612	○ ○	32	32	170	43	25	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTBNR-4040R27	G-MTBNL-4040R27	TNMG-270612	○ ○	40	40	200	43	31	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTBNR-4040R33	G-MTBNL-4040R33	TNMG-330912	○ ○	40	40	200	45	30	TSN-637	NLM-68L	CLM-12	STCM-4	TK-02756	S-68M	TSN-657

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

\*\* Cannot be used with lock pin.


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com




# G-MTENNS

Style E  
Triangle  
Negative Rake  
60° Lead Angle

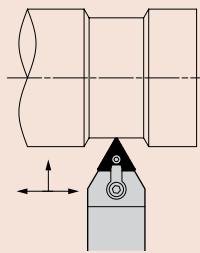

Neutral Toolholder Shown

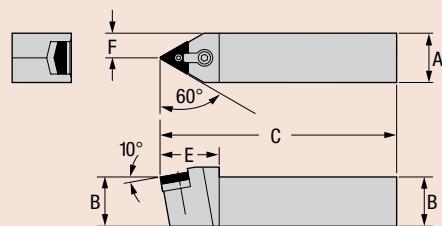

Part Number	Gage	Stock	Dimensions (millimeters)						Standard Components			* Tune-Up Kit	Optional Components	
	Insert		N	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw		
G-MTENNS-1616M11	TNMG-110304	○	16	16	150	25	8	—	NLM-23	CLM-6	STCM-25	TK-02752	—	—
G-MTENNS-1616M16	TNMG-060308	○	16	16	150	30	8	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTENNS-2020M16	TNMG-060308	○	20	20	150	30	10	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTENNS-2525M16	TNMG-060308	○	25	25	150	30	12,5	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTENNS-3225P16	TNMG-060308	○	25	32	170	30	12,5	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTENNS-2020M22	TNMG-220408	○	20	20	150	38	10	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	—
G-MTENNS-2525M22	TNMG-220408	●	25	25	150	38	12,5	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	—
G-MTENNS-3225P22	TNMG-220408	○	25	32	170	38	12,5	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	—
G-MTENNS-3232P22	TNMG-220408	●	32	32	170	38	16	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	—
G-MTENNS-3232P27	TNMG-270612	○	32	32	170	42	16	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	—
G-MTENNS-4040R27	TNMG-270612	○	40	40	200	42	20	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	—
G-MTENNS-4040R33	TNMG-330912	○	40	40	200	50	20	TSN-637	NLM-68L	CLM-12	STCM-4	TK-02756	S-68M	—

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.


10 Business Days or Less

Stocked Standard




# G-MTFNR/L

Style F  
Triangle  
Negative Rake  
90° Lead Angle

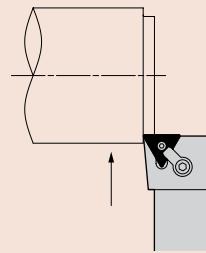

Right-Hand  
Toolholder Shown

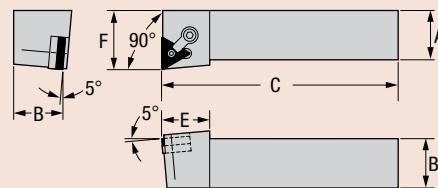

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components	
Right	Left	Insert	R L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MTFNR-1616M11	G-MTFNL-1616M11	TNMG-110304	○ ○	16	16	150	20	22	-	NLM-23	CLM-19	STCM-25	TK-02762	-	-
G-MTFNR-1616M16	G-MTFNL-1616M16	TNMG-160308	○ ○	16	16	150	24	22	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTFNR-2020M16	G-MTFNL-2020M16	TNMG-160308	○ ○	20	20	150	24	25	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTFNR-2525M16	G-MTFNL-2525M16	TNMG-160308	○ ○	25	25	150	24	32	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTFNR-3225P16	G-MTFNL-3225P16	TNMG-160308	○ ○	25	32	170	24	32	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTFNR-3232P16	G-MTFNL-3232P16	TNMG-160308	○ ○	32	32	170	24	40	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTFNR-2525M22	G-MTFNL-2525M22	TNMG-220408	● ●	25	25	150	31	32	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTFNR-3225P22	G-MTFNL-3225P22	TNMG-220408	○ ○	25	32	170	31	32	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTFNR-3232P22	G-MTFNL-3232P22	TNMG-220408	● ●	32	32	170	31	40	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTFNR-4040R22	G-MTFNL-4040R22	TNMG-220408	○ ○	40	40	200	31	50	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTFNR-2525M27	G-MTFNL-2525M27	TNMG-270612	○ ○	25	25	150	36	32	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTFNR-3225P27	G-MTFNL-3225P27	TNMG-270612	○ ○	25	32	170	36	32	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTFNR-3232P27	G-MTFNL-3232P27	TNMG-270612	○ ○	32	32	170	36	40	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTFNR-4040R27	G-MTFNL-4040R27	TNMG-270612	○ ○	40	40	200	36	50	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTFNR-4040R33	G-MTFNL-4040R33	TNMG-330912	○ ○	40	40	200	38	50	TSN-637	NLM-68L	CLM-12	STCM-4	TK-02756	S-68M	TSN-657

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

\*\* Cannot be used with lock pin.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Stocked Standard


10 Business Days or Less

# G-MTGNR/L

Style G  
Triangle  
Negative Rake  
90° Lead Angle

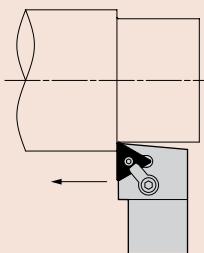

Right-Hand  
Toolholder Shown

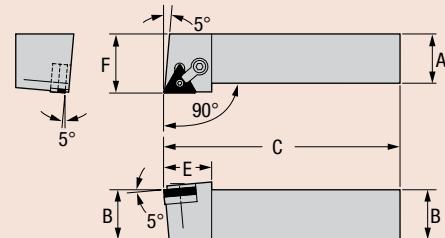


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components		
Right	Left	Insert	R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MTGNR-1616M11	G-MTGNL-1616M11	TNMG-110304	○	○	16	16	150	25	20	—	NLM-23	CLM-19	STCM-25	TK-02639	—	—
G-MTGNR-1616M16	G-MTGNL-1616M16	TNMG-160308	○	○	16	16	150	28	22	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTGNR-2020M16	G-MTGNL-2020M16	TNMG-160308	○	○	20	20	150	28	25	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTGNR-2525M16	G-MTGNL-2525M16	TNMG-160308	○	○	25	25	150	28	32	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTGNR-3225P16	G-MTGNL-3225P16	TNMG-160308	○	○	25	32	170	28	32	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTGNR-3232P16	G-MTGNL-3232P16	TNMG-160308	○	○	32	32	170	28	40	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTGNR-2020M22	G-MTGNL-2020M22	TNMG-220408	○	○	20	20	150	31	25	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTGNR-2525M22	G-MTGNL-2525M22	TNMG-220408	●	●	25	25	150	31	32	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTGNR-3225P22	G-MTGNL-3225P22	TNMG-220408	○	○	25	32	170	31	32	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTGNR-3232P22	G-MTGNL-3232P22	TNMG-220408	●	●	32	32	170	31	40	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTGNR-4040R22	G-MTGNL-4040R22	TNMG-220408	○	○	40	40	200	31	50	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	ITSN-424
G-MTGNR-2525M27	G-MTGNL-2525M27	TNMG-270612	○	○	25	25	150	37	32	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTGNR-3225P27	G-MTGNL-3225P27	TNMG-270612	○	○	25	32	170	37	32	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTGNR-3232P27	G-MTGNL-3232P27	TNMG-270612	○	○	32	32	170	37	40	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTGNR-4040R27	G-MTGNL-4040R27	TNMG-270612	○	○	40	40	200	37	50	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTGNR-4040R33	G-MTGNL-4040R33	TNMG-330912	○	○	40	40	200	38	50	TSN-637	NLM-68L	CLM-12	STCM-4	TK-02756	S-68M	TSN-657


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# G-MTJNRS

Style J  
Triangle  
Negative Rake  
93° Lead Angle

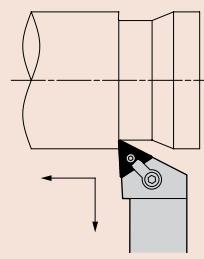

Right-Hand  
Toolholder Shown

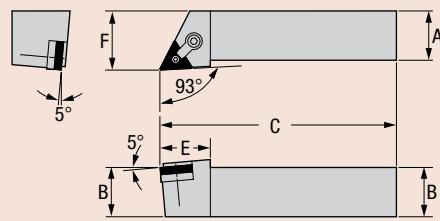

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Component		
Right	Left	Insert	R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MTJNRS-2020M16	G-MTJNLS-2020M16	TNMG-160308	○	○	20	20	150	28	25	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTJNRS-2525M16	G-MTJNLS-2525M16	TNMG-160308	○	○	25	25	150	28	32	ITSN-333	NLM-34L	CLM-6	STCM-25	TK-02753	S-34M	ITSN-323
G-MTJNRS-2525M22	G-MTJNLS-2525M22	TNMG-220408	●	●	25	25	150	30	25	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	—
G-MTJNRS-3225P22	G-MTJNLS-3225P22	TNMG-220408	○	○	25	32	170	30	25	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	—
G-MTJNRS-3232P22	G-MTJNLS-3232P22	TNMG-220408	●	●	32	32	170	30	40	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	—
G-MTJNRS-3232P27	G-MTJNLS-3232P27	TNMG-270612	○	○	32	32	170	36	40	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	—
G-MTJNRS-4040R27	G-MTJNLS-4040R27	TNMG-270612	○	○	40	40	200	36	50	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	—
G-MTJNRS-4040R33	G-MTJNLS-4040R33	TNMG-330912	○	○	40	40	200	42	50	TSN-637	NLM-68L	CLM-12	STCM-4	TK-02756	S-68M	—

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

10 Business Days or Less


Stocked Standard

60°




## G-MTLNR/L

Style L  
Triangle  
Negative Rake  
95° Lead Angle

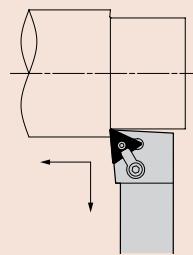

Right-Hand Toolholder Shown

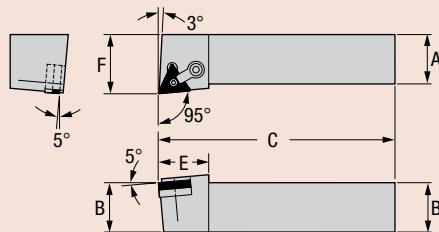

TOOLHOLDERS


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Components				
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MTLNR-2525M22	G-MTLNL-2525M22	TNMG-220408		○	○	25	25	150	32	25	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	TS-424**
G-MTLNR-3225P22	G-MTLNL-3225P22	TNMG-220408		○	○	25	32	170	32	32	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	TS-424**
G-MTLNR-3232P22	G-MTLNL-3232P22	TNMG-220408		○	○	32	32	170	32	40	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	TS-424**
G-MTLNR-3232P27	G-MTLNL-3232P27	TNMG-270612		○	○	32	32	170	36	40	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTLNR-4040R27	G-MTLNL-4040R27	TNMG-270612		○	○	40	40	200	36	50	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTLNR-4040R33	G-MTLNL-4040R33	TNMG-330912		○	○	40	40	200	39	50	TSN-637	NLM-68L	CLM-12	STCM-4	TK-02756	S-68M	TSN-657

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.


\*\* Cannot be used with lock pin.

## G-MTRNR/L

Style R  
Triangle  
Negative Rake  
75° Lead Angle

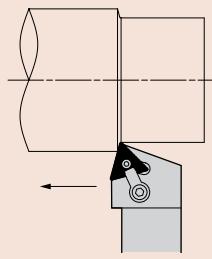

Right-Hand Toolholder Shown

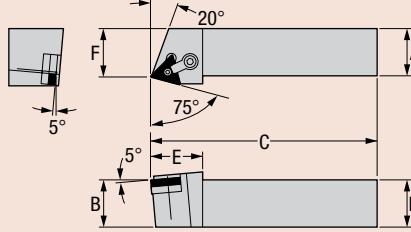

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Components				
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw	Seat
G-MTRNR-1616M11	G-MTRNL-1616M11	TNMG-110304		○	○	16	16	150	26	20	-	NLM-23	CLM-19	STCM-25	TK-02762	-	-
G-MTRNR-1616M16	G-MTRNL-1616M16	TNMG-160308		○	○	16	16	150	31	20	ITSN-333	NLM-34L	CLM-20	STCM-32	TK-02765	S-34M	ITSN-323
G-MTRNR-2020M16	G-MTRNL-2020M16	TNMG-160308		○	○	20	20	150	31	22	ITSN-333	NLM-34L	CLM-20	STCM-32	TK-02765	S-34M	ITSN-323
G-MTRNR-2525M16	G-MTRNL-2525M16	TNMG-160308		○	○	25	25	150	31	28	ITSN-333	NLM-34L	CLM-20	STCM-32	TK-02765	S-34M	ITSN-323
G-MTRNR-3225P16	G-MTRNL-3225P16	TNMG-160308		○	○	25	32	170	31	28	ITSN-333	NLM-34L	CLM-20	STCM-32	TK-02765	S-34M	ITSN-323
G-MTRNR-2525M22	G-MTRNL-2525M22	TNMG-220408		○	○	25	25	150	35	26	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	TS-424**
G-MTRNR-3225P22	G-MTRNL-3225P22	TNMG-220408		○	○	25	32	170	35	26	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	TS-424**
G-MTRNR-3232P22	G-MTRNL-3232P22	TNMG-220408		○	○	32	32	170	35	32	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	TS-424**
G-MTRNR-4040R22	G-MTRNL-4040R22	TNMG-220408		○	○	40	40	200	35	45	ITSN-433	NLM-46	CLM-9	STCM-4	TK-02754	S-46M	TS-424**
G-MTRNR-2525M27	G-MTRNL-2525M27	TNMG-270612		○	○	25	25	150	41	25	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTRNR-3225P27	G-MTRNL-3225P27	TNMG-270612		○	○	25	32	170	41	25	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTRNR-3232P27	G-MTRNL-3232P27	TNMG-270612		○	○	32	32	170	41	32	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTRNR-4040R27	G-MTRNL-4040R27	TNMG-270612		○	○	40	40	200	41	45	ITSN-533	NLM-58	CLM-9	STCM-4	TK-02755	S-58M	ITSN-543
G-MTRNR-4040R33	G-MTRNL-4040R33	TNMG-330912		○	○	40	40	200	45	43	TSN-637	NLM-68L	CLM-12	STCM-4	TK-02756	S-68M	TSN-657

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

\*\* Cannot be used with lock pin.



### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com




# G-MVJNR/L

Style J  
35° Diamond  
Negative Rake  
93° Lead Angle



Right-Hand  
Toolholder Shown


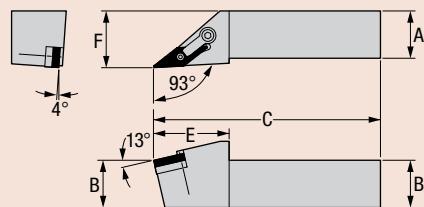


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Component		
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw
G-MVJNR-2020M16	G-MVJNL-2020M16	VNMG-160408	○ ○	20	20	150	43	25	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		
G-MVJNR-2525M16	G-MVJNL-2525M16	VNMG-160408	● ●	25	25	150	43	32	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		
G-MVJNR-3225P16	G-MVJNL-3225P16	VNMG-160408	○ ○	25	32	170	43	32	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		
G-MVJNR-3232P16	G-MVJNL-3232P16	VNMG-160408	● ●	32	32	170	43	40	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		
G-MVJNR-4040R16	G-MVJNL-4040R16	VNMG-160408	○ ○	40	40	200	43	50	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		
G-MVJNR-2525M22	G-MVJNL-2525M22	VNMG-220408	● ●	25	25	150	50	32	IVSN-433	NLM-46	CLM-30	STCM-4	TK-02759	S-46M		
G-MVJNR-3232P22	G-MVJNL-3232P22	VNMG-220408	● ●	32	32	170	50	40	IVSN-433	NLM-46	CLM-30	STCM-4	TK-02759	S-46M		
G-MVJNR-4040R22	G-MVJNL-4040R22	VNMG-220408	○ ○	40	40	200	50	50	IVSN-433	NLM-46	CLM-30	STCM-4	TK-02759	S-46M		


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# G-MVTNR/L

Style T  
35° Diamond  
Negative Rake  
117,5° Lead Angle

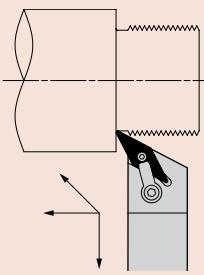

Right-Hand  
Toolholder Shown

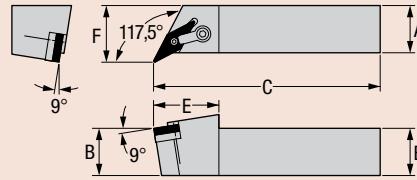

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Component		
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat Screw
G-MVTNR-2020M16	G-MVTNL-2020M16	VNMG-160408	○ ○	20	20	150	44	25	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		
G-MVTNR-2525M16	G-MVTNL-2525M16	VNMG-160408	● ●	25	25	150	44	32	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		
G-MVTNR-3225P16	G-MVTNL-3225P16	VNMG-160408	○ ○	25	32	170	44	32	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		
G-MVTNR-3232P16	G-MVTNL-3232P16	VNMG-160408	● ●	32	32	170	44	40	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		
G-MVTNR-4040R16	G-MVTNL-4040R16	VNMG-160408	○ ○	40	40	200	44	45	IVSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M		

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

10 Business Days or Less

Stocked Standard



35°

80°




## G-MVWN

Style V  
35° Diamond  
Negative Rake  
72,5° Lead Angle

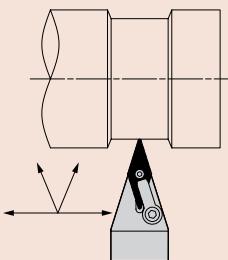

Neutral  
Toolholder Shown

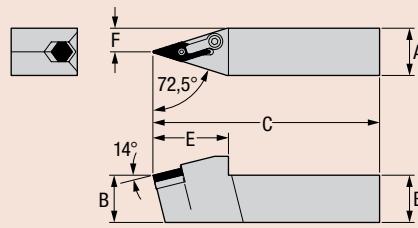


**TOOLHOLDERS**

Part Number	Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Component	
	Neutral	Insert	N	A	B	C	E	F	Seat	Lock Pin	Clamp		
G-MVNN-2020M16	VNMG-160408	○	20	20	150	45	10	IWSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M
G-MVNN-2525M16	VNMG-160408	●	25	25	150	45	12,5	IWSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M
G-MVNN-3225P16	VNMG-160408	○	25	32	170	45	12,5	IWSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M
G-MVNN-3232P16	VNMG-160408	●	32	32	170	45	16	IWSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M
G-MVNN-4040R16	VNMG-160408	○	40	40	200	45	20	IWSN-322	NLM-34L	CLM-30	STCM-4	TK-02758	S-34M
G-MVNN-2525M22	VNMG-220408	●	25	25	150	54	12,5	IWSN-433	NLM-46	CLM-30	STCM-4	TK-02759	S-46M
G-MVNN-3232P22	VNMG-220408	●	32	32	170	54	16	IWSN-433	NLM-46	CLM-30	STCM-4	TK-02759	S-46M
G-MVNN-4040R22	VNMG-220408	○	40	40	200	54	20	IWSN-433	NLM-46	CLM-30	STCM-4	TK-02759	S-46M


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## G-MWLNR/L

Style L  
Trigon  
Negative Rake  
95° Lead Angle

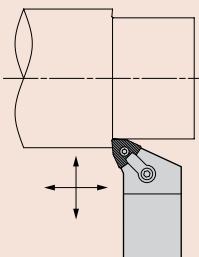

Right-Hand  
Toolholder Shown

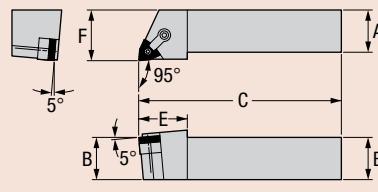

Part Number	Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Component			
	Right	Left	Insert	R	L	A	B	C	E	F	Seat	Lock Pin	Clamp	Clamp Screw	
G-MWLNR-2020M06	G-MWLNL-2020M06	WNMG-060408	○	○	20	20	150	25	25	IWSN-323	NLM-34L	CLM-6	STCM-25	TK-02807	IWSN-332
G-MWLNR-2525M06	G-MWLNL-2525M06	WNMG-060408	○	○	25	25	150	25	32	IWSN-323	NLM-34L	CLM-6	STCM-25	TK-02807	IWSN-332
G-MWLNR-3232P06	G-MWLNL-3232P06	WNMG-060408	○	○	32	32	170	25	40	IWSN-323	NLM-34L	CLM-6	STCM-25	TK-02807	IWSN-332
G-MWLNR-4040R06	G-MWLNL-4040R06	WNMG-060408	○	○	40	40	200	25	50	IWSN-323	NLM-34L	CLM-6	STCM-25	TK-02807	IWSN-332
G-MWLNR-2020M08	G-MWLNL-2020M08	WNMG-080408	○	○	20	20	150	30	25	IWSN-433	NLM-46	CLM-20	STCM-26	TK-02808	-
G-MWLNR-2525M08	G-MWLNL-2525M08	WNMG-080408	●	●	25	25	150	30	32	IWSN-433	NLM-46	CLM-20	STCM-26	TK-02808	-
G-MWLNR-3232P08	G-MWLNL-3232P08	WNMG-080408	●	●	32	32	170	30	40	IWSN-433	NLM-46	CLM-20	STCM-26	TK-02808	-
G-MWLNR-4040R08	G-MWLNL-4040R08	WNMG-080408	○	○	40	40	200	30	50	IWSN-433	NLM-46	CLM-20	STCM-26	TK-02808	-

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard


10 Business Days or Less

# G-CCLPR/L

Style L  
80° Diamond  
Positive Rake  
95° Lead Angle

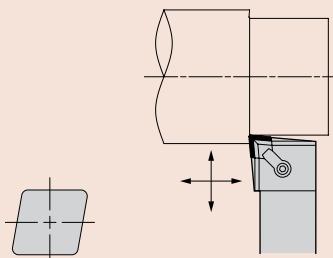

Right-Hand  
Toolholder Shown

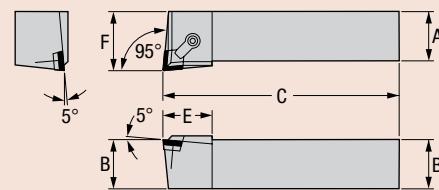


Part Number		Gage	Stock	Dimensions (millimeters)						Seat	Standard Components				* Tune-Up Kit	
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker	Includes All Standard Components
G-CCLPR-2020M12	G-CCLPL-2020M12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	20	20	150	32	25	CSP-422	TFHCS M3-0.5x10mm	CLM-20	STCM-11	CBDC-4L	TK-02781	
G-CCLPR-2525M12	G-CCLPL-2525M12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	25	25	150	32	32	CSP-422	TFHCS M3-0.5x10mm	CLM-20	STCM-11	CBDC-4L	TK-02781	
G-CCLPR-3225P12	G-CCLPL-3225P12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	25	32	170	32	32	CSP-422	TFHCS M3-0.5x10mm	CLM-20	STCM-11	CBDC-4L	TK-02781	
G-CCLPR-3232P12	G-CCLPL-3232P12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	32	32	170	32	40	CSP-422	TFHCS M3-0.5x10mm	CLM-20	STCM-11	CBDC-4L	TK-02781	
G-CCLPR-4040R12	G-CCLPL-4040R12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	40	40	200	32	50	CSP-422	TFHCS M3-0.5x10mm	CLM-20	STCM-11	CBDC-4L	TK-02781	
G-CCLPR-2525M19	G-CCLPL-2525M19	CPGN-190412	<input type="radio"/>	<input type="radio"/>	25	25	150	40	32	CSP-632	TFHCS M3-0.5x10mm	CLM-30	STCM-4	CBDC-6G	TK-02784	
G-CCLPR-3225P19	G-CCLPL-3225P19	CPGN-190412	<input type="radio"/>	<input type="radio"/>	25	32	170	40	32	CSP-632	TFHCS M3-0.5x10mm	CLM-30	STCM-4	CBDC-6G	TK-02784	
G-CCLPR-3232P19	G-CCLPL-3232P19	CPGN-190412	<input type="radio"/>	<input type="radio"/>	32	32	170	40	40	CSP-632	TFHCS M3-0.5x10mm	CLM-30	STCM-4	CBDC-6G	TK-02784	
G-CCLPR-4040R19	G-CCLPL-4040R19	CPGN-190412	<input type="radio"/>	<input type="radio"/>	40	40	200	40	50	CSP-632	TFHCS M3-0.5x10mm	CLM-30	STCM-4	CBDC-6G	TK-02784	


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# G-CCRPR/L

Style R  
80° Diamond  
(Using 100° Corner)  
75° Lead Angle

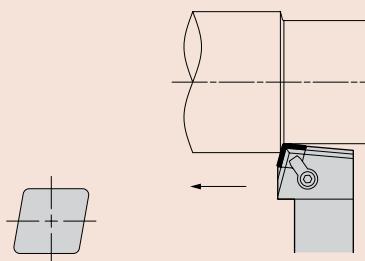

Right-Hand  
Toolholder Shown

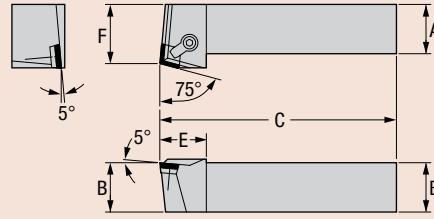

Part Number		Gage	Stock	Dimensions (millimeters)						Seat	Standard Components				* Tune-Up Kit	
Right	Left	Insert		R	L	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker	Includes All Standard Components
G-CCRPR-2020M12	G-CCRPL-2020M12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	20	20	150	31	25	CSP-422	TFHCS M3-0.5x10mm	CLM-9	STCM-4	CBDC-415L	TK-02737	
G-CCRPR-2525M12	G-CCRPL-2525M12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	25	25	150	31	32	CSP-422	TFHCS M3-0.5x10mm	CLM-9	STCM-4	CBDC-415L	TK-02737	
G-CCRPR-3225P12	G-CCRPL-3225P12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	25	32	170	31	32	CSP-422	TFHCS M3-0.5x10mm	CLM-9	STCM-4	CBDC-415L	TK-02737	
G-CCRPR-3232P12	G-CCRPL-3232P12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	32	32	170	31	40	CSP-422	TFHCS M3-0.5x10mm	CLM-9	STCM-4	CBDC-415L	TK-02737	
G-CCRPR-4040R12	G-CCRPL-4040R12	CPGN-120308	<input type="radio"/>	<input type="radio"/>	40	40	200	31	50	CSP-422	TFHCS M3-0.5x10mm	CLM-9	STCM-4	CBDC-415L	TK-02737	
G-CCRPR-2525M19	G-CCRPL-2525M19	CPGN-190412	<input type="radio"/>	<input type="radio"/>	25	25	150	33	32	CSP-632	TFHCS M3-0.5x10mm	CLM-12	STCM-4	CBDC-615G	TK-02742	
G-CCRPR-3225P19	G-CCRPL-3225P19	CPGN-190412	<input type="radio"/>	<input type="radio"/>	25	32	170	33	32	CSP-632	TFHCS M3-0.5x10mm	CLM-12	STCM-4	CBDC-615G	TK-02742	
G-CCRPR-3232P19	G-CCRPL-3232P19	CPGN-190412	<input type="radio"/>	<input type="radio"/>	32	32	170	33	40	CSP-632	TFHCS M3-0.5x10mm	CLM-12	STCM-4	CBDC-615G	TK-02742	
G-CCRPR-4040R19	G-CCRPL-4040R19	CPGN-190412	<input type="radio"/>	<input type="radio"/>	40	40	200	33	50	CSP-632	TFHCS M3-0.5x10mm	CLM-12	STCM-4	CBDC-615G	TK-02742	


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

10 Business Days or Less


Stocked Standard

# G-CSBPR/L

Style B  
Square  
Positive Rake  
75° Lead Angle

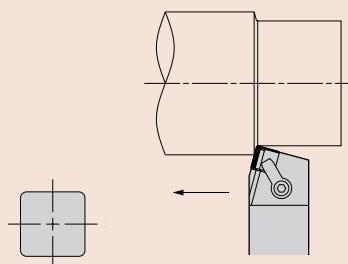


Right-Hand  
Toolholder Shown

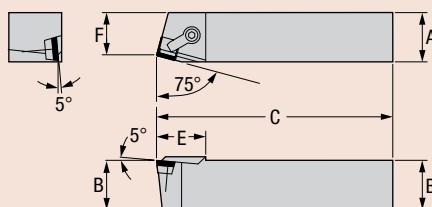

**Part Number**



**Dimensions (millimeters)**




\* Tune-Up Kit  
Includes All Standard Components

Right	Left	Insert	R	L	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker
G-CSBPR-2020M12	G-CSBPL-2020M12	SPGN-120308	○	○	20	20	150	32	15	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-8	CBS-4G
G-CSBPR-2525M12	G-CSBPL-2525M12	SPGN-120308	○	○	25	25	150	32	21	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-8	CBS-4G
G-CSBPR-3232P12	G-CSBPL-3232P12	SPGN-120308	○	○	32	32	170	32	28	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBS-4G
G-CSBPR-4040R12	G-CSBPL-4040R12	SPGN-120308	○	○	40	40	200	32	34	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBS-4G
G-CSBPR-2525M19	G-CSBPL-2525M19	SPGN-190412	○	○	25	25	150	37	20	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6G
G-CSBPR-3232P19	G-CSBPL-3232P19	SPGN-190412	○	○	32	32	170	37	26	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6G
G-CSBPR-4040R19	G-CSBPL-4040R19	SPGN-190412	○	○	40	40	200	37	32	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6G


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# G-CSDPN

Style D  
Square  
Positive Rake  
45° Lead

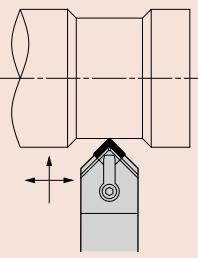



Neutral  
Toolholder Shown

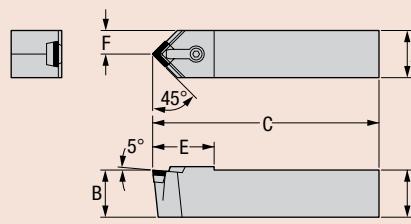

**Part Number**



**Dimensions (millimeters)**



\* Tune-Up Kit  
Includes All Standard Components

Neutral	Insert	N	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker
G-CSDPN-2020M12	SPGN-120308	○	20	20	150	41	10	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBS-4E
G-CSDPN-2525M12	SPGN-120308	○	25	25	150	41	12,5	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBS-4E
G-CSDPN-3232P12	SPGN-120308	○	32	32	170	41	16	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBS-4E
G-CSDPN-4040R12	SPGN-120308	○	40	40	200	41	20	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBS-4E
G-CSDPN-2525M19	SPGN-190412	○	25	25	150	45	12,5	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6E
G-CSDPN-3232P19	SPGN-190412	○	32	32	170	45	16	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6E
G-CSDPN-4040R19	SPGN-190412	○	40	40	200	45	20	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6E

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.



## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard  
 10 Business Days or Less

# G-CSKPR/L

Style K  
Square  
Positive Rake  
75° Lead Angle

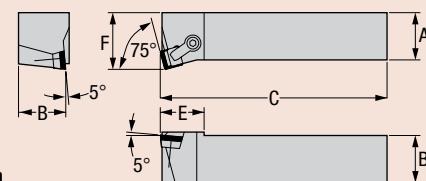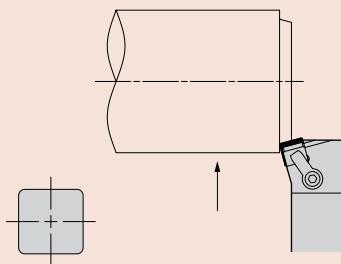

Part Number		Gage	Stock	Dimensions (millimeters)						Seat	Standard Components				* Tune-Up Kit	
Right	Left	Insert		R	L	A	B	C	E	F	Seat Screw	Clamp	Clamp Screw	Chip Breaker	Includes All Standard Components	
G-CSKPR-2020M12	G-CSKPL-2020M12	SPGN-120308	<input type="radio"/>	<input type="radio"/>		20	20	150	29	25	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-8	CBS-4G	TK-02771
G-CSKPR-2525M12	G-CSKPL-2525M12	SPGN-120308	<input type="radio"/>	<input type="radio"/>		25	25	150	29	32	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-8	CBS-4G	TK-02771
G-CSKPR-3225P12	G-CSKPL-3225P12	SPGN-120308	<input type="radio"/>	<input type="radio"/>		25	32	170	29	32	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBS-4G	TK-02772
G-CSKPR-3232P12	G-CSKPL-3232P12	SPGN-120308	<input type="radio"/>	<input type="radio"/>		32	32	170	29	40	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBS-4G	TK-02772
G-CSKPR-4040R12	G-CSKPL-4040R12	SPGN-120308	<input type="radio"/>	<input type="radio"/>		40	40	200	29	50	SP-40	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBS-4G	TK-02772
G-CSKPR-2525M19	G-CSKPL-2525M19	SPGN 190412	<input type="radio"/>	<input type="radio"/>		25	25	150	38	32	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6G	TK-02768
G-CSKPR-3225P19	G-CSKPL-3225P19	SPGN 190412	<input type="radio"/>	<input type="radio"/>		25	32	170	38	32	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6G	TK-02768
G-CSKPR-3232P19	G-CSKPL-3232P19	SPGN 190412	<input type="radio"/>	<input type="radio"/>		32	32	170	38	40	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6G	TK-02768
G-CSKPR-4040R19	G-CSKPL-4040R19	SPGN 190412	<input type="radio"/>	<input type="radio"/>		40	40	200	38	50	SP-60M	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBS-6G	TK-02768

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.



10 Business Days or Less

Stocked Standard




# G-CTAPR/L

Style A  
Triangle  
Positive Rake  
90° Lead Angle

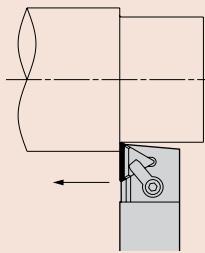

Right-Hand  
Toolholder Shown


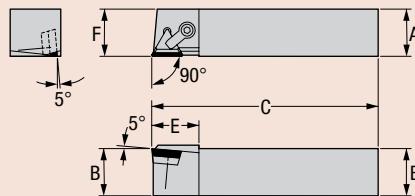


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components	* Tune-Up Kit				
Right	Left	Insert	R L	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker	Includes All Standard Components
G-CTAPR-2020M16	G-CTAPL-2020M16	TPGN-160308	O O	20	20	150	25	20	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTAPR-2525M16	G-CTAPL-2525M16	TPGN-160308	O O	25	25	150	25	25	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTAPR-3225P16	G-CTAPL-3225P16	TPGN-160308	O O	25	32	170	25	25	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTAPR-2525M22	G-CTAPL-2525M22	TPGN-220408	O O	25	25	150	32	25	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTAPR-3225P22	G-CTAPL-3225P22	TPGN-220408	O O	25	32	170	32	25	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTAPR-3232P22	G-CTAPL-3232P22	TPGN-220408	O O	32	32	170	32	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTAPR-4040R22	G-CTAPL-4040R22	TPGN-220408	O O	40	40	200	32	40	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTAPR-2525M27	G-CTAPL-2525M27	TPGN-270612	O O	25	25	150	35	25	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTAPR-3232P27	G-CTAPL-3232P27	TPGN-270612	O O	32	32	170	35	32	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTAPR-4040R27	G-CTAPL-4040R27	TPGN-270612	O O	40	40	200	35	40	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTAPR-4040R33	G-CTAPL-4040R33	TPGN-330924	O O	40	40	200	40	40	SP-6	TFHCS M5-0.8x12mm	CLM-12	STCM-4	CBT-6G	TK-02776


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# G-CTBPR/L

Style B  
Triangle  
Positive Rake  
75° Lead Angle

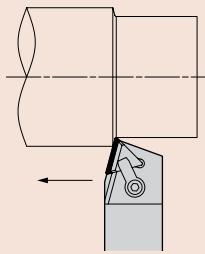

Right-Hand  
Toolholder Shown

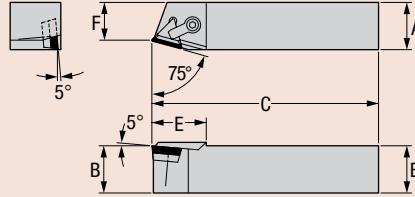

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components	* Tune-Up Kit				
Right	Left	Insert	R L	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker	Includes All Standard Components
G-CTBPR-2020M16	G-CTBPL-2020M16	TPGN-160308	O O	20	20	150	25	15	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTBPR-2525M16	G-CTBPL-2525M16	TPGN-160308	O O	25	25	150	25	21	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTBPR-3225P16	G-CTBPL-3225P16	TPGN-160308	O O	25	32	170	25	27	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTBPR-2525M22	G-CTBPL-2525M22	TPGN-220408	O O	25	25	150	32	19	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTBPR-3225P22	G-CTBPL-3225P22	TPGN-220408	O O	25	32	170	32	19	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTBPR-3232P22	G-CTBPL-3232P22	TPGN-220408	O O	32	32	170	32	26	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTBPR-4040R22	G-CTBPL-4040R22	TPGN-220408	O O	40	40	200	32	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTBPR-2525M27	G-CTBPL-2525M27	TPGN-270612	O O	25	25	150	40	18	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTBPR-3225P27	G-CTBPL-3225P27	TPGN-270612	O O	25	32	170	40	18	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTBPR-3232P27	G-CTBPL-3232P27	TPGN-270612	O O	32	32	170	40	25	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTBPR-4040R27	G-CTBPL-4040R27	TPGN-270612	O O	40	40	200	40	31	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTBPR-4040R33	G-CTBPL-4040R33	TPGN-330924	O O	40	40	200	40	30	SP-6	TFHCS M5-0.8x12mm	CLM-12	STCM-4	CBT-6G	TK-02776

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com




Stocked Standard




10 Business Days or Less

# G-CTCPN

Style C  
Triangle  
Positive Rake  
90° Lead Angle

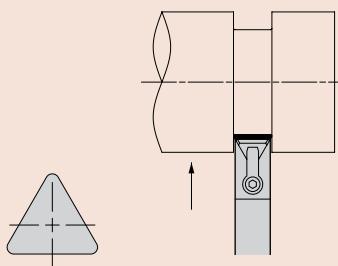

Neutral Toolholder Shown

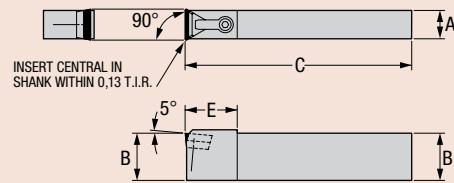

Part Number	Gage	Stock	Dimensions (millimeters)					Standard Components					* Tune-Up Kit
	Insert		N	A	B	C	E	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker	
<b>Neutral</b>													
<b>G-CTCPN-2512M16</b>	TPGN-160308	○	12	25	150	32		TSP-321	TFHCS M3-0.5x10mm	CLM-22	STCM-26	CBT-3G	TK-02830
<b>G-CTCPN-2520M22</b>	TPGN-220408	●	20	25	150	35		SP-4	TFHCS M3-0.5x12mm	CLM-30	STCM-4	CBT-4G	TK-02831
<b>G-CTCPN-3220P22</b>	TPGN-220408	●	20	32	170	35		SP-4	TFHCS M3-0.5x12mm	CLM-30	STCM-4	CBT-4G	TK-02831
<b>G-CTCPN-4020R22</b>	TPGN-220408	○	20	40	200	35		SP-4	TFHCS M3-0.5x12mm	CLM-30	STCM-4	CBT-4G	TK-02831
<b>G-CTCPN-4025R27</b>	TPGN-270612	○	22	40	200	40		SP-5	TFHCS M5-0.8x12mm	CLM-30	STCM-4	CBT-5G	TK-02832


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# G-CTEOR/L

Style E  
Triangle  
Positive Rake  
60° Lead Angle



Right-Hand Toolholder Shown

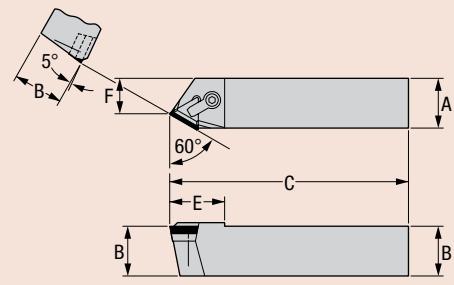

Part Number	Gage	Stock	Dimensions (millimeters)						Standard Components					* Tune-Up Kit	
	Insert		R	L	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker	
<b>Right</b>															
<b>G-CTEOR-1616M16</b>	G-CTEOL-1616M16	TPGN-160308	○	○	16	16	150	27	10	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
<b>G-CTEOR-2020M16</b>	G-CTEOL-2020M16	TPGN-160308	○	○	20	20	150	27	13	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
<b>G-CTEOR-2525M16</b>	G-CTEOL-2525M16	TPGN-160308	○	○	25	25	150	27	19	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
<b>G-CTEOR-3225P16</b>	G-CTEOL-3225P16	TPGN-160308	○	○	25	32	170	27	19	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
<b>G-CTEOR-2525M22</b>	G-CTEOL-2525M22	TPGN-220408	○	○	25	25	150	35	16	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
<b>G-CTEOR-3225P22</b>	G-CTEOL-3225P22	TPGN-220408	○	○	25	32	170	35	16	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
<b>G-CTEOR-3232P22</b>	G-CTEOL-3232P22	TPGN-220408	○	○	32	32	170	35	22	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
<b>G-CTEOR-4040R22</b>	G-CTEOL-4040R22	TPGN-220408	○	○	40	40	200	35	29	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
<b>G-CTEOR-3232P27</b>	G-CTEOL-3232P27	TPGN-270612	○	○	32	32	170	39	20	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
<b>G-CTEOR-4040R27</b>	G-CTEOL-4040R27	TPGN-270612	○	○	40	40	200	39	27	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
<b>G-CTEOR-4040R33</b>	G-CTEOL-4040R33	TPGN-330924	○	○	40	40	200	45	24	SP-6	TFHCS M5-0.8x12mm	CLM-12	STCM-4	CBT-6G	TK-02776

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.


10 Business Days or Less

Stocked Standard




## G-CTFPR/L

Style F  
Triangle  
Positive Rake  
90° Lead Angle

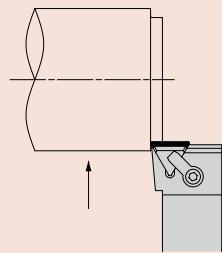

Right-Hand  
Toolholder Shown

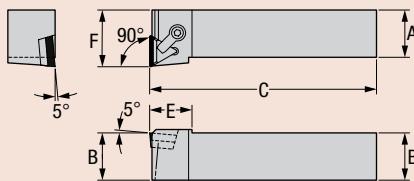


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	
Right	Left	Insert	R L	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker	Includes All Standard Components
G-CTFPR-1616M16	G-CTFPL-1616M16	TPGN-160308	○ ○	16	16	150	25	22	TSP-321	TFHCS M3-0.5x10mm	CLM-6	STCM-25	CBT-3G	TK-02787
G-CTFPR-2020M16	G-CTFPL-2020M16	TPGN-160308	○ ○	20	20	150	25	25	TSP-321	TFHCS M3-0.5x10mm	CLM-6	STCM-25	CBT-3G	TK-02787
G-CTFPR-2525M16	G-CTFPL-2525M16	TPGN-160308	○ ○	25	25	150	25	32	TSP-321	TFHCS M3-0.5x10mm	CLM-6	STCM-25	CBT-3G	TK-02787
G-CTFPR-3225P16	G-CTFPL-3225P16	TPGN-160308	○ ○	25	32	170	25	32	TSP-321	TFHCS M3-0.5x10mm	CLM-6	STCM-25	CBT-3G	TK-02787
G-CTFPR-2525M22	G-CTFPL-2525M22	TPGN-220408	○ ○	25	25	150	28	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTFPR-3225P22	G-CTFPL-3225P22	TPGN-220408	○ ○	25	32	170	28	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTFPR-3232P22	G-CTFPL-3232P22	TPGN-220408	○ ○	32	32	170	28	40	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTFPR-4040R22	G-CTFPL-4040R22	TPGN-220408	○ ○	40	40	200	28	50	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTFPR-2525M27	G-CTFPL-2525M27	TPGN-270612	○ ○	25	25	150	40	32	SP-5	TFHCS M4-0.7x12mm	CLM-30	STCM-4	CBT-5G	TK-02800
G-CTFPR-3225P27	G-CTFPL-3225P27	TPGN-270612	○ ○	25	32	170	40	32	SP-5	TFHCS M4-0.7x12mm	CLM-30	STCM-4	CBT-5G	TK-02800
G-CTFPR-3232P27	G-CTFPL-3232P27	TPGN-270612	○ ○	32	32	170	40	40	SP-5	TFHCS M4-0.7x12mm	CLM-30	STCM-4	CBT-5G	TK-02800
G-CTFPR-4040R27	G-CTFPL-4040R27	TPGN-270612	○ ○	40	40	200	40	50	SP-5	TFHCS M4-0.7x12mm	CLM-30	STCM-4	CBT-5G	TK-02800
G-CTFPR-4040R33	G-CTFPL-4040R33	TPGN-330924	- -	40	40	200	40	50	SP-6	TFHCS M5-0.8x12mm	CLM-12	STCM-4	CBT-6G	TK-02776


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## G-CTGPR/L

Style G  
Triangle  
Positive Rake  
90° Lead Angle

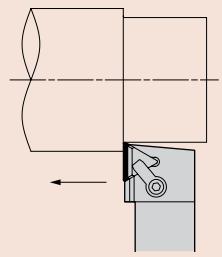

Right-Hand  
Toolholder Shown

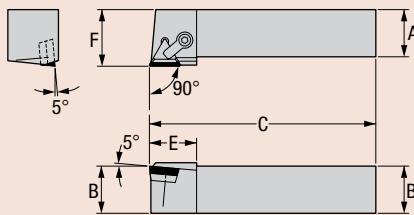

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	
Right	Left	Insert	R L	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker	Includes All Standard Components
G-CTGPL-1616M16	G-CTGPL-1616M16	TPGN-160308	○ ○	16	16	150	25	22	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTGPL-2020M16	G-CTGPL-2020M16	TPGN-160308	○ ○	20	20	150	25	25	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTGPL-2525M16	G-CTGPL-2525M16	TPGN-160308	○ ○	25	25	150	25	32	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTGPL-3225P16	G-CTGPL-3225P16	TPGN-160308	○ ○	25	32	170	25	32	TSP-321	TFHCS M3-0.5x10mm	CLM-7	STCM-25	CBT-3G	TK-02773
G-CTGPL-2525M22	G-CTGPL-2525M22	TPGN-220408	○ ○	25	25	150	32	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTGPL-3225P22	G-CTGPL-3225P22	TPGN-220408	○ ○	25	32	170	32	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTGPL-3232P22	G-CTGPL-3232P22	TPGN-220408	○ ○	32	32	170	32	40	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTGPL-4040R22	G-CTGPL-4040R22	TPGN-220408	○ ○	40	40	200	32	50	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	CBT-4G	TK-02774
G-CTGPL-2525M27	G-CTGPL-2525M27	TPGN-270612	○ ○	25	25	150	35	32	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTGPL-3225P27	G-CTGPL-3225P27	TPGN-270612	○ ○	25	32	170	35	32	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTGPL-3232P27	G-CTGPL-3232P27	TPGN-270612	○ ○	32	32	170	35	40	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTGPL-4040R27	G-CTGPL-4040R27	TPGN-270612	○ ○	40	40	200	35	50	SP-5	TFHCS M4-0.7x12mm	CLM-12	STCM-4	CBT-5G	TK-02775
G-CTGPL-4040R33	G-CTGPL-4040R33	TPGN-330924	○ ○	40	40	200	40	50	SP-6	TFHCS M5-0.8x12mm	CLM-12	STCM-4	CBT-6G	TK-02776

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com



Stocked Standard



10 Business Days or Less

# Advanced Ceramic Toolholders

Greenleaf toolholder systems for use with ceramic inserts are based upon industry standard hardware. However, geometry and pocket depth are designed to maximize ceramic performance. Negative tools have a 10° negative side rake rather than the 5° usually found in tools for carbide inserts. This will increase clearance and, in turn, tool life. The additional pocket depth allows for thicker inserts with shims available to adjust the thickness stack-up for thinner tools if necessary.

The standard clamp is the long series to secure the inserts without a hole which is a stronger set-up. (Short clamps are an optional item.) All tools are fully heat-treated alloy steel and are qualified to  $\pm 0.07$  on the "F" and "C" dimensions.

Greenleaf has designated a "C" prefix for a ceramic insert toolholder and an "H" prefix for ceramic insert toolholder for hard material machining.

## Rough Stuff® Surface Treatment

Greatly improved insert-gripping power for greater accuracy, speed and pocket retention. Available on WG-300®, WG-600®, WG-700™, and GSN100™ ceramics.

*U.S. Patent No. 6,712,564 B1*

## Greenleaf Tune-Up Kits

A Tune-Up Kit consists of all the standard hardware to refurbish a particular toolholder, boring bar, or milling cutter. A toolholder will have a readily visible, laser-inscribed Tune-Up Kit number on it for ease in ordering. This number will prevent any confusion created by searching a catalog for hardware, and it will help reduce downtime.



Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

## Greenleaf Sales

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
 EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
 CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


## Toolholder Identification System



<sup>†</sup> Greenleaf standard.
















### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

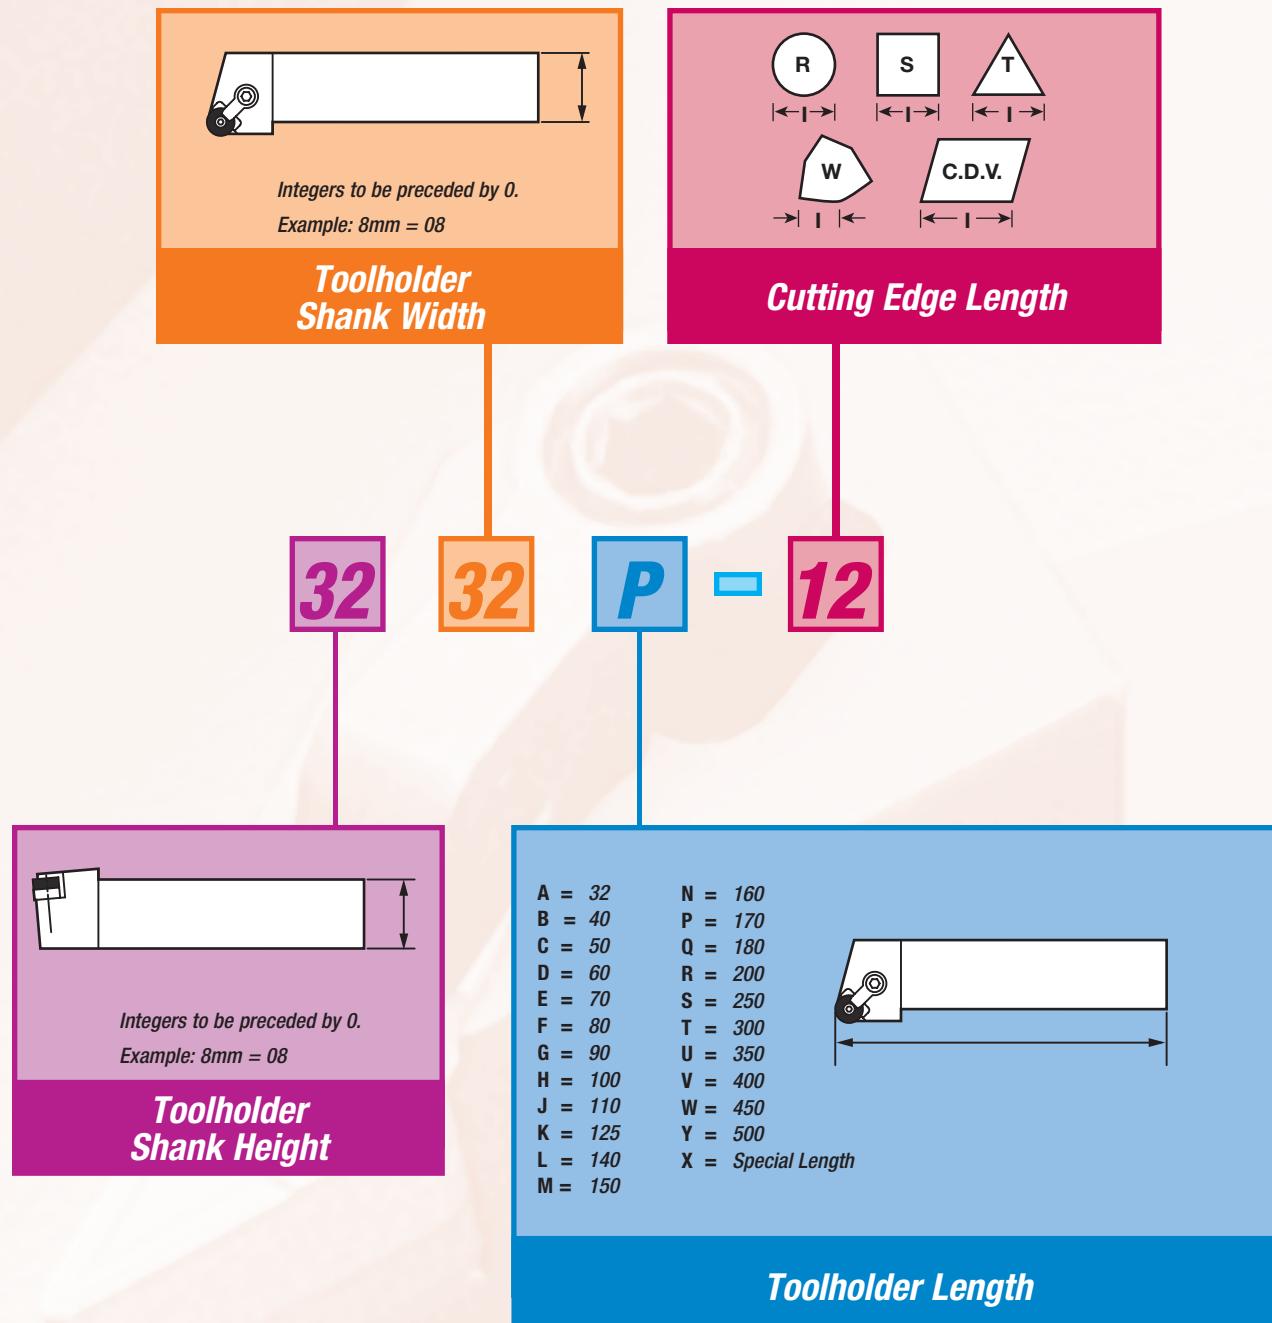
**NOTE:**


All toolholders are qualified to  $\pm 0.07$  over gage insert radius on the "C" and "F" dimensions as standard. Some toolholders are qualifiable on the "C" length dimension only.

# Advanced Ceramic Toolholder Usage Reference Guide

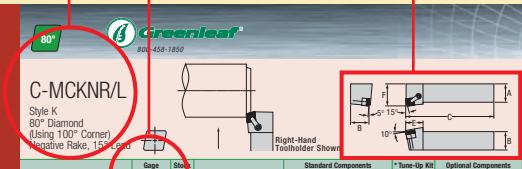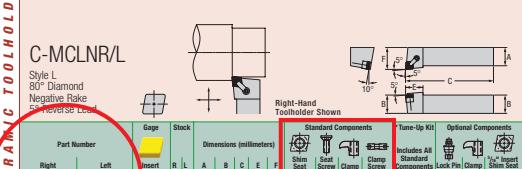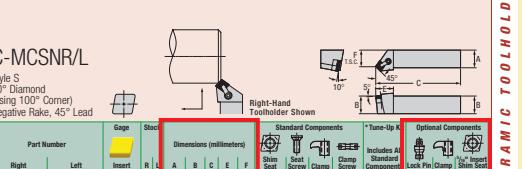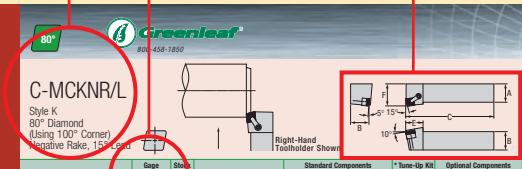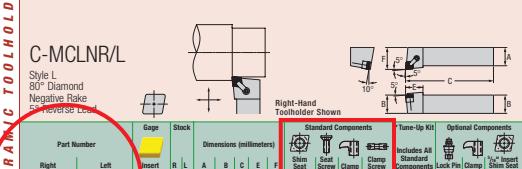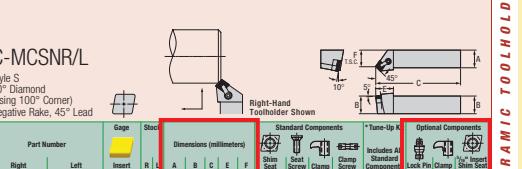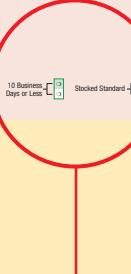
Toolholder Style	Geometry	Toolholder Application	Insert Geometry
 <b>C-MCKNR/L</b> Style K 80° Diamond (Using 100° Corner) Negative Rake, 15° Lead	 <b>C-MCLNR/L</b> Style L 80° Diamond Negative Rake 5° Reverse Lead	 <b>C-MCRNR/L</b> Style R 80° Diamond (Using 100° Corner) Negative Rake, 15° Lead	 <b>C-MCSNR/L</b> Style S 80° Diamond (Using 100° Corner) Negative Rake, 45° Lead
<b>Part Number</b> C-MCKNR/L C-MCLNR/L C-MCRNR/L C-MCSNR/L	<b>Standard Components</b>    	<b>Optional Components</b>    	<b>Tune-Up Kits</b>    
<b>Insert</b>  <b>Style K</b> 80° Diamond (Using 100° Corner) Negative Rake, 15° Lead	<b>Insert</b>  <b>Style L</b> 80° Diamond Negative Rake 5° Reverse Lead	<b>Insert</b>  <b>Style R</b> 80° Diamond (Using 100° Corner) Negative Rake, 15° Lead	<b>Insert</b>  <b>Style S</b> 80° Diamond (Using 100° Corner) Negative Rake, 45° Lead
<b>Stocking Program</b> 	<b>Dimensions</b> 	<b>Optional Components</b> 	<b>Dimensions</b> 

**Greenleaf Sales**


**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

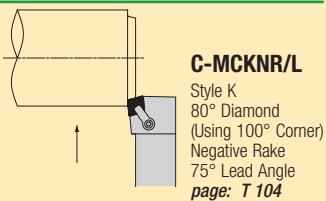**80°/100° Diamond – Negative**


**C-MCKNR/L**  
Style K  
80° Diamond  
(Using 100° Corner)  
Negative Rake  
75° Lead Angle  
page: T 104

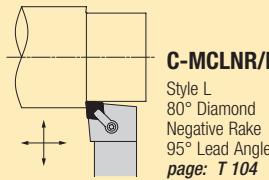


**C-MCLNR/L**  
Style L  
80° Diamond  
Negative Rake  
95° Lead Angle  
page: T 104

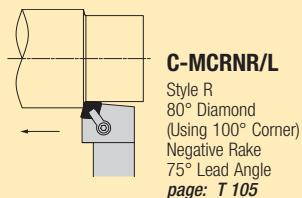

**C-MCRNR/L**  
Style R  
80° Diamond  
(Using 100° Corner)  
Negative Rake  
75° Lead Angle  
page: T 105




**C-MCSNR/L**  
Style S  
80° Diamond  
(Using 100° Corner)  
Negative Rake  
45° Lead Angle  
page: T 105

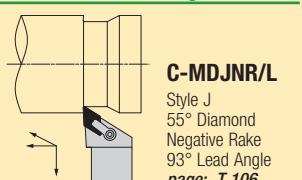**55° Diamond – Negative**


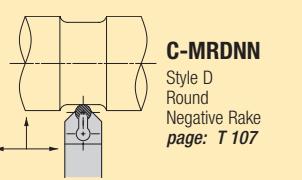
**C-MDJNR/L**  
Style J  
55° Diamond  
Negative Rake  
93° Lead Angle  
page: T 106



**C-MDPNN**  
Style P  
55° Diamond  
Negative Rake  
72,5° Lead Angle  
page: T 106

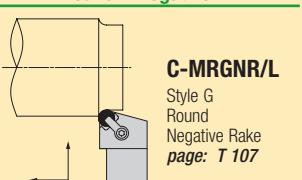**Round – Negative**


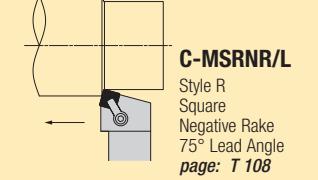
**C-MRGNR/L**  
Style G  
Round  
Negative Rake  
page: T 107




**C-MRDNN**  
Style D  
Round  
Negative Rake  
page: T 107

**Square – Negative**



**C-MSKNR/L**  
Style K  
Square  
Negative Rake  
75° Lead Angle  
page: T 108




**C-MSRNR/L**  
Style R  
Square  
Negative Rake  
75° Lead Angle  
page: T 108

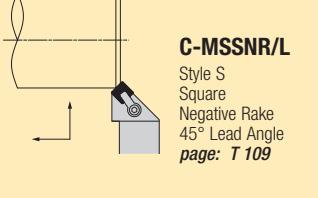


**C-MSSNR/L**  
Style S  
Square  
Negative Rake  
45° Lead Angle  
page: T 109

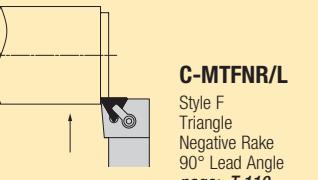**Triangle – Negative**


**C-MTFNR/L**  
Style F  
Triangle  
Negative Rake  
90° Lead Angle  
page: T 110

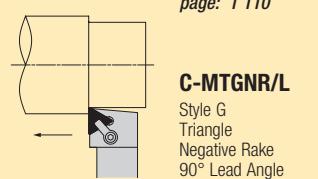


**C-MTGNR/L**  
Style G  
Triangle  
Negative Rake  
90° Lead Angle  
page: T 110

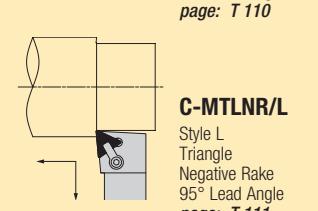


**C-MTLNR/L**  
Style L  
Triangle  
Negative Rake  
95° Lead Angle  
page: T 111

**Trigon – Negative**



**C-MWLNR/L**  
Style L  
Trigon  
Negative Rake  
95° Lead Angle  
page: T 111

**Hard-Turning – Negative**



**H-MCLNR/L**  
Style L  
80° Diamond  
Negative Rake  
95° Lead Angle  
page: T 112



**H-MRGNR/L**  
Style G  
Round  
Negative Rake  
75° Lead Angle  
page: T 112




**H-MSRNR/L**  
Style R  
Square  
Negative Rake  
75° Lead Angle  
page: T 113




**H-MWLNR/L**  
Style L  
Trigon  
Negative Rake  
95° Lead Angle  
page: T 113

**80°/100° Diamond – Positive**


**C-CCKPR/L**  
Style K  
80° Diamond  
(Using 100° Corner)  
Positive Rake  
75° Lead Angle  
page: T 114




**C-CCLPR/L**  
Style L  
80° Diamond  
Positive Rake  
95° Lead Angle  
page: T 114



**C-CCRPR/L**  
Style R  
80° Diamond  
(Using 100° Corner)  
Positive Rake  
75° Lead Angle  
page: T 114

**Greenleaf Sales**


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

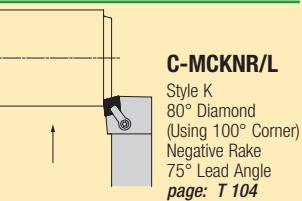**80°/100° Diamond – Positive *continued***


**C-CCSPR/L**  
Style S  
80° Diamond  
(Using 100° Corner)  
Positive Rake  
45° Lead Angle  
page: T 115



**C-CRGPR/L**  
Style G  
Round  
Positive Rake  
page: T 115

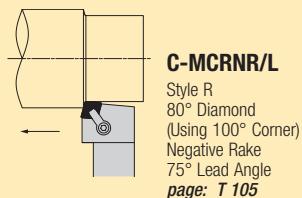


**C-CSDPN**  
Style D  
Square  
Positive Rake  
45° Lead Angle  
page: T 116




**C-CSKPR/L**  
Style K  
Square  
Positive Rake  
75° Lead Angle  
page: T 116




**C-CSRPR/L**  
Style R  
Square  
Positive Rake  
75° Lead Angle  
page: T 117

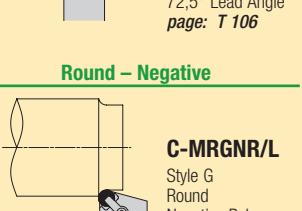


**C-CSSPR/L**  
Style S  
Square  
Positive Rake  
45° Lead Angle  
page: T 117

**Triangle – Positive**



**C-CTCPR/L**  
Style C  
Triangle  
Positive Rake  
90° Lead Angle  
page: T 118



**C-CTFPR/L**  
Style F  
Triangle  
Positive Rake  
90° Lead Angle  
page: T 118




**C-CTGPR/L**  
Style G  
Triangle  
Positive Rake  
90° Lead Angle  
page: T 119




**C-CTLPR/L**  
Style L  
Triangle  
Positive Rake  
95° Lead Angle  
page: T 119

## C-MCKNR/L

Style K, 80° Diamond  
(Using 100° Corner)  
Negative Rake  
75° Lead Angle

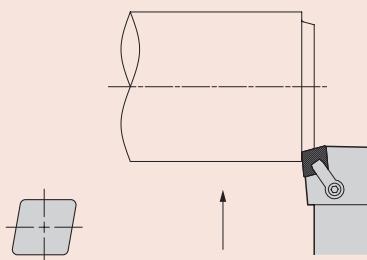

Right-Hand Toolholder Shown

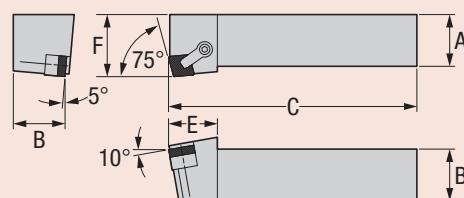

**Part Number**



**Stock**

**Dimensions (millimeters)**



**Standard Components**

**\* Tune-Up Kit**



**Includes All Standard Components**



Right Left

**Insert**

R L

A

B

C

E

F

Shim Seat

Seat Screw

Clamp

Clamp Screw

CSN-453

S-46M

CLM-12

STCM-4

TK-02750

S-46M

CLM-12

STCM-4

TK-02750

S-46M

CLM-12

STCM-4

TK-02750

S-68M

CLM-30

STCM-4

TK-02751

S-68M

CLM-30

STCM-4

TK-02751

NLM-46L

CLM-9

CSN-433

NLM-46L

CLM-9

CSN-433

NLM-46L

CLM-9

CSN-433

NLM-68L

CLM-12

CSN-633

NLM-68L

CLM-12

CSN-633


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## C-MCLNR/L

Style L  
80° Diamond  
Negative Rake  
95° Lead Angle



Right-Hand Toolholder Shown

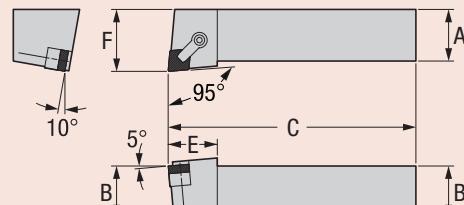

**Part Number**




**Stock**

**Dimensions (millimeters)**



**Standard Components**

**\* Tune-Up Kit**



**Includes All Standard Components**



Right Left

**Insert**

R L

A

B

C

E

F

Shim Seat

Seat Screw

Clamp

Clamp Screw

CSN-453

S-46M

CLM-12

STCM-4

TK-02750

S-46M

CLM-12

STCM-4

TK-02750

S-46M

CLM-12

STCM-4

TK-02750

S-68M

CLM-30

STCM-4

TK-02751

S-68M

CLM-30

STCM-4

TK-02751

NLM-46L

CLM-9

CSN-433

NLM-46L

CLM-9

CSN-433

NLM-46L

CLM-9

CSN-433

NLM-68L

CLM-12

CSN-633

NLM-68L

CLM-12

CSN-633


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

## C-MCRNR/L

Style R, 80° Diamond  
(Using 100° Corner)  
Negative Rake  
75° Lead Angle

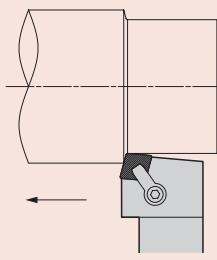

Right-Hand  
Toolholder Shown

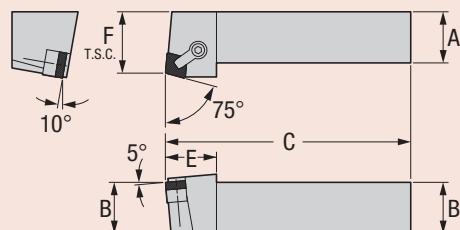


Part Number		Gage	Stock		Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components		
Right	Left	Insert	R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp	7.92 Insert Shim Seat
C-MCRNR-2525M12	C-MCRNL-2525M12	CNGN-120408	○	○	25	25	150	32	32	CSN-453	S-46M	CLM-12	STCM-4	TK-02750	NLM-46L	CLM-9	CSN-433
C-MCRNR-2525P12	C-MCRNL-2525P12	CNGN-120408	●	●	25	25	170	32	32	CSN-453	S-46M	CLM-12	STCM-4	TK-02750	NLM-46L	CLM-9	CSN-433
C-MCRNR-3232P12	C-MCRNL-3232P12	CNGN-120408	●	●	32	32	170	32	40	CSN-453	S-46M	CLM-12	STCM-4	TK-02750	NLM-46L	CLM-9	CSN-433
C-MCRNR-3232P19	C-MCRNL-3232P19	CNGN-190612	○	○	32	32	170	38	40	CSN-643	S-68M	CLM-30	STCM-4	TK-02751	NLM-68L	CLM-12	CSN-633
C-MCRNR-4040R19	C-MCRNL-4040R19	CNGN-190612	○	○	40	40	200	38	50	CSN-643	S-68M	CLM-30	STCM-4	TK-02751	NLM-68L	CLM-12	CSN-633


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## C-MCSNR/L

Style S, 80° Diamond  
(Using 100° Corner)  
Negative Rake  
45° Lead Angle

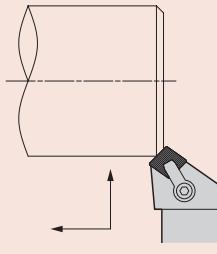

Right-Hand  
Toolholder Shown

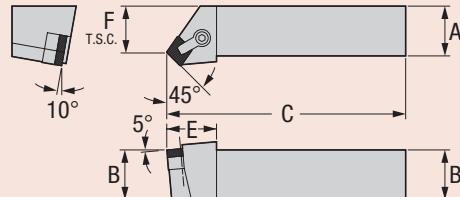

Part Number		Gage	Stock		Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components		
Right	Left	Insert	R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp	7.92 Insert Shim Seat
C-MCSNR-2525M12	C-MCSNL-2525M12	CNGN-120408	○	○	25	25	150	32	23	CSN-453	S-46M	CLM-12	STCM-4	TK-02750	NLM-46L	CLM-9	CSN-433
C-MCSNR-2525P12	C-MCSNL-2525P12	CNGN-120408	○	○	25	25	170	32	23	CSN-453	S-46M	CLM-12	STCM-4	TK-02750	NLM-46L	CLM-9	CSN-433
C-MCSNR-3232P12	C-MCSNL-3232P12	CNGN-120408	○	○	32	32	170	32	29	CSN-453	S-46M	CLM-12	STCM-4	TK-02750	NLM-46L	CLM-9	CSN-433
C-MCSNR-3232P19	C-MCSNL-3232P19	CNGN-190612	○	○	32	32	170	38	25	CSN-643	S-68M	CLM-30	STCM-4	TK-02751	NLM-68L	CLM-12	CSN-633
C-MCSNR-4040R19	C-MCSNL-4040R19	CNGN-190612	○	○	40	40	200	38	38	CSN-643	S-68M	CLM-30	STCM-4	TK-02751	NLM-68L	CLM-12	CSN-633


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

10 Business Days or Less


Stocked Standard

## C-MDJNR/L

Style J  
55° Diamond  
Negative Rake  
93° Lead Angle

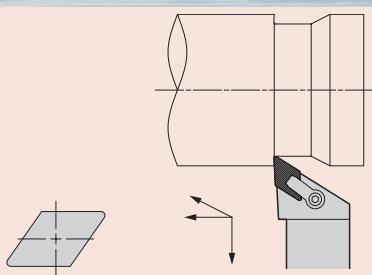

Right-Hand Toolholder Shown

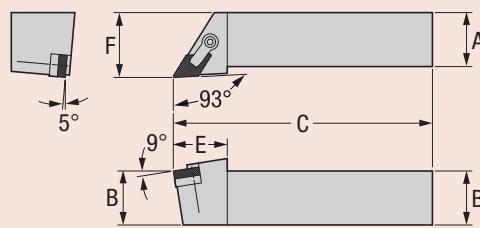


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components	
Right	Left	Insert	R L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp
C-MDJNR-2525M11	C-MDJNL-2525M11	DNGN-110308	○ ○	25	25	150	25	32	DSN-333	S-34M	CLM-7	STCM-25	TK-02788	NLM-34L	CLM-6
C-MDJNR-2525P11	C-MDJNL-2525P11	DNGN-110308	○ ○	25	25	170	25	32	DSN-333	S-34M	CLM-7	STCM-25	TK-02788	NLM-34L	CLM-6
C-MDJNR-3232P11	C-MDJNL-3232P11	DNGN-110308	○ ○	32	32	170	25	40	DSN-333	S-34M	CLM-7	STCM-25	TK-02788	NLM-34L	CLM-6
C-MDJNR-2525M15	C-MDJNL-2525M15	DNGN-150408	○ ○	25	25	150	32	32	DSN-433	S-46M	CLM-22	STCM-26	TK-02789	NLM-46	CLM-20
C-MDJNR-2525P15	C-MDJNL-2525P15	DNGN-150408	● ●	25	25	170	32	32	DSN-433	S-46M	CLM-22	STCM-26	TK-02789	NLM-46	CLM-20
C-MDJNR-3232P15	C-MDJNL-3232P15	DNGN-150408	● ●	32	32	170	32	40	DSN-433	S-46M	CLM-22	STCM-26	TK-02789	NLM-46	CLM-20
C-MDJNR-4040R15	C-MDJNL-4040R15	DNGN-150408	○ ○	40	40	200	32	50	DSN-433	S-46M	CLM-22	STCM-26	TK-02789	NLM-46	CLM-20


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## C-MDPNN

Style P  
55° Diamond  
Negative Rake  
62,5° Lead Angle

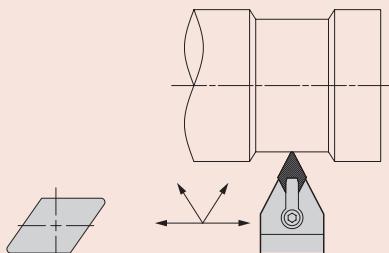

Neutral Toolholder Shown

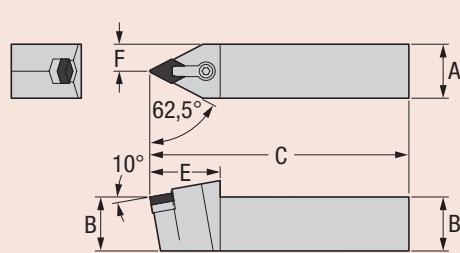

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components	
Neutral	Insert	Stock	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp	
C-MDPNN-2525M11	DNGN-110308	○	25	25	150	40	12,5	DSN-333	S-34M	CLM-12	STCM-4	TK-02785	NLM-34L	CLM-9	
C-MDPNN-2525P11	DNGN-110308	○	25	25	170	40	12,5	DSN-333	S-34M	CLM-12	STCM-4	TK-02785	NLM-34L	CLM-9	
C-MDPNN-3232P11	DNGN-110308	○	32	32	170	40	16	DSN-333	S-34M	CLM-12	STCM-4	TK-02785	NLM-34L	CLM-9	
C-MDPNN-2525M15	DNGN-150408	○	25	25	150	41	12,5	DSN-433	S-46M	CLM-30	STCM-4	TK-02786	NLM-46L	CLM-12	
C-MDPNN-2525P15	DNGN-150408	●	25	25	170	41	12,5	DSN-433	S-46M	CLM-30	STCM-4	TK-02786	NLM-46L	CLM-12	
C-MDPNN-3232P15	DNGN-150408	●	32	32	170	41	16	DSN-433	S-46M	CLM-30	STCM-4	TK-02786	NLM-46L	CLM-12	
C-MDPNN-4040R15	DNGN-150408	○	40	40	200	41	20	DSN-433	S-46M	CLM-30	STCM-4	TK-02786	NLM-46L	CLM-12	

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

### Greenleaf Sales



US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

 Stocked Standard  
 10 Business Days or Less




## C-MRGNR/L

Style G  
Round  
Negative Rake

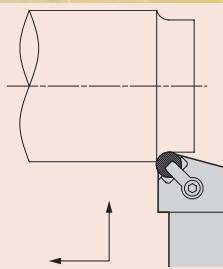

Right-Hand  
Toolholder Shown


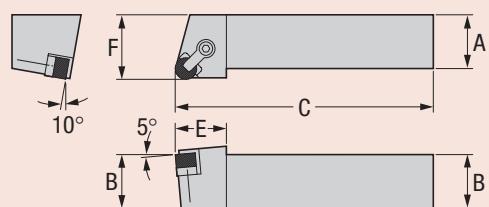


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit Includes All Std. Components	Optional Components #1		Optional Components #2			
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Lock Pin	Clamp	Ins. Thk.	Shim Seat	
C-MRGNR-2525M09	C-MRGNL-2525M09	RNGN-090400	<input type="radio"/>	<input type="radio"/>	25	25	150	25	32		RSN-32	S-34M	CLM-7	STCM-25	TK-02790	NLM-34L	CLM-6	3,18	RSN-33
C-MRGNR-2525P09	C-MRGNL-2525P09	RNGN-090400	<input type="radio"/>	<input type="radio"/>	25	25	170	25	32		RSN-32	S-34M	CLM-7	STCM-25	TK-02790	NLM-34L	CLM-6	3,18	RSN-33
C-MRGNR-3232P09	C-MRGNL-3232P09	RNGN-090400	<input type="radio"/>	<input type="radio"/>	32	32	170	25	40		RSN-32	S-34M	CLM-7	STCM-25	TK-02790	NLM-34L	CLM-6	3,18	RSN-33
C-MRGNR-2525M12	C-MRGNL-2525M12	RNGN-120700	<input type="radio"/>	<input type="radio"/>	25	25	150	30	32		IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	4,75	IRSN-45
C-MRGNR-2525P12	C-MRGNL-2525P12	RNGN-120700	<input checked="" type="radio"/>	<input checked="" type="radio"/>	25	25	170	30	32		IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	4,75	IRSN-45
C-MRGNR-3232P12	C-MRGNL-3232P12	RNGN-120700	<input checked="" type="radio"/>	<input checked="" type="radio"/>	32	32	170	30	40		IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	4,75	IRSN-45
C-MRGNR-4040R12	C-MRGNL-4040R12	RNGN-120700	<input type="radio"/>	<input type="radio"/>	40	40	200	30	50		IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	4,75	IRSN-45
C-MRGNR-2525M19	C-MRGNL-2525M19	RNGN-190700	<input type="radio"/>	<input type="radio"/>	25	25	150	38	32		RSN-63	S-68M	CLM-30	STCM-4	TK-02792	NLM-68L	CLM-12	—	—
C-MRGNR-2525P19	C-MRGNL-2525P19	RNGN-190700	<input type="radio"/>	<input type="radio"/>	25	25	170	38	32		RSN-63	S-68M	CLM-30	STCM-4	TK-02792	NLM-68L	CLM-12	—	—
C-MRGNR-3232P19	C-MRGNL-3232P19	RNGN-190700	<input type="radio"/>	<input type="radio"/>	32	32	170	38	40		RSN-63	S-68M	CLM-30	STCM-4	TK-02792	NLM-68L	CLM-12	—	—
C-MRGNR-4040R19	C-MRGNL-4040R19	RNGN-190700	<input type="radio"/>	<input type="radio"/>	40	40	200	38	50		RSN-63	S-68M	CLM-30	STCM-4	TK-02792	NLM-68L	CLM-12	—	—


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## C-MRDNN

Style D  
Round  
Negative Rake



Neutral  
Toolholder Shown

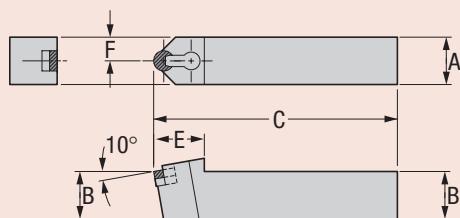

Part Number	Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit Includes All Standard Components	Optional Components #1		Optional Components #2	
	Insert		A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw		Lock Pin	Clamp	Insert Thickness	Shim Seat
C-MRDNN-2525M09	RNGN-090400	<input type="radio"/>	25	25	150	25	12,5	RSN-32	S-34M	CLM-7	STCM-25	TK-02790	NLM-34L	CLM-6	3,18	RSN-33
C-MRDNN-2525P09	RNGN-090400	<input type="radio"/>	25	25	170	25	12,5	RSN-32	S-34M	CLM-7	STCM-25	TK-02790	NLM-34L	CLM-6	3,18	RSN-33
C-MRDNN-3232P09	RNGN-090400	<input type="radio"/>	32	32	170	25	16	RSN-32	S-34M	CLM-7	STCM-25	TK-02790	NLM-34L	CLM-6	3,18	RSN-33
C-MRDNN-2525M12	RNGN-120700	<input type="radio"/>	25	25	150	35	12,5	IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	4,75	IRSN-45
C-MRDNN-2525P12	RNGN-120700	<input checked="" type="radio"/>	25	25	170	35	12,5	IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	4,75	IRSN-45
C-MRDNN-3232P12	RNGN-120700	<input checked="" type="radio"/>	32	32	170	35	16	IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	4,75	IRSN-45
C-MRDNN-4040R12	RNGN-120700	<input type="radio"/>	40	40	200	35	20	IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	4,75	IRSN-45
C-MRDNN-2525M19	RNGN-190700	<input type="radio"/>	25	25	150	40	12,5	RSN-63	S-68M	CLM-30	STCM-4	TK-02792	NLM-68L	CLM-12	—	—
C-MRDNN-2525P19	RNGN-190700	<input type="radio"/>	25	25	170	40	12,5	RSN-63	S-68M	CLM-30	STCM-4	TK-02792	NLM-68L	CLM-12	—	—
C-MRDNN-3232P19	RNGN-190700	<input type="radio"/>	32	32	170	40	16	RSN-63	S-68M	CLM-30	STCM-4	TK-02792	NLM-68L	CLM-12	—	—
C-MRDNN-4040R19	RNGN-190700	<input type="radio"/>	40	40	200	40	20	RSN-63	S-68M	CLM-30	STCM-4	TK-02792	NLM-68L	CLM-12	—	—


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

10 Business Days or Less


Stocked Standard

## C-MSKNR/L

Style K  
Square  
Negative Rake  
75° Lead Angle

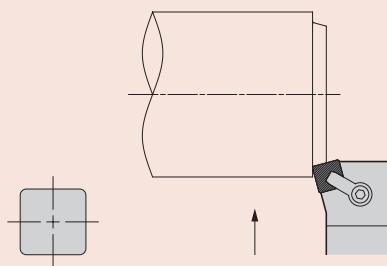


Right-Hand Toolholder Shown

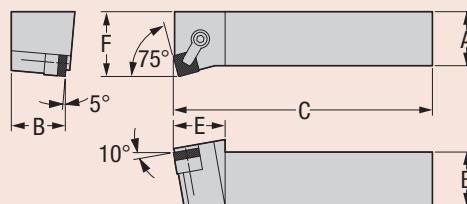


## C-MSRNR/L

Style R  
Square  
Negative Rake  
75° Lead Angle



Right-Hand Toolholder Shown

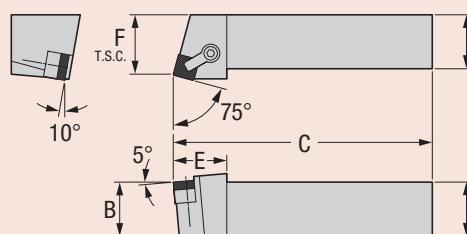

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

\*\* The lock pin option can NOT be used with this shim.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com

EU +31-45-404-1774 • eurooffice@greenleafcorporation.com

CN +86-731-89954796 • info@greenleafcorporation.com.cn

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




Stocked Standard




10 Business Days or Less

# C-MSSNR/L

Style S  
Square  
Negative Rake  
45° Lead Angle

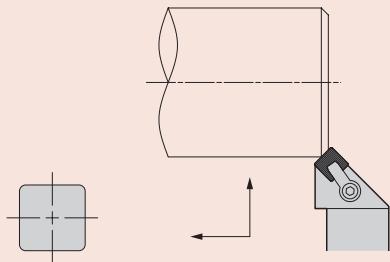

Right-Hand  
Toolholder Shown

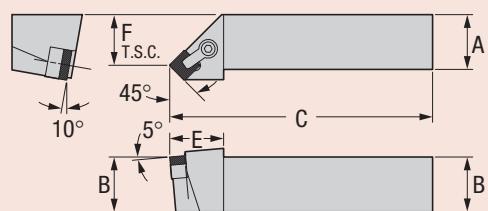

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Components					
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp	7.92 Insert Shim Seat
C-MSSNR-2525M12	C-MSSNL-2525M12	SNGN-120408	○ ○	25	25	150	31	23			ISSN-453	S-46M	CLM-12	STCM-4	TK-02793	NLM-46L	CLM-9	ISSN-433
C-MSSNR-2525P12	C-MSSNL-2525P12	SNGN-120408	● ●	25	25	170	31	23			ISSN-453	S-46M	CLM-12	STCM-4	TK-02793	NLM-46L	CLM-9	ISSN-433
C-MSSNR-3232P12	C-MSSNL-3232P12	SNGN-120408	● ●	32	32	170	31	29			ISSN-453	S-46M	CLM-12	STCM-4	TK-02793	NLM-46L	CLM-9	ISSN-433
C-MSSNR-3232P15	C-MSSNL-3232P15	SNGN-150612	○ ○	32	32	170	35	27			SSN-533	S-58M	CLM-12	STCM-4	TK-02794	NLM-58	CLM-9	-
C-MSSNR-4040R15	C-MSSNL-4040R15	SNGN-150612	○ ○	40	40	200	35	40			SSN-533	S-58M	CLM-12	STCM-4	TK-02794	NLM-58	CLM-9	-
C-MSSNR-3232P19	C-MSSNL-3232P19	SNGN-190612	○ ○	32	32	170	38	25			ISSN-633	S-68M	CLM-30	STCM-4	TK-02795	NLM-68	CLM-12	**ISSN-623
C-MSSNR-4040R19	C-MSSNL-4040R19	SNGN-190612	○ ○	40	40	200	38	40			ISSN-633	S-68M	CLM-30	STCM-4	TK-02795	NLM-68	CLM-12	**ISSN-623

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

\*\* The lock pin option can NOT be used with this shim.


10 Business Days or Less

Stocked Standard




## C-MTFNR/L

Style F  
Triangle  
Negative Rake  
90° Lead Angle

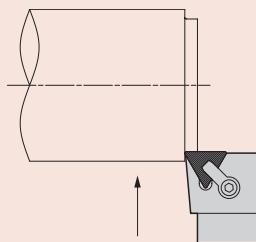

Right-Hand Toolholder Shown

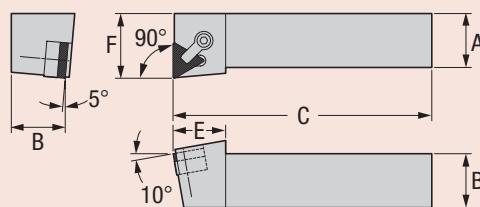

Part Number



Stock

Dimensions (millimeters)



Right Left

Insert

R L

A

B

C

E


F

C-MTFNR-2525M16	C-MTFNL-2525M16	TNGN-160408	<input type="radio"/>	<input type="radio"/>	25	25	150	24	32	ITSN-322	S-34M	CLM-7	STCM-25	TK-02809	NLM-34L	CLM-6	-
C-MTFNR-2525P16	C-MTFNL-2525P16	TNGN-160408	<input type="radio"/>	<input type="radio"/>	25	25	170	24	32	ITSN-322	S-34M	CLM-7	STCM-25	TK-02809	NLM-34L	CLM-6	-
C-MTFNR-3232P16	C-MTFNL-3232P16	TNGN-160408	<input type="radio"/>	<input type="radio"/>	32	32	170	24	40	ITSN-322	S-34M	CLM-7	STCM-25	TK-02809	NLM-34L	CLM-6	-
C-MTFNR-2525M22	C-MTFNL-2525M22	TNGN-220408	<input type="radio"/>	<input type="radio"/>	25	25	150	30	32	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433
C-MTFNR-2525P22	C-MTFNL-2525P22	TNGN-220408	<input type="radio"/>	<input type="radio"/>	25	25	170	30	32	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433
C-MTFNR-3232P22	C-MTFNL-3232P22	TNGN-220408	<input type="radio"/>	<input type="radio"/>	32	32	170	30	40	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433
C-MTFNR-4040R22	C-MTFNL-4040R22	TNGN-220408	<input type="radio"/>	<input type="radio"/>	40	40	200	30	50	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## C-MTGNR/L

Style G  
Triangle  
Negative Rake  
90° Lead Angle

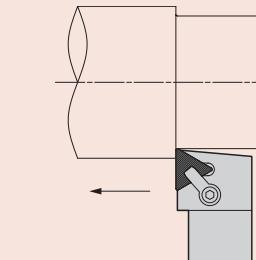

Right-Hand Toolholder Shown

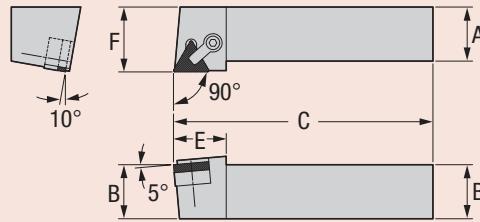


Part Number



Stock

Dimensions (millimeters)



Right Left

Insert

R L

A

B

C

E

F

C-MTGNR-2525M16	C-MTGNL-2525M16	TNGN-160408	<input type="radio"/>	<input type="radio"/>	25	25	150	28	32	ITSN-322	S-34M	CLM-7	STCM-25	TK-02809	NLM-34L	CLM-6	-
C-MTGNR-2525P16	C-MTGNL-2525P16	TNGN-160408	<input type="radio"/>	<input type="radio"/>	25	25	170	28	32	ITSN-322	S-34M	CLM-7	STCM-25	TK-02809	NLM-34L	CLM-6	-
C-MTGNR-3232P16	C-MTGNL-3232P16	TNGN-160408	<input type="radio"/>	<input type="radio"/>	32	32	170	28	40	ITSN-322	S-34M	CLM-7	STCM-25	TK-02809	NLM-34L	CLM-6	-
C-MTGNR-2525M22	C-MTGNL-2525M22	TNGN-220408	<input type="radio"/>	<input type="radio"/>	25	25	150	30	32	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433
C-MTGNR-2525P22	C-MTGNL-2525P22	TNGN-220408	<input type="radio"/>	<input type="radio"/>	25	25	170	30	32	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433
C-MTGNR-3232P22	C-MTGNL-3232P22	TNGN-220408	<input type="radio"/>	<input type="radio"/>	32	32	170	30	40	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433
C-MTGNR-4040R22	C-MTGNL-4040R22	TNGN-220408	<input type="radio"/>	<input type="radio"/>	40	40	200	30	50	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

\*\* The lock pin option can NOT be used with this shim.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com




Stocked Standard




10 Business Days or Less

# C-MTLNR/L

Style L  
Triangle  
Negative Rake  
95° Lead Angle

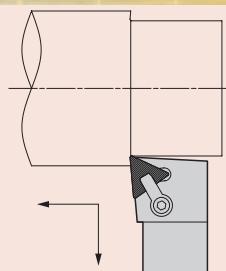

Right-Hand  
Toolholder Shown

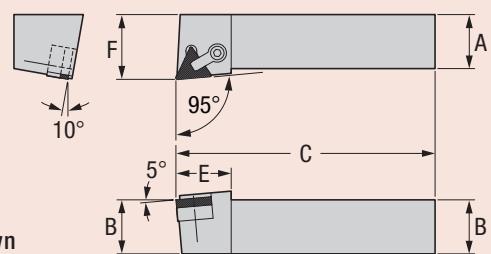


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components				
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp	7,92 Insert Shim Seat
C-MTLNR-2525M16	C-MTLNL-2525M16	TNGN-160408		○	○	25	25	150	28	32	ITSN-322	S-34M	CLM-7	STCM-25	TK-02809	NLM-34L	CLM-6	-
C-MTLNR-2525P16	C-MTLNL-2525P16	TNGN-160408		○	○	25	25	170	28	32	ITSN-322	S-34M	CLM-7	STCM-25	TK-02809	NLM-34L	CLM-6	-
C-MTLNR-3232P16	C-MTLNL-3232P16	TNGN-160408		○	○	32	32	170	28	40	ITSN-322	S-34M	CLM-7	STCM-25	TK-02809	NLM-34L	CLM-6	-
C-MTLNR-2525M22	C-MTLNL-2525M22	TNGN-220408		○	○	25	25	150	30	32	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433
C-MTLNR-2525P22	C-MTLNL-2525P22	TNGN-220408		○	○	25	25	170	30	32	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433
C-MTLNR-3232P22	C-MTLNL-3232P22	TNGN-220408		○	○	32	32	170	30	40	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433
C-MTLNR-4040R22	C-MTLNL-4040R22	TNGN-220408		○	○	40	40	200	30	50	ITSN-453	S-46M	CLM-12	STCM-4	TK-02810	NLM-46L	CLM-9	ITSN-433


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# C-MWLNR/L

Style L  
Trigon  
Negative Rake  
95° Lead Angle



Right-Hand  
Toolholder Shown

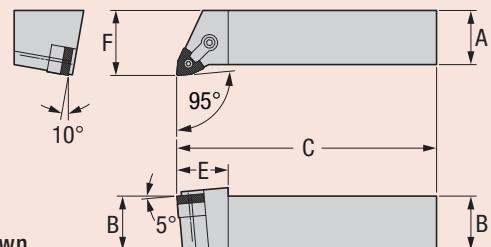

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit		
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components
C-MWLNR-2020M06	C-MWLNL-2020M06	WNGA-060408		○	○	20	20	150	25	25	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811
C-MWLNR-2525M06	C-MWLNL-2525M06	WNGA-060408		○	○	25	25	150	25	32	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811
C-MWLNR-3232P06	C-MWLNL-3232P06	WNGA-060408		○	○	32	32	170	25	40	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811
C-MWLNR-4040R06	C-MWLNL-4040R06	WNGA-060408		○	○	40	40	200	25	50	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811
C-MWLNR-2020M08	C-MWLNL-2020M08	WNGA-080408		○	○	20	20	150	27	25	IWSN-453	NLM-46L	CLM-20	STCM-26	TK-02812
C-MWLNR-2525M08	C-MWLNL-2525M08	WNGA-080408		○	○	25	25	150	27	32	IWSN-453	NLM-46L	CLM-20	STCM-26	TK-02812
C-MWLNR-3232P08	C-MWLNL-3232P08	WNGA-080408		○	○	32	32	170	27	40	IWSN-453	NLM-46L	CLM-20	STCM-26	TK-02812
C-MWLNR-4040R08	C-MWLNL-4040R08	WNGA-080408		○	○	40	40	200	27	50	IWSN-453	NLM-46L	CLM-20	STCM-26	TK-02812

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

10 Business Days or Less


Stocked Standard

80°




## H-MCLNR/L

Style L  
80° Diamond  
Negative Rake  
95° Lead Angle

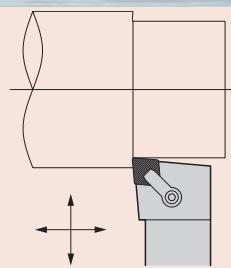


Right-Hand Toolholder Shown

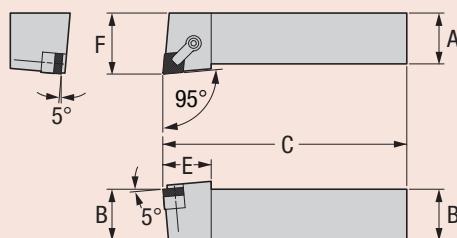


CERAMIC TOOLHOLDERS

## H-MRGNR/L

Style G  
Round  
Negative Rake

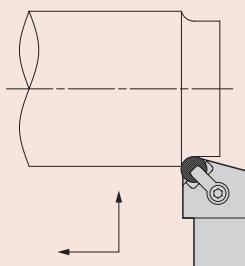

Right-Hand Toolholder Shown

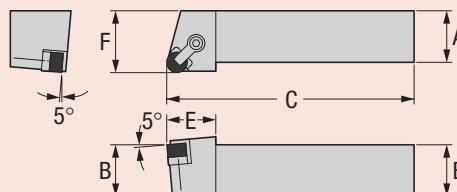

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Components					
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp	7.92 Insert Shim Seat
H-MCLNR-2525M12	H-MCLNL-2525M12	CNGN-120408		○	○	25	25	150	30	32	CSN-453	S-46M	CLM-12	STCM-4	TK-02750	NLM-46L	CLM-9	CSN-433
H-MCLNR-2525P12	H-MCLNL-2525P12	CNGN-120408		●	●	25	25	170	30	32	CSN-453	S-46M	CLM-12	STCM-4	TK-02750	NLM-46L	CLM-9	CSN-433
H-MCLNR-3232P12	H-MCLNL-3232P12	CNGN-120408		●	●	32	32	170	30	40	CSN-453	S-46M	CLM-12	STCM-4	TK-02750	NLM-46L	CLM-9	CSN-433

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit	Optional Components					
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp	4.75 Insert Shim Seat
H-MRGNR-2525M12	H-MRGNL-2525M12	RNGN-120700		○	○	25	25	150	30	32	IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	IRSN-45
H-MRGNR-2525P12	H-MRGNL-2525P12	RNGN-120700		●	●	25	25	170	30	32	IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	IRSN-45
H-MRGNR-3232P12	H-MRGNL-3232P12	RNGN-120700		●	●	32	32	170	30	40	IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	IRSN-45
H-MRGNR-3232R12	H-MRGNL-3232R12	RNGN-120700		○	○	40	40	200	30	50	IRSN-43	S-46M	CLM-12	STCM-4	TK-02791	NLM-46L	CLM-9	IRSN-45

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

**These toolholders are for hard turning  
with ceramic inserts  
using industry standard components.**

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard


10 Business Days or Less

## H-MSRNR/L

Style R  
Square  
Negative Rake  
75° Lead Angle

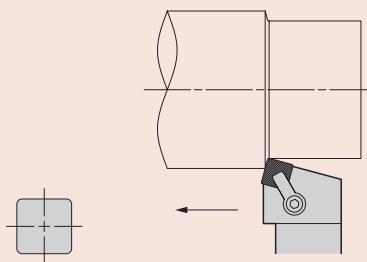

Right-Hand Toolholder Shown

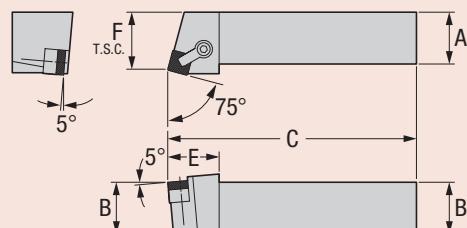


Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	Optional Components			
Right	Left	Insert	R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp	7.92 Insert Shim Seat
H-MSRNR-2525M12	H-MSRNL-2525M12	SNGN-120408	○	○	25	25	150	31	28	ISSN-453	S-46M	CLM-12	STCM-4	TK-02793	NLM-46L	CLM-9	ISSN-433
H-MSRNR-2525P12	H-MSRNL-2525P12	SNGN-120408	○	○	25	25	170	31	28	ISSN-453	S-46M	CLM-12	STCM-4	TK-02793	NLM-46L	CLM-9	ISSN-433
H-MSRNR-3232P12	H-MSRNL-3232P12	SNGN-120408	○	○	32	32	170	31	35	ISSN-453	S-46M	CLM-12	STCM-4	TK-02793	NLM-46L	CLM-9	ISSN-433


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## H-MWLNRL/L

Style L  
Trigon  
Negative Rake  
95° Lead Angle

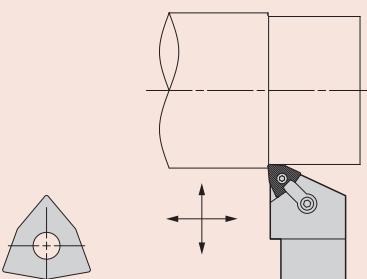

Right-Hand Toolholder Shown

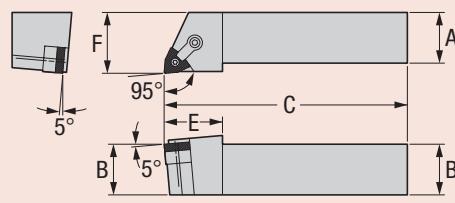

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components				* Tune-Up Kit	
Right	Left	Insert	R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
H-MWLNRL-2020M06	H-MWLNRL-2020M06	WNGA-060408	○	○	20	20	150	25	25	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811
H-MWLNRL-2525M06	H-MWLNRL-2525M06	WNGA-060408	○	○	25	25	150	25	32	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811
H-MWLNRL-3232P06	H-MWLNRL-3232P06	WNGA-060408	○	○	32	32	170	25	40	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811
H-MWLNRL-4040R06	H-MWLNRL-4040R06	WNGA-060408	○	○	40	40	200	25	50	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811
H-MWLNRL-2020M08	H-MWLNRL-2020M08	WNGA-080408	○	○	20	20	150	27	25	IWSN-453	NLM-46L	CLM-20	STCM-26	TK-02812
H-MWLNRL-2525M08	H-MWLNRL-2525M08	WNGA-080408	○	○	25	25	150	27	32	IWSN-453	NLM-46L	CLM-20	STCM-26	TK-02812
H-MWLNRL-3232P08	H-MWLNRL-3232P08	WNGA-080408	○	○	32	32	170	27	40	IWSN-453	NLM-46L	CLM-20	STCM-26	TK-02812
H-MWLNRL-4040R08	H-MWLNRL-4040R08	WNGA-080408	○	○	40	40	200	27	50	IWSN-453	NLM-46L	CLM-20	STCM-26	TK-02812

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

**These toolholders are for hard turning  
with ceramic inserts  
using industry standard components.**

10 Business Days or Less


Stocked Standard

80°




## C-CCKPR/L

Style K  
80° Diamond (Using 100° Corner)  
Positive Rake  
75° Lead Angle

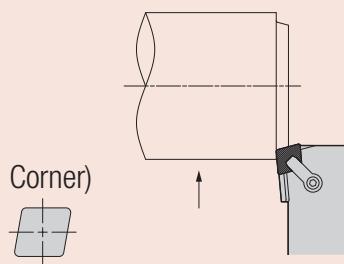


Right-Hand Toolholder Shown

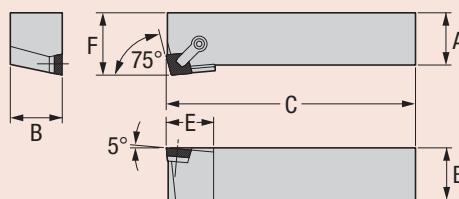


## C-CCLPR/L

Style L  
80° Diamond  
Positive Rake  
95° Lead Angle

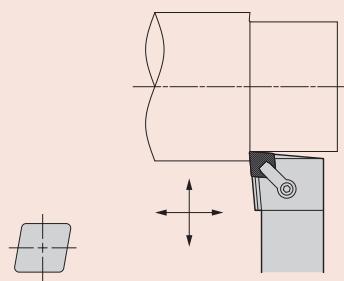


Right-Hand Toolholder Shown

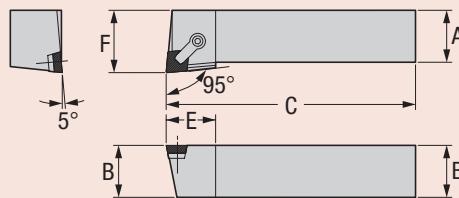


## C-CCRPR/L

Style R  
80° Diamond (Using 100° Corner)  
Positive Rake  
75° Lead Angle

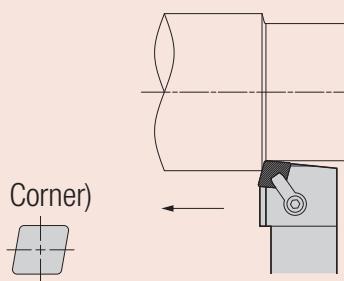

Right-Hand Toolholder Shown

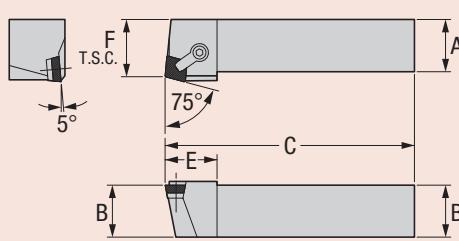

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com



Stocked Standard



10 Business Days or Less

Part Number		Gage	Stock		Dimensions (millimeters)					Standard Components				* Tune-Up Kit
Right	Left	Insert	R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
C-CCKPR-2525M12	C-CCKPL-2525M12	CPGN-120408	○	○	25	25	150	30	32	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779
C-CCKPR-2525P12	C-CCKPL-2525P12	CPGN-120408	○	○	25	25	170	30	32	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779
C-CCKPR-3232P12	C-CCKPL-3232P12	CPGN-120408	○	○	32	32	170	30	40	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

Part Number		Gage	Stock		Dimensions (millimeters)					Standard Components				* Tune-Up Kit
Right	Left	Insert	R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
C-CCLPR-2525M12	C-CCLPL-2525M12	CPGN-120408	○	○	25	25	150	30	32	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779
C-CCLPR-2525P12	C-CCLPL-2525P12	CPGN-120408	○	○	25	25	170	30	32	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779
C-CCLPR-3232P12	C-CCLPL-3232P12	CPGN-120408	○	○	32	32	170	30	40	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

Part Number		Gage	Stock		Dimensions (millimeters)					Standard Components				* Tune-Up Kit
Right	Left	Insert	R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
C-CCRPR-2525M12	C-CCRPL-2525M12	CPGN-120408	○	○	25	25	150	32	32	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779
C-CCRPR-2525P12	C-CCRPL-2525P12	CPGN-120408	○	○	25	25	170	32	32	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779
C-CCRPR-3232P12	C-CCRPL-3232P12	CPGN-120408	○	○	32	32	170	32	40	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.




## C-CCSPR/L

Style S


80° Diamond (Using 100° Corner)

Positive Rake

45° Lead Angle

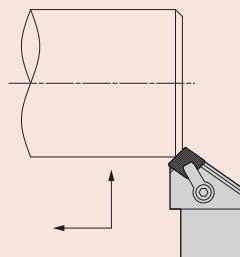

Right-Hand Toolholder Shown

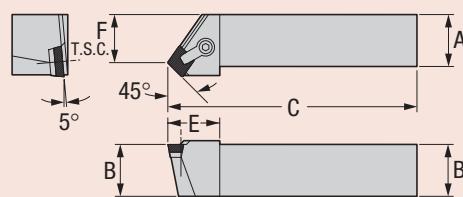

Part Number		Gage	Stock	Dimensions (millimeters)						Standard Components			* Tune-Up Kit		
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
C-CCSPR-2525M12	C-CCSPL-2525M12	CPGN-120408	○ ○	25	25	150	32	32	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779		
C-CCSPR-2525P12	C-CCSPL-2525P12	CPGN-120408	○ ○	25	25	170	32	32	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779		
C-CCSPR-3232P12	C-CCSPL-3232P12	CPGN-120408	○ ○	32	32	170	32	40	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779		


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## C-CRGPR/L


Style G

Round

Positive Rake

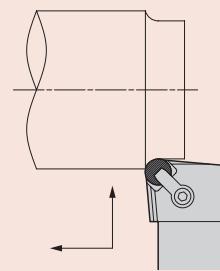

Right-Hand Toolholder Shown

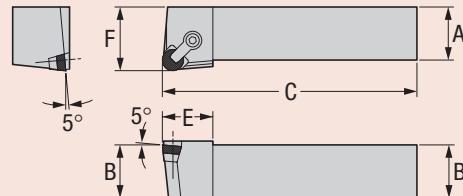

Part Number		Gage	Stock	Dimensions (millimeters)						Standard Components			* Tune-Up Kit		
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
C-CRGPR-2525M09	C-CRGPL-2525M09	RPGN-090300	○ ○	25	25	150	25	32	SP-34	TSHCS M2-0.4x6mm	CLM-7	STCM-25	TK-02813		
C-CRGPR-2525P09	C-CRGPL-2525P09	RPGN-090300	○ ○	25	25	170	25	32	SP-34	TSHCS M2-0.4x6mm	CLM-7	STCM-25	TK-02813		
C-CRGPR-3232P09	C-CRGPL-3232P09	RPGN-090300	○ ○	32	32	170	25	40	SP-34	TSHCS M2-0.4x6mm	CLM-7	STCM-25	TK-02813		
C-CRGPR-2525M12	C-CRGPL-2525M12	RPGN-120400	○ ○	25	25	150	30	32	SP-44	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02814		
C-CRGPR-2525P12	C-CRGPL-2525P12	RPGN-120400	● ●	25	25	170	30	32	SP-44	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02814		
C-CRGPR-3232P12	C-CRGPL-3232P12	RPGN-120400	● ●	32	32	170	30	40	SP-44	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02814		
C-CRGPR-4040R12	C-CRGPL-4040R12	RPGN-120400	○ ○	40	40	200	30	50	SP-44	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02814		

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

10 Business Days or Less


Stocked Standard

90°




## C-CSDPN

Style D  
Square  
Positive Rake  
45° Lead Angle




Neutral Toolholder Shown

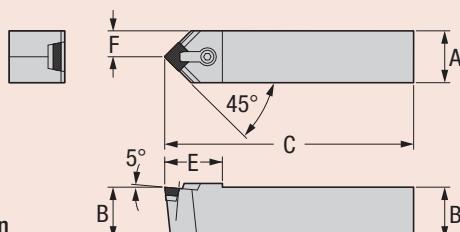


## C-CSKPR/L

Style K  
Square  
Positive Rake  
75° Lead Angle

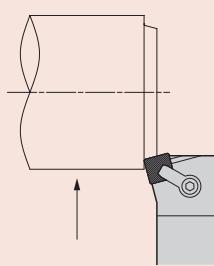

Right-Hand Toolholder Shown

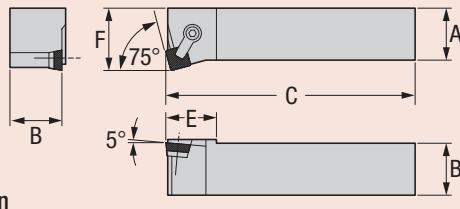

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components	* Tune-Up Kit			
Right	Left	Insert	R L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
C-CSKPR-2525M12	C-CSKPL-2525M12	SPGN-120408	○ ○	25	25	150	31	32	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780
C-CSKPR-2525P12	C-CSKPL-2525P12	SPGN-120408	○ ○	25	25	170	31	32	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780
C-CSKPR-3232P12	C-CSKPL-3232P12	SPGN-120408	○ ○	32	32	170	31	40	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com


● Stocked Standard  
○ 10 Business Days or Less

## C-CSRPR/L

Style R  
Square  
Positive Rake  
75° Lead Angle

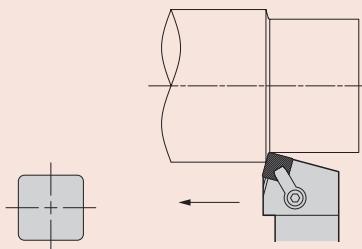

Right-Hand Toolholder Shown

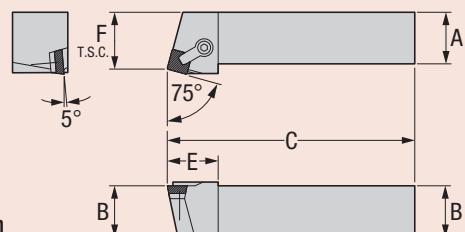

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit			
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
C-CSRPR-2525M12	C-CSRPL-2525M12	SPGN-120408		○	○	25	25	150	31	28	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780
C-CSRPR-2525P12	C-CSRPL-2525P12	SPGN-120408		○	○	25	25	170	31	28	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780
C-CSRPR-3232P12	C-CSRPL-3232P12	SPGN-120408		○	○	32	32	170	31	35	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## C-CSSPR/L

Style S  
Square  
Positive Rake  
45° Lead



Right-Hand Toolholder Shown

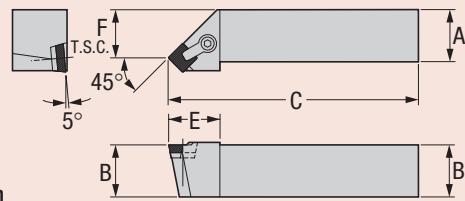

Part Number		Gage	Stock	Dimensions (millimeters)					Standard Components			* Tune-Up Kit			
Right	Left	Insert		R	L	A	B	C	E	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
C-CSSPR-2525M12	C-CSSPL-2525M12	SPGN-120408		○	○	25	25	150	31	23	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780
C-CSSPR-2525P12	C-CSSPL-2525P12	SPGN-120408		○	○	25	25	170	31	23	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780
C-CSSPR-3232P12	C-CSSPL-3232P12	SPGN-120408		○	○	32	32	170	31	29	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.


10 Business Days or Less

Stocked Standard




## C-CTCPR/L

Style C  
Triangle  
Positive Rake  
90° Lead Angle



Right-Hand  
Toolholder Shown

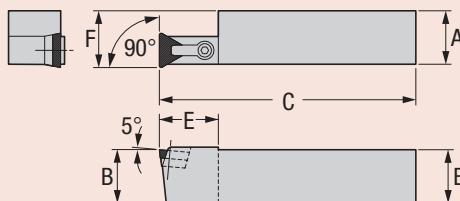

Part Number



Stock

Dimensions (millimeters)



Standard Components





\* Tune-Up Kit  
Includes All Standard Components

Right	Left	Insert	R	L	A	B	C	E	F	SP3A	TFHCS M3-0.5x10mm	CLM-22	STCM-26	TK-02815
C-CTCPR-2525M16	C-CTCPL-2525M16	TPGN-160308	<input type="radio"/>	<input type="radio"/>	25	25	150	29	26,2	SP3A	TFHCS M3-0.5x10mm	CLM-22	STCM-26	TK-02815
C-CTCPR-2525P16	C-CTCPL-2525P16	TPGN-160308	<input type="radio"/>	<input type="radio"/>	25	25	170	29	26,2	SP3A	TFHCS M3-0.5x10mm	CLM-22	STCM-26	TK-02815
C-CTCPR-3232P16	C-CTCPL-3232P16	TPGN-160308	<input type="radio"/>	<input type="radio"/>	32	32	170	29	33,2	SP3A	TFHCS M3-0.5x10mm	CLM-22	STCM-26	TK-02815
C-CTCPR-2525M22	C-CTCPL-2525M22	TPGN-220408	<input type="radio"/>	<input type="radio"/>	25	25	150	35	27	SP-4	TFHCS M3-0.5x12mm	CLM-30	STCM-4	TK-02816
C-CTCPR-2525P22	C-CTCPL-2525P22	TPGN-220408	<input type="radio"/>	<input type="radio"/>	25	25	170	35	27	SP-4	TFHCS M3-0.5x12mm	CLM-30	STCM-4	TK-02816
C-CTCPR-3232P22	C-CTCPL-3232P22	TPGN-220408	<input type="radio"/>	<input type="radio"/>	32	32	170	35	34	SP-4	TFHCS M3-0.5x12mm	CLM-30	STCM-4	TK-02816
C-CTCPR-4040R22	C-CTCPL-4040R22	TPGN-220408	<input type="radio"/>	<input type="radio"/>	40	40	200	35	42	SP-4	TFHCS M3-0.5x12mm	CLM-30	STCM-4	TK-02816


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## C-CTFPR/L

Style F  
Triangle  
Positive Rake  
90° Lead Angle



Right-Hand  
Toolholder Shown

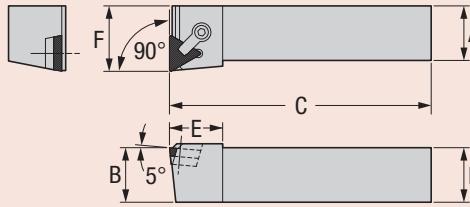

Part Number



Stock

Dimensions (millimeters)



Standard Components



\* Tune-Up Kit  
Includes All Standard Components

Right	Left	Insert	R	L	A	B	C	E	F	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTFPR-2525M16	C-CTFPL-2525M16	TPGN-160308	<input type="radio"/>	<input type="radio"/>	25	25	150	24	32	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTFPR-2525P16	C-CTFPL-2525P16	TPGN-160308	<input type="radio"/>	<input type="radio"/>	25	25	170	24	32	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTFPR-3232P16	C-CTFPL-3232P16	TPGN-160308	<input type="radio"/>	<input type="radio"/>	32	32	170	24	40	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTFPR-2525M22	C-CTFPL-2525M22	TPGN-220408	<input type="radio"/>	<input type="radio"/>	25	25	150	31	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818
C-CTFPR-2525P22	C-CTFPL-2525P22	TPGN-220408	<input type="radio"/>	<input type="radio"/>	25	25	170	31	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818
C-CTFPR-3232P22	C-CTFPL-3232P22	TPGN-220408	<input type="radio"/>	<input type="radio"/>	32	32	170	31	40	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818
C-CTFPR-4040R22	C-CTFPL-4040R22	TPGN-220408	<input type="radio"/>	<input type="radio"/>	40	40	200	31	50	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818



\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

# C-CTGPR/L

Style G  
Triangle  
Positive Rake  
90° Lead Angle



Right-Hand  
Toolholder Shown


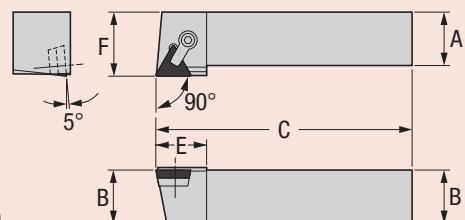


Part Number		Gage 	Stock	Dimensions (millimeters)					Shim Seat	Standard Components			* Tune-Up Kit
Right	Left	Insert	R L	A	B	C	E	F	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	Includes All Standard Components
C-CTGPR-2525M16	C-CTGPL-2525M16	TPGN-160308	○ ○	25	25	150	28	32	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTGPR-2525P16	C-CTGPL-2525P16	TPGN-160308	○ ○	25	25	170	28	32	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTGPR-3232P16	C-CTGPL-3232P16	TPGN-160308	○ ○	32	32	170	28	40	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTGPR-2525M22	C-CTGPL-2525M22	TPGN-220408	○ ○	25	25	150	30	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818
C-CTGPR-2525P22	C-CTGPL-2525P22	TPGN-220408	○ ○	25	25	170	30	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818
C-CTGPR-3232P22	C-CTGPL-3232P22	TPGN-220408	○ ○	32	32	170	30	40	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818
C-CTGPR-4040R22	C-CTGPL-4040R22	TPGN-220408	○ ○	40	40	200	30	50	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# C-CTLPR/L

Style L  
Triangle  
Positive Rake  
95° Lead Angle



Right-Hand  
Toolholder Shown

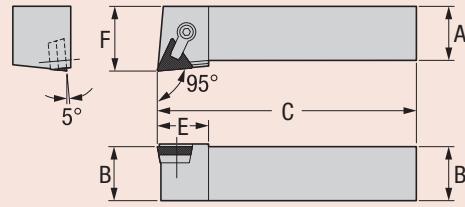

Part Number		Gage 	Stock	Dimensions (millimeters)					Shim Seat	Standard Components			* Tune-Up Kit
Right	Left	Insert	R L	A	B	C	E	F	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	Includes All Standard Components
C-CTLPR-2525M16	C-CTLPL-2525M16	TPGN-160308	○ ○	25	25	150	28	32	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTLPR-2525P16	C-CTLPL-2525P16	TPGN-160308	○ ○	25	25	170	28	32	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTLPR-3232P16	C-CTLPL-3232P16	TPGN-160308	○ ○	32	32	170	28	40	SP3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
C-CTLPR-2525M22	C-CTLPL-2525M22	TPGN-220408	○ ○	25	25	150	30	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818
C-CTLPR-2525P22	C-CTLPL-2525P22	TPGN-220408	○ ○	25	25	170	30	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818
C-CTLPR-3232P22	C-CTLPL-3232P22	TPGN-220408	○ ○	32	32	170	30	40	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818
C-CTLPR-4040R22	C-CTLPL-4040R22	TPGN-220408	○ ○	40	40	200	30	50	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

10 Business Days or Less

Stocked Standard



**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


## Industry-Standard Boring Bars for Carbide Inserts

The boring bar systems and cartridges in this catalog are designed around industry standard hardware. This gives complete interchangeability with other tooling components and minimizes spare parts inventories.

Most bars incorporate "through the bar" coolant feed with directable outlet nozzle.

Greenleaf uses heat treated alloy steel to insure a consistent high quality product for maximum life performance.

Custom engineered tooling is a Greenleaf specialty and we will be pleased to quote your special requirements for boring. Additionally, Greenleaf has the capability to quote boring bars made of heavy metal shanks or "No-Chat" material.

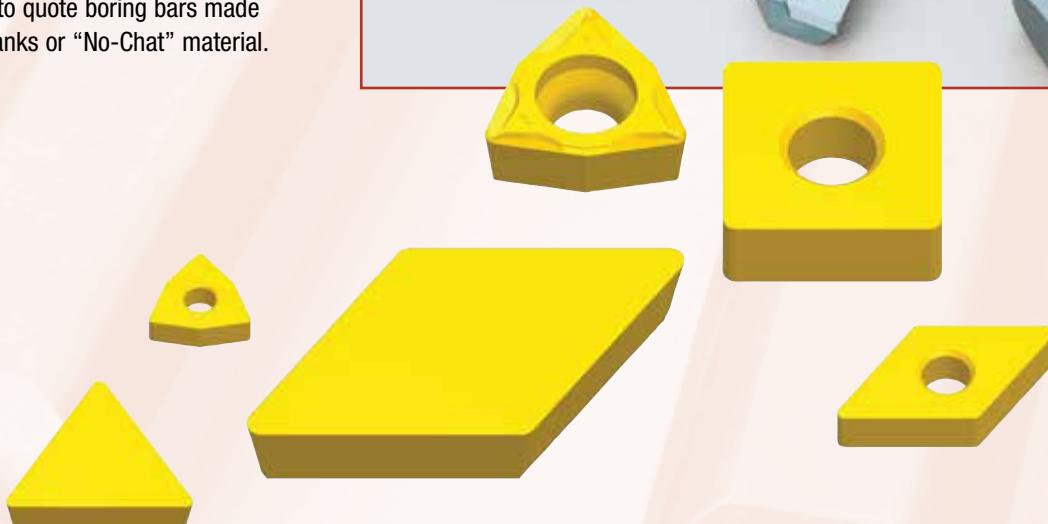


*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**


**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Boring Bar Identification System

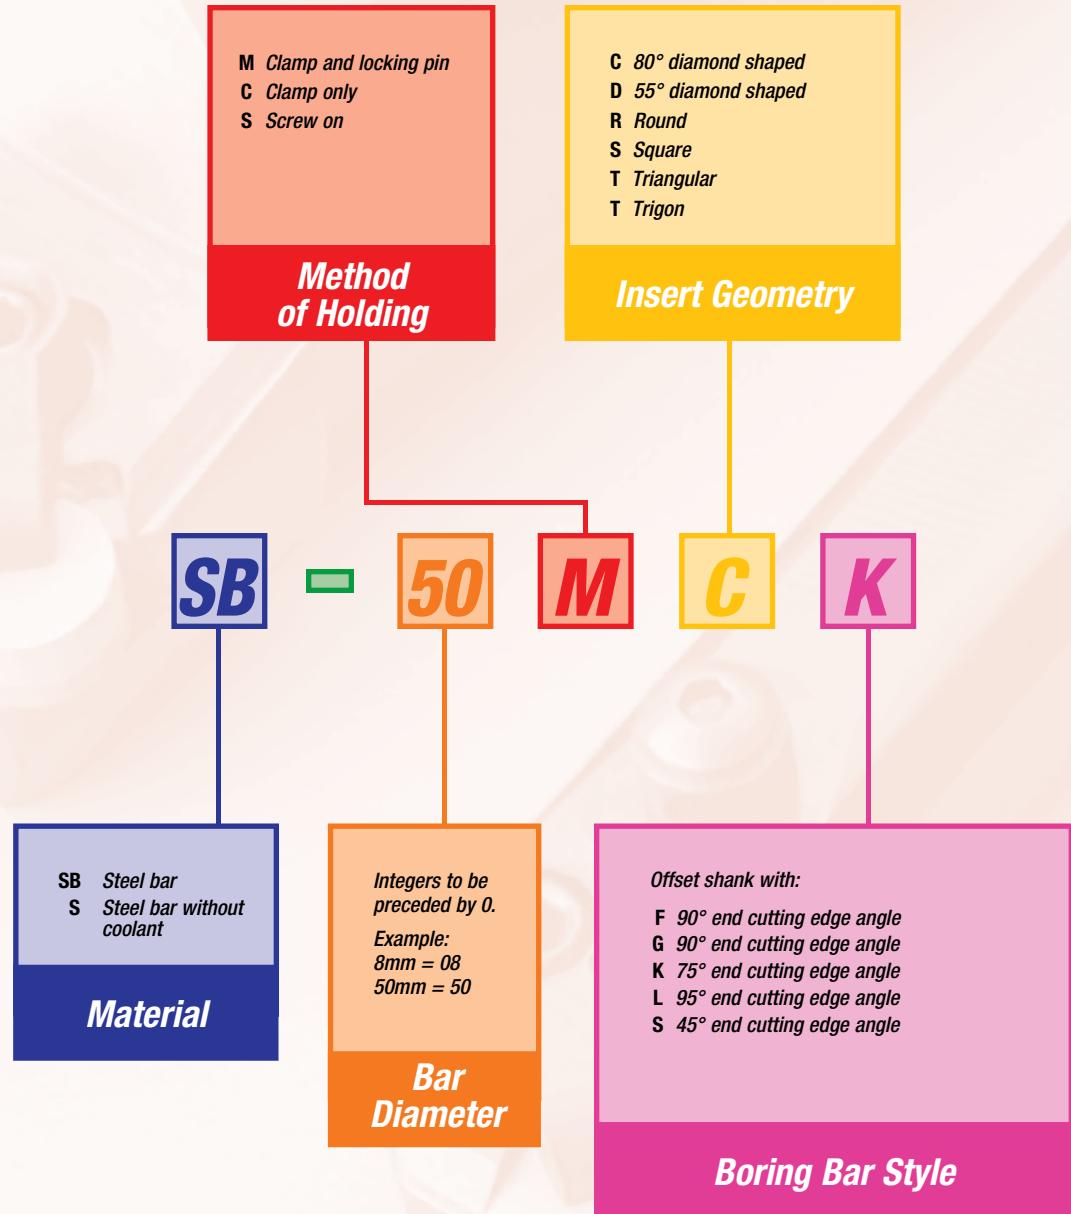


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

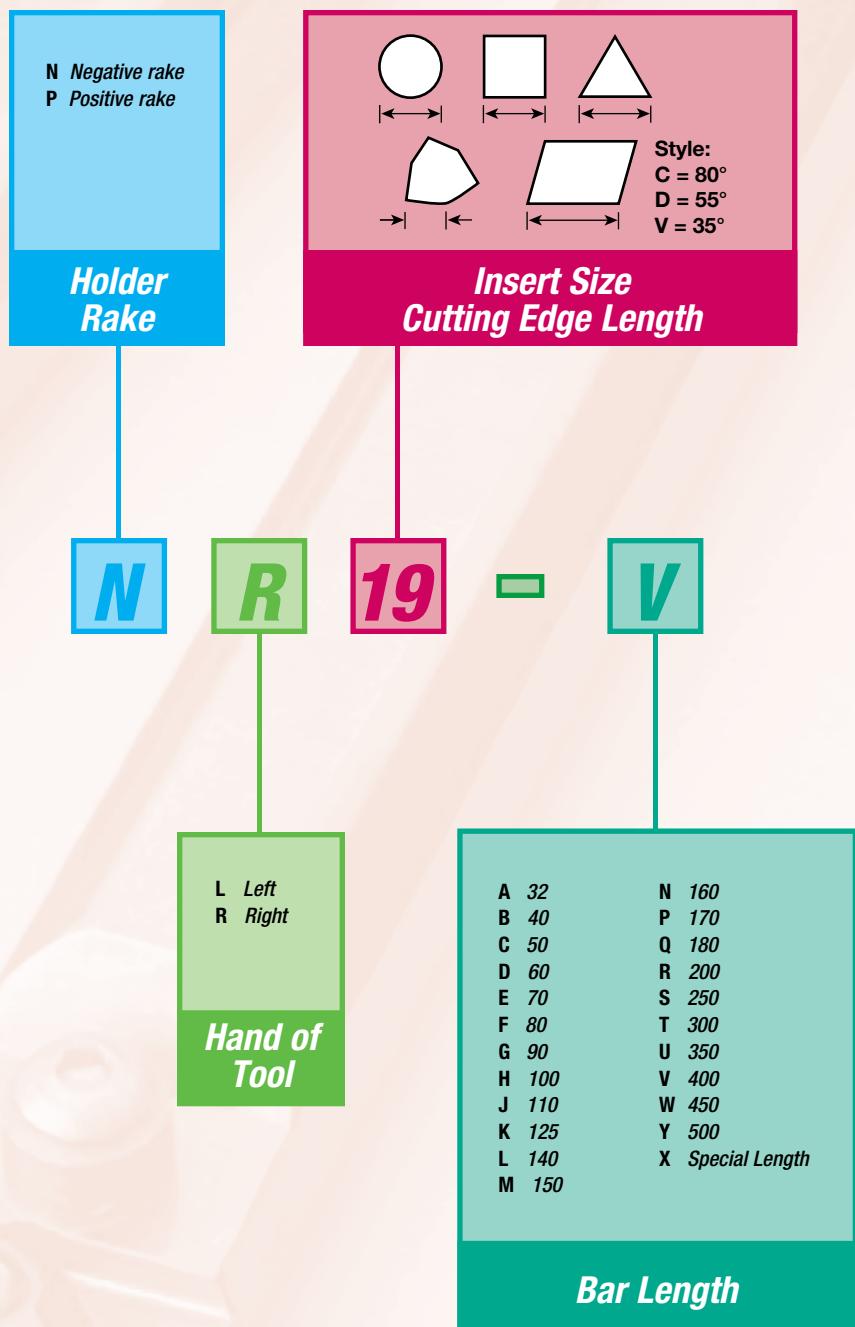

# Boring Bar Usage Reference Guide


Boring Bar Style		Boring Bar Geometry		Insert Type	
<b>Boring Bar Application</b> 		<b>Part Number</b> 			
<b>SB-MCKNR/L</b> Style K 80° Diamond (Using 100° corner) Negative Rake 75° Lead Angle 		<b>SB-MDJNR/L</b> Style J 55° Diamond Negative Rake 33° Lead Angle 			
<b>SB-MCLNR/L</b> Style L 80° Diamond Negative Rake 95° Lead Angle 		<b>SB-MSKNR/L</b> Style K Square Negative Rake 75° Lead Angle 			
<b>Insert Geometry</b> 		<b>Optional Components</b> 		<b>Dimensions</b> 	
<b>Standard Components</b> 		<b>Stocking Program</b> 		<b>Tune-Up Kits</b> 	

**BORING BARS**


**T 126**

**Dimensions**


**T 127**

**80° Diamond – Negative**

**SB-MCKNR/L**


Style K  
80° Diamond  
(Using 100° Corner)  
Negative Rake  
75° Lead Angle  
*page: T 126*


**SB-MCLNR/L**


Style L  
80° Diamond  
Negative Rake  
95° Lead Angle  
*page: T 126*

**55° Diamond – Negative**

**SB-MDJNR/L**

Style J  
55° Diamond  
Negative Rake  
93° Lead Angle  
*page: T 127*

**Square – Negative**

**SB-MSKNR/L**


Style K  
Square  
Negative Rake  
75° Lead Angle  
*page: T 127*

**Triangle – Negative**

**SB-MTFNR/L**


Style F  
Triangle  
Negative Rake  
90° Lead Angle  
*page: T 128*

**SB-MTKNR/L**


Style K  
Triangle  
Negative Rake  
75° Lead Angle  
*page: T 128*

**Trigon – Negative**

**SB-MWLNR/L**


Style L  
80° Trigon  
Negative Rake  
95° Lead Angle  
*page: T 129*

**80° Diamond – Positive**

**SB-CCKPR/L**


Style K  
80° Diamond  
(Using 100° Corner)  
Positive Rake  
75° Lead Angle  
*page: T 129*


**SB-CCLPR/L**

Style L  
80° Diamond  
Positive Rake  
95° Lead Angle  
*page: T 130*

**Square – Positive**

**SB-CSKPR/L**


Style K  
Square  
Positive Rake  
75° Lead Angle  
*page: T 130*

**Triangle – Positive**

**SB-CTFPR/L**


Style F  
Triangle  
Positive Rake  
90° Lead Angle  
*page: T 131*

**S-STFNR/L**

Style F  
Triangle  
Positive Rake  
90° Lead Angle  
*page: T 131*

**Screw-On Trigon**

**S-SWFCR/L**

Style F  
Screw-On Trigon  
Solid Steel  
90° Lead Angle  
*page: T 132*


**S-SWLCR/L**


Style L  
Screw-On Trigon  
Solid Steel  
95° Lead Angle  
*page: T 133*

*These Boring Bars do not follow the Boring Bar Identification System.*
**Greenleaf Sales**


**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## SB-MCKNR/L

Style K  
80° Diamond (Using 100° Corner)  
Negative Rake  
75° Lead Angle



Right-Hand  
Boring Bar Shown

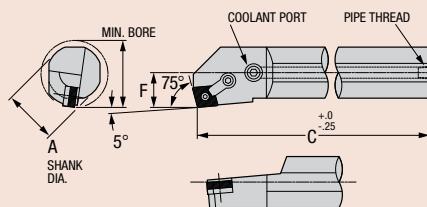


Part Number		Gage Insert	Stock	Dimensions (millimeters)			Standard Components			* Tune-Up Kit	Optional Components			
Right	Left	R L		Min. Bore	A	C	F	Clamp	Clamp Screw	Shim	Lock Pin	Includes All Standard Components	Shim Screw	Shim
SB25-MCKNR-12T	SB25-MCKNL-12T	CNGA-120408	○ ○	32	25	300	17	CLM-20	STCM-11	—	NLM-44	TK-02796	—	—
SB32-MCKNR-12U	SB32-MCKNL-12U	CNGA-120408	● ●	38	32	350	20	CLM-20	STCM-11	CSNB-433	NLM-46S	TK-02797	S-46MS	—
SB40-MCKNR-12U	SB40-MCKNL-12U	CNGA-120408	● ●	44	40	350	23	CLM-20	STCM-11	CSN-432	NLM-46	TK-02798	S-46MS	—
SB50-MCKNR-19V	SB50-MCKNL-19V	CNGA-190612	○ ○	63	50	400	33	CLM-12	STCM-4	CSN-633	NLM-68	TK-02721	S-68MS	CSN-642


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## SB-MCLNR/L

Style L  
80° Diamond  
Negative Rake  
95° Lead Angle



Right-Hand  
Boring Bar Shown

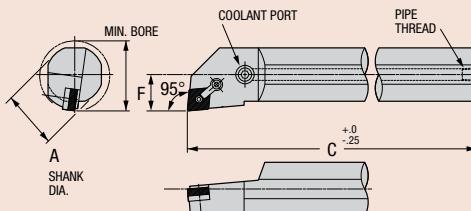

Part Number		Gage Insert	Stock	Dimensions (millimeters)			Standard Components			* Tune-Up Kit	Optional Components			
Right	Left	R L		Min. Bore	A	C	F	Clamp	Clamp Screw	Shim	Lock Pin	Includes All Standard Components	Shim Screw	Shim
SB25-MCLNR-12T	SB25-MCLNL-12T	CNGA-120408	● ●	32	25	300	17	CLM-20	STCM-11	—	NLM-44	TK-02796	—	—
SB32-MCLNR-12U	SB32-MCLNL-12U	CNGA-120408	● ●	38	32	350	20	CLM-20	STCM-11	CSNB-433	NLM-46S	TK-02797	S-46MS	—
SB40-MCLNR-12U	SB40-MCLNL-12U	CNGA-120408	● ●	44	40	350	23	CLM-20	STCM-11	CSN-432	NLM-46	TK-02798	S-46MS	—
SB50-MCLNR-19V	SB50-MCLNL-19V	CNGA-190612	○ ○	63	50	400	33	CLM-12	STCM-4	CSN-633	NLM-68	TK-02721	S-68MS	CSN-642

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard

10 Business Days or Less


# SB-MDJNR/L

Style J


55° Diamond

Negative Rake

93° Lead Angle



Right-Hand  
Boring Bar Shown

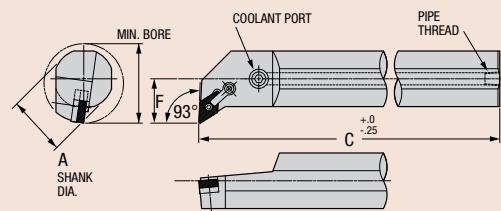

Part Number		Gage	Stock		Dimensions (millimeters)			Standard Components				* Tune-Up Kit	Optional Component	
Right	Left	Insert	R	L	Min. Bore	A	C	F	Clamp	Clamp Screw	Shim	Lock Pin	Includes All Standard Components	Shim Screw
SB32-MDJNR-15U	SB32-MDJNL-15U	DNGA-150408	●	●	50	32	350	25	CLM-12	STCM-4	DSN-433	NLM-46	TK-02725	S-46MS
SB40-MDJNR-15U	SB40-MDJNL-15U	DNGA-150408	○	○	58	40	350	29	CLM-12	STCM-4	DSN-433	NLM-46	TK-02725	S-46MS
SB50-MDJNR-19V	SB50-MDJNL-19V	DNGA-190612	○	○	76	50	400	38	CLM-30	STCM-4	DSN-533	NLM-58	TK-02799	S-58MS

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.


# SB-MSKNR/L

Style K


Square

Negative Rake

75° Lead Angle



Right-Hand  
Boring Bar Shown

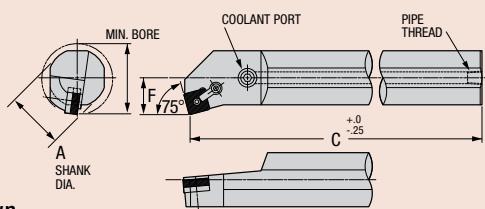

Part Number		Gage	Stock		Dimensions (millimeters)			Standard Components				* Tune-Up Kit	Optional Components		
Right	Left	Insert	R	L	Min. Bore	A	C	F	Clamp	Clamp Screw	Shim	Lock Pin	Includes All Standard Components	Shim Screw	Shim
SB25-MSKNR-12T	SB25-MSKNL-12T	SNGA-120408	●	●	32	25	300	16	CLM-6	STCM-25	—	NLM-44	TK-02801	—	—
SB32-MSKNR-12U	SB32-MSKNL-12U	SNGA-120408	●	●	38	32	350	19	CLM-9	STCM-4	ISSNB-433	NLM-46	TK-02802	S-46MS	—
SB40-MSKNR-12U	SB40-MSKNL-12U	SNGA-120408	●	●	44	40	350	22	CLM-9	STCM-4	ISSNB-433	NLM-46	TK-02802	S-46MS	—
SB40-MSKNR-15V	SB40-MSKNL-15V	SNGA-150612	○	○	63	50	400	32	CLM-12	STCM-4	SSN-533	NLM-58	TK-02713	S-58MS	ISSN-543
SB50-MSKNR-19V	SB50-MSKNL-19V	SNGA-190612	○	○	63	50	400	32	CLM-12	STCM-4	ISSN-633	NLM-68	TK-02714	S-68MS	ISSN-643

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.


10 Business Days or Less

Stocked Standard




# SB-MTFNR/L

Style F  
Triangle  
Negative Rake  
90° Lead Angle



Right-Hand  
Boring Bar Shown

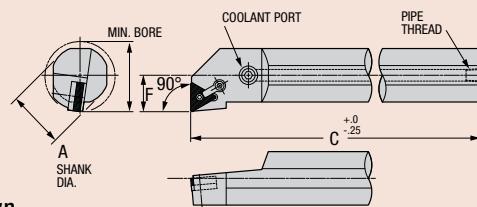


Part Number		Gage 	Stock		Dimensions (millimeters)			Standard Components			* Tune-Up Kit	Optional Components			
Right	Left	Insert 	R	L	Min. Bore	A	C	F	Clamp	Clamp Screw	Shim	Lock Pin	Includes All Standard Components	Shim Screw	Shim
SB25-MTFNR-16T	SB25-MTFNL-16T	TNGA-160408	<input type="radio"/>	<input type="radio"/>	32	25	300	16	CLM-6	STCM-25	—	NLM-33L	TK-02803	—	—
SB32-MTFNR-16U	SB32-MTFNL-16U	TNGA-160408	<input type="radio"/>	<input type="radio"/>	38	32	350	19	CLM-6	STCM-25	ITSN-322	NLM-34L	TK-02804	S-34MS	—
SB40-MTFNR-16U	SB40-MTFNL-16U	TNGA-160408	<input type="radio"/>	<input type="radio"/>	44	40	350	22	CLM-6	STCM-25	ITSN-322	NLM-34L	TK-02804	S-34MS	—
SB40-MTFNR-22U	SB40-MTFNL-22U	TNGA-220408	<input checked="" type="radio"/>	<input checked="" type="radio"/>	50	40	350	26	CLM-9	STCM-4	ITSN-432	NLM-46	TK-02805	S-46MS	TS-424
SB50-MTFNR-27V	SB50-MTFNL-27V	TNGA-270612	<input type="radio"/>	<input type="radio"/>	63	50	400	32	CLM-12	STCM-4	ITSN-533	NLM-58	TK-02806	S-58MS	—


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

# SB-MTKNR/L

Style K  
Triangle  
Negative Rake  
75° Lead Angle



Right-Hand  
Boring Bar Shown

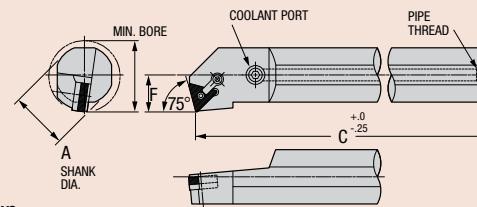

Part Number		Gage 	Stock		Dimensions (millimeters)			Standard Components			* Tune-Up Kit	Optional Components			
Right	Left	Insert 	R	L	Min. Bore	A	C	F	Clamp	Clamp Screw	Shim	Lock Pin	Includes All Standard Components	Shim Screw	Shim
SB25-MTKNR-16T	SB25-MTKNL-16T	TNGA-160408	<input type="radio"/>	<input type="radio"/>	32	25	300	16	CLM-6	STCM-9	—	NLM-33L	TK-02777	—	—
SB32-MTKNR-16U	SB32-MTKNL-16U	TNGA-160408	<input type="radio"/>	<input type="radio"/>	38	32	350	19	CLM-6	STCM-9	ITSN-322	NLM-34L	TK-02828	S-34MS	—
SB40-MTKNR-16U	SB40-MTKNL-16U	TNGA-160408	<input type="radio"/>	<input type="radio"/>	44	40	350	22	CLM-6	STCM-9	ITSN-322	NLM-34L	TK-02828	S-34MS	—
SB40-MTKNR-22U	SB40-MTKNL-22U	TNGA-220408	<input checked="" type="radio"/>	<input checked="" type="radio"/>	50	40	350	26	CLM-9	STCM-4	ITSN-432	NLM-46	TK-02805	S-46MS	TS-424
SB50-MTKNR-27V	SB50-MTKNL-27V	TNGA-270612	<input type="radio"/>	<input type="radio"/>	63	50	400	32	CLM-12	STCM-4	ITSN-533	NLM-58	TK-02806	S-58MS	—

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard


10 Business Days or Less

# SB-MWLNR/L

Style L  
80° Trigon  
Negative Rake  
95° Lead Angle



Right-Hand  
Boring Bar Shown

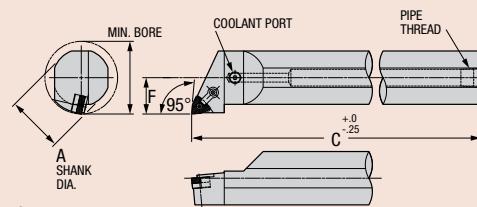


Part Number		Gage	Stock		Dimensions (millimeters)			Standard Components				* Tune-Up Kit	Optional Component	
Right	Left	Insert	R	L	Min. Bore	A	C	F	Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components	Seat
†SB20-MWLNR-06S	†SB20-MWLNL-06S	WNMA-060408	○	○	24	20	250	13	—	NLM-33L	CLM-6	STCM-25	TK-02803	—
SB25-MWLNR-06T	SB25-MWLNL-06T	WNMA-060408	○	○	30	25	300	16	—	NLM-33L	CLM-6	STCM-25	TK-02803	—
SB32-MWLNR-06U	SB32-MWLNL-06U	WNMA-060408	○	○	38	32	350	19	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811	IWSN-332
SB40-MWLNR-06U	SB40-MWLNL-06U	WNMA-060408	○	○	46	40	350	22	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811	IWSN-332
SB25-MWLNR-08T	SB25-MWLNL-08T	WNMA-080408	●	○	33	25	300	16	—	NLM-44	CLM-20	STCM-11	TK-02796	—
SB32-MWLNR-08U	SB32-MWLNL-08U	WNMA-080408	●	●	39	32	350	19	IWSN-433	NLM-46	CLM-20	STCM-26	TK-02808	—
SB40-MWLNR-08U	SB40-MWLNL-08U	WNMA-080408	●	○	45	40	350	22	IWSN-433	NLM-46	CLM-20	STCM-26	TK-02808	—

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.


† Coolant port not available.

# SB-CCKPR/L

Style K  
80° Diamond  
(Using 100° Corner)  
75° Lead Angle



Right-Hand  
Boring Bar Shown

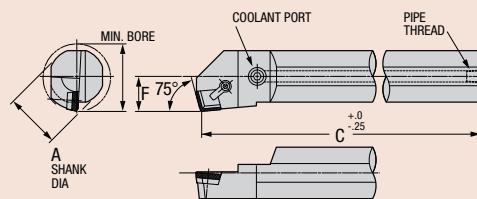

Part Number		Gage	Stock		Dimensions (millimeters)			Standard Components				* Tune-Up Kit		
Right	Left	Insert	R	L	Min. Bore	A	C	F	Clamp	Clamp Screw	Shim	Shim Screw	Includes All Standard Components	Chip-breaker
SB25-CCKPR-12T	SB25-CCKPL-12T	CPGN-120308	○	○	32	25	300	16	CLM-7	STCM-25	—	—	CBDC-415L	TK-02833
SB32-CCKPR-12U	SB32-CCKPL-12U	CPGN-120308	○	○	38	32	350	19	CLM-20	STCM-11	CSP-422	TFHCS M3-0.5x6mm	CBDC-415L	TK-02834
SB40-CCKPR-12U	SB40-CCKPL-12U	CPGN-120308	○	○	44	40	350	22	CLM-20	STCM-11	CSP-422	TFHCS M3-0.5x6mm	CBDC-415L	TK-02834
SB50-CCKPR-19V	SB50-CCKPL-19V	CPGN-190412	○	○	63	50	400	32	CLM-30	STCM-4	CSP-632	TFHCS M3-0.5x10mm	CBDC-615G	TK-02835

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

10 Business Days or Less

Stocked Standard


80°

90°




## SB-CCLPR/L

Style L  
80° Diamond  
Positive Rake  
95° Lead Angle



Right-Hand  
Boring Bar Shown

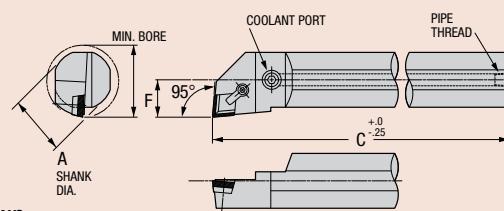


Part Number		Gage	Stock	Min. Bore	Dimensions (millimeters)			Standard Components					* Tune-Up Kit	
Right	Left	Insert	R	L	A	C	F	Clamp	Clamp Screw	Shim	Shim Screw	Chip- breaker	Includes All Standard Components	
SB25-CCLPR-12T	SB25-CCLPL-12T	CPGN-120308	<input type="radio"/>	<input type="radio"/>	32	25	300	16	CLM-7	STCM-25	-	-	CBDC-4L	TK-02782
SB32-CCLPR-12U	SB32-CCLPL-12U	CPGN-120308	<input type="radio"/>	<input type="radio"/>	38	32	350	19	CLM-20	STCM-11	CSP-422	TFHCS M3-0.5x6mm	CBDC-4L	TK-02836
SB40-CCLPR-12U	SB40-CCLPL-12U	CPGN-120308	<input type="radio"/>	<input type="radio"/>	44	40	350	22	CLM-20	STCM-11	CSP-422	TFHCS M3-0.5x6mm	CBDC-4L	TK-02836
SB50-CCLPR-19V	SB50-CCLPL-19V	CPGN-190412	<input type="radio"/>	<input type="radio"/>	63	50	400	32	CLM-30	STCM-4	CSP-632	TFHCS M3-0.5x10mm	CBDC-6G	TK-02784


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## SB-CSKPR/L

Style K  
Square  
Positive Rake  
75° Lead Angle



Right-Hand  
Boring Bar Shown

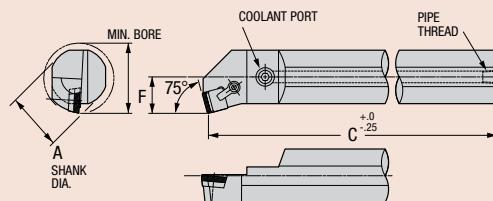

Part Number		Gage	Stock	Min. Bore	Dimensions (millimeters)			Standard Components					* Tune-Up Kit	
Right	Left	Insert	R	L	A	C	F	Clamp	Clamp Screw	Shim	Shim Screw	Chip- breaker	Includes All Standard Components	
SB25-CSKPR-12T	SB25-CSKPL-12T	SPGN-120308	<input type="radio"/>	<input type="radio"/>	32	25	300	16	CLM-7	STCM-25	-	-	CBS-4G	TK-02782
SB32-CSKPR-12U	SB32-CSKPL-12U	SPGN-120308	<input type="radio"/>	<input type="radio"/>	38	32	350	19	CLM-20	STCM-11	-	-	CBS-4G	TK-02868
SB40-CSKPR-12U	SB40-CSKPL-12U	SPGN-120308	<input type="radio"/>	<input type="radio"/>	44	40	350	22	CLM-20	STCM-11	SP-40	TFHCS M3-0.5x12mm	CBS-4G	TK-02869
SB50-CSKPR-19V	SB50-CSKPL-19V	SPGN-190412	<input type="radio"/>	<input type="radio"/>	63	50	400	32	CLM-30	STCM-4	SP-60	TFHCS M4-0.7x12mm	CBS-6G	TK-02870



\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

# SB-CTFPR/L

Style F  
Triangle  
Positive Rake  
90° Lead Angle



Right-Hand  
Boring Bar Shown


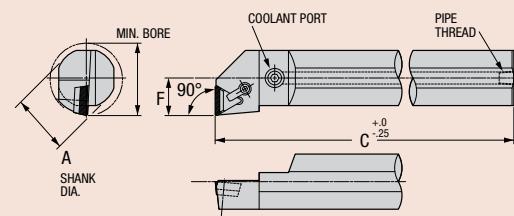


Part Number		Gage	Stock		Dimensions (millimeters)			Standard Components				* Tune-Up Kit		
Right	Left	Insert	R	L	Min. Bore	A	C	F	Clamp	Clamp Screw	Shim	Shim Screw	Chip-breaker	Includes All Standard Components
SB25-CTFPR-16T	SB25-CTFPL-16T	TPGN-160308	○	○	32	25	300	16	CLM-7	STCM-25	—	—	CBT-3G	TK-02783
SB32-CTFPR-16U	SB32-CTFPL-16U	TPGN-160308	○	○	38	32	350	19	CLM-6	STCM-25	TSP-321	—	CBT-3G	TK-02840
SB40-CTFPR-16U	SB40-CTFPL-16U	TPGN-160308	○	○	44	40	350	22	CLM-6	STCM-25	TSP-321	TFHCS M3-0.5x10mm	CBT-3G	TK-02840
SB40-CTFPR-22U	SB40-CTFPL-22U	TPGN-220408	○	○	50	40	350	26	CLM-12	STCM-8	SP-4	TFHCS M3-0.5x12mm	CBT-4G	TK-02748
SB50-CTFPR-27V	SB50-CTFPL-27V	TPGN-270612	○	○	63	50	400	32	CLM-12	STCM-4	SP-5	TFHCS M3-0.5x12mm	CBT-5G	TK-02749


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

# S-STFNR/L

Style F  
Triangle  
Positive Rake  
90° Lead Angle

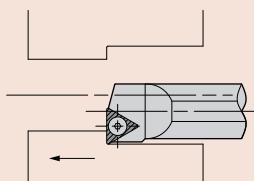

Right-Hand  
Boring Bar Shown

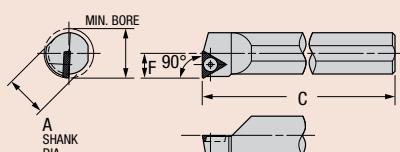

Part Number		Gage	Stock		Dimensions (millimeters)			Standard Component		* Tune-Up Kit
Right	Left	Insert	R	L	Min. Bore	A	C	F	Insert Screw	Includes All Standard Components
S10-STFNR-11M	S10-STFNRL-11M	TP41	○	○	13	10	150	6	TBHCS M3-0.5x6mm	TK-02838
S12-STFNR-11R	S12-STFNRL-11R	TP41	○	○	16	12	200	8	TBHCS M3-0.5x6mm	TK-02838
S16-STFNR-11S	S16-STFNRL-11S	TP41	○	○	20	16	250	9	TBHCS M3-0.5x6mm	TK-02838

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

See page T 38 for carbide inserts.

10 Business Days or Less



Stocked Standard

80°



# S-SWFCL/L

Style F  
Screw-On Trigon  
Solid Steel  
90° Lead Angle

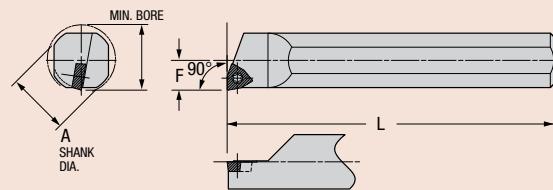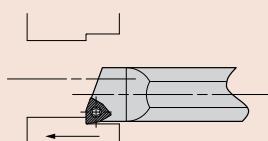

Right-Hand  
Boring Bar Shown

Part Number		Gage Insert	Stock	Min. Bore Dia.	Dimensions (millimeters)			Standard Component	* Tune-Up Kit
Right	Left		R   L		A	F	L	Insert Screw	Includes All Standard Components
S10-SWFCL-04K	S10-SWFCL-04K	WCMT-060204	○   ○	11	10	5,5	125	PT-589T	TK-00804
S12-SWFCL-04M	S12-SWFCL-04M	WCMT-060204	○   ○	14	12	7	150	PT-589T	TK-00804
S12-SWFCL-06D	S12-SWFCL-06D	WCMT-09T304	○   ○	16	12	8	60	PT-559T	TK-00807
S12-SWFCL-06M	S12-SWFCL-06M	WCMT-09T304	○   ○	16	12	8	150	PT-559T	TK-00807
S16-SWFCL-06H	S16-SWFCL-06H	WCMT-09T304	○   ○	18	16	9	100	PT-559T	TK-00807
S16-SWFCL-06Q	S16-SWFCL-06Q	WCMT-09T304	○   ○	18	16	9	180	PT-559T	TK-00807
S20-SWFCL-06H	S20-SWFCL-06H	WCMT-09T304	○   ○	22	20	11	100	PT-559T	TK-00807
S20-SWFCL-06R	S20-SWFCL-06R	WCMT-09T304	○   ○	22	20	11	200	PT-559T	TK-00807
S25-SWFCL-06K	S25-SWFCL-06K	WCMT-09T304	○   ○	28	25	14	125	PT-559T	TK-00807
S25-SWFCL-06S	S25-SWFCL-06S	WCMT-09T304	○   ○	28	25	14	250	PT-559T	TK-00807
S32-SWFCL-06T	S32-SWFCL-06T	WCMT-09T304	○   ○	34	32	17	300	PT-559T	TK-00807

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## Greenleaf Sales



US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard

10 Business Days or Less

# S-SWLCR/L

Style L  
Screw-On Trigon  
Solid Steel  
95° Lead Angle

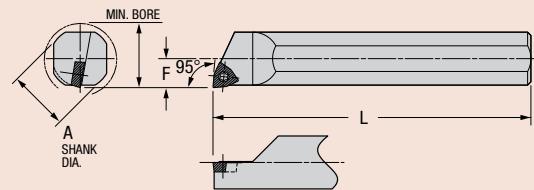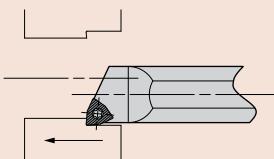

Right-Hand  
Boring Bar Shown

Part Number		Gage Insert	Stock		Min. Bore Dia.	Dimensions (millimeters)			Standard Component	* Tune-Up Kit
Right	Left	R	L	A	F	L	Insert Screw	Includes All Standard Components		
<b>S10-SWLCR-04K</b>	<b>S10-SWLCL-04K</b>	WCMT-060204	○ ○	11	10	5,5	125	PT-589T	TK-00804	
<b>S12-SWLCR-04M</b>	<b>S12-SWLCL-04M</b>	WCMT-060204	○ ○	14	12	7	150	PT-589T	TK-00804	
<b>S12-SWLCR-06D</b>	<b>S12-SWLCL-06D</b>	WCMT-09T304	○ ○	16	12	8	60	PT-559T	TK-00807	
<b>S12-SWLCR-06M</b>	<b>S12-SWLCL-06M</b>	WCMT-09T304	○ ○	16	12	8	150	PT-559T	TK-00807	
<b>S16-SWLCR-06H</b>	<b>S16-SWLCL-06H</b>	WCMT-09T304	○ ○	18	16	9	100	PT-559T	TK-00807	
<b>S16-SWLCR-06Q</b>	<b>S16-SWLCL-06Q</b>	WCMT-09T304	○ ○	18	16	9	180	PT-559T	TK-00807	
<b>S20-SWLCR-06H</b>	<b>S20-SWLCL-06H</b>	WCMT-09T304	○ ○	22	20	11	100	PT-559T	TK-00807	
<b>S20-SWLCR-06R</b>	<b>S20-SWLCL-06R</b>	WCMT-09T304	○ ○	22	20	11	200	PT-559T	TK-00807	
<b>S25-SWLCR-06K</b>	<b>S25-SWLCL-06K</b>	WCMT-09T304	○ ○	28	25	14	125	PT-559T	TK-00807	
<b>S25-SWLCR-06S</b>	<b>S25-SWLCL-06S</b>	WCMT-09T304	○ ○	28	25	14	250	PT-559T	TK-00807	
<b>S32-SWLCR-06T</b>	<b>S32-SWLCL-06T</b>	WCMT-09T304	○ ○	34	32	17	300	PT-559T	TK-00807	

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

10 Business Days or Less

Stocked Standard

**Greenleaf Sales**


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Boring Bars for Ceramic Inserts

This section contains boring bars using ceramic inserts that Greenleaf believes are most often used by industry.

In addition to tempered-steel bars, Greenleaf also can supply *Heavy Metal* or "No Chat" high-density steel bars that can reduce, and sometimes eliminate, "chatter" for those applications that require a longer reach.

Greenleaf's boring bar capability includes numerous additional styles not shown in this catalog. Contact us if you do not see the bar you need. Our special design and build services can be counted on to meet your individual needs.

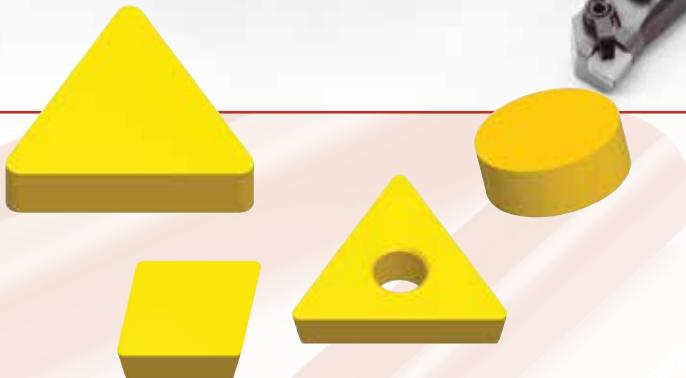


*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**


**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Ceramic-Insert Boring Bar Identification System

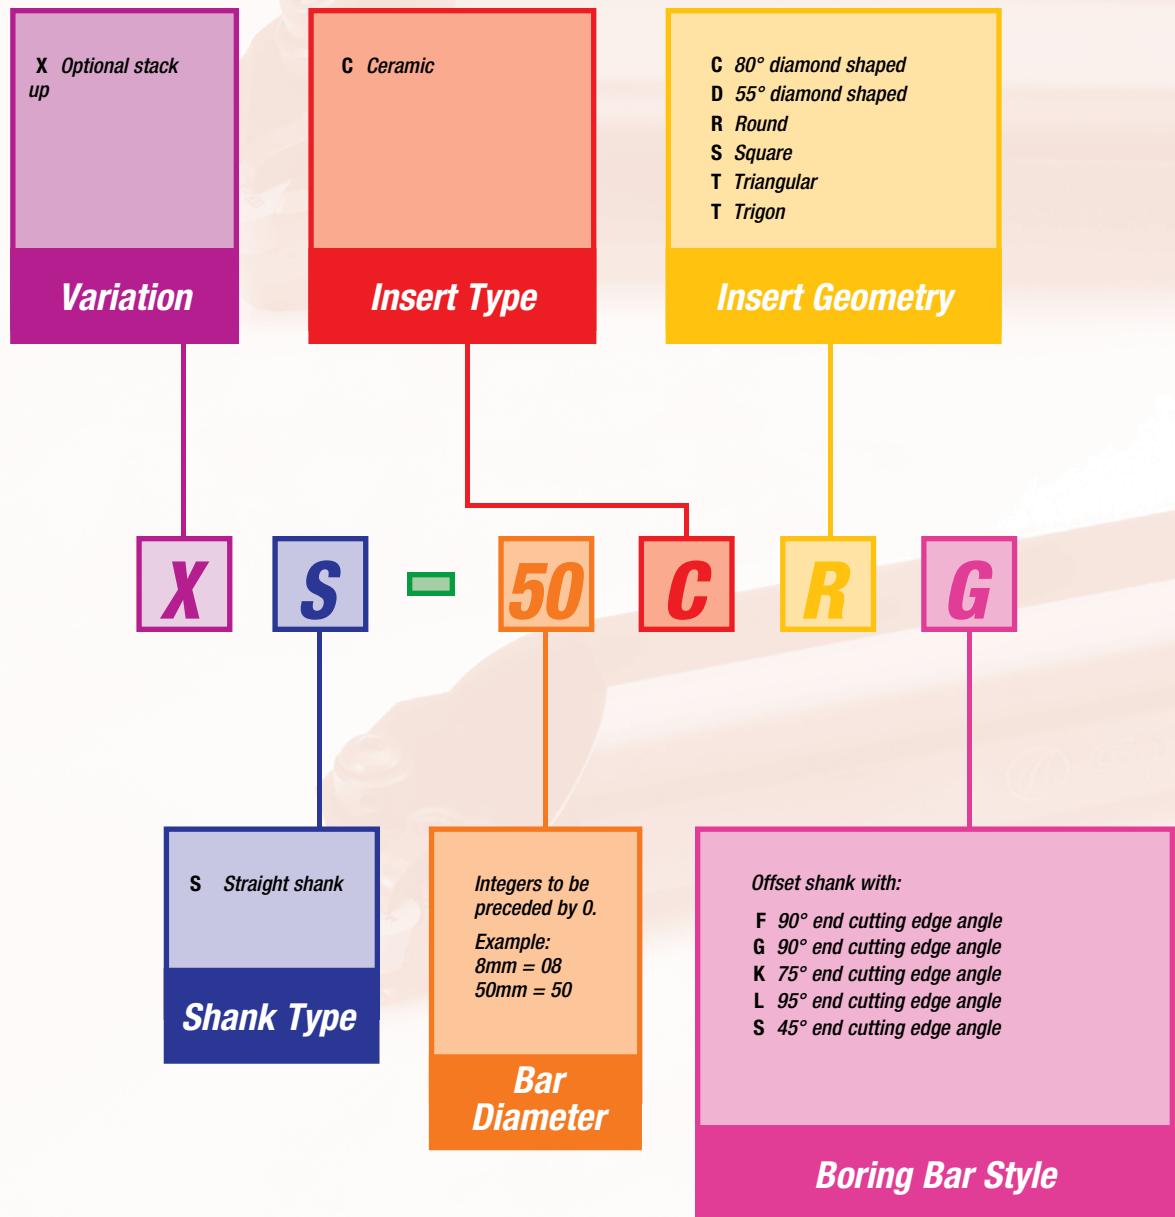

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

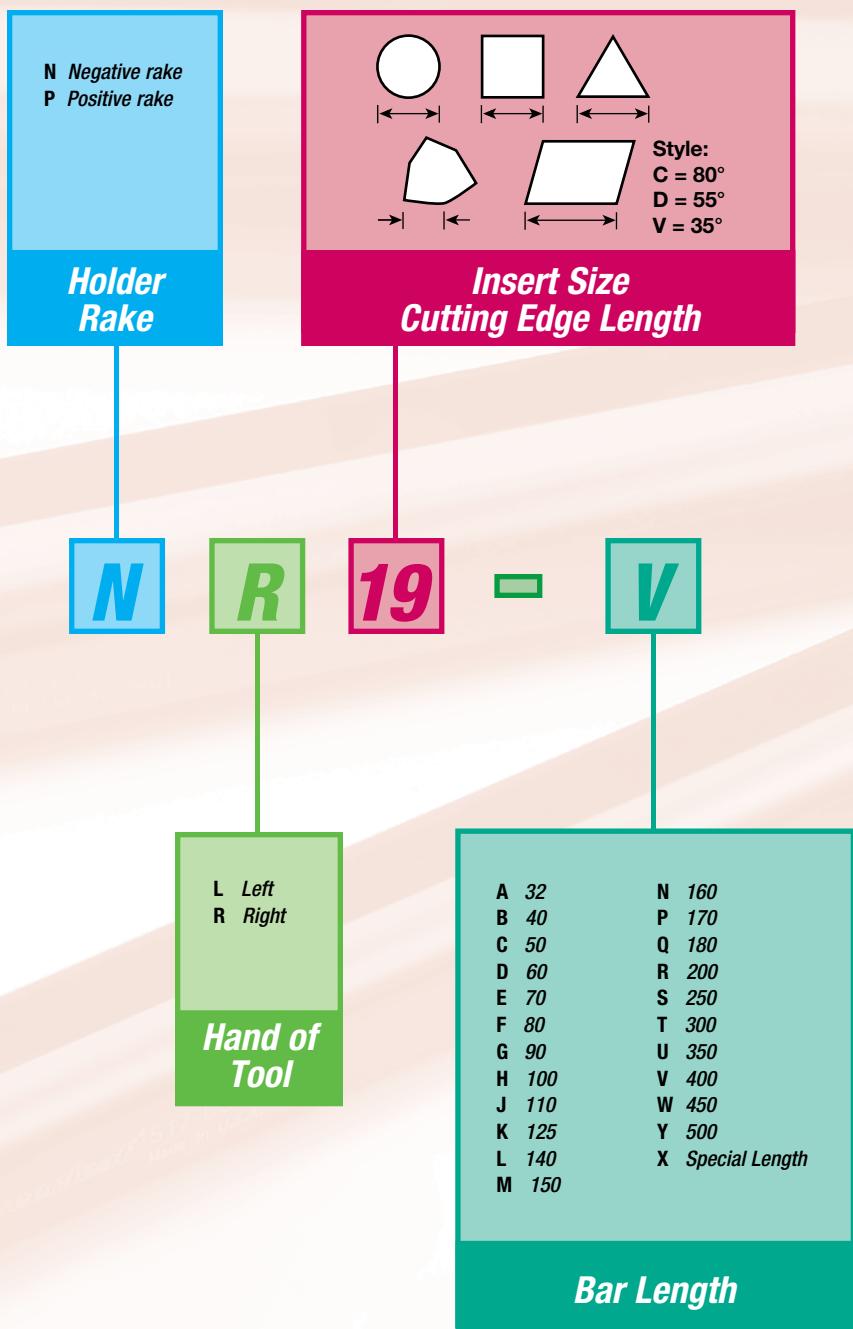



# Ceramic-Insert Boring Bar Usage Reference Guide

## *Boring Bar Style*

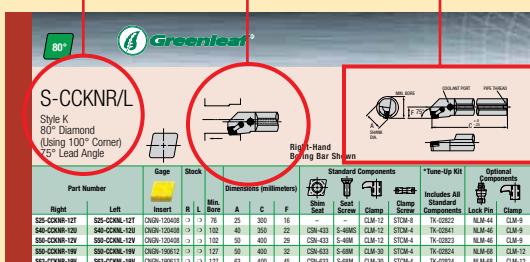


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

*Boring Bar  
Geometry*




### *Insert Type*

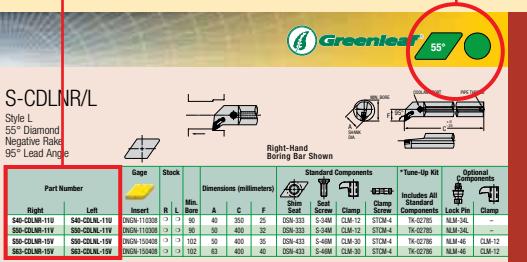


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

S-CCLNR/L

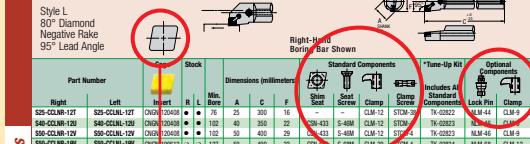

S63-CCLN1R-19V	S63-CCLN1L-19V	CN19	190612	○	○	127	59	400	32	CSN-633
S63-CCLN1R-19V	S63-CCLN1L-19V	CN19	190612	○	○	127	63	400	45	CSN-633

S-CRGNR/L

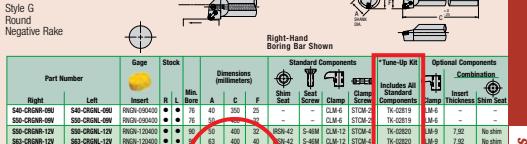

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## *Insert Geometry*



**greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-414-1774 • eurooffice@greenleafcorporation.com

## *Optional Components*



\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

Dimensions



Components to allow you to refurbish the boring bar


## *Standard Components*




Tune-Up Kits

*Greenleaf Sales*


**Greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**80°/100° Diamond – Negative**



**S-CCKNR/L**  
Style K  
80° Diamond  
(Using 100° Corner)  
Negative Rake  
75° Lead Angle  
page: T 140




**S-CCLNR/L**  
Style L  
80° Diamond  
Negative Rake  
95° Lead Angle  
page: T 140

**55° Diamond – Negative**



**S-CDLNR/L**  
Style L  
55° Diamond  
Negative Rake  
95° Lead Angle  
page: T 141

**Round – Negative**



**S-CRGNR/L**  
Style G  
Round  
Negative Rake  
page: T 141

**Square – Negative**



**S-CSKNR/L**  
Style K  
Square  
Negative Rake  
75° Lead Angle  
page: T 142




**S-CSSNR/L**  
Style S  
Square  
Negative Rake  
45° Lead Angle  
page: T 142

**Triangle – Negative**



**S-CTFNR/L**  
Style F  
Triangle  
Negative Rake  
90° Lead Angle  
page: T 143

**Trigon – Negative**



**S-CWLNR/L**  
Style L  
Trigon  
Negative Rake  
95° Lead Angle  
page: T 143

**80° Diamond – Positive**



**S-CCKPR/L**  
Style K  
80° Diamond  
(Using 100° Corner)  
Positive Rake  
75° Lead Angle  
page: T 144




**S-CCLPR/L**  
Style L  
80° Diamond  
Positive Rake  
95° Lead Angle  
page: T 144

**Round – Positive**



**S-CRGPR/L**  
Style G  
Round  
Positive Rake  
page: T 144

**Square – Positive**



**S-CSKPR/L**  
Style K  
Square  
Positive Rake  
75° Lead Angle  
page: T 145



**S-CSSPR/L**  
Style S  
Square  
Positive Rake  
45° Lead Angle  
page: T 145

**Triangle – Positive**


**S-CTFPR/L**  
Style F  
Triangle  
Positive Rake  
90° Lead Angle  
page: T 146




**S-STFNR/L**  
Style F  
Triangle  
Positive Rake  
90° Lead Angle  
page: T 146

**Greenleaf Sales**


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-80058596 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## S-CCKNR/L

Style K  
80° Diamond  
(Using 100° Corner)  
75° Lead Angle

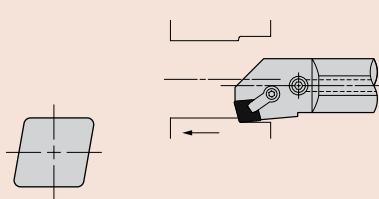

Right-Hand  
Boring Bar Shown

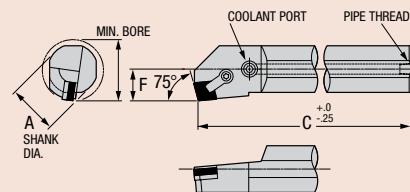


Part Number		Gage	Stock	Dimensions (millimeters)				Standard Components				*Tune-Up Kit	Optional Components	
Right	Left	Insert	R L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp
S25-CCKNR-12T	S25-CCKNL-12T	CNGN-120408	○ ○	76	25	300	16	-	-	CLM-12	STCM-8	TK-02822	NLM-44	CLM-9
S40-CCKNR-12U	S40-CCKNL-12U	CNGN-120408	○ ○	102	40	350	22	CSN-433	S-46MS	CLM-12	STCM-4	TK-02841	NLM-46	CLM-9
S50-CCKNR-12V	S50-CCKNL-12V	CNGN-120408	○ ○	102	50	400	29	CSN-433	S-46M	CLM-12	STCM-4	TK-02823	NLM-46	CLM-9
S50-CCKNR-19V	S50-CCKNL-19V	CNGN-190612	○ ○	127	50	400	32	CSN-633	S-68M	CLM-30	STCM-4	TK-02824	NLM-68	CLM-12


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## S-CCLNR/L

Style L  
80° Diamond  
Negative Rake  
95° Lead Angle

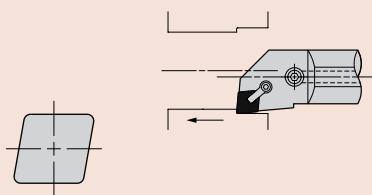

Right-Hand  
Boring Bar Shown

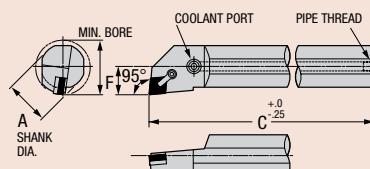

Part Number		Gage	Stock	Dimensions (millimeters)				Standard Components				*Tune-Up Kit	Optional Components	
Right	Left	Insert	R L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp
S25-CCLNR-12T	S25-CCLNL-12T	CNGN-120408	● ●	76	25	300	16	-	-	CLM-12	STCM-8	TK-02822	NLM-44	CLM-9
S40-CCLNR-12U	S40-CCLNL-12U	CNGN-120408	● ●	102	40	350	22	CSN-433	S-46M	CLM-12	STCM-4	TK-02823	NLM-46	CLM-9
S50-CCLNR-12V	S50-CCLNL-12V	CNGN-120408	● ●	102	50	400	29	CSN-433	S-46M	CLM-12	STCM-4	TK-02823	NLM-46	CLM-9
S50-CCLNR-19V	S50-CCLNL-19V	CNGN-190612	○ ○	127	50	400	32	CSN-633	S-68M	CLM-30	STCM-4	TK-02824	NLM-68	CLM-12

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com



 Stocked Standard  
 10 Business Days or Less




55°

## S-CDLNR/L

Style L  
55° Diamond  
Negative Rake  
95° Lead Angle



Right-Hand  
Boring Bar Shown

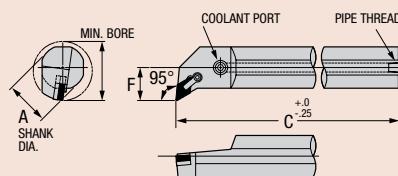


Part Number		Gage	Stock		Dimensions (millimeters)			Standard Components				*Tune-Up Kit	Optional Components		
Right	Left	Insert	R	L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp
S40-CDLNR-11U	S40-CDLNL-11U	DNGN-110308	○	○	90	40	350	25	DSN-333	S-34M	CLM-12	STCM-4	TK-02785	NLM-34L	-
S50-CDLNR-11V	S50-CDLNL-11V	DNGN-110308	○	○	90	50	400	32	DSN-333	S-34M	CLM-12	STCM-4	TK-02785	NLM-34L	-
S50-CDLNR-15V	S50-CDLNL-15V	DNGN-150408	○	○	102	50	400	35	DSN-433	S-46M	CLM-30	STCM-4	TK-02786	NLM-46	CLM-12


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## S-CRGNR/L

Style G  
Round  
Negative Rake



Right-Hand  
Boring Bar Shown

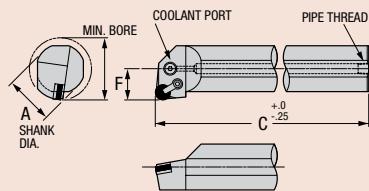

Part Number		Gage	Stock		Dimensions (millimeters)			Standard Components				*Tune-Up Kit	Optional Components			
Right	Left	Insert	R	L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Combination	Insert Thickness	Shim Seat
S40-CRGNR-09U	S40-CRGNL-09U	RNGN-090400	●	●	76	40	350	25	-	-	CLM-6	STCM-25	TK-02819	CLM-6	-	-
S50-CRGNR-09V	S50-CRGNL-09V	RNGN-090400	●	●	76	50	400	32	-	-	CLM-6	STCM-25	TK-02819	CLM-6	-	-
S50-CRGNR-12V	S50-CRGNL-12V	RNGN-120400	●	●	90	50	400	32	IRSN-42	S-46M	CLM-12	STCM-4	TK-02820	CLM-9	7,92	No shim
XS50-CRGNR-12V	XS50-CRGNL-12V	RNGN-120700	○	○	125	50	400	32	IRSN-43	S-46MS	CLM-12	STCM-4	TK-03064	CLM-9	4,75	IRSN-45
S50-CRGNR-15V	S50-CRGNL-15V	RNGN-150700	○	○	90	50	400	32	-	-	CLM-12	STCM-4	TK-02821	CLM-9	4,75	RSN-52
XS50-CRGNR-15V	XS50-CRGNL-15V	RNGN-150700	○	○	125	50	400	32	RSN-53	S-58M	CLM-12	STCM-4	TK-02825	CLM-9	4,75	IRSN-55
S50-CRGNR-19V	S50-CRGNL-19V	RNGN-190700	○	○	90	50	400	32	-	-	CLM-30	STCM-4	TK-02829	CLM-12	4,75	RSN-62
XS50-CRGNR-19V	XS50-CRGNL-19V	RNGN-190700	○	○	125	50	400	32	RSN-63	S-68M	CLM-30	STCM-4	TK-02792	CLM-12	4,75	IRSN-65


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

10 Business Days or Less


Stocked Standard

# S-CSKNR/L

Style K  
Square  
Negative Rake  
75° Lead Angle



Right-Hand  
Boring Bar Shown

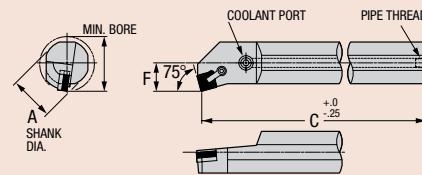


Part Number		Gage	Stock	Dimensions (millimeters)				Standard Components				*Tune-Up Kit	Optional Components	
Right	Left	Insert	R L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp
S25-CSKNR-12T	S25-CSKNL-12T	SNGN-120408	○ ○	76	25	300	16	—	—	CLM-12	STCM-8	TK-02822	NLM-44	CLM-9
S40-CSKNR-12U	S40-CSKNL-12U	SNGN-120408	○ ○	102	40	350	22	ISSN-433	S-46M	CLM-12	STCM-4	TK-02844	NLM-46	CLM-9
S50-CSKNR-12V	S50-CSKNL-12V	SNGN-120408	○ ○	102	50	400	29	ISSN-433	S-46M	CLM-12	STCM-4	TK-02844	NLM-46	CLM-9
S50-CSKNR-15V	S50-CSKNL-15V	SNGN-150612	○ ○	127	50	400	32	SSN-533	S-58M	CLM-12	STCM-4	TK-02794	NLM-58	CLM-9
S50-CSKNR-19V	S50-CSKNL-19V	SNGN-190612	○ ○	127	50	400	32	ISSN-633	S-68M	CLM-30	STCM-4	TK-02795	NLM-68	CLM-12


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

# S-CSSNR/L

Style S  
Square  
Negative Rake  
45° Lead Angle



Right-Hand  
Boring Bar Shown

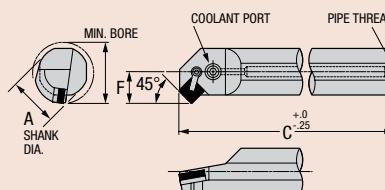

Part Number		Gage	Stock	Dimensions (millimeters)				Standard Components				*Tune-Up Kit	Optional Components	
Right	Left	Insert	R L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp
S25-CSSNR-12T	S25-CSSNL-12T	SNGN-120408	○ ○	76	25	300	16	—	—	CLM-12	STCM-4	TK-02821	NLM-44	CLM-9
S40-CSSNR-12U	S40-CSSNL-12U	SNGN-120408	○ ○	102	40	350	22	ISSN-433	S-46M	CLM-12	STCM-4	TK-02821	NLM-46	CLM-9
S50-CSSNR-12V	S50-CSSNL-12V	SNGN-120408	○ ○	102	50	400	29	ISSN-433	S-46M	CLM-12	STCM-4	TK-02844	NLM-46	CLM-9
S50-CSSNR-15V	S50-CSSNL-15V	SNGN-150612	○ ○	127	50	400	32	SSN-533	S-58M	CLM-12	STCM-4	TK-02794	NLM-58	CLM-9
S50-CSSNR-19V	S50-CSSNL-19V	SNGN-190612	○ ○	127	50	400	32	ISSN-633	S-68M	CLM-30	STCM-4	TK-02795	NLM-68	CLM-12

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com




**Greenleaf®**




## S-CTFNR/L

Style F  
Triangle  
Negative Rake  
90° Lead Angle



Right-Hand  
Boring Bar Shown

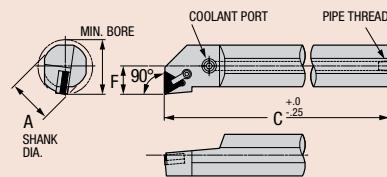


Part Number		Gage	Stock	Dimensions (millimeters)			Standard Components				*Tune-Up Kit	Optional Components			
Right	Left	Insert	R	L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components	Lock Pin	Clamp
S25-CTFNR-16T	S25-CTFNL-16T	TNGN-160408	○	○	76	25	300	16	-	-	CLM-7	STCM-25	TK-02782	NLM-33L	CLM-6
S40-CTFNR-16U	S40-CTFNL-16U	TNGN-160408	○	○	90	40	350	22	ITSN-322	S-34M	CLM-7	STCM-25	TK-02757	NLM-34L	CLM-6
S40-CTFNR-22U	S40-CTFNL-22U	TNGN-220408	●	●	102	40	350	26	ITSN-432	S-46M	CLM-12	STCM-4	TK-02771	NLM-46	CLM-9
S50-CTFNR-22V	S50-CTFNL-22V	TNGN-220408	●	●	102	50	400	32	ITSN-432	S-46M	CLM-12	STCM-4	TK-02771	NLM-46	CLM-9


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## S-CWLNR/L

Style L  
Trigon  
Negative Rake  
95° Lead Angle

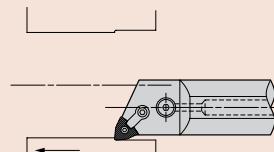

Right-Hand  
Boring Bar Shown

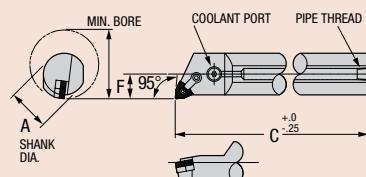

Part Number		Gage	Stock	Dimensions (millimeters)			Standard Components				* Tune-Up Kit		
Right	Left	Insert	R	L	Min. Bore	A	C	F	Shim Seat	Lock Pin	Clamp	Clamp Screw	Includes All Standard Components
S25-CWLNR-06T	S25-CWLNL-06T	WNGA-060408	○	○	76	25	300	16	-	NLM-33L	CLM-6	STCM-25	TK-02803
S40-CWLNR-06U	S40-CWLNL-06U	WNGA-060408	○	○	90	40	350	22	IWSN-322	NLM-34L	CLM-6	STCM-25	TK-02811
S40-CWLNR-08T	S40-CWLNL-08T	WNGA-080408	○	○	76	25	300	16	-	NLM-44	CLM-20	STCM-26	TK-02826
S50-CWLNR-08U	S50-CWLNL-08U	WNGA-080408	●	●	102	40	350	22	IWSN-433	NLM-46	CLM-20	STCM-26	TK-02808
S63-CWLNR-08V	S63-CWLNL-08V	WNGA-080408	○	○	102	50	400	32	IWSN-433	NLM-46	CLM-20	STCM-26	TK-02808

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

10 Business Days or Less


Stocked Standard

80°




## S-CCKPR/L

Style K  
80° Diamond  
(Using 100° Corner)  
75° Lead Angle

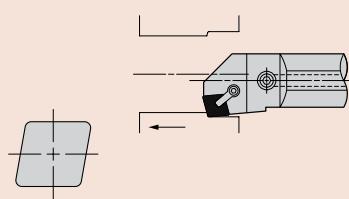

Right-Hand  
Boring Bar Shown

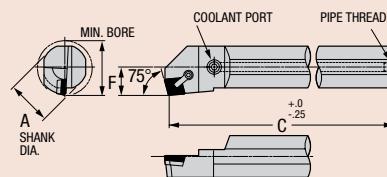


Part Number		Gage	Stock	Dimensions (millimeters)			Standard Components		* Tune-Up Kit			
Right	Left	Insert	R L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
S25-CCKPR-12T	S25-CCKPL-12T	CPGN-120408	○ ○	32	25	300	16	—	—	CLM-22	STCM-32	TK-02778
S40-CCKPR-12U	S40-CCKPL-12U	CPGN-120408	○ ○	44	40	350	22	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779
S50-CCKPR-12V	S50-CCKPL-12V	CPGN-120408	○ ○	56	50	400	29	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## S-CCLPR/L

Style L  
80° Diamond  
Positive Rake  
95° Lead Angle

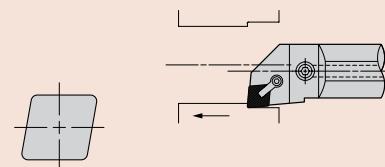

Right-Hand  
Boring Bar Shown

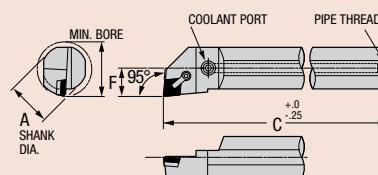


Part Number		Gage	Stock	Dimensions (millimeters)			Standard Components		* Tune-Up Kit			
Right	Left	Insert	R L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
S25-CCLPR-12T	S25-CCLPL-12T	CPGN-120408	○ ○	32	25	300	16	—	—	CLM-22	STCM-32	TK-02778
S40-CCLPR-12U	S40-CCLPL-12U	CPGN-120408	○ ○	44	40	350	22	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779
S50-CCLPR-12V	S50-CCLPL-12V	CPGN-120408	○ ○	56	50	400	29	SP-49	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02779


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## S-CRGPR/L

Style G  
Round  
Positive Rake

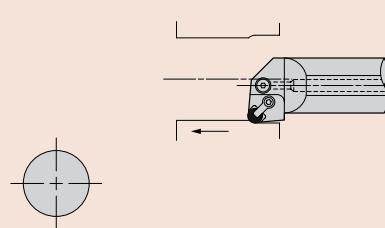

Right-Hand  
Boring Bar Shown

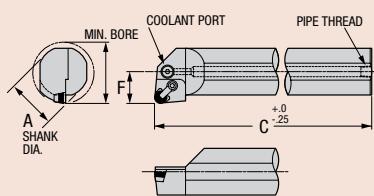

Part Number		Gage	Stock	Dimensions (millimeters)			Standard Components		* Tune-Up Kit			
Right	Left	Insert	R L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
S25-CRGPR-09T	S25-CRGPL-09T	RPGN-090300	● ●	32	25	300	16	—	—	CLM-7	STCM-25	TK-02782
S40-CRGPR-09U	S40-CRGPL-09U	RPGN-090300	● ●	44	40	350	22	SP-34	TSHCS M2-0.4x6mm	CLM-7	STCM-25	TK-02813
S50-CRGPR-09V	S50-CRGPL-09V	RPGN-090300	● ●	56	50	400	29	SP-34	TSHCS M2-0.4x6mm	CLM-7	STCM-25	TK-02813
S50-CRGPR-12V	S50-CRGPL-12V	RPGN-120400	● ●	63	50	400	32	SP-44	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02814


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

## S-CSKPR/L

Style K  
Square  
Positive Rake  
75° Lead Angle



Right-Hand  
Boring Bar Shown

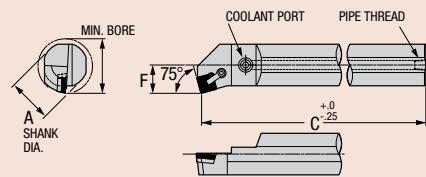


Part Number		Gage	Stock	Min. Bore	Dimensions (millimeters)			Shim Seat	Standard Components			* Tune-Up Kit  Includes All Standard Components	
Right	Left	Insert	R	L	A	C	F		Seat Screw	Clamp	Clamp Screw		
S25-CSKPR-12T	S25-CSKPL-12T	SPGN-120408	○	○	32	25	300	16	-	-	CLM-7	STCM-25	TK-02782
S40-CSKPR-12U	S40-CSKPL-12U	SPGN-120408	○	○	44	40	350	22	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780
S50-CSKPR-12V	S50-CSKPL-12V	SPGN-120408	○	○	56	50	400	29	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## S-CSSPR/L

Style S  
Square  
Positive Rake  
45° Lead Angle



Right-Hand  
Boring Bar Shown

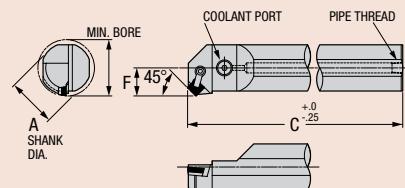

Part Number		Gage	Stock	Min. Bore	Dimensions (millimeters)			Shim Seat	Standard Components			* Tune-Up Kit  Includes All Standard Components	
Right	Left	Insert	R	L	A	C	F		Seat Screw	Clamp	Clamp Screw		
S25-CSSPR-12T	S25-CSSPL-12T	SPGN-120408	○	○	32	25	300	16	-	-	CLM-7	STCM-25	TK-02782
S40-CSSPR-12U	S40-CSSPL-12U	SPGN-120408	○	○	44	40	350	22	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780
S50-CSSPR-12V	S50-CSSPL-12V	SPGN-120408	○	○	56	50	400	29	SP-41	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02780

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.


10 Business Days or Less

Stocked Standard




## S-CTFPR/L

Style F  
Triangle  
Positive Rake  
90° Lead Angle



Right-Hand  
Boring Bar Shown

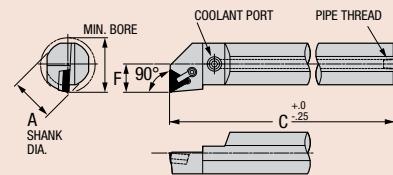


Part Number		Gage	Stock	Dimensions (millimeters)			Standard Components				* Tune-Up Kit	
Right	Left	Insert	R L	Min. Bore	A	C	F	Shim Seat	Seat Screw	Clamp	Clamp Screw	Includes All Standard Components
S25-CTFPR-16T	S25-CTFPL-16T	TPGN-160308	○ ○	32	25	300	16	-	-	CLM-7	STCM-25	TK-02782
S40-CTFPR-16U	S40-CTFPL-16U	TPGN-160308	○ ○	44	40	350	22	SP-3A	TFHCS M3-0.5x10mm	CLM-7	STCM-25	TK-02817
S40-CTFPR-22U	S40-CTFPL-22U	TPGN-220408	○ ○	50	40	350	26	SP-4	TFHCS M3-0.5x10mm	CLM-12	STCM-4	TK-02839
S50-CTFPR-22V	S50-CTFPL-22V	TPGN-220408	● ●	63	50	400	32	SP-4	TFHCS M3-0.5x12mm	CLM-12	STCM-4	TK-02818


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

## S-STFNR/L

Style F  
Triangle  
Positive Rake  
90° Lead Angle



Right-Hand  
Boring Bar Shown

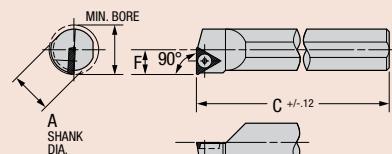

Part Number		Gage	Stock	Dimensions (millimeters)			Standard Components		* Tune-Up Kit
Right	Left	Insert	R L	Min. Bore	A	C	F	Insert Screw	Includes All Standard Components
S10-STFNR-11M	S10-STFNL-11M	TP41	○ ○	13	10	150	6	TBHCS M3-0.5x6mm	TK-02838
S12-STFNR-11R	S12-STFNL-11R	TP41	○ ○	16	12	200	8	TBHCS M3-0.5x6mm	TK-02838
S16-STFNR-11S	S16-STFNL-11S	TP41	○ ○	20	16	250	9	TBHCS M3-0.5x6mm	TK-02838


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the boring bar.

See page T 70 for ceramic inserts.


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com


## Additional Greenleaf Turning Inserts




CCMT 060204 X2  
CCMT 09T308 X2  
CPMT 060204 X2  
CPMT 09T308 X2




CPMW 050204  
(310993)




RCMX 102  
(309161)  
RCMX 105  
(303788)  
RCMX 106  
(312242)




Ceramic  
with Chipform  
(425196)  
(425022)




RCMM 120400  
RCMM 190600  
RCMM 250900  
RCGT 120400 GP  
(421930)  
(310520)




RD-8P  
RD-9P  
RD-10P  
RD-12P  
RD-16P




RD6-C  
RD8-C




SCMT 06T308 X2  
SCMT 220408 X2




SD-7P  
SD-8P  
SD-12P




SDH-42




TCMT 060204 X2  
TCMT 09T308 X2  
TPMT 060204 X2  
TPMT 09T308 X2




TPMA-  
NG  
TNMA-  
NG  
TNMC-  
NG  
TPMC-  
NG




TPMA-  
NV  
TNMA-  
NV  
TNMC-  
NV  
TPMC-  
NV



VDB 188RA  
VDB 188A015  
VDB 218RA  
VDB 250 RB  
VDB 250B015  
  
ZT 1967  
(420555)



VBM  
(420864)



WG  
Carbide

### Greenleaf Sales

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



<i>Heavy Turning Introduction</i> .....	HT 03
<i>Grade Descriptions</i> .....	HT 04-05
<i>Edge Preparations</i> .....	HT 06
<i>Chipform Application Range</i> .....	HT 07
<i>Pictorial Index</i> .....	HT 08-09
<b>Heavy Turning Inserts</b>	
Carbide .....	HT 10-20
Ceramic .....	HT 21-25
Roll Turning.....	HT 26-32
<i>Heavy Turning Tooling Options</i> .....	HT 34-35



**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Heavy Turning Inserts


The manufacture of rolls for use in steel making is an area where machinability has been decreased significantly by the introduction of alloyed materials, especially chromium content. In addition, the use of forged rolls is increasing, and centrifugally cast products with high hardness levels and surface contamination are another challenge.

Ceramic cutting tools such as Greenleaf GEM-7™ composite material and WG-300® whiskered material are finding an important place in heavy turning when combined with rigid, well-designed holding systems.

Greenleaf has extensive experience in the design and manufacture of heavy-turning tooling systems. For more than thirty years, we have supplied O.E.M. packages to many of the largest lathe manufacturers – both domestic and overseas.

We will be pleased to quote tooling systems for any type of machine to effectively use ceramic or carbide inserts. Most of the options regularly manufactured are outlined on page HT 34.

Call a Greenleaf heavy-turning specialist at 1-814-763-2915 to discuss your particular needs.

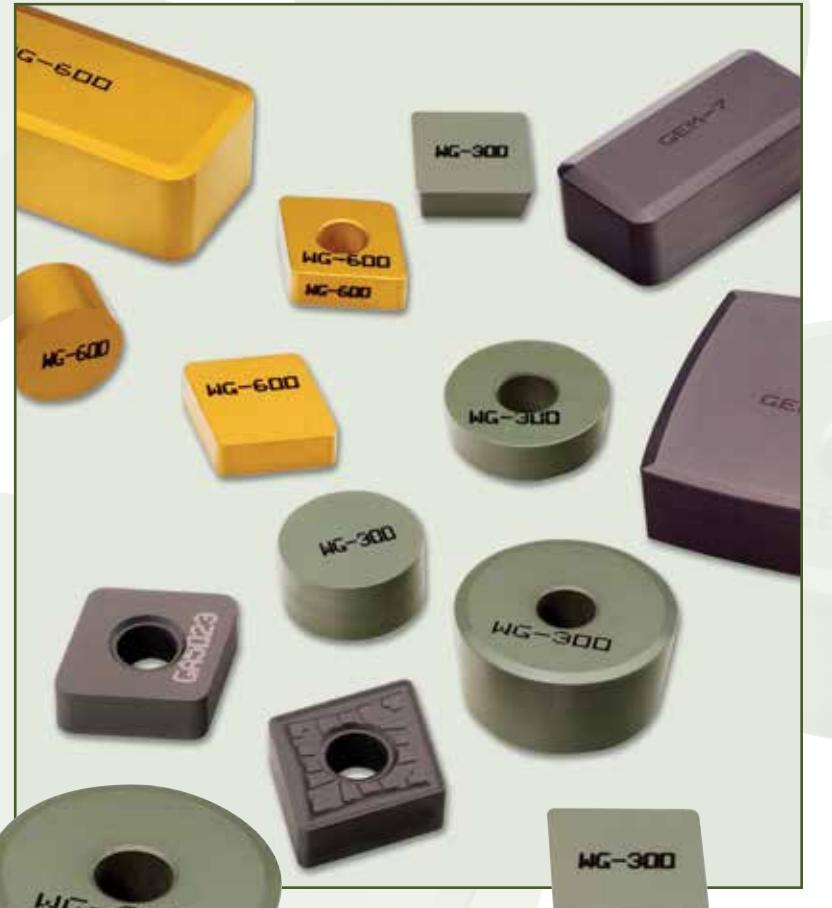

*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## CARBIDE

**Greenleaf offers a comprehensive line of carbide inserts in grades ranging from sub-micron C-1 through C-8 classifications. An industry pioneer in coated carbide, Greenleaf offers a variety of uncoated, MT-CVD coated and PVD-coated grades. Carbide inserts are available in ANSI standard geometries with multi-purpose chip-breakers for heavy roughing through finishing.**

### COATED – MT-CVD

**GA5023** A high-speed performance grade for turning and milling cast iron. GA5023 features an advanced MT-CVD coating specifically developed for abrasive wear resistance. Application ranges from roughing to finishing on most cast iron materials including gray iron, ductile, nodular and other alloyed irons. The high wear and shock resistance of GA5023 allows machining at high speeds and a variety of feeds.

**GA5035** A high-performance MT-CVD coated grade for turning all types of steels, and selected stainless steels. GA5035 can be used in rough, semi-finish, and finish turning situations requiring resistance to heat deformation, thermal shock, and abrasion. GA5035 should be applied at high speeds and a range of feeds.

**GA5036** A high-performance MT-CVD coated grade for milling steels at high speed. GA5036 should be used when milling forged and cast steels and selected ductile irons. GA5036 has a unique combination of toughness and heat resistance making it suitable for heavy- and light-duty milling at high cutting speeds.

**GA5125** New high-performance MT-CVD coated carbide milling grade especially suited for manganese steel. GA5125 is also applicable on chrome-moly steel, tool steel and similar high alloy steels. GA5125 provides excellent resistance to abrasion, crater wear, thermal shock, deformation and edge build-up. GA5125 should be applied at high speeds with moderate feed rates.

### COATED – PVD

**G-915** Multi-layer PVD-coated grade, excellent for cut off, milling and turning high-temp alloys, stainless steel, and low carbon steels. The multi-layer PVD coating adds heat and abrasion resistance to the tough, shock-resistant substrate. G-915 should be run at moderate speeds and moderate to high feeds in milling and interrupted turning applications.

**G-935** Multi-layer PVD-coated grade for steel milling and turning applications requiring additional resistance to mechanical and thermal shock. The multi-layered PVD coating increases the speed capability and wear resistance in tough milling and interrupted turning applications.

## CARBIDE

### UNCOATED

**G-20M** A sub-micron C-2 carbide grade suited for use in turning and milling titanium and nickel-based super-alloys. G-20M has the strength and edge wear characteristics to resist notching when turning high-strength materials.

**G-50** Heavy roughing grade for steel and steel castings under difficult conditions, and ferritic stainless steels in most applications. G-50 is tough enough to enable the use of positive rakes for turning.

**G-74** Roughing or finishing grade for steel and steel castings. G-74 has higher shock resistance than G-70, and should be applied at high speeds and moderate to heavy feeds. Well suited for turning of steel rolls.

#### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## CERAMIC

**Greenleaf is the industry leader in the development and manufacture of ceramic and coated ceramic inserts in ANSI standard and special geometries. Some of the most prominent include:**

**WG-300®** Whisker-reinforced ceramic with excellent wear and shock resistance at high surface speeds. WG-300 is very effective at machining nickel and cobalt based super-alloys, and other hard materials at metal removal rates up to 10 times higher than carbide.

**WG-600®** Coated whisker-reinforced ceramic offering longer tool life and better performance over uncoated ceramics due to outstanding thermal properties and shock-resistance at high cutting speeds. Application areas include rough and finish turning, as well as high-performance milling of high-strength alloys, hardened steels and select stainless steels. *U.S. Patent No. 6,447,896 B1*.

**WG-700™** New whisker-reinforced Al<sub>2</sub>O<sub>3</sub> ceramic substrate featuring improved toughness and a unique high-speed coating. WG-700 is ideal for machining nickel- and cobalt-based super alloys and other difficult-to-machine materials. WG-700 exhibits high metal-removal rates with exceptional tool life.

*U.S. Patent No. 6,447,896 B1*

**XSYTINT™-1** New phase-toughened ceramic capable of extreme feed rates. XSYTINT™-1 excels at machining a wide variety of materials including steels, cast and ductile irons, high-temperature alloys and other challenging metals. XSYTINT™-1 is ideal for use in interrupted cuts, scale, abrasive casting materials and milling.




**GSN100™** New engineered blend of silicon nitride and proprietary toughening agents that redefines productivity in the machining of cast iron. GSN100 delivers outstanding tool life at high cutting speeds in turning, grooving and milling applications.

**GEM-7™** Al<sub>2</sub>O<sub>3</sub> + TiC composite ceramic with a high degree of predictability in roll turning and hard alloy (up to 65 R/c) machining.



### Greenleaf Sales




**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

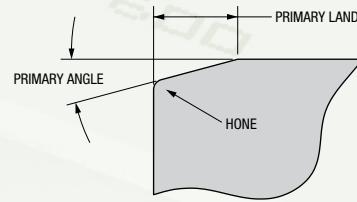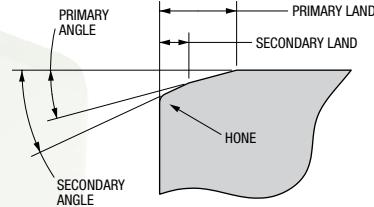
**HONE**

**PRIMARY ANGLE**

**SECONDARY ANGLE**

Edge Prep	Hone	Primary Land	Primary Angle	Secondary Land	Secondary Angle	Application
T2A	0,015R	0,17	20°			Scale applications, light interruptions, weld overlays, finish turning and milling of hardened materials.
T4A	0,015R	1,90	10°	0,17	25°	Heavy machining <19mm IC - Roll turning, 3V, 4V, CDH-22, CDH-33.
T4B	0,035R	1,90	10°	0,17	25°	Heavy machining <19mm IC - Roll turning, 3V, 4V, CDH-22, CDH-33.
T10B	0,035R	2,41	15°	0,17	30°	Heavy machining, iron and steel roll turning >19mm IC, CDH-43, CDH-53.

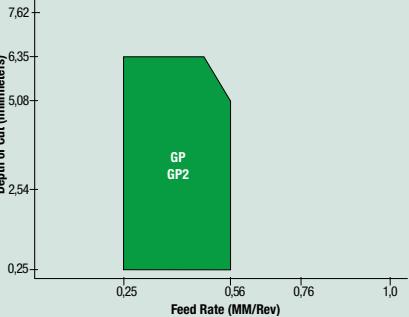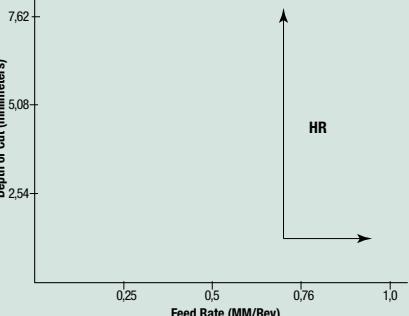**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

<b>GENERAL PURPOSE</b> GP and GP2 	General purpose chipbreaker. Feed rates up to 0,56/rev and 6,35 depth of cut.	
<b>MEDIUM ROUGHING</b> MR and MR2 	Used for medium roughing of all material. Feeds up to 0,71/rev and depths up to 7,62.	
<b>HEAVY ROUGHING</b> <i>HR single sided</i> 	Heavy roughing for all materials. Feeds above 0,58/rev. One-sided chipbreaker for heaviest feeds (MM). <i>Example: CNMM-190612 HR</i>	

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Carbide Inserts – Negative**

**80° Diamond**  
Chip Control  
GP2, MR, HR – single  
sided  
*page: HT 10*



**80° Diamond**  
Flat Top  
*page: HT 11*



**80° Diamond**  
Flat Top  
*page: HT 11*



**Round**  
Chip Control  
MR, MR – single sided  
*page: HT 12*



**Round**  
Flat Top  
*page: HT 13*



**Round**  
Flat Top  
*page: HT 13*



**Square**  
Chip Control  
GP2, MR,  
HR – single sided  
*page: HT 14*

**Carbide Inserts – Negative *continued***

**Square**  
Flat Top  
*page: HT 15*



**Square**  
Flat Top  
*page: HT 16*



**Triangle**  
Chip Control  
MR  
*page: HT 17*



**Triangle**  
Flat Top  
*page: HT 17*



**Triangle**  
Flat Top  
TNGN, TNUN  
*page: HT 18*

**Ceramic Inserts – Negative**

**80° Diamond**  
*page: HT 21*



**Round**  
*page: HT 22*



**Square**  
*page: HT 23*



**Triangle**  
*page: HT 24*

**Ceramic Inserts – Positive**

**Square**  
*page: HT 25*

**Carbide Inserts – Positive**

**Triangle**  
Flat Top  
*page: HT 19*



**Square**  
Flat Top  
*page: HT 20*

**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Roll Turning****Roll Turning**  
page: HT 26**Roll Turning**  
page: HT 27**Roll Turning**  
page: HT 28**Roll Turning**  
page: HT 29**Round  
V-Bottom**  
page: HT 30**Round  
V-Bottom**  
page: HT 31**Square  
Negative**  
page: HT 32**Greenleaf Sales**


**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

80°



# 80° Diamond Inserts

## Chip Control

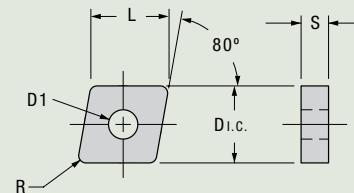

		Part Number ISO	Steel				S. Steel	Cast Iron	H-T A.	Part Number ANSI	Dimensions (millimeters)																																											
Shape: 80° Diamond			P25	P25	P25	P35	M20	M35	K15		G-915	G-20M	D I.C.	L	S	D1	R																																					
GENERAL PURPOSE	GP	CNMG-190612-GP	●	○	○	○	○	○	○	●			CNMG-643-GP	19,05	19,33	6,35	7,92	1,19																																				
MEDIUM ROUGHING	MR	CNMG-190608-MR	○	○	○	○	○	○	○	○			CNMG-642-MR	19,05	19,33	6,35	7,92	0,79																																				
		CNMG-190612-MR	●	○	●	●	●	●	●	●	○		CNMG-643-MR	19,05	19,33	6,35	7,92	1,19																																				
		CNMG-190616-MR	○	○	●	○	●	○	●	●			CNMG-644-MR	19,05	19,33	6,35	7,92	1,57																																				
HEAVY ROUGHING	HR - single sided	CNMM-190612-HR	○	○	○	○	○	○	○	○	○	○	CNMM-643-HR	19,05	19,33	6,35	7,92	1,19																																				
		<b>Carbide Coatings</b> MT-CVD Coated    PVD Coated    Uncoated																																																				
		<table border="1"> <tr> <td>P25</td><td>GA5035</td> <td>P25</td><td>GA5125</td> <td>P35</td><td>GA5036</td> <td>M20</td><td>GA5023</td> <td>M35</td><td>G-915</td> <td>K15</td><td>GA5023</td> <td>G-915</td> <td>S</td> <td>G-20M</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Steel</td><td></td> <td>S. Steel</td><td></td> <td>Cast Iron</td><td></td> <td>H-T A.</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table>																	P25	GA5035	P25	GA5125	P35	GA5036	M20	GA5023	M35	G-915	K15	GA5023	G-915	S	G-20M				Steel		S. Steel		Cast Iron		H-T A.											
P25	GA5035	P25	GA5125	P35	GA5036	M20	GA5023	M35	G-915	K15	GA5023	G-915	S	G-20M																																								
Steel		S. Steel		Cast Iron		H-T A.																																																


**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard  
 Stocked or Available Upon Request

# 80° Diamond Inserts


## Flat Top (CNMA)

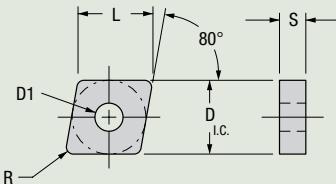

Shape: 80° Diamond	Part Number	ISO					Part Number	Dimensions (millimeters)				
		Steel	S. Steel	Cast Iron	H-T A.			D I.C.	L	S	D1	R
	CNMA-190608	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	CNMA-642	19,05	19,33	6,35	7,92	0,79
	CNMA-190612	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	CNMA-643	19,05	19,33	6,35	7,92	1,19
	CNMA-190616	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	CNMA-644	19,05	19,33	6,35	7,92	1,57
	CNMA-250924	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	CNMA-866	25,40	25,78	9,53	9,12	2,36
Carbide Coatings		P25 Steel	P25 S. Steel	M20 Cast Iron	M35 H-T A.	K15 S						
MT-CVD Coated		P25 Coated	P25 PVD Coated	M20 Uncoated	M35 S	K15 G-915	G-915 G-20M					

# 80° Diamond Inserts

## Flat Top (CNGN)

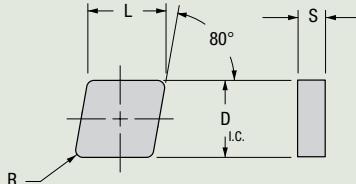


Shape: 80° Diamond	Part Number	ISO					Part Number	Dimensions (millimeters)				
		Steel	S. Steel	Cast Iron	H-T A.			D I.C.	L	S	D1	R
	CNGN-190408	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	CNGN-632	19,05	19,33	4,75	0,79	
	CNGN-190412	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	CNGN-633	19,05	19,33	4,75	1,19	
	CNGN-190416	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	CNGN-634	19,05	19,33	4,75	1,57	
	CNGN-190612	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	CNGN-643	19,05	19,33	6,35	1,19	
	CNGN-190616	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	CNGN-644	19,05	19,33	6,35	1,57	
Carbide Coatings		P25 Steel	P25 S. Steel	M20 Cast Iron	M35 H-T A.	K15 S	G-915 G-20M					
MT-CVD Coated		P25 Coated	P25 PVD Coated	M20 Uncoated	M35 S	K15 G-915	G-915 G-20M					

Stocked  
or Available  
Upon Request Stocked Standard

# Round Inserts

## Chip Control

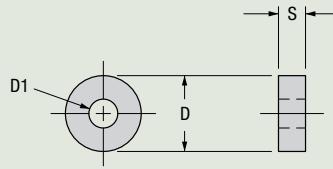

Shape: Round		Part Number	ISO	Steel	S. Steel	Cast Iron	H-T A.	Part Number	Dimensions (millimeters)			
MEDIUM ROUGHING	MR	RNMG-190600-MR	○ ● ○ ○ ○ ○ ○ ○	GA5035	P25	GA5125	P25	RNMG-64-MR	D 19,05	S 6,35	D1 7,92	
HEAVY ROUGHING	MR – single sided	RNMG-250900-MR	○ ○ ○ ○ ○ ○ ○ ○	GA5036	P35	GA5023	M20	RNMG-86-MR	D 25,40	S 9,53	D1 9,12	
Carbide Coatings				P25	GA5035	P25	GA5125	P25	RNMM-84-MR	D 25,40	S 6,35	D1 9,12
MT-CVD Coated		PVD Coated		Uncoated		P35	GA5036	M20	GA5023	K15	G-915	S G-20M
						Steel	S. Steel	Cast Iron	H-T A.			

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


 Stocked Standard  
 Stocked or Available Upon Request

 Stocked or Available Upon Request



# Round Inserts


## Flat Top (RNMA)

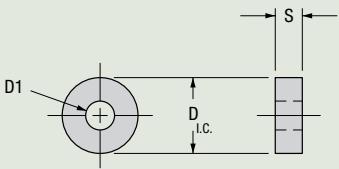

Shape: Round	Part Number ISO							Part Number ANSI	Dimensions (millimeters)										
		Steel	S. Steel	Cast Iron	H-T A.	P25	GA5035	P25	GA5125	P35	GA5036	M20	M35	K15	G-915	G-20M	S		
	RNMA-190600	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
	RNMA-250900	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
		P25	GA5035	P25	GA5125	P35	GA5036	M20	GA5023	M35	G-915	K15	GA5023	G-915	G-20M	S			
		Steel	S. Steel	Cast Iron	H-T A.														
		MT-CVD Coated	PVD Coated	Uncoated		P25	GA5035	P25	GA5125	P35	GA5036	M20	M35	K15	G-915	G-20M	S		
						Steel	S. Steel	Cast Iron	H-T A.										

# Round Inserts

## Flat Top (RNGN)

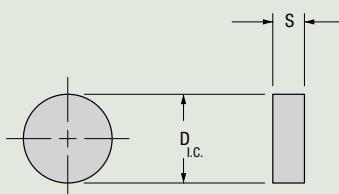

Shape: Round	Part Number ISO							Part Number ANSI	Dimensions (millimeters)										
		Steel	S. Steel	Cast Iron	H-T A.	P25	GA5035	P25	GA5125	P35	GA5036	M20	M35	K15	G-915	G-20M	S		
	RNGN-190400	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
	RNGN-250600	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
		P25	GA5035	P25	GA5125	P35	GA5036	M20	GA5023	M35	G-915	K15	GA5023	G-915	G-20M	S			
		Steel	S. Steel	Cast Iron	H-T A.														
		MT-CVD Coated	PVD Coated	Uncoated		P25	GA5035	P25	GA5125	P35	GA5036	M20	M35	K15	G-915	G-20M	S		
						Steel	S. Steel	Cast Iron	H-T A.										

Stocked or Available Upon Request


Stocked Standard

90°



# Square Inserts

## Chip Control

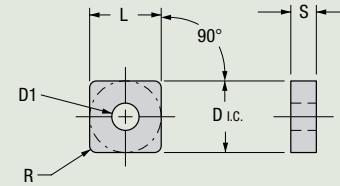

		Part Number ISO					Part Number ANSI	Dimensions (millimeters)																																																																																								
Shape: Square			Steel	S. Steel	Cast Iron	H-T A.		D I.C.	L	S	D1	R																																																																																				
GENERAL PURPOSE		SNMG-190612-GP2	● ○ ● ○ ● ○	GA5035 P25 GA5125 P25	GA5036 P35 GA5023 M20	GA5023 M35 GA5023 K15	G-915 S G-20M	SNMG-643-GP2	19,05	19,05	6,35	7,92 1,19																																																																																				
		SNMG-190616-GP2	○ ○ ○ ○ ○ ○	GA5036 P35 GA5023 M20	GA5023 M35 GA5023 K15	GA5023 K15 GA5023 G-915	G-915 S G-20M	SNMG-644-GP2	19,05	19,05	6,35	7,92 1,57																																																																																				
MEDIUM ROUGHING		SNMG-190612-MR	● ○ ● ○ ● ○	GA5035 P25 GA5125 P25	GA5036 P35 GA5023 M20	GA5023 M35 GA5023 K15	GA5023 G-915 GA5023 G-915	SNMG-643-MR	19,05	19,05	6,35	7,92 1,19																																																																																				
		SNMG-190616-MR	○ ○ ● ○ ○ ○	GA5036 P35 GA5023 M20	GA5023 M35 GA5023 K15	GA5023 K15 GA5023 G-915	GA5023 G-915 GA5023 G-915	SNMG-644-MR	19,05	19,05	6,35	7,92 1,57																																																																																				
		SNMG-250924-MR	○ ○ ○ ○ ○ ○	GA5036 P35 GA5023 M20	GA5023 M35 GA5023 K15	GA5023 K15 GA5023 G-915	GA5023 G-915 GA5023 G-915	SNMG-866-MR	25,40	25,40	9,53	9,12 2,36																																																																																				
HEAVY ROUGHING		SNMM-190612-HR	○ ○ ○ ○ ○ ○	GA5035 P25 GA5125 P25	GA5036 P35 GA5023 M20	GA5023 M35 GA5023 K15	GA5023 K15 GA5023 G-915	SNMM-643-HR	19,05	19,05	6,35	7,92 1,19																																																																																				
		SNMM-190616-HR	○ ○ ○ ○ ○ ○	GA5035 P25 GA5125 P25	GA5036 P35 GA5023 M20	GA5023 M35 GA5023 K15	GA5023 K15 GA5023 G-915	SNMM-644-HR	19,05	19,05	6,35	7,92 1,57																																																																																				
		<b>Carbide Coatings</b> MT-CVD Coated    PVD Coated    Uncoated																																																																																														
		<table border="1"> <tr> <td>P25</td><td>GA5035</td><td>GA5125</td><td>GA5036</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td> </tr> <tr> <td>P25</td><td>GA5035</td><td>GA5125</td><td>GA5036</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td> </tr> <tr> <td>M20</td><td>GA5036</td><td>GA5125</td><td>GA5036</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td> </tr> <tr> <td>M35</td><td>GA5036</td><td>GA5125</td><td>GA5036</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td> </tr> <tr> <td>K15</td><td>GA5036</td><td>GA5125</td><td>GA5036</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td><td>GA5023</td> </tr> <tr> <td>S</td><td>S</td><td>S</td><td>S</td><td>S</td><td>S</td><td>S</td><td>S</td><td>S</td><td>S</td><td>S</td><td>S</td> </tr> <tr> <td>Steel</td><td>S. Steel</td><td>Cast Iron</td><td>H-T A.</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table>											P25	GA5035	GA5125	GA5036	GA5023	P25	GA5035	GA5125	GA5036	GA5023	M20	GA5036	GA5125	GA5036	GA5023	M35	GA5036	GA5125	GA5036	GA5023	K15	GA5036	GA5125	GA5036	GA5023	S	S	S	S	S	S	S	S	S	S	S	S	Steel	S. Steel	Cast Iron	H-T A.																																											
P25	GA5035	GA5125	GA5036	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023																																																																																					
P25	GA5035	GA5125	GA5036	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023																																																																																					
M20	GA5036	GA5125	GA5036	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023																																																																																					
M35	GA5036	GA5125	GA5036	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023																																																																																					
K15	GA5036	GA5125	GA5036	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023	GA5023																																																																																					
S	S	S	S	S	S	S	S	S	S	S	S																																																																																					
Steel	S. Steel	Cast Iron	H-T A.																																																																																													


**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Stocked Standard  
 Stocked or Available Upon Request

# Square Inserts

## Flat Top (SNMA)

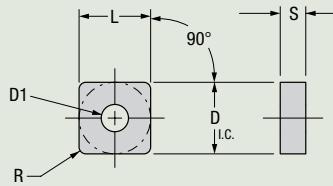


Shape: Square	Part Number ISO						Part Number ANSI	Dimensions (millimeters)				
		Steel	S. Steel	Cast Iron	H-T A.			D I.C.	L	S	D1	R
	SNMA-190612	○	○	○	○	○	GA5035	P25	19,05	19,05	6,35	7,92
	SNMA-190616	○	○	○	○	○	GA5125	P25	19,05	19,05	6,35	7,92
	SNMA-250916	○	○	○	○	○	GA5036	P35	25,40	25,40	9,53	9,12
	SNMA-250924	○	○	○	○	○	GA5023	M20	25,40	25,40	9,53	9,12
							G-915	M35				2,36
							K15	GA5023				
							S	G-915				
							G-20M	H-T A.				

90°



# Square Inserts

## Flat Top (SNGN/SNUN)

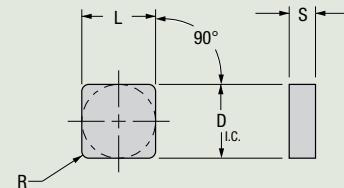

Shape: Square	Part Number ISO	Steel				S. Steel	Cast Iron	H-T A.	Part Number ANSI	Dimensions (millimeters)					
		P25	P25	P25	P35	M20	M35	K15		G-915	G-20M	D.I.C.	L	S	R
	SNGN-190412	○	○	○	○	○	○	○	SNGN-633	19,05	19,05	4,75	1,19		
	SNGN-190416	○	○	○	○	○	○	○	SNGN-634	19,05	19,05	4,75	1,57		
	SNGN-190432	○	○	○	○	○	○	○	SNGN-638	19,05	19,05	4,75	3,18		
	SNGN-190612	○	●	○	○	○	○	○	SNGN-643	19,05	19,05	6,35	1,19		
	SNGN-190616	○	●	○	○	○	○	○	SNGN-644	19,05	19,05	6,35	1,57		
	SNGN-190624	○	○	○	○	○	○	○	SNGN-646	19,05	19,05	6,35	2,36		
	SNGN-250616	○	○	○	○	○	○	○	SNGN-844	25,40	25,40	6,35	1,57		
	SNGN-250716	○	○	○	○	○	○	○	SNGN-854	25,40	25,40	7,92	1,57		
	SNGN-310648	○	○	○	○	○	○	○	SNGN-10412	31,75	31,75	6,35	4,75		
	SNGN-310924	○	○	○	○	○	○	○	SNGN-1066	31,75	31,75	9,53	2,36		
	SNGN-310932	○	○	○	○	○	○	○	SNGN-1068	31,75	31,75	9,53	3,18		
	SNGN-381232	○	○	○	○	○	○	○	SNGN-1288	38,10	38,10	12,70	3,18		
	SNUN-190412	○	○	○	○	○	○	○	SNUN-633	19,05	19,05	4,75	1,19		
	SNUN-190416	○	○	○	○	○	○	○	SNUN-634	19,05	19,05	4,75	1,57		
	SNUN-250616	○	○	○	○	○	○	○	SNUN-844	25,40	25,40	6,35	1,57		
	SNUN-250632	○	○	○	○	○	○	○	SNUN-848	25,40	25,40	6,35	3,18		
	SNUN-250716	○	○	○	○	○	○	○	SNUN-854	25,40	25,40	7,92	1,57		
	SNUN-310924	○	○	○	○	○	○	○	SNUN-1066	31,75	31,75	9,53	2,36		
	SNUN-310932	○	○	○	○	○	○	○	SNUN-1068	31,75	31,75	9,53	3,18		
	SNUN-381232	○	○	○	○	○	○	○	SNUN-1288	38,10	38,10	12,70	3,18		
Carbide Coatings		P25	GA5035	GA5125	GA5125	GA5036	GA5023	GA5023	G-915	G-915	G-20M				
		MT-CVD Coated	PVD Coated	Uncoated			Steel	S. Steel	Cast Iron	H-T A.					

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Stocked Standard  
 Stocked or Available Upon Request




# Triangle Inserts

## Chip Control

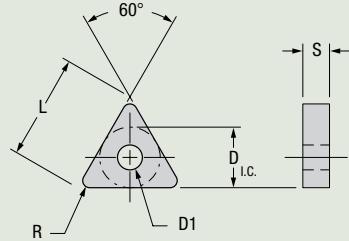

# Triangle Inserts

## Flat Top (TNMA)

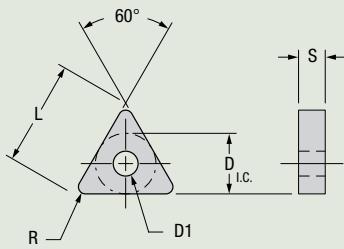

Stocked  
or Available — [ ]  
Upon Request


Stocked Standard

**Greenleaf Sales**  
**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



# Triangle Inserts


## Flat Top (TNGN)

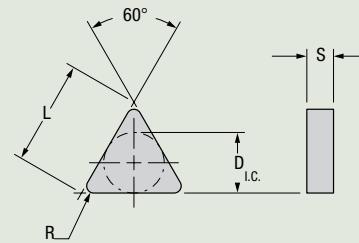

Shape: Triangle	Part Number	ISO				Part Number	Dimensions (millimeters)			
		Steel	S. Steel	Cast Iron	H-T A.		D I.C.	L	S	R
	TNGN-330716	P25	GA5035	GA5035	G-915	TNGN-654	19,05	32,99	7,92	1,57
	TNGN-330724	P25	GA5125	GA5125	S	TNGN-656	19,05	32,99	7,92	2,36
	TNGN-330916	P35	GA5036	P35	G-20M	TNGN-664	19,05	32,99	9,53	1,57
	TNGN-330924	M20	GA5023	M20	S	TNGN-666	19,05	32,99	9,53	2,36
	TNGN-330932	M35	G915	M35	G-20M	TNGN-668	19,05	32,99	9,53	3,18
	TNGN-381124	K15	GA5023	K15	S	TNGN-776	22,23	38,51	11,10	2,36
	TNGN-381132	S	G-915	S	G-20M	TNGN-778	22,23	38,51	11,10	3,18
	TNGN-381140	G-915	S	G-20M	S	TNGN-770	22,23	38,51	11,10	3,96
	TNGN-441132	G-20M	S	S	S	TNGN-878	25,40	43,99	11,10	3,18
Carbide Coatings		P25	GA5035	P25	GA5125	TNGN-654	19,05	32,99	7,92	1,57
MT-CVD Coated		P35	GA5036	M20	GA5023	TNGN-656	19,05	32,99	7,92	2,36
PVD Coated		M35	G915	M35	K15	TNGN-664	19,05	32,99	9,53	1,57
Uncoated		K15	GA5023	S	S	TNGN-666	19,05	32,99	9,53	2,36
Steel		S	G-915	S	G-20M	TNGN-668	19,05	32,99	9,53	3,18
S. Steel		G-915	S	G-20M	S	TNGN-776	22,23	38,51	11,10	2,36
Cast Iron		S	G-20M	S	S	TNGN-778	22,23	38,51	11,10	3,18
H-T A.		S	S	S	S	TNGN-770	22,23	38,51	11,10	3,96

# Triangle Inserts

## Flat Top (TNUN)

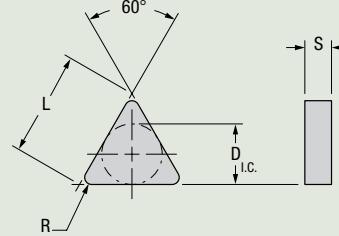


Shape: Triangle	Part Number	ISO				Part Number	Dimensions (millimeters)			
		Steel	S. Steel	Cast Iron	H-T A.		D I.C.	L	S	R
	TNUN-330716	P25	GA5035	GA5035	G-915	TNUN-654	19,05	32,99	7,92	1,57
	TNUN-330724	P25	GA5125	GA5125	S	TNUN-656	19,05	32,99	7,92	2,36
	TNUN-330916	P35	GA5036	P35	G-915	TNUN-664	19,05	32,99	9,53	1,57
	TNUN-330924	M20	GA5023	M20	M35	TNUN-666	19,05	32,99	9,53	2,36
	TNUN-330932	M35	G915	M35	K15	TNUN-668	19,05	32,99	9,53	3,18
	TNUN-381124	K15	GA5023	K15	S	TNUN-776	22,23	38,51	11,10	2,36
	TNUN-381132	S	G-915	S	G-20M	TNUN-778	22,23	38,51	11,10	3,18
	TNUN-381140	S	S	G-20M	S	TNUN-770	22,23	38,51	11,10	3,96
	TNUN-441132	G-915	S	S	G-20M	TNUN-878	25,40	43,99	11,10	3,18
Carbide Coatings		P25	GA5035	P25	GA5125	TNUN-654	19,05	32,99	7,92	1,57
MT-CVD Coated		P35	GA5036	M20	GA5023	TNUN-656	19,05	32,99	7,92	2,36
PVD Coated		M35	G915	M35	K15	TNUN-664	19,05	32,99	9,53	1,57
Uncoated		K15	GA5023	S	S	TNUN-666	19,05	32,99	9,53	2,36
Steel		S	G-915	S	G-20M	TNUN-668	19,05	32,99	9,53	3,18
S. Steel		S	S	G-20M	S	TNUN-776	22,23	38,51	11,10	2,36
Cast Iron		G-915	S	G-20M	S	TNUN-778	22,23	38,51	11,10	3,18
H-T A.		S	S	S	S	TNUN-770	22,23	38,51	11,10	3,96

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




Stocked Standard



Stocked or Available Upon Request

# Triangle Inserts

## Flat Top (TPGN/TPUN)

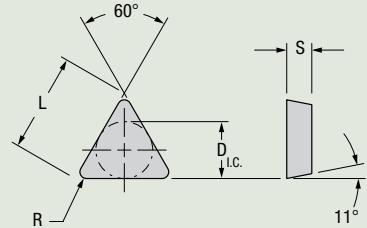

Shape: Triangle	Part Number ISO	Steel      S. Steel      Cast Iron      H-T A.									Part Number ANSI	Dimensions (millimeters)			
		P25 GA5035	P25 GA5125	P25 GA5036	M20 GA5023	M35 G-915	K15 GA5023	S G-915	G-20M H-T A.	D I.C.		L	S	R	
	TPGN-330924	○	○	○	○	○	○	○	○	TPGN-666	19,05	32,99	9,53	2,36	
	TPUN-330916	○	○	○	○	○	○	○	○	TPUN-664	19,05	32,99	9,53	1,57	
	TPUN-330924	○	○	○	○	○	○	○	○	TPUN-666	19,05	32,99	9,53	2,36	
<b>Carbide Coatings</b>		P25 GA5035 P25 GA5125 P35 GA5036 M20 GA5023 M35 G-915 K15 GA5023 G-915 S G-20M H-T A.  Steel      S. Steel      Cast Iron      H-T A.													
MT-CVD Coated		PVD Coated		Uncoated											

Stocked  
or Available  
Upon Request


Stocked Standard

90°



# Square Inserts

## Flat Top

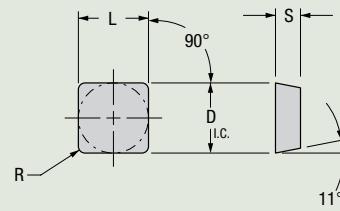

Shape: Square	Part Number	ISO						Part Number	Dimensions (millimeters)			
			Steel	S. Steel	Cast Iron	H-T A.			D I.C.	L	S	R
	SPGN-190412	<input type="radio"/> <input type="radio"/> <input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/>	GA5035	P25	GA5125	P25	P35	SPGN-633	19,05	19,05	4,75	1,19
	SPGN-190416	<input type="radio"/> <input checked="" type="radio"/> <input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/>	GA5036	M20	M35	K15	S	SPGN-634	19,05	19,05	4,75	1,57
	SPGN-190424	<input type="radio"/>	GA5023	G-915	M35	GA5023	G-915	SPGN-636	19,05	19,05	4,75	2,36
	SPGN-190432	<input type="radio"/>	GA5023	G-915	M35	K15	G-20M	SPGN-638	19,05	19,05	4,75	3,18
	SPUN-190412	<input type="radio"/>	SPUN-633	19,05	19,05	4,75	1,19					
	SPUN-190416	<input type="radio"/>	SPUN-634	19,05	19,05	4,75	1,57					
	SPUN-190612	<input type="radio"/>	SPUN-643	19,05	19,05	6,35	1,19					
	SPUN-190616	<input type="radio"/>	SPUN-644	19,05	19,05	6,35	1,57					
	SPUN-250916	<input type="radio"/>	SPUN-864	25,40	25,40	9,53	1,57					
	SPUN-250924	<input type="radio"/>	SPUN-866	25,40	25,40	9,53	2,36					
	SPUN-250932	<input type="radio"/>	SPUN-868	25,40	25,40	9,53	3,18					
	SPUN-310932	<input type="radio"/>	SPUN-1068	31,75	31,75	9,53	3,18					
	SPUN-381232	<input type="radio"/>	SPUN-1288	38,10	38,10	12,70	3,18					
Carbide Coatings			P25	GA5035	GA5125	GA5036	GA5023	G-915	G-20M			
MT-CVD Coated	PVD Coated	Uncoated	Steel	S. Steel	Cast Iron	H-T A.						


### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Stocked Standard  
 Stocked or Available Upon Request

# 80° Diamond Inserts

## Negative

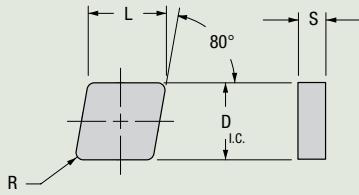

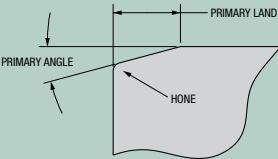Shape: 80° Diamond	Part Number ISO	Edge Prep	Whisker				Part Number ANSI	Edge Prep	Dimensions (millimeters)								
			WG-300	WG-600	WG-700	XSYTIN-1			GSN100	Si <sub>3</sub> N <sub>4</sub>	GEM-7	Al <sub>2</sub> O <sub>3</sub> -TiC	D I.C.	L	S	R	
	<b>CNGN-190608</b>	T2A	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>CNGN-642</b>	T2A	19,05	19,33	6,35	0,79			
	<b>CNGN-190612</b>	T4A	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>CNGN-643</b>	T4A	19,05	19,33	6,35	1,19			
		T2A	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		T2A	19,05	19,33	6,35	1,19			
	<b>CNGN-190616</b>	T2A	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>CNGN-644</b>	T2A	19,05	19,33	6,35	1,57			
<b>Ceramic Classification</b>				<b>Whisker</b>	WG-300	WG-600	WG-700	XSYTIN-1	GSN100	Si <sub>3</sub> N <sub>4</sub>	GEM-7	Al <sub>2</sub> O <sub>3</sub> -TiC	<b>Edge Prep Descriptions – HT 06</b>				
<input checked="" type="checkbox"/> Whisker Ceramic <input type="checkbox"/> Phase Toughened				<input type="checkbox"/> Silicon Nitride	<input type="checkbox"/> Alumina TiC												
Page HT 05 – grade descriptions																	


If edge prep is not shown, call Greenleaf Technical Service for assistance.

Inserts and Steel Products Only	Inserts Only	Steel Products
10 Business Days or Less <input type="radio"/>	Stocked or Available Upon Request <input type="radio"/>	Stocked Standard <input checked="" type="radio"/>

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Round Inserts

## Negative

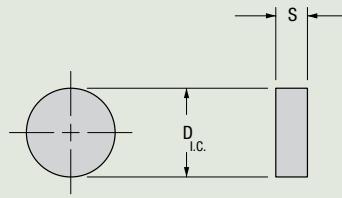

Shape: Round	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)		
			WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened	Si <sub>3</sub> N <sub>4</sub>	GSN100	GEM-7	D i.c.	S	
	RNGN-190600	T2A	○	○	○	○	○	○		RNGN-64	T2A	19,05	6,35
	RNGN-190700	T2A	●	○	●	○	○	○		RNGN-65	T2A	19,05	7,92
		T10B	○	○	○	○	○	○	●		T10B	19,05	7,92
	RNGN-250600	T2A	○	○	○	○	○	○		RNGN-84	T2A	25,40	6,35
	RNGN-250700	T2A	○	○	○	○	○	○		RNGN-85	T2A	25,40	7,92
	RNGN-250900	T2A	○	○	○	○	○	○		RNGN-86	T2A	25,40	9,53
	RNGN-310900	T4B	○	○	○	○	○	○	●	RNGN-106	T4B	31,75	9,53
		T10B	○	○	○	○	○	○	●		T10B	31,75	9,53
<b>Ceramic Classification</b>			WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened	Si <sub>3</sub> N <sub>4</sub>	GSN100	GEM-7	<b>Edge Prep Descriptions – HT 06</b>		
			Whisker										
			Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC							
Page HT 05 – grade descriptions													

If edge prep is not shown, call Greenleaf Technical Service for assistance.


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Stocked Standard  
 Stocked or Available Upon Request

# Square Inserts

## Negative

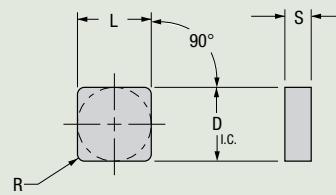

Shape: Square	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)				
			WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened	Si <sub>3</sub> N <sub>4</sub>	GSN100		D I.C.	L	S	R	
	<b>SNGN-190608</b>	T2A	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>SNGN-642</b>	T2A	19,05	19,05	6,35	0,79
	<b>SNGN-190612</b>	T2A	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>SNGN-643</b>	T2A	19,05	19,05	6,35	1,19				
	<b>SNGN-190616</b>	T2A	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>SNGN-644</b>	T2A	19,05	19,05	6,35	1,57				
	<b>SNGN-190712</b>	T2A	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>SNGN-653</b>	T2A	19,05	19,05	7,92	1,19
	<b>SNGN-190716</b>	T10B	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>SNGN-654</b>	T10B	19,05	19,05	7,92	1,57
	<b>SNGN-190720</b>	T2A	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>SNGN-655</b>	T2A	19,05	19,05	7,92	1,98
	<b>SNGN-250924</b>	T10B	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>SNGN-866</b>	T10B	25,40	25,40	9,53	2,39
<b>Ceramic Classification</b>															
Whisker Ceramic             Phase Toughened             Silicon Nitride             Alumina TiC															
Page HT 05 – grade descriptions															
Edge Prep Descriptions – HT 06															
<p>The diagram illustrates the HT 06 edge preparation process. It shows a primary land at the top, followed by a primary angle, and finally a hone at the bottom. The diagram is labeled with "PRIMARY LAND", "PRIMARY ANGLE", and "HONE".</p>															

If edge prep is not shown, call Greenleaf Technical Service for assistance.


Stocked  
or Available  
Upon Request

Stocked Standard



# Triangle Inserts

## Negative

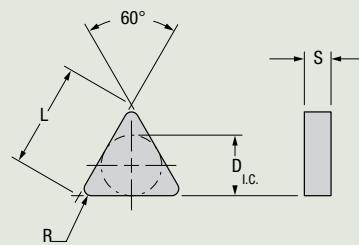

Shape: Triangle	Part Number ISO	Edge Prep	Whisker	Part Number ANSI	Edge Prep	Dimensions (millimeters)			
						D_I.C.	L	S	R
	TNGN-330924	T4B	WG-300 WG-600 WG-700 XSYTIN-1 GSN100 GEM-7	TNGN-666	T4B	19,05	32,99	9,53	2,39
	TNGN-440932	T10B	WG-300 WG-600 WG-700 XSYTIN-1 GSN100 GEM-7	TNGN-868	T10B	25,40	43,99	9,53	3,18


## Ceramic Classification

Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC
-----------------	-----------------	-----------------	-------------

WG-300 Whisker	WG-600	WG-700	XSYTIN-1 Phase Toughened
Si <sub>3</sub> N <sub>4</sub>	GSN100	Al <sub>2</sub> O <sub>3</sub> -TiC	GEM-7

Page HT 05 – grade descriptions

## Edge Prep Descriptions – page HT 06

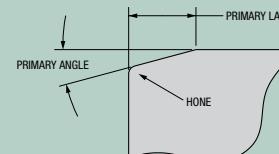


If edge prep is not shown, call Greenleaf Technical Service for assistance.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




Stocked Standard



Stocked or Available Upon Request

# Square Inserts

## Positive

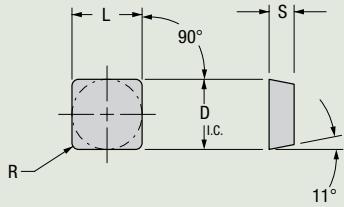

Shape: Square	Part Number ISO	Edge Prep	Whisker				Part Number ANSI	Edge Prep	Dimensions (millimeters)			
			WG-300	WG-600	WG-700	XSYTIN-1			D I.C.	L	S	R
	<b>SPGN-190412</b>	T2A	○ ○ ○ ○ ○ ○ ○				<b>SPGN-633</b>	T2A	19,05	19,05	4,75	1,19
	<b>SPGN-190416</b>	T2A	○ ○ ○ ○ ○ ○ ○				<b>SPGN-634</b>	T2A	19,05	19,05	4,75	1,57
	<b>SPGN-190608</b>	T2A	○ ○ ○ ○ ○ ○ ○				<b>SPGN-642</b>	T2A	19,05	19,05	6,35	0,79
<b>Ceramic Classification</b>			WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened	SiAl <sub>x</sub>	GEM-7	Al <sub>2</sub> O <sub>3</sub> -TiC	<b>Edge Prep Descriptions – HT 06</b>	
			Whisker									
			Whisker	GSN100								
Page HT 05 – grade descriptions												


If edge prep is not shown, call Greenleaf Technical Service for assistance.

Stocked  
or Available  
Upon Request

Stocked Standard

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Roll Turning Inserts

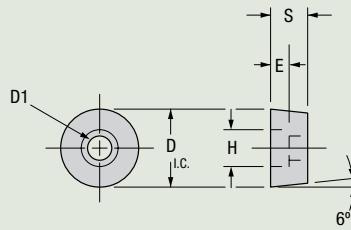

Shape: CDH	Part Number	ISO	ANSI	Dimensions (millimeters)					
					D I.C.	S	H	D1	E
	CDH-42	<input type="checkbox"/> G-935 <input type="checkbox"/> G-935 <input type="checkbox"/> G-50 <input type="checkbox"/> G-74	CDH-42	25,40	12,70	10,31	6,73	6,35	
	CDH-43	<input type="checkbox"/> G-935 <input type="checkbox"/> G-935 <input type="checkbox"/> G-50 <input type="checkbox"/> G-74	CDH-43	25,40	19,05	10,31	6,73	12,70	
	CDH-51.5	<input type="checkbox"/> G-935 <input type="checkbox"/> G-935 <input type="checkbox"/> G-50 <input type="checkbox"/> G-74	CDH-51.5	31,75	9,53	15,06	9,91	9,53	
	CDH-53	<input type="checkbox"/> G-935 <input type="checkbox"/> G-935 <input type="checkbox"/> G-50 <input type="checkbox"/> G-74	CDH-53	31,75	19,05	15,06	9,91	9,53	
<b>Carbide Coatings</b>  MT-CVD Coated  PVD Coated  Uncoated									

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard  
 Stocked or Available Upon Request

 Stocked or Available Upon Request



# Roll Turning Inserts

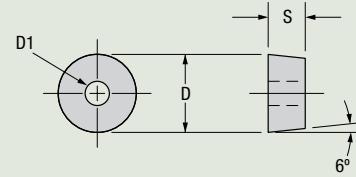


Shape: C-CDH	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)			
			WG-300	WG-600	WG-700	XSYTN-1	Phase Toughened	Si <sub>3</sub> N <sub>4</sub>	GSM100		D I.C.	S	D1	
	C-CDH-21	T4B	○	○	○	○	○	○	○	C-CDH-21	T4B	12,70	6,35	3,18
		T10B	○	○	○	○	○	○	○		T10B	12,70	6,35	3,18
	C-CDH-22	T4B	○	○	○	○	○	○	○	C-CDH-22	T4B	12,70	12,70	3,18
		T10B	○	○	○	○	○	○	○		T10B	12,70	12,70	3,18
	C-CDH-31	T4B	○	○	○	○	○	○	○	C-CDH-31	T4B	19,05	6,35	6,73
		T10B	○	○	○	○	○	○	○		T10B	19,05	6,35	6,73
	C-CDH-31.5	T4B	○	○	○	○	○	○	○	C-CDH-31.5	T4B	19,05	9,53	6,73
		T10B	○	○	○	○	○	○	○		T10B	19,05	9,53	6,73
	C-CDH-42	T4B	○	○	○	○	○	○	○	C-CDH-42	T4B	25,40	12,70	6,73
		T10B	●	○	○	○	○	○	●		T10B	25,40	12,70	6,73
	C-CDH-43	T4B	○	○	○	○	○	○	○	C-CDH-43	T4B	25,40	19,05	6,73
		T10B	○	○	○	○	○	○	○		T10B	25,40	19,05	6,73
	C-CDH-51.5	T4B	○	○	○	○	○	○	○	C-CDH-51.5	T4B	31,75	9,53	9,91
		T10B	○	○	○	○	○	○	○		T10B	31,75	9,53	9,91
	C-CDH-53	T4B	○	○	○	○	○	○	○	C-CDH-53	T4B	31,75	19,05	9,91
		T10B	○	○	○	○	○	○	●		T10B	31,75	19,05	9,91
<b>Ceramic Classification</b>														
Page HT 05 – grade descriptions														
If edge prep is not shown, call Greenleaf Technical Service for assistance.														
<b>Edge Prep Descriptions – HT 06</b>														

Stocked  
or Available  
Upon Request

Stocked Standard

# Roll Turning Inserts

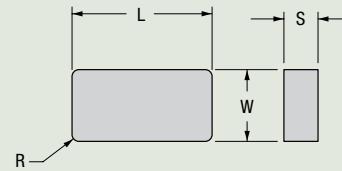

Shape: LNUN	Part Number ISO	GA5035 G-935 G-50 G-74	Part Number ANSI	Dimensions (millimeters)			
				W	L	S	R
	LNUN-4442	○ ○ ○ ○	LNUN-4442	12,70	25,40	6,35	0,79
	LNUN-4444	○ ○ ○ ○	LNUN-4444	12,70	25,40	6,35	1,57
	LNUN-4452	○ ○ ○ ○	LNUN-4452	12,70	25,40	7,92	0,79
	LNUN-4454	○ ○ ○ ○	LNUN-4454	12,70	25,40	7,92	1,57
	LNUN-5444	○ ○ ○ ○	LNUN-5444	15,88	25,40	6,35	1,57
	LNUN-5464	○ ○ ○ ○	LNUN-5464	15,88	25,40	9,53	1,57
	LNUN-5564	○ ○ ○ ○	LNUN-5564	15,88	31,75	9,53	1,57
	LNUN-6568	○ ○ ○ ○	LNUN-6568	19,05	31,75	9,53	3,18
	LNUN-6684	○ ○ ○ ○	LNUN-6684	19,05	38,10	12,70	1,57
	LNUN-6688	○ ○ ● ○	LNUN-6688	19,05	38,10	12,70	3,18
	LNUN-66812	○ ○ ○ ○	LNUN-66812	19,05	38,10	12,70	4,75
	LNUN-68812	○ ○ ○ ○	LNUN-68812	19,05	50,80	12,70	4,75
<b>Carbide Coatings</b>		GA5035 G-935 G-50 G-74					
MT-CVD Coated	PVD Coated	Uncoated					


## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard  
 Stocked or Available Upon Request

 Stocked or Available Upon Request

# Roll Turning Inserts

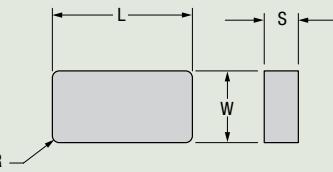


Shape: LNMN	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)				
			WG-300	WG-600	WG-700	XSYTIN-1	Phase Toughened Si <sub>3</sub> N <sub>4</sub>	GSN100			W	L	S	R	
	<b>LNMN-4442</b>	T4B	○	○	○	○	○	○	<b>LNMN-4442</b>	T4B	12,70	25,40	6,35	0,79	
		T10B	○	○	○	○	○	○		T10B	12,70	25,40	6,35	0,79	
	<b>LNMN-4444</b>	T4B	○	○	○	○	○	○	<b>LNMN-4444</b>	T4B	12,70	25,40	6,35	1,57	
		T10B	○	○	○	○	○	○		T10B	12,70	25,40	6,35	1,57	
	<b>LNMN-4452</b>	T4B	○	○	○	○	○	○	<b>LNMN-4452</b>	T4B	12,70	25,40	7,92	0,79	
		T10B	○	○	○	○	○	○		T10B	12,70	25,40	7,92	0,79	
	<b>LNMN-4454</b>	T4B	○	○	○	○	○	○	<b>LNMN-4454</b>	T4B	12,70	25,40	7,92	1,57	
		T10B	○	○	○	○	○	○		T10B	12,70	25,40	7,92	1,57	
	<b>LNMN-5444</b>	T4B	○	○	○	○	○	○	<b>LNMN-5444</b>	T4B	15,88	25,40	6,35	1,57	
		T10B	○	○	○	○	○	○		T10B	15,88	25,40	6,35	1,57	
	<b>LNMN-5464</b>	T4B	○	○	○	○	○	○	<b>LNMN-5464</b>	T4B	15,88	25,40	9,53	1,57	
		T10B	○	○	○	○	○	●		T10B	15,88	25,40	9,53	1,57	
	<b>LNMN-5564</b>	T4B	○	○	○	○	○	○	<b>LNMN-5564</b>	T4B	15,88	31,75	9,53	1,57	
		T10B	○	○	○	○	○	○		T10B	15,88	31,75	9,53	1,57	
	<b>LNMN-6568</b>	T4B	○	○	○	○	○	○	<b>LNMN-6568</b>	T4B	19,05	31,75	9,53	3,18	
		T10B	○	○	○	○	○	○		T10B	19,05	31,75	9,53	3,18	
	<b>LNMN-6684</b>	T4B	○	○	○	○	○	○	<b>LNMN-6684</b>	T4B	19,05	38,10	12,70	1,57	
		T10B	○	○	○	○	○	○		T10B	19,05	38,10	12,70	1,57	
	<b>LNMN-6688</b>	T4B	○	○	●	○	○	○	<b>LNMN-6688</b>	T4B	19,05	38,10	12,70	3,18	
		T10B	●	●	●	○	○	●		T10B	19,05	38,10	12,70	3,18	
	<b>LNMN-66812</b>	T4B	○	○	○	○	○	○	<b>LNMN-66812</b>	T4B	19,05	38,10	12,70	4,75	
		T10B	○	○	○	○	○	○		T10B	19,05	38,10	12,70	4,75	
<b>Ceramic Classification</b>															
 Whisker Ceramic  Phase Toughened  Silicon Nitride  Alumina TiC				WG-300	WG-600	WG-700	XSYTIN-1	Whisker	Phase Toughened Si <sub>3</sub> N <sub>4</sub>	GSN100	Al <sub>2</sub> O <sub>3</sub> -TiC GEM-7	<b>Edge Prep Descriptions – HT 06</b>			

Page HT 05 – grade descriptions

If edge prep is not shown, call Greenleaf Technical Service for assistance.

## Edge Prep Descriptions – HT 06

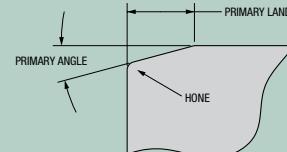


Stocked  
or Available  
Upon Request

Stocked Standard

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


# Round V-Bottom Inserts

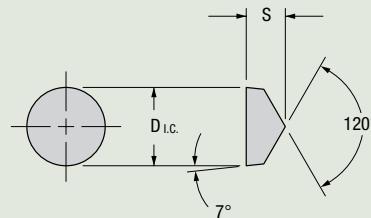

Shape: Round V-Bottom	Part Number ISO	Edge Prep	Whisker						Part Number ANSI	Edge Prep	Dimensions (millimeters)		
			WG-300	WG-600	WG-700	Phase Toughened	XSYTIN-1	GSN100	Si <sub>3</sub> N <sub>4</sub>		D_I.C.	S	
	RCGX-060400	T2A	○	○	○	○	○	●		RCGN-2V	T2A	6,35	4,75
	RCGX-090700	T2A	●	○	○	○	○	●		RCGN-3V	T2A	9,53	7,92
		T4B	●	○	○	○	○	○			T5B	9,53	7,92
	RCGX-120700	T2A	●	●	●	○	○	●		RCGN-4V	T2A	12,70	7,92
		T4A	○	○	○	○	○	●			T4A	12,70	7,92
		T5A	●	○	○	○	○	●			T5A	12,70	7,92
		T5B	●	○	○	○	○	●			T5B	12,70	7,92
	RCGX-151000	T2A	○	○	○	○	○	○		RCGN-5V	T2A	15,88	10,01
	RCGX-191000	T2A	○	○	○	○	○	○		RCGX-106	T2A	19,05	10,01
	RCGX-191200	T2A	○	○	○	○	○	○		RCGN-6V	T2A	19,05	12,70
<b>Ceramic Classification</b>				WG-300	WG-600	WG-700	Phase Toughened	XSYTIN-1	GSN100	Whisker		Edge Prep Descriptions – HT 06	
				Si <sub>3</sub> N <sub>4</sub>									
				Al <sub>2</sub> O <sub>3</sub> -TiC				GEM-7					



# Round V-Bottom Inserts

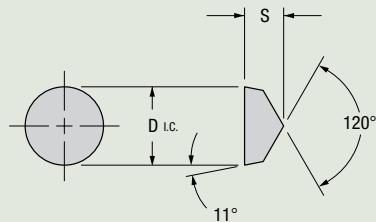

Shape: Round V-Bottom	Part Number ISO	Edge Prep	Whisker				Part Number ANSI	Edge Prep	Dimensions (millimeters)	
			WG-300	WG-600	WG-700	XSYTIN-1 Phase Toughened Si <sub>3</sub> N <sub>4</sub>			D I.C.	S
	<b>RPGX-060400</b>	T2A	● ○ ● ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○		<b>RPGN-2V</b>	T2A	6,35	4,75
	<b>RPGX-090700</b>	T2A	● ● ● ○ ○ ○	○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○		<b>RPGN-3V</b>	T2A	9,53	7,92
		T4B	○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○			T4B	9,53	7,92
	<b>RPGX-120700</b>	T2A	● ● ○ ○ ○ ○	○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○		<b>RPGN-4V</b>	T2A	12,70	7,92
		T4B	○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○	○ ○ ○ ○ ○ ○			T4B	12,70	7,92
<b>Ceramic Classification</b>				WG-300	WG-600	WG-700	Whisker	XSYTIN-1 Phase Toughened Si <sub>3</sub> N <sub>4</sub>	GSM100 Al <sub>2</sub> O <sub>3</sub> -TiC	GEM-7 Al <sub>2</sub> O <sub>3</sub> -TiC
Whisker Ceramic		Phase Toughened		Silicon Nitride		Alumina TiC				
<b>Edge Prep Descriptions – HT 06</b>										

Page HT 05 – grade descriptions

If edge prep is not shown, call Greenleaf Technical Service for assistance.

Stocked or Available Upon Request

Stocked Standard


**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

90°



# Square Inserts

## Negative

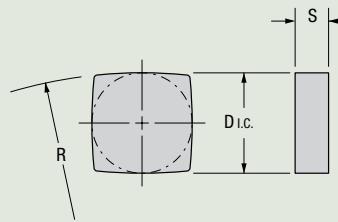

Shape: Square	Part Number ISO	Edge Prep	Whisker				Part Number ANSI	Edge Prep	Dimensions (millimeters)		
			WG-300	WG-600	WG-700	XSYTIN-1			D_I.C.	S	R
	SNGN-128-R4.5	T4B	○	○	○	○	○	○	38,10	12,70	114,30
<b>Ceramic Classification</b>											
Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>			WG-300 Whisker	WG-600 XSYTIN-1	WG-700 GSN100	Phase Toughened Si <sub>3</sub> N <sub>4</sub>	GEM-7 Al <sub>2</sub> O <sub>3</sub> -TiC
Page HT 05 – grade descriptions											
If edge prep is not shown, call Greenleaf Technical Service for assistance.											
<b>Edge Prep Descriptions – HT 06</b>											

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

Stocked Standard  
 Stocked or Available Upon Request

Stocked or Available Upon Request

Stocked  
or Available -    
Upon Request Stocked Standard -

**Greenleaf Sales**  
**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Inserts


ROUND  
V-BOTTOM  
RPGN , RCGN STYLES




SINGLE  
RECTANGULAR  
LNU STYLE



DOUBLE  
RECTANGULAR  
LNU STYLE




SINGLE SQUARE  
NEGATIVE OR POSITIVE  
SNUN , SPUN STYLES




DOUBLE SQUARE  
NEGATIVE OR POSITIVE  
SNUN , SPUN STYLE



## Shank Options



STRAIGHT SHANK



CUSTOMIZED  
V-BOTTOM  
SHANK




FARREL  
QUICK CHANGE

## Inserts *continued*

### TRIANGULAR INSERT

NEGATIVE OR POSITIVE  
TPGN , TNUN STYLES




### DIAMOND INSERT

NEGATIVE OR POSITIVE  
CNGN , CPGN STYLES




### ROUND INSERT

NEGATIVE OR POSITIVE  
RNGN , RCGN STYLES  
CDH STYLES



### FINISHING INSERT


SNGN-128R4.5

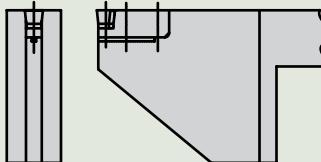


## Shank Options *continued*



GREENLEAF  
CAM LOCK



CUSTOMIZED  
SHANK FOR  
HERCULES  
LATHES



CUSTOMIZED  
SHANK FOR  
WALDRICH  
SIEGEN  
LATHES


### Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

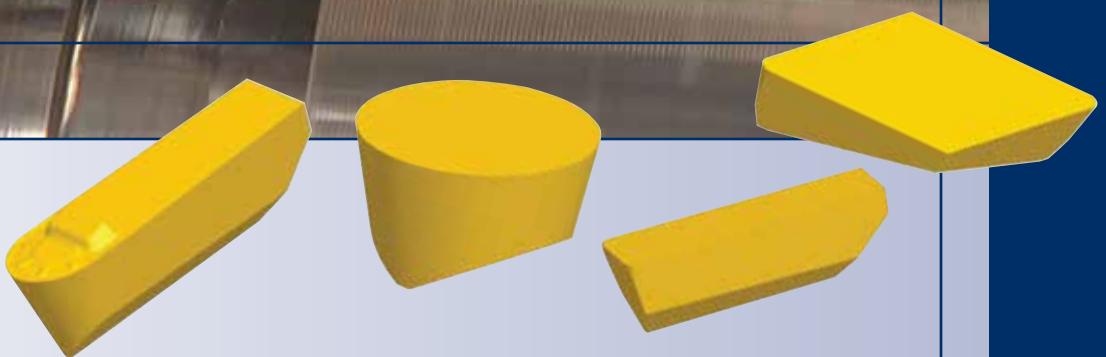

**Grooving, Profiling and.....GP 02-03  
Cut-Off Inserts**

<i>Grade Descriptions .....</i>	<i>GP 04</i>
<i>Insert Grade Reference .....</i>	<i>GP 05</i>
<i>Pictorial Index.....</i>	<i>GP 07</i>
<i>Inserts.....</i>	<i>GP 08-18</i>

**Toolholders and Bars .....**GP 19-38

**Support Blades and Holders .....**GP 39-55



**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Grooving, Profiling and Cut-Off Inserts

Greenleaf offers one of the most comprehensive lines of grooving, profiling and cut-off inserts in the industry. Every application on the shop floor can use this unique tooling system that accommodates both ceramic and carbide inserts.

Our advanced MT-CVD coated and PVD-coated grades have the strength and wear resistance needed for higher cutting speeds and longer tool life.

Greenleaf is the industry leader in the development and manufacture of ceramic and coated ceramic inserts including WG-600®, the only commercially available, second generation, coated ceramic-composite cutting tool using whisker reinforcement. WG-600 is one of seven prominent advanced-ceramic grades that continue to increase productivity in industry.



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## CARBIDE

**Greenleaf offers a comprehensive line of carbide inserts in grades ranging from sub-micron C-1 through C-8 classifications. An industry pioneer in coated carbide, Greenleaf offers a variety of uncoated, MT-CVD coated and PVD-coated grades. Carbide inserts are available in ANSI standard geometries with multi-purpose chipbreakers for heavy roughing through finishing.**

### COATED – MT-CVD

**GA5025** A high-speed MT-CVD coated grade for turning, light roughing and finishing of carbon and alloy steels, as well as selected stainless steels.

**GA5026** A high-speed grade developed for turning nickel- and cobalt-based super-alloys, stainless steels, and refractory metals. The advanced MT-CVD coating over a micro-grain substrate offers high wear resistance. GA5026 has exceptional resistance to the notching and deformation common to machining high strength materials. Apply at high speeds and light feeds in turning and selected milling applications.

**GA5035** A high-performance MT-CVD coated grade for turning all types of steels, and selected stainless steels. GA5035 can be used in rough, semi-finish, and finish turning situations requiring resistance to heat deformation, thermal shock, and abrasion. GA5035 should be applied at high speeds and a range of feeds.

**GA5125** New high-performance MT-CVD coated carbide milling grade especially suited for manganese steel. GA5125 is also applicable on chrome-moly steel, tool steel and similar high alloy steels. GA5125 provides excellent resistance to abrasion, crater wear, thermal shock, deformation and edge build-up. GA5125 should be applied at high speeds with moderate feed rates.

### COATED – PVD

**G-915** Multi-layer PVD-coated grade, excellent for cut off, milling and turning high-temp alloys, stainless steel, and low carbon steels. The multi-layer PVD coating adds heat and abrasion resistance to the tough, shock-resistant substrate. G-915 should be run at moderate speeds and moderate to high feeds in milling and interrupted turning applications.

**G-920** PVD-coated grade for turning and milling high-strength materials such as high-temp alloys, titanium and stainless steel. G-920 is also an excellent grade for aluminum and refractory metals. This grade has the resistance to deformation and notching required for higher speeds than G-910.

**G-925** Multi-layer PVD-coated grade specifically designed for machining abrasive and difficult-to-machine materials. Typical applications include high-temp alloys, titanium and other refractory metals, stainless steel, and many cast irons. G-925 exhibits excellent resistance to notching and deformation. Apply at moderate to high speeds and moderate feeds.

**G-935** Multi-layer PVD-coated grade for steel milling and turning applications requiring additional resistance to mechanical and thermal shock. The multi-layered PVD coating increases the speed capability and wear resistance in tough milling and interrupted turning applications.

### UNCOATED

**G-20M** A sub-micron C-2 carbide grade suited for use in turning and milling titanium and nickel-based super-alloys. G-20M has the strength and edge wear characteristics to resist notching when turning high-strength materials.

### CERAMIC

**Greenleaf is the industry leader in the development and manufacture of ceramic and coated ceramic inserts in ANSI standard and special geometries. Some of the most prominent include:**

**WG-300®** Whisker-reinforced ceramic with excellent wear and shock resistance at high surface speeds. WG-300 is very effective at machining nickel and cobalt based super-alloys, and other hard materials at metal removal rates up to 10 times higher than carbide.

**WG-600®** Coated whisker-reinforced ceramic offering longer tool life and better performance over uncoated ceramics due to outstanding thermal properties and shock-resistance at high cutting speeds. Application areas include rough and finish turning, as well as high-performance milling of high-strength alloys, hardened steels and select stainless steels.

*U.S. Patent No. 6,447,896 B1.*

**WG-700™** New whisker-reinforced  $\text{Al}_2\text{O}_3$  ceramic substrate featuring improved toughness and a unique high-speed coating. WG-700 is ideal for machining nickel- and cobalt-based super alloys and other difficult-to-machine materials. WG-700 exhibits high metal-removal rates with exceptional tool life. *U.S. Patent No. 6,447,896 B1*


**XSYTIN™-1** New phase-toughened ceramic capable of extreme feed rates. XSYTIN™-1 excels at machining a wide variety of materials including steels, cast and ductile irons, high-temperature alloys and other challenging metals. XSYTIN™-1 is ideal for use in interrupted cuts, scale, abrasive casting materials and milling.

**GSN100™** New engineered blend of silicon nitride and proprietary toughening agents that redefines productivity in the machining of cast iron. GSN100 delivers outstanding tool life at high cutting speeds in turning, grooving and milling applications.

**GEM-7™**  $\text{Al}_2\text{O}_3 + \text{TiC}$  composite ceramic with a high degree of predictability in roll turning and hard alloy (up to 65 R/c) machining.

**GEM-19™** Cold pressed and sintered  $\text{Al}_2\text{O}_3$  ceramic for economical roughing and finishing of cast iron grades application range on severe interruption or old machinery.


# Insert Grade Reference for Grooving, Profiling and Cut Off


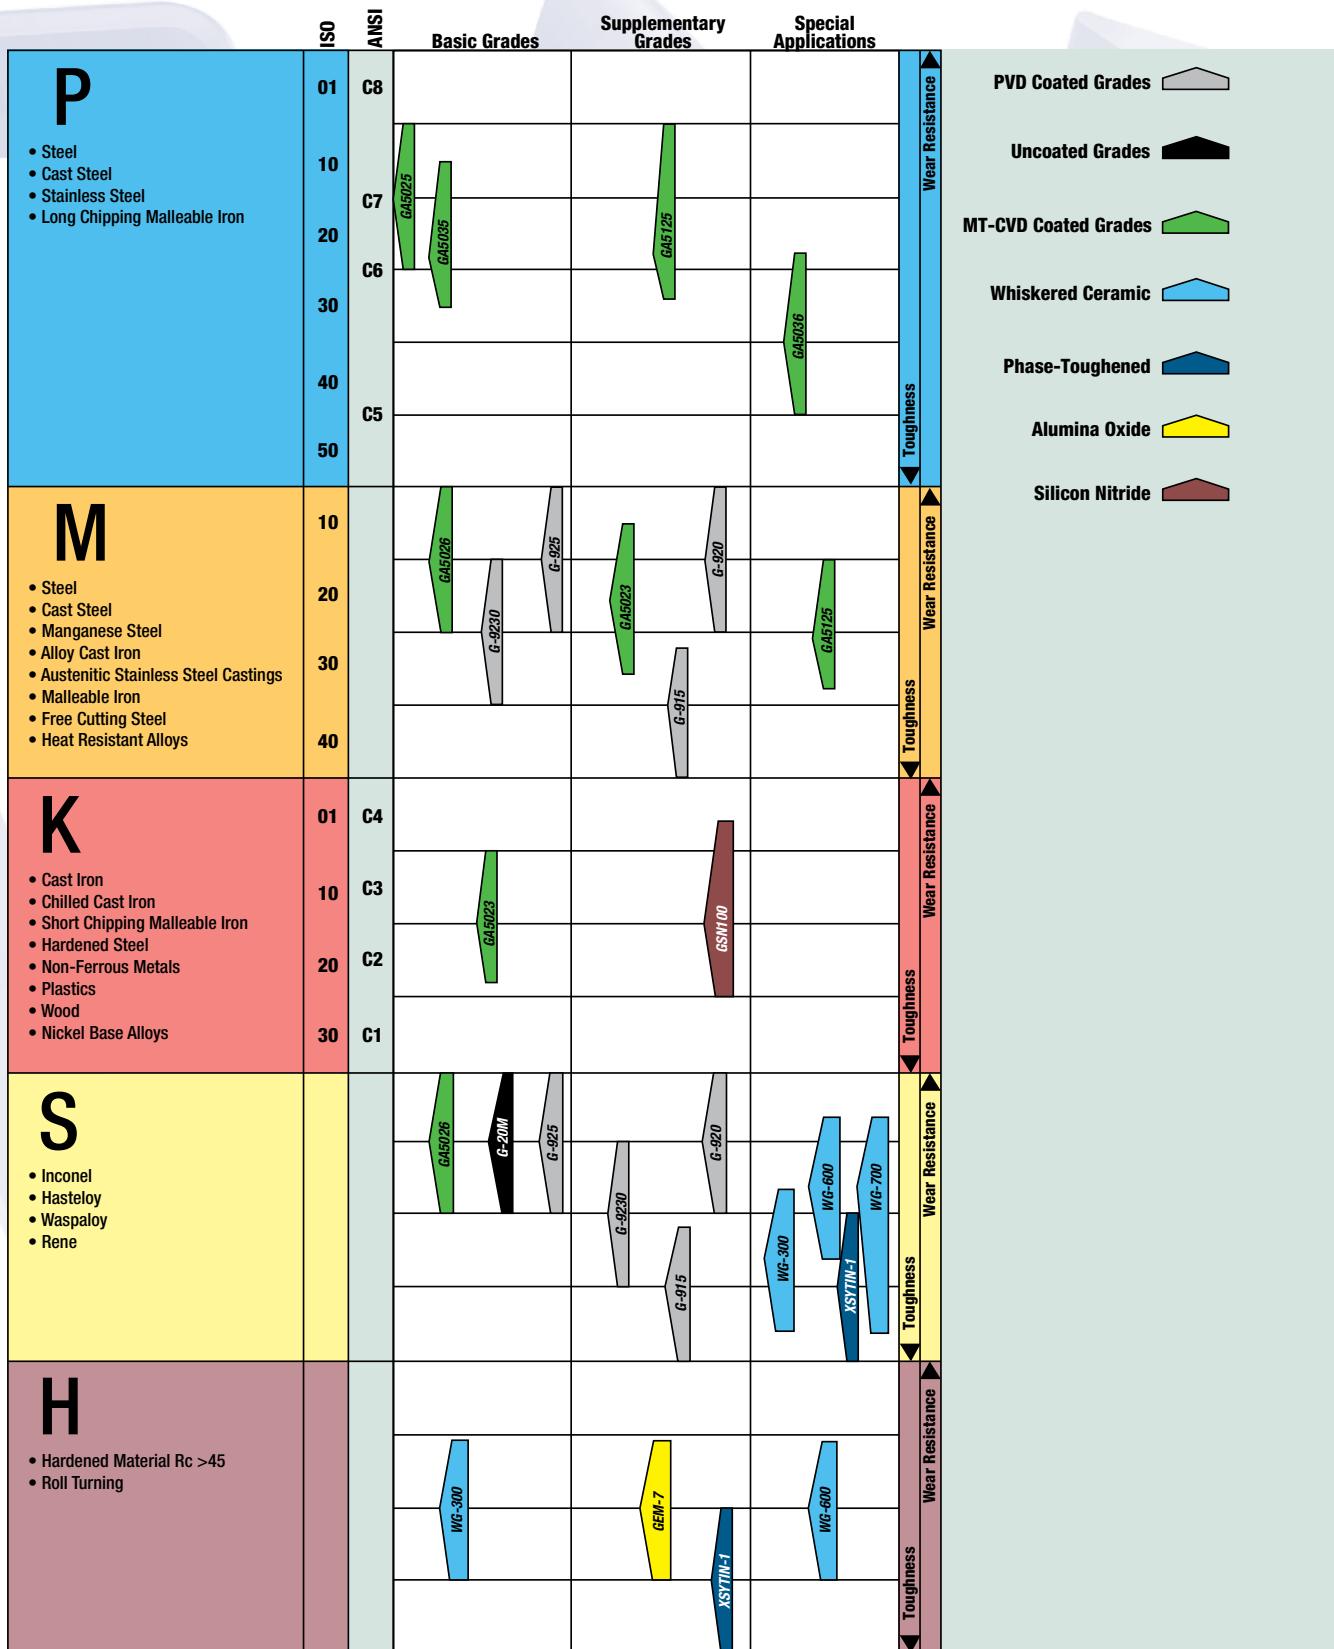




**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Greenleaf Cut-Off System**

**COS**  
page: GP 08

**Single-Ended Groovers**

**Full Nose**  
page: GP 09

**Flat Nose**  
page: GP 09

**WG-Style  
Full Nose**  
page: GP 10

**WG-Style  
Flat Nose**  
page: GP 11

**WGC  
Full Nose**  
page: GP 12

**WGC  
Flat Nose**  
page: GP 13



**V-Bottom Round Inserts**

**RCGX**  
Positive: Carbide  
page: GP 14

**RCGX**  
Positive: Ceramic  
page: GP 14

**RPGX**  
Positive: Carbide  
page: GP 15

**RPGX**  
Positive: Ceramic  
page: GP 15




**RCGR/RPGR**  
Positive Chipform  
V-Bottom  
page: GP 16

**RCGT/RPGT**  
Positive Chipform  
V-Bottom  
page: GP 17

**Pulley and  
Poly Groove  
Inserts**  
page: GP 18

**Greenleaf Sales**

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)
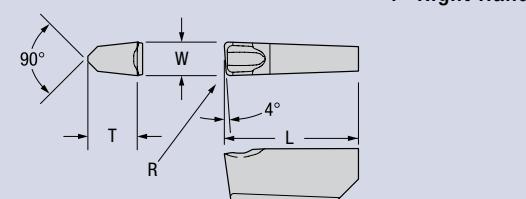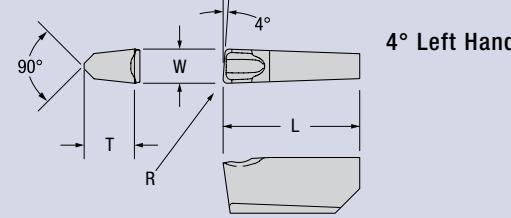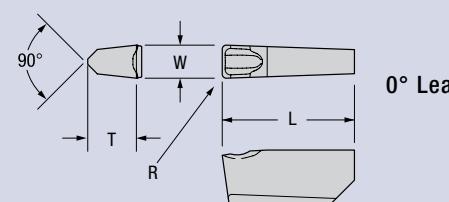
# Greenleaf Cut-Off System

Shape: Groove/Turn	Part Number ISO	G-915	Part Number ANSI	Dimensions (millimeters)			
				W	L	T	R
	COS-4094-0	●	COS-4094-0	2,39	12,70	4,75	0,25
	COS-4125-0	●	COS-4125-0	3,18	12,70	4,75	0,25
	COS-4187-0	●	COS-4187-0	4,75	12,70	4,75	0,25
	COS-4094-4L	●	COS-4094-4L	2,39	12,70	4,75	0,25
	COS-4125-4L	●	COS-4125-4L	3,18	12,70	4,75	0,25
	COS-4187-4L	●	COS-4187-4L	4,75	12,70	4,75	0,25
	COS-4094-4R	●	COS-4094-4R	2,39	12,70	4,75	0,25
	COS-4125-4R	●	COS-4125-4R	3,18	12,70	4,75	0,25
	COS-4187-4R	●	COS-4187-4R	4,75	12,70	4,75	0,25
Carbide Coatings		G-915					
		PVD Coated					



See pages GP29, GP32, GP34, GP35, GP43 and GP44 for toolholders.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard

 Stocked or Available Upon Request


# Full Nose Grooving Inserts

Shape: Groove/Turn	Part Number	Dimensions (millimeters)					
		ANSI	W	L	T	R	
	GTS-4125	● ● ● ● ●	GTS-4125	3,18	12,70	4,75	1,59
	GTS-4187	● ● ● ● ●	GTS-4187	4,75	12,70	4,75	2,37
	GTS-6250	● ● ○ ● ●	GTS-6250	6,35	19,05	6,35	3,18
Carbide Coatings							
MT-CVD Coated		GA5026	GA5035	G-935	G-925	G-915	
PVD Coated							
Uncoated							

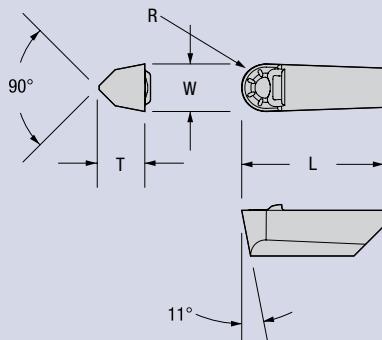

# Flat Nose Grooving Inserts


Shape: Groove/Turn	Part Number	Dimensions (millimeters)					
		ANSI	W	L	T	R	
	GTS-4125-1	● ● ● ● ●	GTS-4125-1	3,18	12,70	4,75	0,38
	GTS-4125-2	● ● ● ● ●	GTS-4125-2	3,18	12,70	4,75	0,79
	GTS-4187-1	● ● ● ● ●	GTS-4187-1	4,75	12,70	4,75	0,38
	GTS-4187-2	● ● ● ● ●	GTS-4187-2	4,75	12,70	4,75	0,79
	GTS-6250-1	● ● ● ● ●	GTS-6250-1	6,35	19,05	6,35	0,38
	GTS-6250-2	● ● ● ● ●	GTS-6250-2	6,35	19,05	6,35	0,79
Carbide Coatings							
MT-CVD Coated		GA5026	GA5035	G-935	G-915		
PVD Coated							
Uncoated							

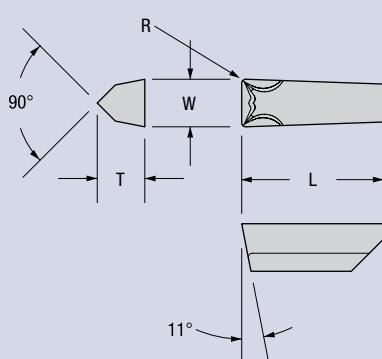

Stocked or Available Upon Request  Stocked Standard

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# WG-Style, Full Nose Grooving Inserts

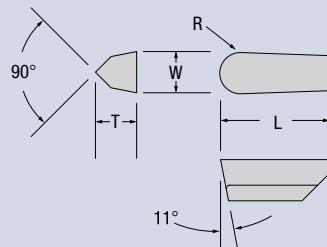

Shape: Groover	Part Number	ISO							Part Number	Dimensions (millimeters)														
			WG-300	WG-600	WG-700	Whisker	XSYTIN-1	Phase Toughened	GSN100	Si <sub>3</sub> N <sub>4</sub>	GEM-19	Al <sub>2</sub> O <sub>3</sub>	W	L	T	R								
	WG-4094		● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-4094	2,39	12,70	4,75	1,19							
	WG-4125		● ● ○	● ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	WG-4125	3,18	12,70	4,75	1,59							
	WG-4156		● ● ○	● ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	WG-4156	3,96	12,70	4,75	1,98							
	WG-4187		● ● ○	● ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	WG-4187	4,75	12,70	4,75	2,37							
	WG-6218		● ● ○	● ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	WG-6218	5,54	19,05	6,35	2,77							
	WG-6250		● ● ○	● ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	WG-6250	6,35	19,05	6,35	3,18							
	WG-6281		● ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	WG-6281	7,14	19,05	6,35	3,57							
	WG-8312		○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	WG-8312	7,93	25,40	8,56	3,96							
	WG-8344		● ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	WG-8344	8,74	25,40	8,56	4,37							
	WG-8375		● ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	○ ○ ○	WG-8375	9,53	25,40	8,56	4,76							
<b>Ceramic Classification</b> <table style="margin-left: auto; margin-right: auto;"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Whisker Ceramic</td> <td>Phase Toughened</td> <td>Silicon Nitride</td> <td>Alumina TiC</td> <td>Al<sub>2</sub>O<sub>3</sub></td> </tr> </table>																				Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>
																								
Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>																				

Page GP 04 – grade description

\* The standard edge prep for WG groovers is "A" hone (0,012–0,025mm).


## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard  
 Stocked or Available Upon Request

 Stocked or Available Upon Request

# WG-Style, Flat Nose Grooving Inserts

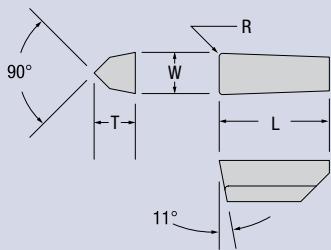

Shape: Groover	Part Number							Part Number	Dimensions (millimeters)					
		WG-300	WG-600	WG-700	XSTIN-1	GSN100	Si <sub>3</sub> N <sub>4</sub>	GEM-19	Al <sub>2</sub> O <sub>3</sub>	W	L	T	R	
	WG-4094-1	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-4094-1	2,39	12,70	4,75	0,38
	WG-4094-2	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-4094-2	2,39	12,70	4,75	0,79
	WG-4125-1	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-4125-1	3,18	12,70	4,75	0,38
	WG-4125-2	● ○	● ○	● ○	○ ○	● ○	○ ○	○ ○	○ ○	WG-4125-2	3,18	12,70	4,75	0,79
	WG-4156-1	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-4156-1	3,96	12,70	4,75	0,38
	WG-4156-2	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-4156-2	3,96	12,70	4,75	0,79
	WG-4156-3	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-4156-3	3,96	12,70	4,75	1,17
	WG-4187-1	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-4187-1	4,75	12,70	4,75	0,38
	WG-4187-2	● ○	● ○	● ○	○ ○	● ○	○ ○	○ ○	○ ○	WG-4187-2	4,75	12,70	4,75	0,79
	WG-6218-1	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-6218-1	5,54	19,05	6,35	0,38
	WG-6218-2	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-6218-2	5,54	19,05	6,35	0,79
	WG-6250-1	● ●	● ●	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-6250-1	6,35	19,05	6,35	0,38
	WG-6250-2	● ●	● ●	● ○	○ ○	● ○	○ ○	○ ○	○ ○	WG-6250-2	6,35	19,05	6,35	0,79
	WG-6250-3	● ●	● ●	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-6250-3	6,35	19,05	6,35	1,17
	WG-6250-4	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-6250-4	6,35	19,05	6,35	1,57
	WG-6281-1	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-6281-1	7,14	19,05	6,35	0,38
	WG-6281-2	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-6281-2	7,14	19,05	6,35	0,79
	WG-6281-3	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-6281-3	7,14	19,05	6,35	1,17
	WG-8312-1	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8312-1	7,92	25,40	8,56	0,38
	WG-8312-2	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8312-2	7,92	25,40	8,56	0,79
	WG-8312-3	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8312-3	7,92	25,40	8,56	1,17
	WG-8312-4	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8312-4	7,92	25,40	8,56	1,57
	WG-8344-1	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8344-1	8,74	25,40	8,56	0,38
	WG-8344-2	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8344-2	8,74	25,40	8,56	0,79
	WG-8344-3	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8344-3	8,74	25,40	8,56	1,17
	WG-8344-4	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8344-4	8,74	25,40	8,56	1,57
	WG-8375-1	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8375-1	9,53	25,40	8,56	0,38
	WG-8375-2	● ○	● ○	● ○	○ ○	● ○	○ ○	○ ○	○ ○	WG-8375-2	9,53	25,40	8,56	0,79
	WG-8375-3	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8375-3	9,53	25,40	8,56	1,17
	WG-8375-4	● ○	● ○	● ○	○ ○	○ ○	○ ○	○ ○	○ ○	WG-8375-4	9,53	25,40	8,56	1,57

**Ceramic Classification**

				
Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>

WG-300	WG-600	WG-700	XSTIN-1	GSN100	Si <sub>3</sub> N <sub>4</sub>	GEM-19	Al <sub>2</sub> O <sub>3</sub>
Whisker	Phase Toughened	Si <sub>3</sub> N <sub>4</sub>	Al <sub>2</sub> O <sub>3</sub>				

Page GP 04 – grade description


\* The standard edge prep for WG groovers is "A" hone (0,012–0,025mm).

 Stocked or Available Upon Request  

 Stocked Standard  

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# WGC Full Nose Grooving Inserts

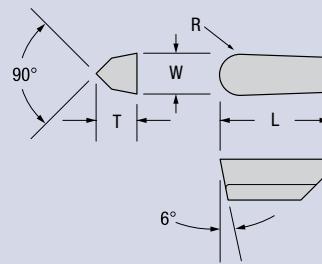

Shape: Groover	Part Number	Whisker								Part Number	Dimensions (millimeters)						
		WG-300	WG-600	WG-700	Phase Toughened	XSYTIN-1	GSN100	Sia <sub>3</sub> N <sub>4</sub>	GEM-7	Al <sub>2</sub> O <sub>3</sub> -TiC	GEM-19	Al <sub>2</sub> O <sub>3</sub>	W	L	T	R	
	WGC-4094	○	○	○	○	○	○	○	○	○	○	○	WGC-4094	2,39	12,70	4,75	1,19
	WGC-4125	○	○	○	○	○	○	○	○	○	○	○	WGC-4125	3,18	12,70	4,75	1,59
	WGC-4156	○	○	○	○	○	○	○	○	○	○	○	WGC-4156	3,96	12,70	4,75	1,98
	WGC-4187	○	○	○	○	○	○	○	○	○	○	○	WGC-4187	4,75	12,70	4,75	2,37
	WGC-6218	○	○	○	○	○	○	○	○	○	○	○	WGC-6218	5,54	19,05	6,35	2,77
	WGC-6250	○	○	○	○	○	●	○	○	○	○	○	WGC-6250	6,35	19,05	6,35	3,18
	WGC-6281	○	○	○	○	○	○	○	○	○	○	○	WGC-6281	7,14	19,05	6,35	3,57
	WGC-8312	○	○	○	○	○	○	○	○	○	○	○	WGC-8312	7,93	25,40	8,56	3,96
	WGC-8344	○	○	○	○	○	○	○	○	○	○	○	WGC-8344	8,74	25,40	8,56	4,37
	WGC-8375	○	○	○	○	○	○	○	○	○	○	○	WGC-8375	9,53	25,40	8,56	4,76
Ceramic Classification																	
 Whisker Ceramic  Phase Toughened  Silicon Nitride  Alumina TiC  Al <sub>2</sub> O <sub>3</sub>																	
Page GP 04 – grade description																	

\* WGC style inserts come standard with a "T1A" edge prep (0,05–0,10mm x 20 degrees and 0,012–0,025mm hone).


## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard  
 Stocked or Available Upon Request

 Stocked or Available Upon Request

# WGC Flat Nose Grooving Inserts

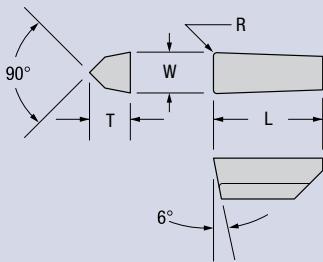

Shape: Groover	Part Number	Whisker								Part Number	Dimensions (millimeters)						
		WG-300	WG-600	WG-700	XSY/TIN-1	Phase Toughened	GSN100	Si <sub>3</sub> N <sub>4</sub>	GEM-7	Al <sub>2</sub> O <sub>3</sub> -TiC	GEM-19	Al <sub>2</sub> O <sub>3</sub>	W	L	T	R	
	WGC-4094-1	○	○	○	○	○	○	○	○	○	○	○	WGC-4094-1	2,39	12,70	4,75	0,38
	WGC-4094-2	○	○	○	○	○	○	○	○	○	○	○	WGC-4094-2	2,39	12,70	4,75	0,79
	WGC-4125-1	○	○	○	○	○	●	○	○	○	○	○	WGC-4125-1	3,18	12,70	4,75	0,38
	WGC-4125-2	○	○	○	○	○	○	○	○	○	○	○	WGC-4125-2	3,18	12,70	4,75	0,79
	WGC-4156-1	○	○	○	○	○	○	○	○	○	○	○	WGC-4156-1	3,96	12,70	4,75	0,38
	WGC-4156-2	○	○	○	○	○	○	○	○	○	○	○	WGC-4156-2	3,96	12,70	4,75	0,79
	WGC-4187-1	○	○	○	○	○	○	○	○	○	○	○	WGC-4187-1	4,75	12,70	4,75	0,38
	WGC-4187-2	○	○	○	○	○	○	○	○	○	○	○	WGC-4187-2	4,75	12,70	4,75	0,79
	WGC-6218-1	○	○	○	○	○	○	○	○	○	○	○	WGC-6218-1	5,54	19,05	6,35	0,38
	WGC-6218-2	○	○	○	○	○	○	○	○	○	○	○	WGC-6218-2	5,54	19,05	6,35	0,79
	WGC-6250-1	○	○	○	○	○	○	○	○	○	○	○	WGC-6250-1	6,35	19,05	6,35	0,38
	WGC-6250-2	○	○	○	○	○	○	○	○	○	○	○	WGC-6250-2	6,35	19,05	6,35	0,79
	WGC-6250-3	○	○	○	○	○	○	○	○	○	○	○	WGC-6250-3	6,35	19,05	6,35	1,17
	WGC-6281-1	○	○	○	○	○	○	○	○	○	○	○	WGC-6281-1	7,14	19,05	6,35	0,38
	WGC-6281-2	○	○	○	○	○	○	○	○	○	○	○	WGC-6281-2	7,14	19,05	6,35	0,79
	WGC-6281-3	○	○	○	○	○	○	○	○	○	○	○	WGC-6281-3	7,14	19,05	6,35	1,17
	WGC-8312-1	○	○	○	○	○	○	○	○	○	○	○	WGC-8312-1	7,92	25,40	8,56	0,38
	WGC-8312-2	○	○	○	○	○	○	○	○	○	○	○	WGC-8312-2	7,92	25,40	8,56	0,79
	WGC-8312-3	○	○	○	○	○	○	○	○	○	○	○	WGC-8312-3	7,92	25,40	8,56	1,17
	WGC-8312-4	○	○	○	○	○	○	○	○	○	○	○	WGC-8312-4	7,92	25,40	8,56	1,57
	WGC-8344-1	○	○	○	○	○	○	○	○	○	○	○	WGC-8344-1	8,74	25,40	8,56	0,38
	WGC-8344-2	○	○	○	○	○	○	○	○	○	○	○	WGC-8344-2	8,74	25,40	8,56	0,79
	WGC-8344-3	○	○	○	○	○	○	○	○	○	○	○	WGC-8344-3	8,74	25,40	8,56	1,17
	WGC-8344-4	○	○	○	○	○	○	○	○	○	○	○	WGC-8344-4	8,74	25,40	8,56	1,57
	WGC-8375-1	○	○	○	○	○	○	○	○	○	○	○	WGC-8375-1	9,53	25,40	8,56	0,38
	WGC-8375-2	○	○	○	○	○	○	○	○	○	○	○	WGC-8375-2	9,53	25,40	8,56	0,79
	WGC-8375-3	○	○	○	○	○	○	○	○	○	○	○	WGC-8375-3	9,53	25,40	8,56	1,17
	WGC-8375-4	○	○	○	○	○	○	○	○	○	○	○	WGC-8375-4	9,53	25,40	8,56	1,57
Ceramic Classification																	
 Whisker Ceramic  Phase Toughened  Silicon Nitride  Alumina TiC  Al <sub>2</sub> O <sub>3</sub>																	
Page GP 04 – grade description																	

\* WGC style inserts come standard with a "T1A" edge prep (0,05–0,10mm x 20° and 0,012–0,025mm hone).


Stocked  
or Available  
Upon Request

Stocked Standard

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Round: Positive V-Bottom Inserts (RCGX)


Carbide

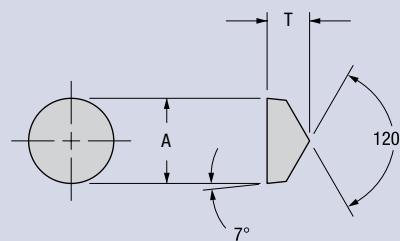


Shape: Round V-Bottom	Part Number ISO	Steel				Stainless Steel		Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters) A      T			
		P15	P25	P25	P35	GA5025	GA5035	GA5125	GA5036	M15	GA5026	M15	K15	S	G-20M	
	RCGX-060400	○	○	○	○	○	○	○	○	○	○	○	○	○	RCGN-2V	6,35      4,75
	RCGX-060600	○	○	○	○	○	○	○	○	○	○	○	○	○	RCGX-102	6,35      6,35
	RCGX-090700	○	○	○	○	●	●	○	○	○	○	○	●	●	RCGN-3V	9,53      7,92
	RCGX-120700	○	○	○	○	●	●	○	○	○	○	●	●	●	RCGN-4V	12,70      7,92
Carbide Coatings		 MT-CVD Coated  PVD Coated  Uncoated				P15	GA5025	GA5035	GA5125	GA5036	M15	GA5026	M15	K15	S	G-20M
		 Steel  Stainless Steel  Cast Iron  High-Temp Alloys				P25	GA5026	GA5036	GA5126	GA5037	M20	GA5023	M20	M35		

# Round: Positive V-Bottom Inserts (RCGX)

Ceramic

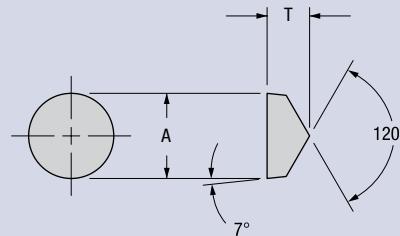

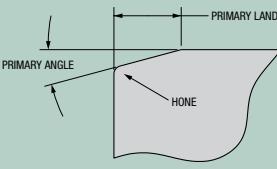Shape: Round V-Bottom	Part Number ISO	Edge Prep*	Whisker				Part Number ANSI	Edge Prep*	Dimensions (millimeters) A      T									
			WG-300	WG-500	WG-700	XSYTIN-1												
	RCGX-060400	T1	●	●	●	●	○	○	○	RCGN-2V	T1	6,35	4,75					
		T2A	●	○	○	○	○	●	○		T2A	6,35	4,75					
	RCGX-090700	T1	●	●	●	●	●	●	○	RCGN-3V	T1	9,53	7,92					
		T1A	○	○	○	○	○	○	○		T1A	9,53	7,92					
	RCGX-120700	T2A	●	○	○	○	○	●	○	RCGN-4V	T2A	9,53	7,92					
		T1	●	●	●	●	●	●	○		T1	12,70	7,92					
		T1A	●	●	●	●	○	○	○		T1A	12,70	7,92					
		T2	●	○	●	○	○	○	○		T2	12,70	7,92					
		T2A	●	●	●	●	○	●	○		T2A	12,70	7,92					
<b>Ceramic Classification</b> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Whisker Ceramic</td> <td>Phase Toughened</td> <td>Silicon Nitride</td> <td>Alumina TiC</td> <td>Al<sub>2</sub>O<sub>3</sub></td> </tr> </table>											Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>	<b>Additional Edge Preps</b>		
Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>														
																		

Page GP 04 – grade description

\* If edge prep is not shown, call Greenleaf technical service for assistance.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

 Stocked Standard   
 Stocked or Available Upon Request   
 Not Recommended



# Round: Positive V-Bottom Inserts (RPGX)

Carbide

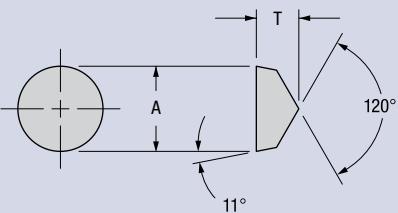


Shape: Round V-Bottom	Part Number ISO	Steel				Stainless Steel		Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)		
		P15	P25	P25	P25	M15	M15	M15	M20	M15	M35	K15	S	A	T
	RPGX-060400	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	G-925	G-920	G-920	G-915	G-915	G-920	G-925	G-920	6,35	4,75
	RPGX-090700	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	G-925	G-920	G-920	G-915	G-915	G-920	G-925	G-920	9,53	7,92
	RPGX-120700	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	M15	M15	M15	M20	M20	M35	K15	S	12,70	7,92

Carbide Coatings			Steel				Stainless Steel		Cast Iron		High-Temp Alloys					
MT-CVD Coated	PVD Coated	Uncoated	P15	GA5025	GA5035	GA5125	M15	GA5026	M20	M15	M35	K15	G-925	G-920	G-915	G-20M
			P25	GA5025	GA5035	GA5125	M15	GA5026	M20	M15	M35	K15	G-925	G-920	G-915	G-20M
			P25	GA5025	GA5035	GA5125	M15	GA5026	M20	M15	M35	K15	G-925	G-920	G-915	G-20M
			P35	GA5025	GA5035	GA5125	M15	GA5026	M20	M15	M35	K15	G-925	G-920	G-915	G-20M

# Round: Positive V-Bottom Inserts (RPGX)

Ceramic

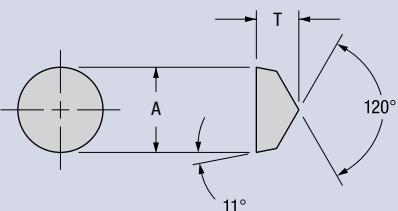


Shape: Round V-Bottom	Part Number ISO	Edge Prep*	Whisker				Phase Toughened	Si <sub>3</sub> N <sub>4</sub>	GEM-7	Al <sub>2</sub> O <sub>3</sub> -TIC	GEM-19	Al <sub>2</sub> O <sub>3</sub>	Part Number ANSI	Edge Prep*	Dimensions (millimeters)	
			WG-300	WG-500	WG-700	XSYTIN-1										
	RPGX-060400	T1	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	○	○	○	○	○	○	RPGN-2V	T1	6,35	4,75
		T2	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	●	●	●	●	●	●	RPGN-2V	T2	6,35	4,75
		T2A	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	○	○	○	○	○	○	RPGN-2V	T2A	6,35	4,75
	RPGX-090700	T1	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	○	○	○	○	○	○	RPGN-3V	T1	9,53	7,92
		T1A	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	●	●	●	●	●	●	RPGN-3V	T1A	9,53	7,92
		T2	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	●	●	●	●	●	●	RPGN-3V	T2	9,53	7,92
	RPGX-120700	T1	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	● ○ ○ ○ ○	○	○	○	○	○	○	RPGN-4V	T1	12,70	7,92
		T2	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	○ ○ ○ ○ ○	●	●	●	●	●	●	RPGN-4V	T2	12,70	7,92

Ceramic Classification										Additional Edge Preps				
Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>			WG-300	WG-500	WG-700	XSYTIN-1	GSN100	GEM-7	Al <sub>2</sub> O <sub>3</sub> -TIC	Al <sub>2</sub> O <sub>3</sub>

Page GP 04 – grade description

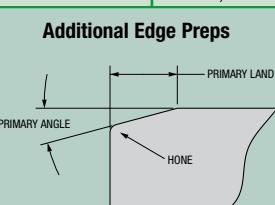


\* If edge prep is not shown, call Greenleaf technical service for assistance.

Not Recommended Stocked or Available Upon Request Stocked Standard


**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Round Inserts (RCGR-V/RPGX-V)

Positive Chipform V-Bottom  
Carbide

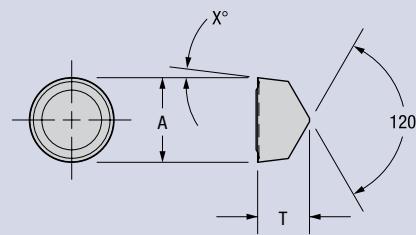

Shape: Round V-Bottom	Part Number	Steel			Stainless Steel			Cast Iron		High-Temp Alloys			Part Number	Dimensions (millimeters)	
		P15	P25	P25	P25	P35	M15	M15	M15	M20	M35	K15	S	G-20M	
	RCGR-060400V-TF				○	○	○			○	○	○	●		
	RCGR-090700V-TF				○	○	●			○	○	●	○		
	RCGR-120700V-TF				○	○	○			○	○	○	○		
	RPGX-060400V-TF				○	●	○			○	●	○	●		
	RPGX-090700V-TF				●	●	●			●	●	●	●		
	RPGX-120700V-TF				●	●	●			●	●	●	○		

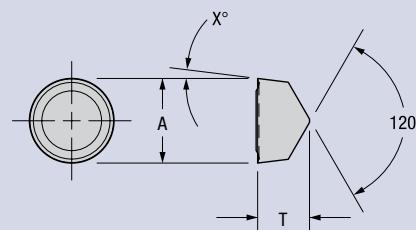

# Round Inserts (RCGR-V/RPGR-V)

Positive Chipform V-Bottom  
Ceramic

Shape: Round V-Bottom	Part Number	Edge Prep *	Whisker					Part Number	Edge Prep *	Dimensions (millimeters)				
			WG-300	WG-600	WG-700	XSYTIN-1 Phase	GSN100 Si <sub>3</sub> N <sub>4</sub>			A	T	X		
	RCGR-060400V-GF1	A	○	○	○	○				RCGR-2V-GF1	A	6,35	4,75	7°
	RCGR-090700V-GF1	A	○	○	○	○				RCGR-3V-GF1	A	9,53	7,92	7°
	RCGR-120700V-GF1	A	●	○	○	○				RCGR-4V-GF1	A	12,70	7,92	7°
	RPGR-060400V-GF1	A	○	○	○	○				RPGR-2V-GF1	A	6,35	4,75	11°
	RPGR-090700V-GF1	A	○	○	○	○				RPGR-3V-GF1	A	9,53	7,92	11°

### Ceramic Classification

Whisker Ceramic	Phase Toughened	Silicon Nitride	Alumina TiC	Al <sub>2</sub> O <sub>3</sub>
-----------------	-----------------	-----------------	-------------	--------------------------------

WG-300	WG-600	WG-700	XSYTIN-1 Phase	GSN100 Si <sub>3</sub> N <sub>4</sub>	GEM-7 Al <sub>2</sub> O <sub>3</sub> -TiC	GEM-19 Al <sub>2</sub> O <sub>3</sub>
Whisker						

Page GP 04 – grade description

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard   Stocked or Available Upon Request   Not Recommended



# Round Inserts (RCGT-V)

Positive Chipform V-Bottom  
Carbide

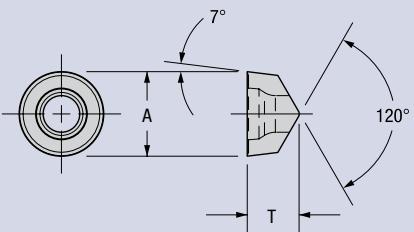


Shape: Round V-Bottom	Part Number ISO	Steel				Stainless Steel		Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)			
		P15	P25	P25	P35	M15	M15	M15	M20	M35	K15	G-915	G-20M	A I.C.	T	
	RCGT-060400V-TF			○	○	○				○	○	○	●	RCGT-2V-TF	6,35	4,75
	RCGT-090700V-TF			○	●	○				○	●	○	○		9,53	7,92
	RCGT-120700V-TF			○	●	○				○	●	○	●		12,70	7,92

Carbide Coatings			P15	GA5025	GA5035	GA5125	GA5036	M15	GA5026	M15	G-925	M15	G-920	S	Part Number ANSI	Dimensions (millimeters)
MT-CVD Coated	PVD Coated	Uncoated	P25	GA5035	GA5125	GA5125	GA5036	P35	GA5026	M15	G-925	M15	G-920	G-915		
Steel	Stainless Steel	Cast Iron	Steel	Stainless Steel	Cast Iron	Steel	Stainless Steel	Cast Iron	Steel	Stainless Steel	Cast Iron	Steel	Stainless Steel			
MT-CVD Coated	PVD Coated	Uncoated	P15	GA5025	GA5035	GA5125	GA5036	P35	GA5026	M15	G-925	M15	G-920	S		

# Round Inserts (RPGT-V)

Positive Chipform V-Bottom  
Carbide

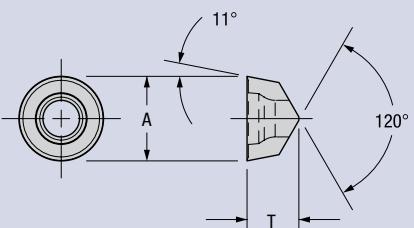

Shape: Round V-Bottom	Part Number ISO	Steel				Stainless Steel		Cast Iron		High-Temp Alloys		Part Number ANSI	Dimensions (millimeters)			
		P15	P25	P25	P35	M15	M15	M15	M20	M35	K15	G-915	G-20M	A I.C.	T	
	RPGT-060400V-TF			○	●	●				○	●	●	○	RPGT-2V-TF	6,35	4,75
	RPGT-090700V-TF			●	○	○				●	○	○	●		9,53	7,92
	RPGT-120700V-TF			○	○	○				○	○	○	○		12,70	7,92

Carbide Coatings			P15	GA5025	GA5035	GA5125	GA5036	M15	GA5026	M15	G-925	M15	G-920	S	Part Number ANSI	Dimensions (millimeters)
MT-CVD Coated	PVD Coated	Uncoated	P25	GA5035	GA5125	GA5125	GA5036	P35	GA5026	M15	G-925	M15	G-920	G-915		
Steel	Stainless Steel	Cast Iron	Steel	Stainless Steel	Cast Iron	Steel	Stainless Steel	Cast Iron	Steel	Stainless Steel	Cast Iron	Steel	Stainless Steel			
MT-CVD Coated	PVD Coated	Uncoated	P15	GA5025	GA5035	GA5125	GA5036	P35	GA5026	M15	G-925	M15	G-920	S		

Not Recommended Stocked or Available Upon Request Stocked Standard






**Greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

# Pulley and Poly Grooving Inserts

When ordering or requesting quotations, you should provide a part print and a sketch with dimensions as indicated in the following format:

Insert Style	B	E°	L
R <sub>1</sub>	R <sub>2</sub>	T	Z

\* Recommended – other specifications available upon request.

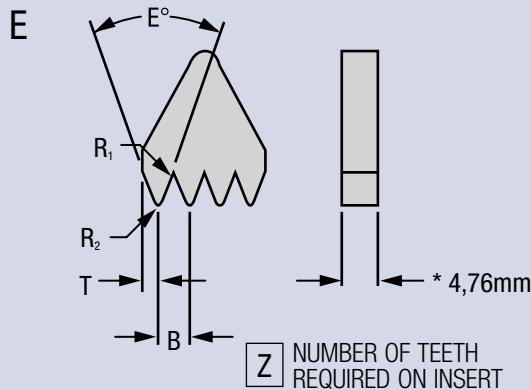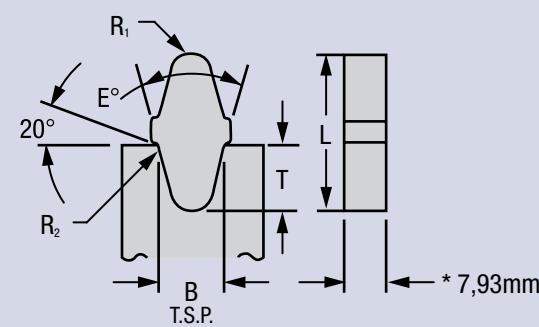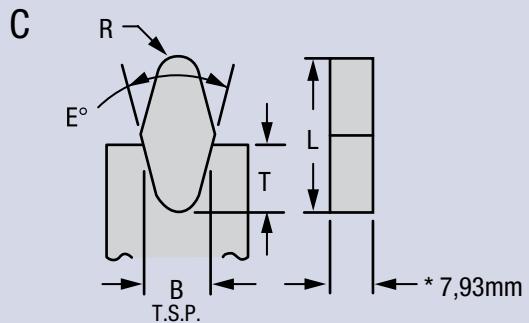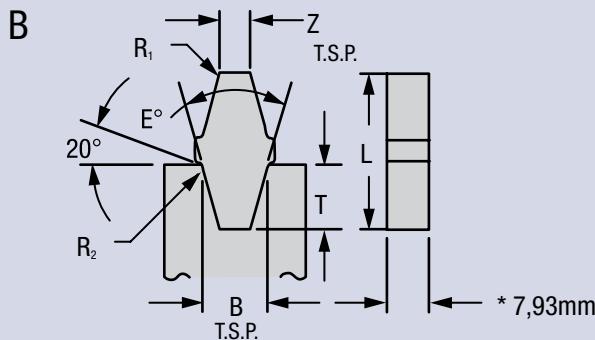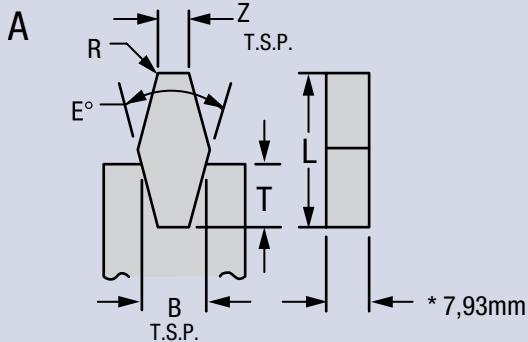

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Grooving, Profiling and Cut-Off Toolholders and Bars

The Greenleaf Advanced Tooling System for grooving, profiling and cut off provides every specific application with unsurpassed support to ensure the longest tool life and highest material-removal rates with both carbide and ceramic inserts. All of the tools in this system are designed to use Greenleaf carbide or ceramic inserts interchangeably for maximum versatility.

Utilizing 4140 alloyed steel at 42-44 RC, these qualified toolholders are offered in both milled nest and replaceable nest designs to provide further options in your tooling requirements.




Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)


### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




**V-Bottom Round Toolholders**



**CRDPN-VS**  
Replaceable Nest  
Shallow D.O.C.  
page: GP 22




**CRDPN-V**  
Replaceable Nest  
Deep D.O.C.  
page: GP 22




**CRDPN-VMS**  
Milled Nest  
Shallow D.O.C.  
page: GP 23




**CRDPN-VM**  
Milled Nest  
Deep D.O.C.  
page: GP 23




**O.D.**  
Replaceable Nest  
Shallow D.O.C.  
page: GP 24




**O.D.**  
Replaceable Nest  
Deep D.O.C.  
page: GP 24

**V-Bottom Round Toolholders continued**



**O.D.**  
Milled Nest  
Shallow D.O.C.  
page: GP 25




**O.D.**  
Milled Nest  
Deep D.O.C.  
page: GP 25




**CRGPL-V**  
**CRGPR-V**  
45°  
Replaceable Nest  
page: GP 26




**CRGPL-VM**  
**CRGPR-VM**  
45°  
Milled Nest  
page: GP 26

**Single-Ended Groovers continued**



**45° G/P**  
Toolholder  
page: GP 31




**90° G/P**  
Toolholder  
page: GP 32-33

**Grooving, Profiling and Cut-Off Bars**



**Cut-Off**  
Grooving Bar  
page: GP 34



**Cut-Off**  
Grooving  
Support Blade  
For Single-Ended,  
V-Bottom Inserts  
page: GP 35




**Profiling Bar**  
Round V-Bottom Insert  
Milled Nest  
page: GP 36




**Profiling**  
Support Blade  
Round V-Bottom Insert  
Milled Nest  
page: GP 37

**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Grooving, Profiling and Cut-Off Bars *continued***

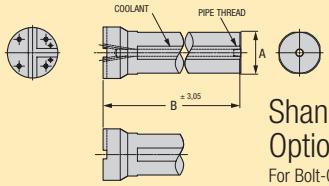**Profiling Support Blade**



 Round V-Bottom Insert  
 Replaceable Nest  
*page: GP 37*

**Shank Options**

 For Bolt-On  
 Support Blades  
*page: GP 38*
**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## CRDPN-VS Toolholder

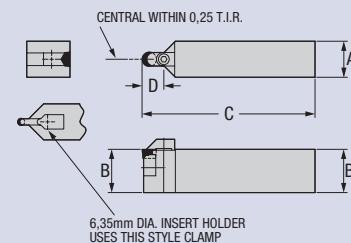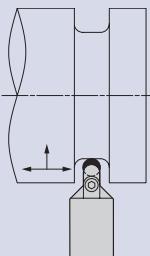Round V-Bottom Insert; Replaceable Nest  
Shallow D.O.C. (D) Series



Part Number	Gage	Stock	D.O.C.	Dimensions (millimeters)			Standard Components				*Tune-Up Kit Includes All Standard Components
	Insert			D	A	B	C	Nest	Nest Screw	Clamp	
CRDPN-2525-06VS	●	060400	10	25	25	150	410631	BHCS M2.5-0.45x10mm	411910-250VRC	434416	TK-02684
CRDPN-3232-06VS	●		10	32	32	170	410631	BHCS M2.5-0.45x10mm	411910-250VRC	434416	TK-02684
CRDPN-4040-06VS	○		10	40	40	200	410631	BHCS M2.5-0.45x10mm	411910-250VRC	434416	TK-02684
CRDPN-2525-09VS	●	**RPGX-090700	15	25	25	150	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
CRDPN-3232-09VS	●		15	32	32	170	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
CRDPN-4040-09VS	○		15	40	40	200	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
CRDPN-2525-12VS	●	**RPGX-120700	20	25	25	150	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686
CRDPN-3232-12VS	●		20	32	32	170	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686
CRDPN-4040-12VS	○		20	40	40	200	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686



\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

See page GP 14 for ceramic and carbide inserts.

\*\* RCGX can be used in place of RPGX.

## CRDPN-V Toolholder

Round V-Bottom Insert; Replaceable Nest Deep  
D.O.C. (D) Series

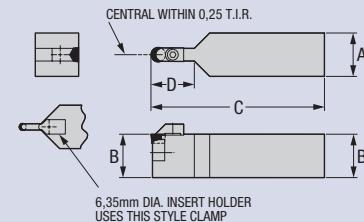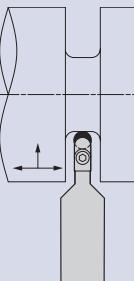

Part Number	Gage	Stock	D.O.C.	Dimensions (millimeters)			Standard Components				*Tune-Up Kit Includes All Standard Components
	Insert			D	A	B	C	Nest	Nest Screw	Clamp	
CRDPN-2525-06V	●	**RPGX-060400	19	25	25	150	410631	BHCS M2.5-0.45x10mm	411910-250VRC	434416	TK-02684
CRDPN-3232-06V	●		19	32	32	170	410631	BHCS M2.5-0.45x10mm	411910-250VRC	434416	TK-02684
CRDPN-4040-06V	○		19	40	40	200	410631	BHCS M2.5-0.45x10mm	411910-250VRC	434416	TK-02684
CRDPN-2525-09V	●	**RPGX-090700	28	25	25	150	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
CRDPN-3232-09V	●		28	32	32	170	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
CRDPN-4040-09V	○		28	40	40	200	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
CRDPN-2525-12V	●	**RPGX-120700	38	25	25	150	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686
CRDPN-3232-12V	●		38	32	32	170	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686
CRDPN-4040-12V	○		38	40	40	200	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

See page GP 14 for ceramic and carbide inserts.

\*\* RCGX can be used in place of RPGX .

### Greenleaf Sales



US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard

10 Business Days or Less

# CRDPN-VMS Toolholder

Round V-Bottom Insert; Milled Nest  
Shallow D.O.C. (D) Series

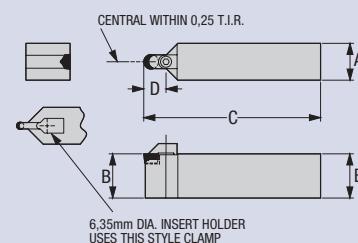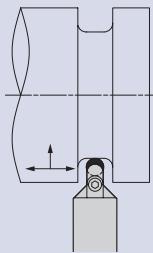

Part Number	Gage Insert	Stock	D.O.C.	Dimensions (millimeters)			Standard Components	Clamp	Clamp Screw	*Tune-Up Kit Includes All Standard Components	Optional Component Insert Screw Key Code
				D	A	B					
CRDPN-2525-06VMS	**RPGX-060400	●	10	25	25	150	411910-250VRC		434416	TK-02717	PT-542T
CRDPN-3232-06VMS		●	10	32	32	170	411910-250VRC		434416	TK-02717	PT-542T
CRDPN-4040-06VMS		●	10	40	40	200	411910-250VRC		434416	TK-02717	PT-542T
CRDPN-2525-09VMS	**RPGX-090700	●	15	25	25	150	308063	TSHCS M5-0.8x12mm		TK-01709	PT-545T
CRDPN-3232-09VMS		●	15	32	32	170	308063	TSHCS M5-0.8x12mm		TK-01709	PT-545T
CRDPN-4040-09VMS		●	15	40	40	200	308063	TSHCS M5-0.8x12mm		TK-01709	PT-545T
CRDPN-2525-12VMS	**RPGX-120700	●	20	25	25	150	308136		434258	TK-02691	CO-5018
CRDPN-3232-12VMS		●	20	32	32	170	308136		434258	TK-02691	CO-5018
CRDPN-4040-12VMS		●	20	40	40	200	308136		434258	TK-02691	CO-5018

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.



See page GP 14 for ceramic and carbide inserts.

\*\* RCGX can be used in place of RPGX.

NOTE: Use carbide inserts RCGT and RPCT with optional insert screw for finishing.

# CRDPN-VM Toolholder

Round V-Bottom Insert; Milled Nest  
Deep D.O.C. (D) Series

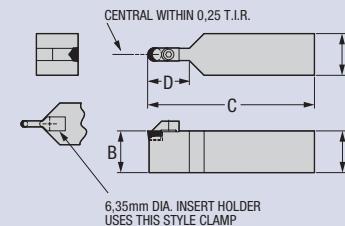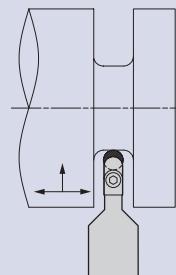

Part Number	Gage Insert	Stock	D.O.C.	Dimensions (millimeters)			Standard Components	Clamp	Clamp Screw	*Tune-Up Kit Includes All Standard Components	Optional Component Insert Screw Key Code
				D	A	B					
CRDPN-2525-06VM	**RPGX-060400	●	19	25	25	150	411910-250VRC		434416	TK-02717	PT-542T
CRDPN-3232-06VM		●	19	32	32	170	411910-250VRC		434416	TK-02717	PT-542T
CRDPN-4040-06VM		●	19	40	40	200	411910-250VRC		434416	TK-02717	PT-542T
CRDPN-2525-09VM	**RPGX-090700	●	28	25	25	150	308063	TSHCS M5-0.8x12mm		TK-02734	PT-545T
CRDPN-3232-09VM		●	28	32	32	170	308063	TSHCS M5-0.8x12mm		TK-02734	PT-545T
CRDPN-4040-09VM		●	28	40	40	200	308063	TSHCS M5-0.8x12mm		TK-02734	PT-545T
CRDPN-2525-12VM	**RPGX-120700	●	38	25	25	150	308136		434258	TK-02691	CO-5018
CRDPN-3232-12VM		●	38	32	32	170	308136		434258	TK-02691	CO-5018
CRDPN-4040-12VM		●	38	40	40	200	308136		434258	TK-02691	CO-5018

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

See page GP 14 for ceramic and carbide inserts.

\*\* RCGX can be used in place of RPGX.


NOTE: Use carbide inserts RCGT and RPCT with optional insert screw for finishing.

10 Business Days or Less


Stocked Standard

# O.D. Grooving/Profiling Toolholder

Round V-Bottom Insert; Replaceable Nest  
Shallow D.O.C. (D) Series

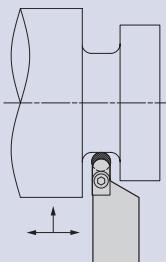

Right-Hand  
Toolholder Shown

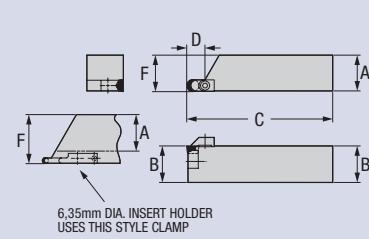

6.35mm DIA. INSERT HOLDER  
USES THIS STYLE CLAMP

Part Number		Gage Insert	Stock	D.O.C.	Dimensions (millimeters)				Standard Components				*Tune-Up Kit Includes All Std. Components	
Right	Left		R	L	D	A	B	C	F	Nest	Nest Screw	Clamp	Clamp Screw	
M-415419-06VRS	—	** RPGX-060400	●	●	10	25	25	150	38	410631	BHCS M2.5-0.45x10mm	411905-250VRC	434259	TK-02692
—	M-415420-06VRS		●	●	10	25	25	150	38	410631	BHCS M2.5-0.45x10mm	411906-250VRC	434259	TK-02693
M-415421-06VRS	—		●	●	10	32	32	170	45	410631	BHCS M2.5-0.45x10mm	411905-250VRC	434259	TK-02692
—	M-415422-06VRS		●	●	10	32	32	170	45	410631	BHCS M2.5-0.45x10mm	411906-250VRC	434259	TK-02693
M-415423-06VRS	—		●	●	10	40	40	200	53	410631	BHCS M2.5-0.45x10mm	411905-250VRC	434259	TK-02692
—	M-415424-06VRS		●	●	10	40	40	200	53	410631	BHCS M2.5-0.45x10mm	411906-250VRC	434259	TK-02693
M-415427-09VRS	M-415428-09VRS	** RPGX-090700	●	●	15	25	25	150	25	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
M-415429-09VRS	M-415430-09VRS		●	●	15	32	32	170	32	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
M-415431-09VRS	M-415432-09VRS		●	●	15	40	40	200	40	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
M-415435-12VRS	M-415436-12VRS	** RPGX-120700	●	●	20	25	25	150	25	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02696
M-415437-12VRS	M-415438-12VRS		●	●	20	32	32	170	32	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02696
M-415439-12VRS	M-415440-		●	●	20	40	40	200	40	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02696

12VRS


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

See page GP 14 for ceramic and carbide inserts.


\*\* RCGX can be used in place of RPGX.

# O.D. Grooving/Profiling Toolholder

Round, V-Bottom Insert; Replaceable Nest  
Deep D.O.C. (D) Series

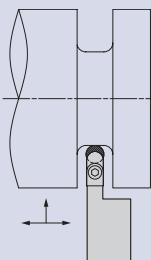

Right-Hand  
Toolholder Shown

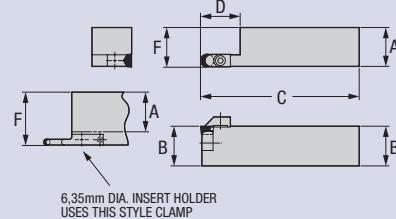

6.35mm DIA. INSERT HOLDER  
USES THIS STYLE CLAMP

Part Number		Gage Insert	Stock	D.O.C.	Dimensions (millimeters)				Standard Components				*Tune-Up Kit Includes All Std. Components	
Right	Left		R	L	D	A	B	C	F	Nest	Nest Screw	Clamp	Clamp Screw	
M-411149-06VRS	—	** RPGX-060400	●	●	19	25	25	150	38	410631	BHCS M2.5-0.45x10mm	411905-250VRC	434259	TK-02692
—	M-411150-06VRS		●	●	19	25	25	150	38	410631	BHCS M2.5-0.45x10mm	411906-250VRC	434259	TK-02693
M-411151-06VRS	—		●	●	19	32	32	170	45	410631	BHCS M2.5-0.45x10mm	411905-250VRC	434259	TK-02692
—	M-411156-06VRS		●	●	19	32	32	170	45	410631	BHCS M2.5-0.45x10mm	411906-250VRC	434259	TK-02693
M-411157-06VRS	—		●	●	19	40	40	200	53	410631	BHCS M2.5-0.45x10mm	411905-250VRC	434259	TK-02692
—	M-411158-06VRS		●	●	19	40	40	200	53	410631	BHCS M2.5-0.45x10mm	411906-250VRC	434259	TK-02693
M-411157-09VRS	M-411158-09VRS	** RPGX-090700	○	○	29	25	25	150	25	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
M-411159-09VRS	M-411160-09VRS		●	●	29	32	32	170	32	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
M-411161-09VRS	M-411162-09VRS		○	○	29	40	40	200	40	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
M-411165-12VRS	M-411166-12VRS	** RPGX-120700	●	●	38	25	25	150	25	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686
M-411167-12VRS	M-411168-12VRS		●	●	38	32	32	170	32	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686
M-411169-12VRS	M-411170-12VRS		○	○	38	40	40	200	40	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

See page GP 14 for ceramic and carbide inserts.

\*\* RCGX can be used in place of RPGX.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com




Stocked Standard




10 Business Days or Less

# O.D. Grooving/Profiling Toolholder

Round, V-Bottom Insert; Milled Nest  
Shallow D.O.C. (D) Series



Right-Hand  
Toolholder Shown

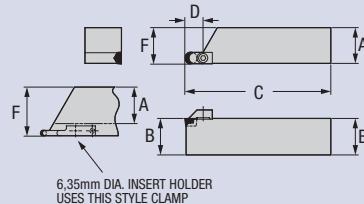

6.35mm DIA. INSERT HOLDER  
USES THIS STYLE CLAMP

Part Number		Gage Insert	Stock	D.O.C.	Dimensions (millimeters)				Standard Components	Clamp	Clamp Screw	*Tune-Up Kit Includes All Standard Components	Optional Component	
Right	Left		R	L	D	A	B	C	F				Insert Screw	
M-421450-06VMRS	-	** RPGX-060400	●	●	10	25	25	150	38	411905-250VRC		434259	TK-02689	PT-542T
-	M-421451-06VMRS		●	●	10	25	25	150	38	411906-250VRC		434259	TK-02690	PT-542T
M-421452-06VMRS	-	** RPGX-060400	●	●	10	32	32	170	45	411905-250VRC		434259	TK-02689	PT-542T
-	M-421453-06VMRS		●	●	10	32	32	170	45	411906-250VRC		434259	TK-02690	PT-542T
M-421454-06VMRS	-	** RPGX-060400	○	○	10	40	40	200	53	411905-250VRC		434259	TK-02689	PT-542T
-	M-421455-06VMRS		○	○	10	40	40	200	53	411906-250VRC		434259	TK-02690	PT-542T
M-421458-09VMRS	M-421459-09VMRS	** RPGX-090700	●	●	15	25	25	150	25	308063	TSHCS M5-0.8x12mm		TK-02734	PT-545T
M-421460-09VMRS	M-421461-09VMRS		●	●	15	32	32	170	32	308063	TSHCS M5-0.8x12mm		TK-02734	PT-545T
M-421462-09VMRS	M-421463-09VMRS		○	○	15	40	40	200	40	308063	TSHCS M5-0.8x12mm		TK-02734	PT-545T
M-421466-12VMRS	M-421467-12VMRS	** RPGX-120700	●	●	20	25	25	150	25	308136		434258	TK-02691	CO-5018
M-421468-12VMRS	M-421469-12VMRS		●	●	20	32	32	170	32	308136		434258	TK-02691	CO-5018
M-421470-12VMRS	M-421471-12VMRS		○	○	20	40	40	200	40	308136		434258	TK-02691	CO-5018

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.


See page GP 14 for ceramic and carbide inserts.

\*\* RCGX can be used in place of RPGX.


NOTE: Use carbide inserts RCGT and RPCT with optional insert screw for finishing.

# O.D. Grooving/Profiling Toolholder

Round, V-Bottom Insert; Milled Nest  
Deep D.O.C. (D) Series

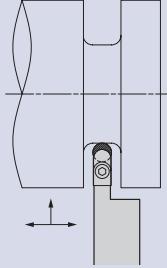

Right-Hand  
Toolholder Shown

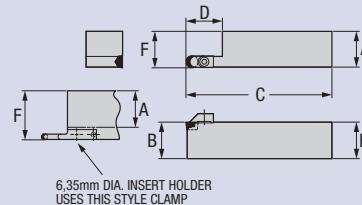

6.35mm DIA. INSERT HOLDER  
USES THIS STYLE CLAMP

Part Number		Gage Insert	Stock	D.O.C.	Dimensions (millimeters)				Standard Components	Clamp	Clamp Screw	*Tune-Up Kit Includes All Standard Components	Optional Component	
Right	Left		R	L	D	A	B	C	F				Insert Screw	
M-421498-06VMRS	-	** RPGX-060400	●	●	19	25	25	150	38	411905-250VRC		434259	TK-02689	PT-542T
-	M-421499-06VMRS		●	●	19	25	25	150	38	411906-250VRC		434259	TK-02690	PT-542T
M-421500-06VMRS	-	** RPGX-060400	●	●	19	32	32	170	45	411905-250VRC		434259	TK-02689	PT-542T
-	M-421501-06VMRS		●	●	19	32	32	170	45	411906-250VRC		434259	TK-02690	PT-542T
M-421502-06VMRS	-	** RPGX-060400	●	●	19	40	40	200	53	411905-250VRC		434259	TK-02689	PT-542T
-	M-421503-06VMRS		●	●	19	40	40	200	53	411906-250VRC		434259	TK-02690	PT-542T
M-421504-09VMRS	M-421505-09VMRS	** RPGX-090700	●	●	29	25	25	150	25	308063	TSHCS M5-0.8x12mm		TK-02734	PT-545T
M-421506-09VMRS	M-421507-09VMRS		●	●	29	32	32	170	32	308063	TSHCS M5-0.8x12mm		TK-02734	PT-545T
M-421508-09VMRS	M-421509-09VMRS		●	●	29	40	40	200	40	308063	TSHCS M5-0.8x12mm		TK-02734	PT-545T
M-421510-12VMRS	M-421511-12VMRS	** RPGX-120700	●	●	38	25	25	150	25	308136		434258	TK-02691	CO-5018
M-421512-12VMRS	M-421513-12VMRS		●	●	38	32	32	170	32	308136		434258	TK-02691	CO-5018
M-421514-12VMRS	M-421515-12VMRS		●	●	38	40	40	200	40	308136		434258	TK-02691	CO-5018

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

See page GP 14 for ceramic and carbide inserts.

\*\* RCGX can be used in place of RPGX.

NOTE: Use carbide inserts RCGT and RPCT with optional insert screw for finishing.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

10 Business Days or Less


Stocked Standard

# CRGPR-V/CRGPL-V

45° Grooving/Profiling Toolholder  
Round V-Bottom Insert; Replaceable Nest



Right-Hand  
Toolholder Shown

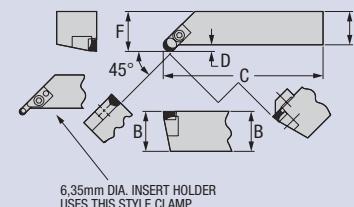

6.35mm DIA. INSERT HOLDER  
USES THIS STYLE CLAMP

Part Number		Gage	Stock	D.O.C.	Dimensions (millimeters)				Standard Components			*Tune-Up Kit Includes All Std. Components		
Right	Left	Insert	R	L	D	A	B	C	F	Nest	Nest Screw	Clamp	Clamp Screw	
CRGPR-2525-06V	-	** RPGX-060400	●	●	7	25	25	150	32	411108	BHCS M2.5-0.45x10mm	412131-250GC	434258	TK-02687
-	CRGPL-2525-06V		●	●	7	25	25	150	32	411108	BHCS M2.5-0.45x10mm	412132-250GC	434258	TK-02731
CRGPR-3232-06V	-		●	●	7	32	32	170	39	411108	BHCS M2.5-0.45x10mm	412131-250GC	434258	TK-02687
-	CRGPL-3232-06V		●	●	7	32	32	170	39	411108	BHCS M2.5-0.45x10mm	412132-250GC	434258	TK-02731
CRGPR-4040-06V	-		○	○	7	40	40	200	47	411108	BHCS M2.5-0.45x10mm	412131-250GC	434258	TK-02687
-	CRGPL-4040-06V		○	○	7	40	40	200	47	411108	BHCS M2.5-0.45x10mm	412132-250GC	434258	TK-02731
CRGPR-2525-09V	CRGPL-2525-09V	** RPGX-090700	●	●	7	25	25	150	32	414009	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02733
CRGPR-3232-09V	CRGPL-3232-09V		●	●	7	32	32	170	39	414009	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02733
CRGPR-4040-09V	CRGPL-4040-09V		○	○	7	40	40	200	47	414009	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02733
CRGPR-2525-12V	CRGPL-2525-12V	** RPGX-120700	●	●	7	25	25	150	32	414008	TBHCS M5-0.8x16mm	308136	434258	TK-02732
CRGPR-3232-12V	CRGPL-3232-12V		●	●	7	32	32	170	39	414008	TBHCS M5-0.8x16mm	308136	434258	TK-02732
CRGPR-4040-12V	CRGPL-4040-12V		○	○	7	40	40	200	47	414008	TBHCS M5-0.8x16mm	308136	434258	TK-02732


\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

See page GP 14 for ceramic and carbide inserts.


\*\* RCGX can be used in place of RPGX.

# CRGPR-VM/CRGPL-VM

45° Grooving/Profiling Toolholder  
Round V-Bottom Insert; Milled Nest

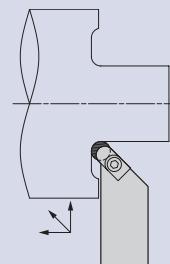

Right-Hand  
Toolholder Shown

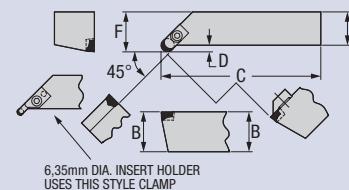

6.35mm DIA. INSERT HOLDER  
USES THIS STYLE CLAMP

Part Number		Gage	Stock	D.O.C.	Dimensions (millimeters)				Standard Components		*Tune-Up Kit Includes All Standard Components	Optional Component	
Right	Left	Insert	R	L	D	A	B	C	F	Clamp	Clamp Screw	Insert Screw	
CRGPR-2525-06VM	-	** RPGX-060400	●	●	7	25	25	150	32	412131-250GC	434259	TK-02745	PT-542T
-	CRGPL-2525-06VM		●	●	7	25	25	150	32	412132-250GC	434259	TK-02746	PT-542T
CRGPR-3232-06VM	-		●	●	7	32	32	170	39	412131-250GC	434259	TK-02745	PT-542T
-	CRGPL-3232-06VM		●	●	7	32	32	170	39	412132-250GC	434259	TK-02746	PT-542T
CRGPR-4040-06VM	-		○	○	7	40	40	200	47	412131-250GC	434259	TK-02745	PT-542T
-	CRGPL-4040-06VM		○	○	7	40	40	200	47	412132-250GC	434259	TK-02746	PT-542T
CRGPR-2525-09VM	CRGPL-2525-09VM	** RPGX-090700	●	●	7	25	25	150	32	308063	TSHCS M5-0.8x12mm	TK-02733	PT-545T
CRGPR-3232-09VM	CRGPL-3232-09VM		●	●	7	32	32	170	39	308063	TSHCS M5-0.8x12mm	TK-02733	PT-545T
CRGPR-4040-09VM	CRGPL-4040-09VM		○	○	7	40	40	200	47	308063	TSHCS M5-0.8x12mm	TK-02733	PT-545T
CRGPR-2525-12VM	CRGPL-2525-12VM	** RPGX-120700	●	●	7	25	25	150	32	308136	434258	TK-02691	CO-5018
CRGPR-3232-12VM	CRGPL-3232-12VM		●	●	7	32	32	170	39	308136	434258	TK-02691	CO-5018
CRGPR-4040-12VM	CRGPL-4040-12VM		○	○	7	40	40	200	47	308136	434258	TK-02691	CO-5018

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

See page GP 14 for ceramic and carbide inserts.

\*\* RCGN can be used in place of RPGN.

NOTE: Use carbide inserts RCGT and RPCT with optional insert screw for finishing.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com




Stocked Standard




10 Business Days or Less

# Grooving/Profiling/ Cut-Off Toolholder

Deep D.O.C. Series

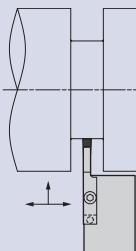

Right-Hand  
Toolholder Shown

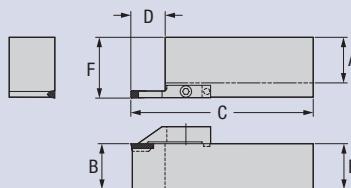

Part Number		Groove Width	Stock	D.O.C.	Dimensions (millimeters)				Standard Components	Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components		
Right	Left				R	L	D	A			Insert	Clamp	
M-427635-094VGS	-	2,39	●		19	25	25	150	38	427651-094GC	TK-02626	429524-094GC	429525-094GC
-	M-427636-094VGS	2,39	●	●	19	25	25	150	38	427652-094GC	TK-02627		
M-427637-094VGS	-	2,39	●		19	32	32	170	45	427651-094GC	TK-02626	429524-094GC	429525-094GC
-	M-427638-094VGS	2,39	●	●	19	32	32	170	45	427652-094GC	TK-02627		
M-427639-094VGS	-	2,39	○		19	40	40	200	53	427651-094GC	TK-02626	429524-094GC	429525-094GC
-	M-427640-094VGS	2,39	○	○	19	40	40	200	53	427652-094GC	TK-02627		
M-411173-125VGS	-	3,18	●		19	25	25	150	38	WGC-4125	411966-125GC	TK-02628	429512-125GC
-	M-411961-125VGS	3,18	●	●	19	25	25	150	38		411967-125GC	TK-02629	
M-411250-125VGS	-	3,18	●		19	32	32	170	45	WG-4125	411966-125GC	TK-02628	429512-125GC
-	M-411251-125VGS	3,18	●	●	19	32	32	170	45	GTS-4125-1	411967-125GC	TK-02629	
M-411962-125VGS	-	3,18	○		19	40	40	200	53	GTS-4125-2	411966-125GC	TK-02628	429512-125GC
-	M-411963-125VGS	3,18	○	○	19	40	40	200	53		411967-125GC	TK-02629	
M-411964-156VGS	-	3,96	●		19	25	25	150	38	WGC-4156	411968-156GC	TK-02630	436373-156GC
-	M-411965-156VGS	3,96	●	●	19	25	25	150	38		411969-156GC	TK-02631	
M-411256-156VGS	-	3,96	●		19	32	32	170	45	WG-4156	411968-156GC	TK-02630	436373-156GC
-	M-411257-156VGS	3,96	●	●	19	32	32	170	45		411969-156GC	TK-02631	
M-411258-156VGS	-	3,96	○		19	40	40	200	53	GTS-4156	411968-156GC	TK-02630	436373-156GC
-	M-411259-156VGS	3,96	○	○	19	40	40	200	53		411969-156GC	TK-02631	
M-411970-187VGS	-	4,75	●		19	25	25	150	38	WGC-4187	411977-187GC	TK-02632	429518-187GC
-	M-411178-187VGS	4,75	●	●	19	25	25	150	38		411978-187GC	TK-02633	
M-411262-187VGS	-	4,75	●		19	32	32	170	45	GTS-4187-1	411977-187GC	TK-02632	429518-187GC
-	M-411263-187VGS	4,75	●	●	19	32	32	170	45		411978-187GC	TK-02633	
M-411971-187VGS	-	4,75	○		19	40	40	200	53	GTS-4187-2	411977-187GC	TK-02632	429518-187GC
-	M-411972-187VGS	4,75	○	○	19	40	40	200	53		411978-187GC	TK-02633	
M-411179-218VGS	-	5,54	●		29	25	25	150	38	WGC-6218	411979-218GC	TK-02634	429519-218GC
-	M-411180-218VGS	5,54	●	●	29	25	25	150	38		411130-218GC	TK-02635	
M-411268-218VGS	-	5,54	●		29	32	32	170	45	WG-6218	411979-218GC	TK-02634	429519-218GC
-	M-411269-218VGS	5,54	●	●	29	32	32	170	45		411130-218GC	TK-02635	
M-411270-218VGS	-	5,54	○		29	40	40	200	53	GTS-6218	411979-218GC	TK-02634	429519-218GC
-	M-411271-218VGS	5,54	○	○	29	40	40	200	53		411130-218GC	TK-02635	
M-411973-250VGS	-	6,35	●		29	25	25	150	38	WGC-6250	411980-250GC	TK-02636	429519-250GC
-	M-411974-250VGS	6,35	●	●	29	25	25	150	38		411981-250GC	TK-02637	
M-411975-250VGS	-	6,35	●		29	32	32	170	45	WG-6250	411980-250GC	TK-02636	429519-250GC
-	M-411275-250VGS	6,35	●	●	29	32	32	170	45		411981-250GC	TK-02637	
M-411276-250VGS	-	6,35	○		29	40	40	200	53	GTS-6250-1	411980-250GC	TK-02636	429519-250GC
-	M-411277-250VGS	6,35	○	○	29	40	40	200	53		411981-250GC	TK-02637	
M-411183-281VGS	-	7,14	●		29	25	25	150	38	WGC-6281	411133-281GC	TK-02638	429519-281GC
-	M-411184-281VGS	7,14	●	●	29	25	25	150	38		411134-281GC	TK-02648	
M-411280-281VGS	-	7,14	●		29	32	32	170	45	WG-6281	411133-281GC	TK-02638	429519-281GC
-	M-411281-281VGS	7,14	●	●	29	32	32	170	45		411134-281GC	TK-02648	
M-411282-281VGS	-	7,14	○		29	40	40	200	53	GTS-6281	411133-281GC	TK-02638	429519-281GC
-	M-411283-281VGS	7,14	○	○	29	40	40	200	53		411134-281GC	TK-02648	

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.

\* All toolholders include standard clamp and clamp screw 33-434259-000 (Greenleaf Metric M6-1.0 clamp screw).


Continued on next page.

10 Business Days or Less


Stocked Standard

# Grooving/Profiling/ Cut-Off Toolholder

Deep D.O.C. Series (Continued)

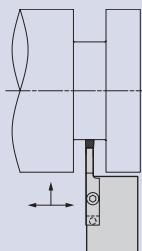

Right-Hand  
Toolholder Shown

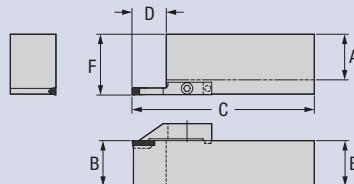

Part Number		Stock	D.O.C.	Dimensions (millimeters)					Standard Components		Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components			
Right	Left			Groove Width	R	L	D	A	B	C	F	Insert	Clamp		
M-411982-312VGS	-	WGC-8312	WG-8312	7,92	●		38	25	25	150	38	411985-312GC	TK-02640	-	-
-	M-411186-312VGS			7,92		●	38	25	25	150	38	411136-312GC	TK-02641	-	-
M-411286-312VGS	-	WG-8312	WGC-8344	7,92	●		38	32	32	170	45	411985-312GC	TK-02640	-	-
-	M-411287-312VGS			7,92		●	38	32	32	170	45	411136-312GC	TK-02641	-	-
M-411288-312VGS	-	WG-8344	WG-8344	7,92	○		38	40	40	200	53	411985-312GC	TK-02640	-	-
-	M-411289-312VGS			7,92		○	38	40	40	200	53	411136-312GC	TK-02641	-	-
M-411187-344VGS	-	WGC-8344	WG-8344	8,74	●		38	25	25	150	38	411137-344GC	TK-02642	-	-
-	M-411188-344VGS			8,74		●	38	25	25	150	38	411138-344GC	TK-02643	-	-
M-411292-344VGS	-	WG-8344	WGC-8375	8,74	●		38	32	32	170	45	411137-344GC	TK-02642	-	-
-	M-411293-344VGS			8,74		●	38	32	32	170	45	411138-344GC	TK-02643	-	-
M-411294-344VGS	-	WG-8375	WG-8375	8,74	○		38	40	40	200	53	411137-344GC	TK-02642	-	-
-	M-411295-344VGS			8,74		○	38	40	40	200	53	411138-344GC	TK-02643	-	-
M-411189-375VGS	-	WGC-8375	WG-8375	9,53	●		38	25	25	150	38	411986-375GC	TK-02649	-	-
-	M-411190-375VGS			9,53		●	38	25	25	150	38	411987-375GC	TK-02645	-	-
M-411983-375VGS	-	WG-8375	WGC-8375	9,53	●		38	32	32	170	45	411986-375GC	TK-02649	-	-
-	M-411984-375VGS			9,53		●	38	32	32	170	45	411987-375GC	TK-02645	-	-
M-411300-375VGS	-	WGC-8375	WG-8375	9,53	○		38	40	40	200	53	411986-375GC	TK-02649	-	-
-	M-411301-375VGS			9,53		○	38	40	40	200	53	411987-375GC	TK-02645	-	-

\* All toolholders include standard clamp and clamp screw 33-434259-000 (Greenleaf Metric M6-1.0 clamp screw).

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

 Stocked Standard


 10 Business Days or Less

# Grooving/Profiling/ Cut-Off Toolholder

Shallow D.O.C. Series



Right-Hand  
Toolholder Shown

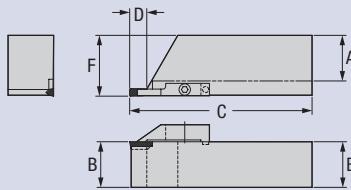

Part Number		Groove Width	Stock	D.O.C.	Dimensions (millimeters)				Standard Components		Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components		
Right	Left				R	L	D	A	B	C	F	Insert	Clamp	
M-427641-094VGS	-	2,39	○		10	25	25	150	38	WG-4094	427651-094GC	TK-02626	COS-4094-0	429524-094GC
-	M-427642-094VGS	2,39	○	○	10	25	25	150	38		427652-094GC	TK-02627		429525-094GC
M-427643-094VGS	-	2,39	○		10	32	32	170	45	WGC-4094	427651-094GC	TK-02626	COS-4094-4L	429524-094GC
-	M-427644-094VGS	2,39	○	○	10	32	32	170	45		427652-094GC	TK-02627		429525-094GC
M-427645-094VGS	-	2,39	○		10	40	40	200	53	WG-4094	427651-094GC	TK-02626	COS-4094-4R	429524-094GC
-	M-427646-094VGS	2,39	○	○	10	40	40	200	53		427652-094GC	TK-02627		429525-094GC
M-415316-125VGS	-	3,18	○		10	25	25	150	38	GTS-4125-1	411966-125GC	TK-02628	GTS-4125	429512-125GC
-	M-415317-125VGS	3,18	○	○	10	25	25	150	38		411967-125GC	TK-02629		429513-125GC
M-415318-125VGS	-	3,18	○		10	32	32	170	45	GTS-4125-2	411966-125GC	TK-02628	COS-4125-0	429512-125GC
-	M-415319-125VGS	3,18	○	○	10	32	32	170	45		411967-125GC	TK-02629		429513-125GC
M-415320-125VGS	-	3,18	○		10	40	40	200	53	WG-4125	411966-125GC	TK-02628	COS-4125-4L	429512-125GC
-	M-415321-125VGS	3,18	○	○	10	40	40	200	53		411967-125GC	TK-02629		429513-125GC
M-415324-156VGS	-	3,96	○		10	25	25	150	38	WG-4156	411968-156GC	TK-02630	GTS-4156	436373-156GC
-	M-415325-156VGS	3,96	○	○	10	25	25	150	38		411969-156GC	TK-02631		436374-156GC
M-415326-156VGS	-	3,96	○		10	32	32	170	45	WGC-4156	411968-156GC	TK-02630	GTS-4156	436373-156GC
-	M-415327-156VGS	3,96	○	○	10	32	32	170	45		411969-156GC	TK-02631		436374-156GC
M-415328-156VGS	-	3,96	○		10	40	40	200	53	WG-4156	411968-156GC	TK-02630	COS-4125-4R	436373-156GC
-	M-415329-156VGS	3,96	○	○	10	40	40	200	53		411969-156GC	TK-02631		436374-156GC
M-415332-187VGS	-	4,75	○		10	25	25	150	38	GTS-4187-1	411977-187GC	TK-02632	GTS-4187	429518-187GC
-	M-415333-187VGS	4,75	○	○	10	25	25	150	38		411978-187GC	TK-02633		429519-187GC
M-415334-187VGS	-	4,75	○		10	32	32	170	45	GTS-4187-2	411977-187GC	TK-02632	COS-4187-0	429518-187GC
-	M-415335-187VGS	4,75	○	○	10	32	32	170	45		411978-187GC	TK-02633		429519-187GC
M-415336-187VGS	-	4,75	○		10	40	40	200	53	WG-4187	411977-187GC	TK-02632	COS-4187-4L	429518-187GC
-	M-415337-187VGS	4,75	○	○	10	40	40	200	53		411978-187GC	TK-02633		429519-187GC
M-415340-218VGS	-	5,54	○		15	25	25	150	38	WG-6218	411979-218GC	TK-02634	WG-6218	-
-	M-415341-218VGS	5,54	○	○	15	25	25	150	38		411130-218GC	TK-02635		-
M-415342-218VGS	-	5,54	○		15	32	32	170	45	WGC-6218	411979-218GC	TK-02634	WGC-6218	-
-	M-415343-218VGS	5,54	○	○	15	32	32	170	45		411130-218GC	TK-02635		-
M-415344-218VGS	-	5,54	○		15	40	40	200	53	WG-6218	411979-218GC	TK-02634	WG-6218	-
-	M-415345-218VGS	5,54	○	○	15	40	40	200	53		411130-218GC	TK-02635		-
M-415348-250VGS	-	6,35	●		15	25	25	150	38	GTS-6250	411980-250GC	TK-02636	GTS-6250	-
-	M-415349-250VGS	6,35	●	●	15	25	25	150	38		411981-250GC	TK-02637		-
M-415350-250VGS	-	6,35	●		15	32	32	170	45	GTS-6250-1	411980-250GC	TK-02636	GTS-6250-1	-
-	M-415351-250VGS	6,35	●	●	15	32	32	170	45		411981-250GC	TK-02637		-
M-415352-250VGS	-	6,35	○		15	40	40	200	53	WG-6250	411980-250GC	TK-02636	WG-6250	-
-	M-415353-250VGS	6,35	○	○	15	40	40	200	53		411981-250GC	TK-02637		-
M-415356-281VGS	-	7,14	○		15	25	25	150	38	WG-6281	411133-281GC	TK-02638	WG-6281	-
-	M-415357-281VGS	7,14	○	○	15	25	25	150	38		411134-281GC	TK-02648		-
M-415358-281VGS	-	7,14	○		15	32	32	170	45	WGC-6281	411133-281GC	TK-02638	WGC-6281	-
-	M-415359-281VGS	7,14	○	○	15	32	32	170	45		411134-281GC	TK-02648		-
M-415360-281VGS	-	7,14	○		15	40	40	200	53	WG-6281	411133-281GC	TK-02638	WG-6281	-
-	M-415361-281VGS	7,14	○	○	15	40	40	200	53		411134-281GC	TK-02648		-

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.

\* All toolholders include standard clamp and clamp screw 33-434259-000 (Greenleaf Metric M6-1.0 clamp screw).

Continued on next page.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

10 Business Days or Less


Stocked Standard

# Grooving/Profiling/Cut-Off Toolholder

Shallow D.O.C. Series (Continued)

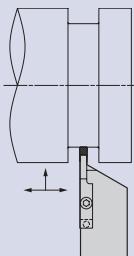

Right-Hand  
Toolholder Shown

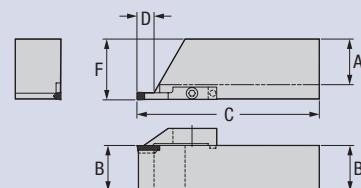

Part Number		Stock	D.O.C.	Dimensions (millimeters)					Standard Components		Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components			
Right	Left			Groove Width	R	L	D	A	B	C	F	Insert	Clamp	Insert	Clamp
M-415364-312VGS	-	WG-8312	7,92	●			20	25	25	150	38	411985-312GC	TK-02640	-	-
-	M-415365-312VGS		7,92	●			20	25	25	150	38	411136-312GC	TK-02641	-	-
M-415366-312VGS	-	WGC-8312	7,92	●			20	32	32	170	45	411985-312GC	TK-02640	-	-
-	M-415367-312VGS		7,92	●			20	32	32	170	45	411136-312GC	TK-02641	-	-
M-415368-312VGS	-	WG-8344	7,92	○			20	40	40	200	53	411985-312GC	TK-02640	-	-
-	M-415369-312VGS		7,92	○			20	40	40	200	53	411136-312GC	TK-02641	-	-
M-415372-344VGS	-	WGC-8344	8,74	○			20	25	25	150	38	411137-344GC	TK-02642	-	-
-	M-415373-344VGS		8,74	○			20	25	25	150	38	411138-344GC	TK-02643	-	-
M-415374-344VGS	-	WG-8344	8,74	○			20	32	32	170	45	411137-344GC	TK-02642	-	-
-	M-415375-344VGS		8,74	○			20	32	32	170	45	411138-344GC	TK-02643	-	-
M-415376-344VGS	-	WG-8375	8,74	○			20	40	40	200	53	411137-344GC	TK-02642	-	-
-	M-415377-344VGS		8,74	○			20	40	40	200	53	411138-344GC	TK-02643	-	-
M-415380-375VGS	-	WG-8375	9,53	○			20	25	25	150	38	411986-375GC	TK-02649	-	-
-	M-415381-375VGS		9,53	○			20	25	25	150	38	411987-375GC	TK-02645	-	-
M-415382-375VGS	-	WGC-8375	9,53	○			20	32	32	170	45	411986-375GC	TK-02649	-	-
-	M-415383-375VGS		9,53	○			20	32	32	170	45	411987-375GC	TK-02645	-	-
M-415384-375VGS	-	WGC-8375	9,53	○			20	40	40	200	53	411986-375GC	TK-02649	-	-
-	M-415385-375VGS		9,53	○			20	40	40	200	53	411987-375GC	TK-02645	-	-

\* All toolholders include standard clamp and clamp screw 33-434259-000  
(Greenleaf Metric M6-1.0 clamp screw).

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.


## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com


 Stocked Standard

 10 Business Days or Less

# 45° Grooving/Profiling Toolholder

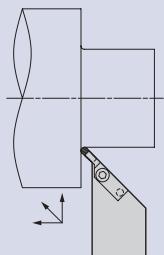

Right-Hand  
Toolholder Shown

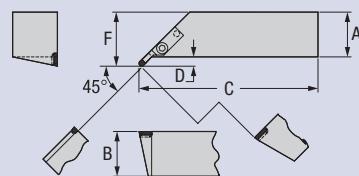

Part Number		Gage 	Stock	D.O.C.	Dimensions (millimeters)				Standard Components	Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components		
Right	Left	Insert	R	L	D	A	B	C	F	Clamp	Insert	Clamp	
M-415293-45VGS -	M-415294-45VGS	GTS-4125-1			8	25	25	150,5	33,43	415305-GC 415306-GC	TK-02655 TK-02656	GTS-4125	429514-GC 429515-GC
		GTS-4125-2			8	25	25	150,3	33,25				
		WG-4125			8	25	25	150,0	32,92				
		WG-4125-1	○		8	25	25	150,5	33,43				
		WG-4125-2		○	8	25	25	150,3	33,25				
		WG-4156			8	25	25	150,1	33,05				
		WG-4156-1			8	25	25	150,6	33,71				
		WG-4156-2			8	25	25	150,6	33,53				
M-415295-45VGS -	M-415296-45VGS	GTS-4125-1			8	32	32	170,5	40,43	415305-GC 415306-GC	TK-02655 TK-02656	GTS-4125	429514-GC 429515-GC
		GTS-4125-2			8	32	32	170,3	40,26				
		WG-4125			8	32	32	170,0	39,93				
		WG-4125-1	○		8	32	32	170,5	40,43				
		WG-4125-2		○	8	32	32	170,3	40,26				
		WG-4156			8	32	32	170,1	40,05				
		WG-4156-1			8	32	32	170,6	40,71				
		WG-4156-2			8	32	32	170,6	40,53				
M-415297-45VGS -	M-415298-45VGS	GTS-4125-1			8	40	40	200,5	33,43	415305-GC 415306-GC	TK-02655 TK-02656	GTS-4125	429514-GC 429515-GC
		GTS-4125-2			8	40	40	200,3	33,43				
		WG-4125			8	40	40	200,0	47,93				
		WG-4125-1	○		8	40	40	200,5	48,43				
		WG-4125-2		○	8	40	40	200,3	48,26				
		WG-4156			8	40	40	200,1	48,05				
		WG-4156-1			8	40	40	200,8	33,43				
		WG-4156-2			8	40	40	200,6	33,43				
M-415299-45VGS -	M-415300-45VGS	GTS-4187-1			8	25	25	150,83	33,76	415307-GC 415308-GC	TK-02657 TK-02658	GTS-4187	429520-GC 429521-GC
		GTS-4187-2	○		8	25	25	150,66	33,59				
		WG-4187		○	8	25	25	150,00	32,92				
		WG-4187-1			8	25	25	150,83	33,76				
		WG-4187-2			8	25	25	150,66	33,58				
M-415301-45VGS -	M-415302-45VGS	GTS-4187-1			8	32	32	170,83	40,76	415307-GC 415308-GC	TK-02657 TK-02658	GTS-4187	429520-GC 429521-GC
		GTS-4187-2	○		8	32	32	170,66	40,59				
		WG-4187		○	8	32	32	170,0	39,92				
		WG-4187-1			8	32	32	170,83	40,76				
		WG-4187-2			8	32	32	170,66	40,59				
M-415303-45VGS -	M-415304-45VGS	GTS-4187-1			8	40	40	200,8	48,76	415307-GC 415308-GC	TK-02657 TK-02658	GTS-4187	429520-GC 429521-GC
		GTS-4187-2	○		8	40	40	200,7	49,73				
		WG-4187		○	8	40	40	200,0	47,92				
		WG-4187-1			8	40	40	200,8	48,76				
		WG-4187-2			8	40	40	200,7	48,58				

\* All toolholders include standard clamp and clamp screw 33-434259-000 (Greenleaf Metric M6-1.0 clamp screw).

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.


10 Business Days or Less

Stocked Standard


**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**s i n g l e - e n d e d g r o o v e r s - g r o o v i n g , p r o f i l i n g a n d c u t - o f f**

# 90° Grooving/Profiling Toolholder

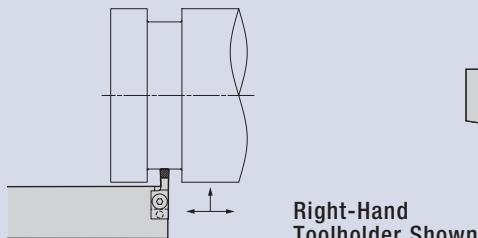

Right-Hand  
Toolholder Shown

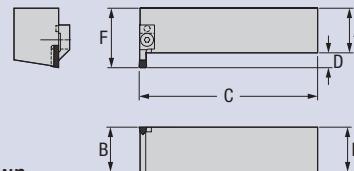

Part Number		Groove Width	Stock	D.O.C.	Dimensions (millimeters)				Standard Components	Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components			
Right	Left				R	L	D	A			Insert	Clamp		
M-411693-125VGS	-	3,18	○		10	25	25	150	35	411765-125GC	TK-02659	429516-125GC		
-	M-411694-125VGS	3,18	○		10	25	25	150	35	411766-125GC	TK-02660	429517-125GC		
M-411695-125VGS	-	3,18	○		10	32	32	170	42	411765-125GC	TK-02659	429516-125GC		
-	M-411696-125VGS	3,18	○		10	32	32	170	42	411766-125GC	TK-02660	429517-125GC		
M-411697-125VGS	-	3,18	○		10	40	40	200	50	411765-125GC	TK-02659	429516-125GC		
-	M-411698-125VGS	3,18	○		10	40	40	200	50	411766-125GC	TK-02660	429517-125GC		
M-411701-156VGS	-	3,96	○		10	25	25	150	35	WG-4156	411767-156GC	TK-02661	-	
-	M-411702-156VGS	3,96	○		10	25	25	150	35		411768-156GC	TK-02662	-	
M-411703-156VGS	-	3,96	○		10	32	32	170	42		411767-156GC	TK-02661	-	
-	M-411704-156VGS	3,96	○		10	32	32	170	42		411768-156GC	TK-02662	-	
M-411705-156VGS	-	3,96	○		10	40	40	200	50	WGC-4156	411767-156GC	TK-02661	-	
-	M-411706-156VGS	3,96	○		10	40	40	200	50		411768-156GC	TK-02662	-	
M-411709-187VGS	-	4,75	○		10	25	25	150	35		411769-187GC	TK-02663	429522-187GC	
-	M-411710-187VGS	4,75	○		10	25	25	150	35		411770-187GC	TK-02664	429523-187GC	
M-411711-187VGS	-	4,75	○		10	32	32	170	42	WG-4187	411769-187GC	TK-02663	429522-187GC	
-	M-411712-187VGS	4,75	○		10	32	32	170	42		411770-187GC	TK-02664	429523-187GC	
M-411713-187VGS	-	4,75	○		10	40	40	200	50		411769-187GC	TK-02663	429522-187GC	
-	M-411714-187VGS	4,75	○		10	40	40	200	50		411770-187GC	TK-02664	429523-187GC	
M-411717-218VGS	-	5,54	○		13	25	25	150	38	WG-6218	411771-218GC	TK-02665	-	
-	M-411718-218VGS	5,54	○		13	25	25	150	38		411772-218GC	TK-02666	-	
M-411719-218VGS	-	5,54	○		13	32	32	170	45		411771-218GC	TK-02665	-	
-	M-411720-218VGS	5,54	○		13	32	32	170	45		411772-218GC	TK-02666	-	
M-411721-218VGS	-	5,54	○		13	40	40	200	53	WGC-6218	411771-218GC	TK-02665	-	
-	M-411722-218VGS	5,54	○		13	40	40	200	53		411772-218GC	TK-02666	-	
M-411725-250VGS	-	6,35	●		13	25	25	150	38		411773-250GC	TK-02667	-	
-	M-411726-250VGS	6,35	●		13	25	25	150	38		411774-250GC	TK-02668	-	
M-411727-250VGS	-	6,35	●		13	32	32	170	45	GTS-6250	411773-250GC	TK-02667	-	
-	M-411728-250VGS	6,35	●		13	32	32	170	45		411773-250GC	TK-02667	-	
M-411729-250VGS	-	6,35	○		13	40	40	200	53		411774-250GC	TK-02668	-	
-	M-411730-250VGS	6,35	○		13	40	40	200	53		WG-6250	411773-250GC	TK-02667	-
M-411733-281VGS	-	7,14	○		13	25	25	150	38	WG-6281	411775-281GC	TK-02669	-	
-	M-411734-281VGS	7,14	○		13	25	25	150	38		411776-281GC	TK-02670	-	
M-411735-281VGS	-	7,14	○		13	32	32	170	45		411775-281GC	TK-02669	-	
-	M-411736-281VGS	7,14	○		13	32	32	170	45		411776-281GC	TK-02670	-	
M-411737-281VGS	-	7,14	○		13	40	40	200	53	WGC-6281	411775-281GC	TK-02669	-	
-	M-411738-281VGS	7,14	○		13	40	40	200	53		411776-281GC	TK-02670	-	
M-411743-312VGS	-	7,92	○		16	32	32	170	48		411777-312GC	TK-02671	-	
-	M-411744-312VGS	7,92	○		16	32	32	170	48		411778-312GC	TK-02672	-	
M-411745-312VGS	-	7,92	○		16	40	40	200	56	WG-8312	411777-312GC	TK-02671	-	
-	M-411746-312VGS	7,92	○		16	40	40	200	56		411778-312GC	TK-02672	-	

\* All toolholders include standard clamp and BHCS clamp screw 31-434416-000.

Continued on next page.

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard




10 Business Days or Less




# 90° Grooving/Profiling Toolholder

(Continued)

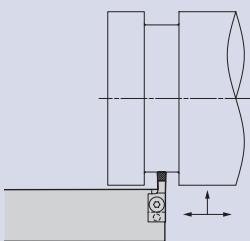

Right-Hand  
Toolholder Shown

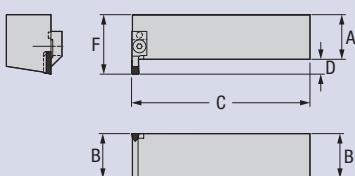

Part Number		Groove Width	Stock		D.O.C.	Dimensions (millimeters)				Insert	Clamp	Standard Components		Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components	
Right	Left		R	L		A	B	C	F			Insert	Clamp		Insert	Clamp
M-411751-344VGS	–	8,74	○		16	32	32	170	48	WG-8344	WGC-8344	411779-344GC	TK-02673	–	–	–
–	M-411752-344VGS	8,74		○		32	32	170	48			411780-344GC	TK-02674	–	–	–
M-411753-344VGS	–	8,74	○		16	40	40	200	56	WG-8375	WGC-8375	411779-344GC	TK-02673	–	–	–
–	M-411754-344VGS	8,74		○		40	40	200	56			411780-344GC	TK-02674	–	–	–
M-411759-375VGS	–	9,53	○		16	32	32	170	48	WG-8375	WGC-8375	411781-375GC	TK-02675	–	–	–
–	M-411760-375VGS	9,53		○		32	32	170	48			411782-375GC	TK-02676	–	–	–
M-411761-375VGS	–	9,53	○		16	40	40	200	56	WG-8375	WGC-8375	411781-375GC	TK-02675	–	–	–
–	M-411762-375VGS	9,53		○		40	40	200	56			411782-375GC	TK-02676	–	–	–

\* All toolholders include standard clamp and BHCS clamp screw 31-434416-000.

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.


WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.


10 Business Days or Less

Stocked Standard

# Cut-Off Grooving Bar

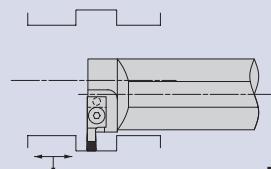

Right-Hand Grooving Bar Shown

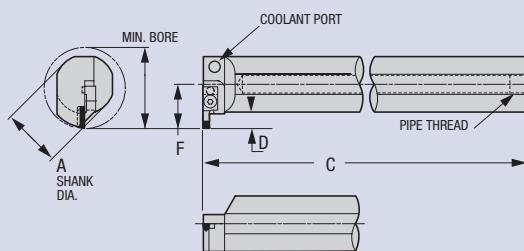

Part Number		Stock	D.O.C.	Min. Bore	Dimensions (millimeters)			Standard Components		Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components			
Right	Left				Groove Width	R	L	D	A	C	F	Insert	Clamp	
M-512074-125VGS	-	3,18	○		10	63	50	400	35	GTS-4125-1	411765-125GC	TK-02659	GTS-4125	429516-125GC
-	M-512075-125VGS	3,18		○	10	63	50	400	35	GTS-4125-2	411766-125GC	TK-02660	COS-4125-0	429517-125GC
										WG-4125			COS-4125-4R	
										WGC-4125			COS-4125-4L	
M-512086-156VGS	-	3,96	○		10	63	50	400	35	WG-4156	411767-156GC	TK-02661	-	-
-	M-512087-156VGS	3,96		○	10	63	50	400	35	WGC-4156	411768-156GC	TK-02662	-	-
M-512098-187VGS	-	4,75	○		10	63	50	400	35	GTS-4187-1	411769-187GC	TK-02663	GTS-4187	429522-187GC
-	M-512099-187VGS	4,75		○	10	63	50	400	35	GTS-4187-2	411770-187GC	TK-02664	COS-4187-0	429523-187GC
										WG-4187			COS-4187-4R	
										WGC-4187			COS-4187-4L	
M-512106-218VGS	-	5,54	○		13	70	50	400	38	WG-6218	411771-218GC	TK-02665	-	-
-	M-512107-218VGS	5,54		○	13	70	50	400	38	WGC-6218	411772-218GC	TK-02666	-	-
M-512116-250VGS	-	6,35	●		13	70	50	400	38	GTS-6250	411773-250GC	TK-02667	-	-
-	M-512117-250VGS	6,35		●	13	70	50	400	38	GTS-6250-1	411774-250GC	TK-02668	-	-
										GTS-6250-2				
										WG-6250				
										WGC-6250				
M-512126-281VGS	-	7,14	○		13	70	50	400	38	WG-6281	411775-281GC	TK-02669	-	-
-	M-512127-281VGS	7,14		○	13	70	50	400	38	WGC-6281	411776-281GC	TK-02670	-	-
M-512132-312VGS	-	7,92	○		16	77	50	400	41	WG-8312	411777-312GC	TK-02671	-	-
-	M-512133-312VGS	7,92		○	16	77	50	400	41	WGC-8312	411778-312GC	TK-02672	-	-
M-512138-344VGS	-	8,74	○		16	77	50	400	41	WG-8344	411779-344GC	TK-02673	-	-
-	M-512139-344VGS	8,74		○	16	77	50	400	41	WGC-8344	411780-344GC	TK-02674	-	-
M-512144-375VGS	-	9,53	○		16	77	50	400	41	WG-8375	411781-375GC	TK-02675	-	-
-	M-512145-375VGS	9,53		○	16	77	50	400	41	WGC-8375	411782-375GC	TK-02676	-	-

\* All toolholders include standard clamp and BHCS clamp screw 31-434416-000.

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard  
 10 Business Days or Less


 Stocked Standard  
 10 Business Days or Less

# Cut-Off Grooving Support Blade

For Single Ended V-Bottom Inserts

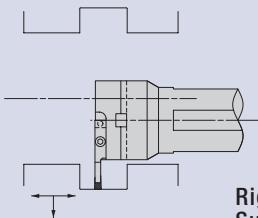

Right-Hand  
Support Blade Shown

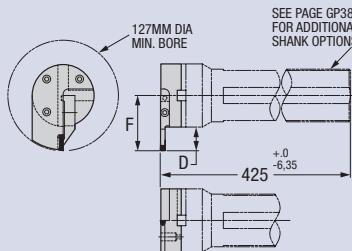

Part Number		Groove Width	Stock		D.O.C.	Dimensions (millimeters)	Standard Components		Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components	
Right	Left		R	L			Insert	Clamp		Insert	Clamp
M-511309-125VGB	-	3,18	○		19	57,15	GTS-4125-1	411967-125GC	TK-02629	GTS-4125	429513-125GC
-	M-512228-125VGB	3,18		○	19	57,15	GTS-4125-2	411966-125GC	TK-02628	COS-4125-0	429512-125GC
							WG-4125			COS-4125-4R	
							WGC-4125			COS-4125-4L	
M-511311-156VGB	-	3,96	○		19	57,15	WG-4156	411969-156GC	TK-02631	-	-
-	M-511312-156VGB	3,96		○	19	57,15	WGC-4156	411968-156GC	TK-02630	-	-
M-511313-187VGB	-	4,75	○		19	57,15	GTS-4187-1	411978-187GC	TK-02633	GTS-4187	429519-187GC
-	M-511314-187VGB	4,75		○	19	57,15	GTS-4187-2	411977-187GC	TK-02632	COS-4187-0	429518-187GC
							WG-4187			COS-4187-4R	
							WGC-4187			COS-4187-4L	
M-511315-218VGB	-	5,54	○		28,6	66,68	WG-6218	411130-218GC	TK-02635	-	-
-	M-512229-218VGB	5,54		○	28,6	66,68	WGC-6218	4111979-218GC	TK-02634	-	-
M-512230-250VGB	-	6,35	○		28,6	66,68	GTS-6250	411981-250GC	TK-02637	-	-
-	M-511318-250VGB	6,35		○	28,6	66,68	GTS-6250-1	411980-250GC	TK-02636	-	-
							GTS-6250-2				
							WG-6250				
							WGC-6250				
M-511319-281VGB	-	7,14	○		28,6	66,68	WG-6281	411134-281GC	TK-02648	-	-
-	M-511320-281VGB	7,14		○	28,6	66,68	WGC-6281	411133-281GC	TK-02638	-	-
M-511321-312VGB	-	7,92	○		38,1	76,20	WG-8312	411136-312GC	TK-02641	-	-
-	M-511322-312VGB	7,92		○	38,1	76,20	WGC-8312	411985-312GC	TK-02640	-	-
M-511323-344VGB	-	8,74	○		38,1	76,20	WG-8344	411138-344GC	TK-02643	-	-
-	M-511324-344VGB	8,74		○	38,1	76,20	WGC-8344	411137-344GC	TK-02642	-	-
M-511325-375VGB	-	9,53	○		38,1	76,20	WG-8375	411987-375GC	TK-02645	-	-
-	M-511326-375VGB	9,53		○	38,1	76,20	WGC-8375	411986-375GC	TK-02649	-	-

See page GP 38 for additional shank options.

All toolholders include standard clamp and clamp screw 31-434259-000.

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.


WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.

10 Business Days or Less


Stocked Standard

# Profiling Bar

Round V-Bottom Insert  
Milled Nest



Right-Hand Profiling Bar Shown

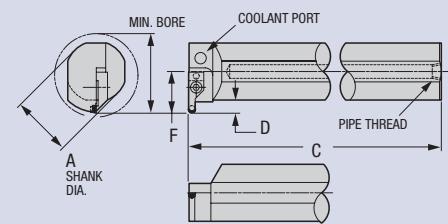

Part Number		Gage—Option 1	Gage—Option 2	Stock	D.O.C.	Dimensions (millimeters)			Standard Components	Clamp	Clamp Screw	*Tune-Up Kit Includes All Std. Components	Optional Component Insert Screw
Right	Left	Insert	Min. Bore	Insert	Min. Bore	R	L	D	A	C	F		
M-519700-06VMRB	—	RPGN-060400	38	RCGN-060400	90	○		10	25	300	22	412131-250GC	434258
—	M-519701-06VMRB	RPGN-060400	38	RCGN-060400	90	○	○	10	25	300	22	412132-250GC	434258
M-519702-06VMRB	—	RPGN-060400	45	RCGN-060400	90	○		10	32	300	25	412131-250GC	434258
—	M-519703-06VMRB	RPGN-060400	45	RCGN-060400	90	○	○	10	32	300	25	412132-250GC	434258
M-519704-06VMRB	—	RPGN-060400	50	RCGN-060400	90	○		10	40	350	28	412131-250GC	434258
—	M-519705-06VMRB	RPGN-060400	50	RCGN-060400	90	○	○	10	40	350	28	412132-250GC	434258
M-519706-06VMRB	—	RPGN-060400	64	RCGN-060400	90	○		10	50	400	35	412131-250GC	434258
—	M-519707-06VMRB	RPGN-060400	64	RCGN-060400	90	○	○	10	50	400	35	412132-250GC	434258
M-519708-09VMRB	M-519709-09VMRB	RPGN-090700	57	RCGN-090700	115	○	○	13	32	300	29	308063	TSHCS M5-0.8x12mm
M-519710-09VMRB	M-519711-09VMRB	RPGN-090700	64	RCGN-090700	115	●	●	13	40	350	33	308063	TSHCS M5-0.8x12mm
M-519712-09VMRB	M-519713-09VMRB	RPGN-090700	70	RCGN-090700	115	●	●	13	50	400	38	308063	TSHCS M5-0.8x12mm
M-519714-12VMRB	M-519715-12VMRB	RPGN-120700	57	RCGN-120700	115	○	○	16	32	300	32	308136	434258
M-519716-12VMRB	M-519717-12VMRB	RPGN-120700	64	RCGN-120700	115	●	●	16	40	350	35	308136	434258
M-519718-12VMRB	M-519719-12VMRB	RPGN-120700	70	RCGN-120700	115	●	●	16	50	400	41	308136	434258

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the profiling bar.

See page GP 14 for ceramic and carbide inserts.

NOTE: Use carbide inserts RCGT and RPGT with optional insert screw for finishing.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard


10 Business Days or Less

# Profiling Support Blade

Round V-Bottom Insert  
Milled Nest



Right-Hand Profiling Bar Shown

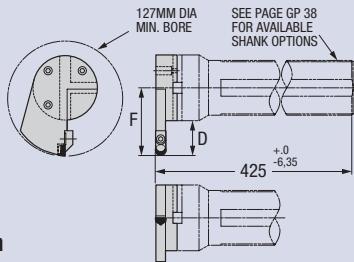

Part Number		Gage	Stock	D.O.C.	Dimensions (millimeters)	Standard Components		*Tune-Up Kit Includes All Standard Components	Optional Component
Right	Left	Insert	R	L	D	F	Clamp	Clamp Screw	Insert Screw
M-519740-06VMRB	-	** RPGN-060400	○		19,05	60,33	411906-250VRC	434259	TK-02690
-	M-519741-06VMRB	** RPGN-060400		○	19,05	60,33	411905-250VRC	434259	PT-542T
M-519742-09VMRB	-	** RPGN-090700	○		28,60	69,85	308063	TSHCS M5-0.8x16mm	TK-01709
-	M-519743-09VMRB	** RPGN-090700		○	28,60	69,85	308063	TSHCS M5-0.8x16mm	PT-545T
M-519744-12VMRB	-	** RPGN-120700	○		38,10	79,38	308136	434258	TK-02691
-	M-519745-12VMRB	** RPGN-120700		○	38,10	79,38	308136	434258	CO-5018

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade.

\*\* RCGN can be used in place of RPGN.


NOTE: Use carbide inserts RCGT and RPGT with optional insert screw for finishing.

See page GP 14 for ceramic and carbide inserts.


See page GP 38 for available shank options.

# Profiling Support Blade

Round V-Bottom Insert  
Replaceable Nest



Right-Hand Profiling Bar Shown

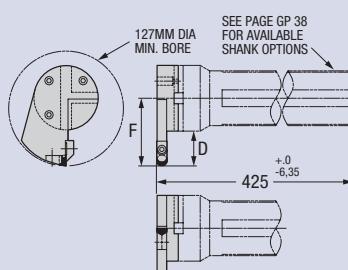

Part Number		Gage	Stock	D.O.C.	Dimensions (millimeters)	Standard Components		*Tune-Up Kit Includes All Standard Components	
Right	Left	Insert	R	L	D	Nest	Nest Screw	Clamp	Clamp Screw
M-512227-06VRB	-	** RPGN-060400	○		19,05	60,33	411108	BHCS M2.5-0.45x10mm	411906-250VRC
-	M-511287-06VRB	** RPGN-060400		○	19,05	60,33	411108	BHCS M2.5-0.45x10mm	434259
M-511288-09VRB	-	** RPGN-090700	○		38,10	69,85	414009	TBHCS M3-0.5x12mm	411905-250VRC
-	M-511289-09VRB	** RPGN-090700		○	38,10	69,85	414009	TBHCS M3-0.5x12mm	434259
M-511290-12VRB	-	** RPGN-120700	○		38,10	79,38	414008	TBHCS M5-0.8x16mm	434258
-	M-511291-12VRB	** RPGN-120700		○	38,10	79,38	414008	TBHCS M5-0.8x16mm	434258

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade.

See page GP 14 for ceramic and carbide inserts.

\*\* RCGN can be used in place of RPGN.

See page GP 38 for available shank options.

10 Business Days or Less

Stocked Standard


**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

# Shank Options

For Bolt-On Support Blades

Part Number	Stock	Dimensions (millimeters)	
		A	B
M-529756	○	50	400
M-529757	○	60	400
M-529758	○	72	400

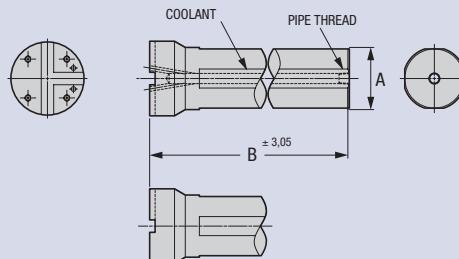

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard

 10 Business Days or Less

## Grooving, Profiling and Cut-Off Support Blades

The Greenleaf Advanced Tooling System for grooving, profiling and cut off is further expanded to a support blade system that couples qualified shanks and qualified support blades to increase the application range of each toolholder or bar. Each Greenleaf tool has the option to utilize 252 support blade combinations of cut-off, V-bottom round profilers, and grooving inserts to meet your cut-off, grooving, profiling and face-grooving application needs.

Quick-change shanks such as CAPTO or KM, as well as straight shank holders and bars, are all part of this tooling system. Call Greenleaf to design your unique right- or left-hand support blade.






Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)


### Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

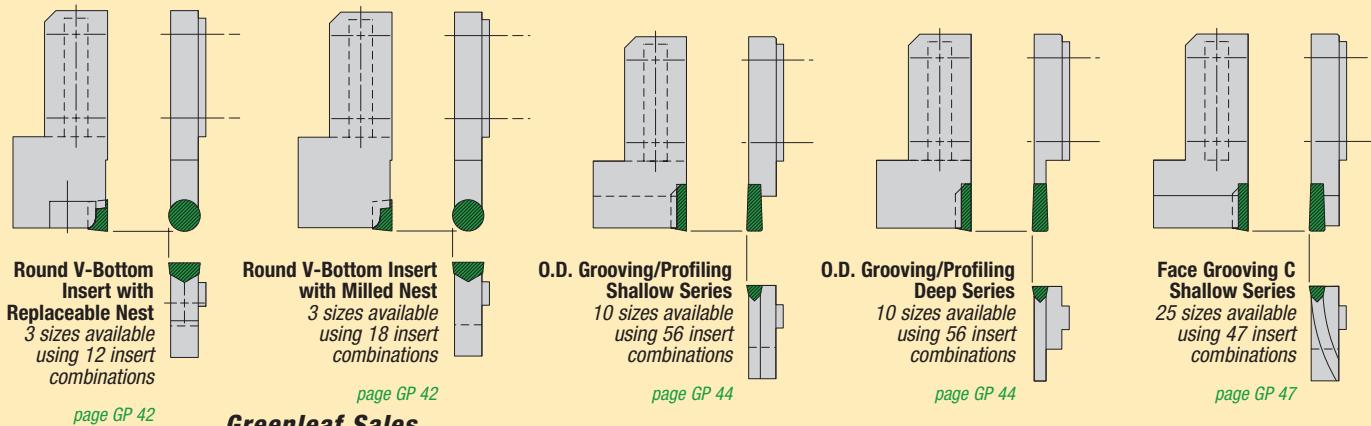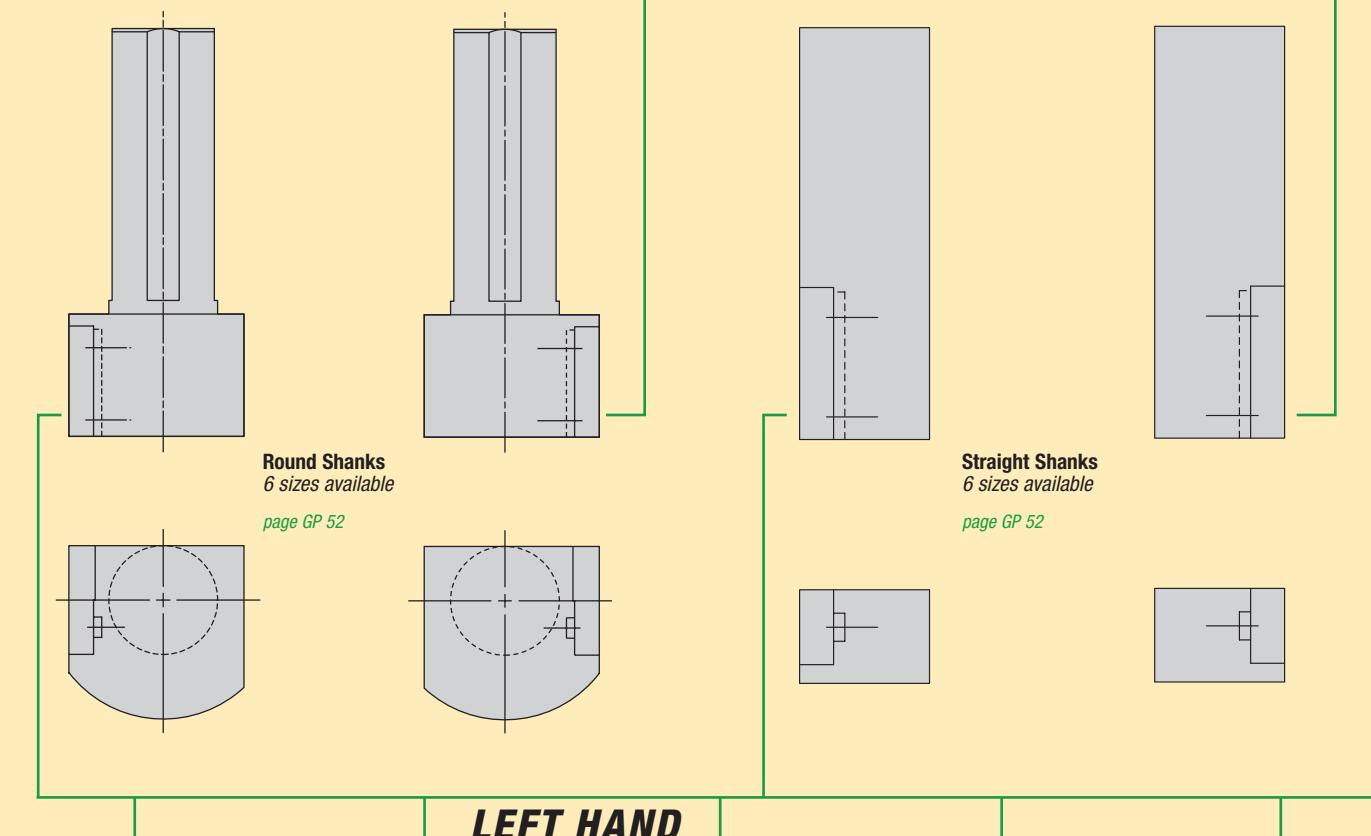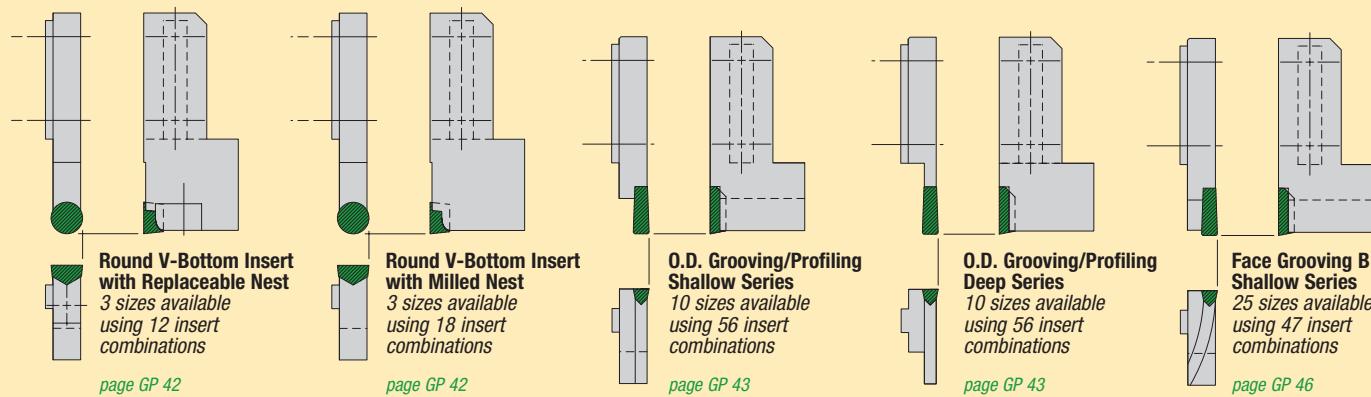


#### **Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

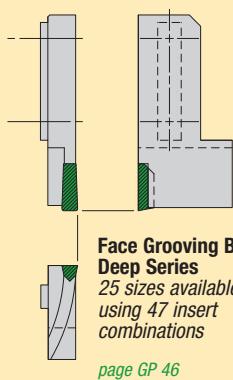


**Face Grooving B  
Deep Series**  
25 sizes available  
using 47 insert  
combinations

page GP 46

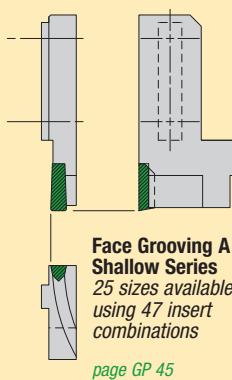


**Face Grooving A  
Shallow Series**  
25 sizes available  
using 47 insert  
combinations

page GP 45

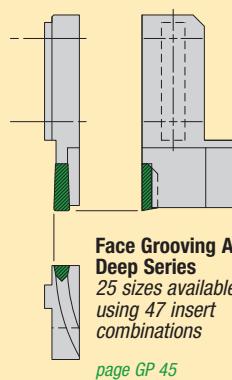

**Face Grooving A  
Deep Series**  
25 sizes available  
using 47 insert  
combinations


page GP 45

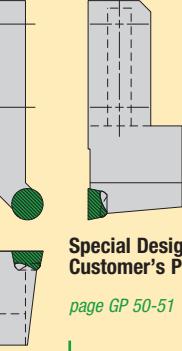

**Special Designs to Fit  
Customer's Parts**



page GP 50-51

## RIGHT HAND

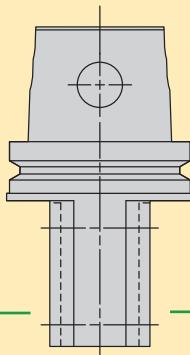


**KM Tool Shanks**  
4 sizes available

page GP 53

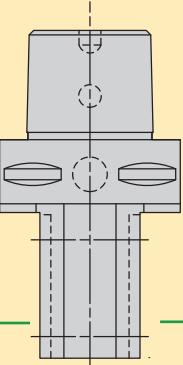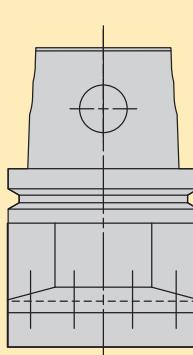


**Cproto Tool Shanks**  
4 sizes available

page GP 54

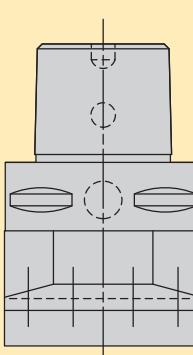


## LEFT HAND

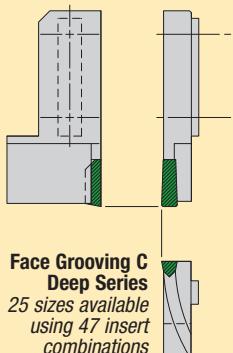


**Face Grooving C  
Deep Series**  
25 sizes available  
using 47 insert  
combinations

page GP 47

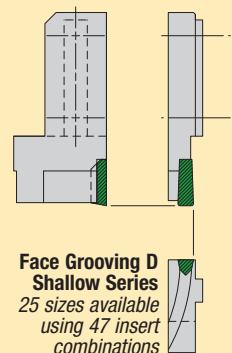


**Face Grooving D  
Shallow Series**  
25 sizes available  
using 47 insert  
combinations

page GP 48

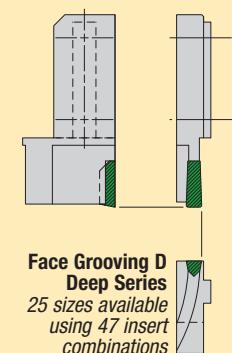

**Face Grooving D  
Deep Series**  
25 sizes available  
using 47 insert  
combinations

page GP 48

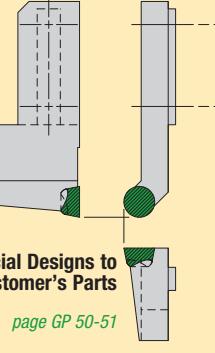

**Special Designs to  
Fit Customer's Parts**


page GP 50-51

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


# O.D. Grooving/Profiling Support Blade

Round V-Bottom Insert  
Replaceable Nest



Right-Hand Support Blade Shown

SEE PAGES GP 53-54 FOR ADDITIONAL SHANK OPTIONS

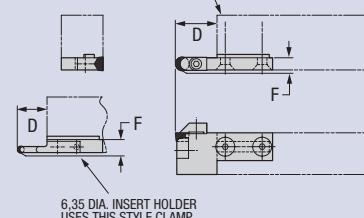

6.35 DIA. INSERT HOLDER USES THIS STYLE CLAMP

Part Number		Gage	Stock	D.O.C.	Dimensions (millimeters)		Standard Components			*Tune-Up Kit Includes All Std. Components	
Right	Left	Insert	R	L	D	F	Nest	Nest Screw	Clamp	Clamp Screw	
M-411959-06VR	-	** RPGN-060400	●		19,05	11,91	410631	BHCS M2.5-0.45x10mm	411905-250VRC	434259	TK-02692
-	M-411960-06VR	** RPGN-060400		●	19,05	11,91	410631	BHCS M2.5-0.45x10mm	411906-250VRC	434259	TK-02693
M-411011-09VR	M-411012-09VR	** RPGN-090700	●	●	28,60	11,91	413970	TBHCS M3-0.5x12mm	308063	TSHCS M5-0.8x12mm	TK-02685
M-411009-12VR	M-411010-12VR	** RPGN-120700	●	●	38,10	11,91	414007	TBHCS M5-0.8x16mm	308136	434258	TK-02686

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade.


See page GP 14 for ceramic and carbide inserts.

\*\* RCGN can be used in place of RPGN.

See pages GP 53-54 for additional shank options.


# O.D. Grooving/Profiling Support Blade

Round V-Bottom Insert  
Milled Nest



Right-Hand Support Blade Shown

SEE PAGES GP 53-54 FOR ADDITIONAL SHANK OPTIONS

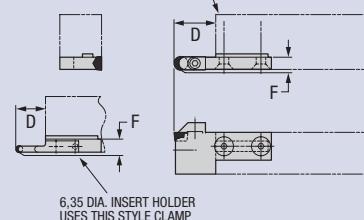

6.35 DIA. INSERT HOLDER USES THIS STYLE CLAMP

Part Number		Gage	Stock	D.O.C.	Dimensions (millimeters)		Standard Components			*Tune-Up Kit Includes All Standard Components	Optional Component
Right	Left	Insert	R	L	D	F	Clamp	Clamp Screw		Insert Screw	
M-421534-06VMR	-	** RPGN-060400	●		19,05	11,91	411905-250VRC	434259		TK-02689	PT-542T
-	M-421535-06VMR	** RPGN-060400		●	19,05	11,91	411906-250VRC	434259		TK-02690	PT-542T
M-421536-09VMR	M-421537-09VMR	** RPGN-090700	●	●	28,60	11,91	308063	TSHCS M5-0.8x12mm	TK-02734	PT-545T	
M-421538-12VMR	M-421539-12VMR	** RPGN-120700	●	●	38,10	11,91	308136	434258	TK-02691	CO-5018	

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade.

See page GP 14 for ceramic and carbide inserts.

\*\* RCGN can be used in place of RPGN.

See pages GP 53-54 for additional shank options.

NOTE: Use carbide inserts RCGT and RPGT with optional insert screw for finishing.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard

10 Business Days or Less


# O.D. Grooving/Profiling/Cut-Off Support Blade

Right Hand



Right-Hand Support Blade Shown

SEE PAGES GP 53-54 FOR ADDITIONAL SHANK OPTIONS

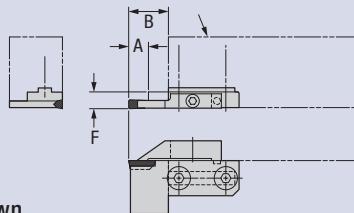

Part Number		Groove Width	Stock		Dimensions (millimeters)			Standard Components		*Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components	
Shallow Series	Deep Series		Shallow	Deep	A	B	F	Insert	Clamp		Insert	Clamp
M-427647-094VG		2,39	○		9,6	—	11,91	WG-4094	427651-094GC	TK-02626	COS-4094-0	429524-094GC
	M-427648-094VG			○	—	19	11,91	WGC-4094	427651-094GC	TK-02626	COS-4094-4L	429524-094GC
M-421109-125VG		3,18	●		9,6	—	11,91	GTS-4125-1	411966-125GC	TK-02628	GTS-4125	429512-125GC
	M-411988-125VG			●	—	19	11,91	GTS-4125-2	411966-125GC	TK-02628	COS-4125-0	429512-125GC
								WG-4125		COS-4125-4R		
								WGC-4125		COS-4125-4L		
M-421110-156VG		3,96	○		9,6	—	11,91	WG-4156	411968-156GC	TK-02630	—	—
	M-411066-156VG			○	—	19	11,91	WGC-4156	411968-156GC	TK-02630		
M-421111-187VG		4,75	○		9,6	—	11,91	GTS-4187-1	411977-187GC	TK-02632	GTS-4187	429518-187GC
	M-411068-187VG			○	—	19	11,91	GTS-4187-2	411977-187GC	TK-02632	COS-4187-0	429518-187GC
								WG-4187		COS-4187-4R		
								WGC-4187		COS-4187-4L		
M-421112-218VG		5,54	○		14,2	—	11,91	WG-6218	411979-218GC	TK-02634	—	—
	M-411081-218VG			○	—	28,7	11,91	WGC-6218	411979-218GC	TK-02634		
M-421113-250VG		6,35	●		14,2	—	11,91	WG-6250	411980-250GC	TK-02636	—	—
	M-411992-250VG			●	—	28,7	11,91	WGC-6250	411980-250GC	TK-02636		
								GTS-6250				
								GTS-6250-1				
								GTS-6250-2				
M-421114-281VG		7,14	○		14,2	—	11,91	WG-6281	411133-281GC	TK-02638	—	—
	M-411085-281VG			○	—	28,7	11,91	WGC-6281	411133-281GC	TK-02638		
M-421115-312VG		7,92	●		19	—	11,91	WG-8312	411985-312GC	TK-02640	—	—
	M-411087-312VG			●	—	38,1	11,91	WGC-8312	411985-312GC	TK-02640		
M-421116-344VG		8,74	○		19	—	11,91	WG-8344	411137-344GC	TK-02642	—	—
	M-411089-344VG			○	—	38,1	11,91	WGC-8344	411137-344GC	TK-02642		
M-421117-375VG		9,53	○		19	—	11,91	WG-8375	411986-375GC	TK-02649	—	—
	M-411994-375VG			○	—	38,1	11,91	WGC-8375	411986-375GC	TK-02649		

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade.

All support blades include standard clamp and clamp screw 31-434259-000.

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.



See pages GP 53-54 for additional shank options.

10 Business Days or Less

Stocked Standard

# O.D. Grooving/Profiling/Cut-Off Support Blade

Left Hand

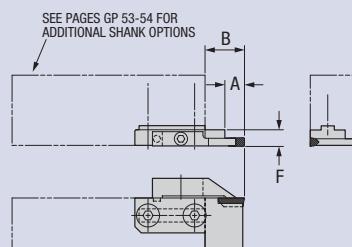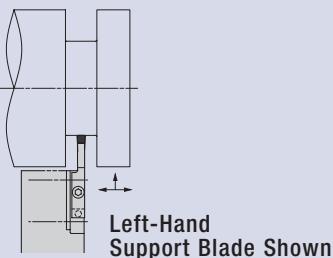

Part Number		Groove Width	Stock		Dimensions (millimeters)			Standard Components		*Tune-Up Kit Includes Standard Clamp and *Clamp Screw	Optional Components	
Shallow Series	Deep Series		Shallow	Deep	A	B	F	Insert	Clamp		Insert	Clamp
M-427649-094VG	M-427650-094VG	2,39	○	○	9,6	—	11,91	WG-4094	427652-094GC	TK-02627	COS-4094-0	429525-094GC
M-421100-125VG	M-411989-125VG	3,18	●	●	9,6	—	11,91	GTS-4125-1	411967-125GC	TK-02629	GTS-4125	429513-125GC
M-421101-156VG	M-411990-156VG	3,96	○	○	9,6	—	11,91	GTS-4125-2	411967-125GC	TK-02629	COS-4125-0	429513-125GC
M-421102-187VG	M-411991-187VG	4,75	○	○	9,6	—	11,91	WG-4125	411969-156GC	TK-02631	COS-4125-4R	429513-125GC
M-421103-218VG	M-411082-218VG	5,54	○	○	14,2	—	11,91	WG-4125	411969-156GC	TK-02631	COS-4125-4L	429513-125GC
M-421104-250VG	M-411993-250VG	6,35	●	●	14,2	—	11,91	GTS-4187-1	411978-187GC	TK-02633	GTS-4187	429519-187GC
M-421105-281VG	M-411086-281VG	7,14	○	○	14,2	—	11,91	GTS-4187-2	411978-187GC	TK-02633	COS-4187-0	429519-187GC
M-421106-312VG	M-411088-312VG	7,92	●	●	19	—	11,91	WG-6250	411981-250GC	TK-02637	COS-4187-4R	429519-187GC
M-421107-344VG	M-411090-344VG	8,74	○	○	19	—	11,91	WG-6250	411981-250GC	TK-02637	COS-4187-4L	429519-187GC
M-421108-375VG	M-411122-375VG	9,53	○	○	19	—	11,91	GTS-6250	411136-312GC	TK-02641	—	—
					—	28,7	11,91	GTS-6250	411136-312GC	TK-02641	—	—
					—	38,1	11,91	GTS-6250-1	411136-312GC	TK-02641	—	—
					—	38,1	11,91	GTS-6250-2	411136-312GC	TK-02641	—	—
					—	38,1	11,91	WG-8312	411134-281GC	TK-02648	—	—
					—	38,1	11,91	WG-8312	411134-281GC	TK-02648	—	—
					—	38,1	11,91	WG-8344	411138-344GC	TK-02643	—	—
					—	38,1	11,91	WG-8344	411138-344GC	TK-02643	—	—
					—	38,1	11,91	WG-8375	411987-375GC	TK-02645	—	—
					—	38,1	11,91	WG-8375	411987-375GC	TK-02645	—	—

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade.

All support blades include standard clamp and clamp screw 31-434259-000.

GTS is Greenleaf's groove/turn system insert with chip control. Page GP 09.

COS is Greenleaf's cut-off system insert. Page GP 08.

WG is Greenleaf flat-top groover with an 11° nose clearance. Pages GP 10 and GP 11.

WGC is Greenleaf's flat-top groover with a 6° nose clearance. Pages GP 12 and GP 13.

See pages GP 53-54 for additional shank options.



## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard

 10 Business Days or Less

# Face Grooving Support Blade A

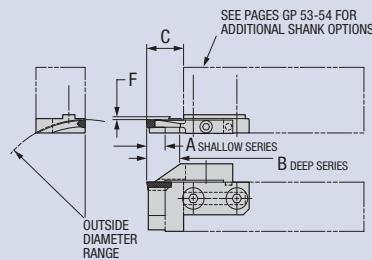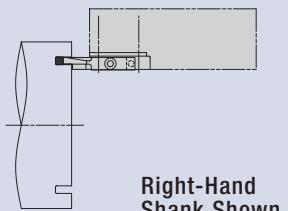

Part Number		Gage	Stock	Outside Diameter Range	Dimensions (millimeters)				Standard Components		*Tune-Up Kit Includes All Standard Components
Shallow Series	Deep Series	Insert	Shallow Deep		A	B	C	F	Clamp	Clamp Screw	
M-421218-125S-030	M-421243-125L-030	WG-4125	○ ○	76,20 - 88,90	9,65	16	19,05	0,79	421323-125GC	434259	TK-02650
M-421219-125S-035	M-421244-125L-035	WG-4125	○ ○	88,90 - 107,95	9,65	16	19,05	0,79	421323-125GC	434259	TK-02650
M-421220-125S-0425	M-421245-125L-0425	WG-4125	○ ○	107,95 - 139,70	9,65	16	19,05	0,79	421323-125GC	434259	TK-02650
M-421221-125S-055	M-421246-125L-055	WG-4125	○ ○	139,70 - 190,50	9,65	16	19,05	0,79	421323-125GC	434259	TK-02650
M-421222-125S-075	M-421247-125L-075	WG-4125	○ ○	190,50 - 317,50	9,65	16	19,05	0,79	421323-125GC	434259	TK-02650
M-421223-125S-125	M-421248-125L-125	WG-4125	○ ○	317,50 - 1016,0	9,65	16	19,05	0,79	421323-125GC	434259	TK-02650
M-421224-187S-030	M-421249-187L-030	WG-4187	○ ○	76,20 - 88,90	9,65	16	19,05	0,79	421324-187GC	434259	TK-02651
M-421225-187S-035	M-421250-187L-035	WG-4187	○ ○	88,90 - 107,95	9,65	16	19,05	0,79	421324-187GC	434259	TK-02651
M-421226-187S-0425	M-421251-187L-0425	WG-4187	○ ○	107,95 - 139,70	9,65	16	19,05	0,79	421324-187GC	434259	TK-02651
M-421227-187S-055	M-421252-187L-055	WG-4187	○ ○	139,70 - 190,50	9,65	16	19,05	0,79	421324-187GC	434259	TK-02651
M-421228-187S-075	M-421253-187L-075	WG-4187	○ ○	190,50 - 317,50	9,65	16	19,05	0,79	421324-187GC	434259	TK-02651
M-421229-187S-125	M-421254-187L-125	WG-4187	○ ○	317,50 - 1016,0	9,65	16	19,05	0,79	421324-187GC	434259	TK-02651
M-421230-250S-030	M-421255-250L-030	WG-6250	○ ○	76,20 - 107,95	14,22	25,40	28,58	0,79	421325-250GC	434259	TK-02652
M-421231-250S-0425	M-421256-250L-0425	WG-6250	○ ○	107,95 - 152,40	14,22	25,40	28,58	0,79	421325-250GC	434259	TK-02652
M-421232-250S-060	M-421257-250L-060	WG-6250	○ ○	152,40 - 215,90	14,22	25,40	28,58	0,79	421325-250GC	434259	TK-02652
M-421233-250S-085	M-421258-250L-085	WG-6250	○ ○	215,90 - 393,70	14,22	25,40	28,58	0,79	421325-250GC	434259	TK-02652
M-421234-250S-155	M-421259-250L-155	WG-6250	○ ○	393,70 - 1016,0	14,22	25,40	28,58	0,79	421325-250GC	434259	TK-02652
M-421235-312S-030	M-421260-312L-030	WG-8312	○ ○	76,20 - 127,00	19,05	33,27	38,10	0,79	421326-312GC	434259	TK-02653
M-421236-312S-050	M-421261-312L-050	WG-8312	○ ○	127,00 - 228,60	19,05	33,27	38,10	0,79	421326-312GC	434259	TK-02653
M-421237-312S-090	M-421262-312L-090	WG-8312	○ ○	228,60 - 482,60	19,05	33,27	38,10	0,79	421326-312GC	434259	TK-02653
M-421238-312S-190	M-421263-312L-190	WG-8312	○ ○	482,60 -	19,05	33,27	38,10	0,79	421326-312GC	434259	TK-02653
M-421239-375S-030	M-421264-375L-030	WG-8375	○ ○	76,20 - 127,00	19,05	33,27	38,10	0,79	421327-375GC	434259	TK-02654
M-421240-375S-050	M-421265-375L-050	WG-8375	○ ○	127,00 - 228,60	19,05	33,27	38,10	0,79	421327-375GC	434259	TK-02654
M-421241-375S-090	M-421266-375L-090	WG-8375	○ ○	228,60 - 482,60	19,05	33,27	38,10	0,79	421327-375GC	434259	TK-02654
M-421242-375S-190	M-421267-375L-190	WG-8375	○ ○	482,60 -	19,05	33,27	38,10	0,79	421327-375GC	434259	TK-02654



\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade. See pages GP 10 and GP 11 for ceramic and carbide inserts.

See pages GP 53-54 for additional shank options.

10 Business Days or Less

Stocked Standard

# Face Grooving Support Blade B

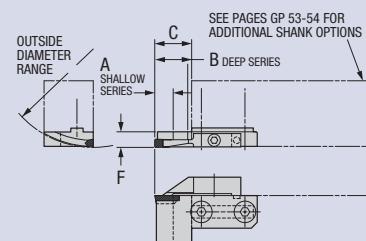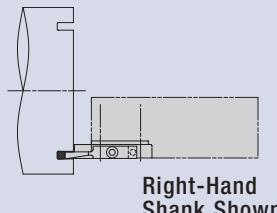

Part Number		Gage Insert	Stock Shallow	Stock Deep	Outside Diameter Range	Dimensions (millimeters)				Standard Components		*Tune-Up Kit Includes All Standard Components
Shallow Series	Deep Series					A	B	C	F	Clamp	Clamp Screw	
M-421118-125S-030	M-421143-125L-030	WG-4125	○	○	76,20 - 88,90	9,65	16	19,05	11,91	421318-125GC	434259	TK-02677
M-421119-125S-035	M-421144-125L-035	WG-4125	○	○	88,90 - 107,95	9,65	16	19,05	11,91	421318-125GC	434259	TK-02677
M-421120-125S-0425	M-421145-125L-0425	WG-4125	○	○	107,95 - 139,70	9,65	16	19,05	11,91	421318-125GC	434259	TK-02677
M-421121-125S-055	M-421146-125L-055	WG-4125	○	○	139,70 - 190,50	9,65	16	19,05	11,91	421318-125GC	434259	TK-02677
M-421122-125S-075	M-421147-125L-075	WG-4125	○	○	190,50 - 317,50	9,65	16	19,05	11,91	421318-125GC	434259	TK-02677
M-421123-125S-125	M-421148-125L-125	WG-4125	○	○	317,50 - 1016,0	9,65	16	19,05	11,91	421318-125GC	434259	TK-02677
M-421124-187S-030	M-421149-187L-030	WG-4187	○	○	76,20 - 88,90	9,65	16	19,05	11,91	421319-187GC	434259	TK-02678
M-421125-187S-035	M-421150-187L-035	WG-4187	○	○	88,90 - 107,95	9,65	16	19,05	11,91	421319-187GC	434259	TK-02678
M-421126-187S-0425	M-421151-187L-0425	WG-4187	○	○	107,95 - 139,70	9,65	16	19,05	11,91	421319-187GC	434259	TK-02678
M-421127-187S-055	M-421152-187L-055	WG-4187	○	○	139,70 - 190,50	9,65	16	19,05	11,91	421319-187GC	434259	TK-02678
M-421128-187S-075	M-421153-187L-075	WG-4187	○	○	190,50 - 317,50	9,65	16	19,05	11,91	421319-187GC	434259	TK-02678
M-421129-187S-125	M-421154-187L-125	WG-4187	○	○	317,50 - 1016,0	9,65	16	19,05	11,91	421319-187GC	434259	TK-02678
M-421130-250S-030	M-421155-250L-030	WG-6250	○	○	76,20 - 107,95	14,22	25,40	28,58	11,91	421320-250GC	434259	TK-02679
M-421131-250S-0425	M-421156-250L-0425	WG-6250	○	○	107,95 - 152,40	14,22	25,40	28,58	11,91	421320-250GC	434259	TK-02679
M-421132-250S-060	M-421157-250L-060	WG-6250	○	○	152,40 - 215,90	14,22	25,40	28,58	11,91	421320-250GC	434259	TK-02679
M-421133-250S-085	M-421158-250L-085	WG-6250	○	○	215,90 - 393,70	14,22	25,40	28,58	11,91	421320-250GC	434259	TK-02679
M-421134-250S-155	M-421159-250L-155	WG-6250	○	○	393,70 - 1016,0	14,22	25,40	28,58	11,91	421320-250GC	434259	TK-02679
M-421135-312S-030	M-421160-312L-030	WG-8312	○	○	76,20 - 127,00	19,05	33,27	38,10	11,91	421321-312GC	434259	TK-02680
M-421136-312S-050	M-421161-312L-050	WG-8312	○	○	127,00 - 228,60	19,05	33,27	38,10	11,91	421321-312GC	434259	TK-02680
M-421137-312S-090	M-421162-312L-090	WG-8312	○	○	228,60 - 482,60	19,05	33,27	38,10	11,91	421321-312GC	434259	TK-02680
M-421138-312S-190	M-421163-312L-190	WG-8312	○	○	482,60 -	19,05	33,27	38,10	11,91	421321-312GC	434259	TK-02680
M-421139-375S-030	M-421164-375L-030	WG-8375	○	○	76,20 - 127,00	19,05	33,27	38,10	11,91	421322-375GC	434259	TK-02681
M-421140-375S-050	M-421165-375L-050	WG-8375	○	○	127,00 - 228,60	19,05	33,27	38,10	11,91	421322-375GC	434259	TK-02681
M-421141-375S-090	M-421166-375L-090	WG-8375	○	○	228,60 - 482,60	19,05	33,27	38,10	11,91	421322-375GC	434259	TK-02681
M-421142-375S-190	M-421167-375L-190	WG-8375	○	○	482,60 -	19,05	33,27	38,10	11,91	421322-375GC	434259	TK-02681

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade. See page GP 10 and GP 11 for ceramic and carbide inserts.

See pages GP 53-54 for additional shank options.


## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


 Stocked Standard

 10 Business Days or Less

# Face Grooving Support Blade C

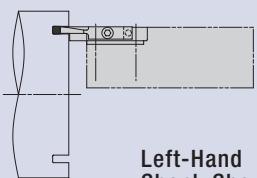

Left-Hand  
Shank Shown

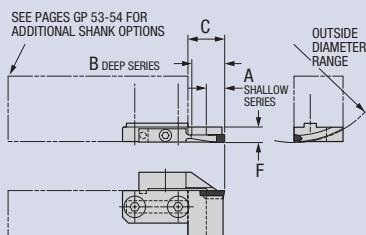

Part Number		Gage	Stock	Outside Diameter Range	Dimensions (millimeters)				Standard Components		*Tune-Up Kit Includes All Standard Components
Shallow Series	Deep Series	Insert	Shallow Deep		A	B	C	F	Clamp	Clamp Screw	
M-421168-125S-030	M-421193-125L-030	WG-4125	○ ○	76,20 - 88,90	9,65	16	19,05	11,91	421323-125GC	434259	TK-02650
M-421169-125S-035	M-421194-125L-035	WG-4125	○ ○	88,90 - 107,95	9,65	16	19,05	11,91	421323-125GC	434259	TK-02650
M-421170-125S-0425	M-421195-125L-0425	WG-4125	○ ○	107,95 - 139,70	9,65	16	19,05	11,91	421323-125GC	434259	TK-02650
M-421171-125S-055	M-421196-125L-055	WG-4125	○ ○	139,70 - 190,50	9,65	16	19,05	11,91	421323-125GC	434259	TK-02650
M-421172-125S-075	M-421197-125L-075	WG-4125	○ ○	190,50 - 317,50	9,65	16	19,05	11,91	421323-125GC	434259	TK-02650
M-421173-125S-125	M-421198-125L-125	WG-4125	○ ○	317,50 - 1016,0	9,65	16	19,05	11,91	421323-125GC	434259	TK-02650
M-421174-187S-030	M-421199-187L-030	WG-4187	○ ○	76,20 - 88,90	9,65	16	19,05	11,91	421324-187GC	434259	TK-02651
M-421175-187S-035	M-421200-187L-035	WG-4187	○ ○	88,90 - 107,95	9,65	16	19,05	11,91	421324-187GC	434259	TK-02651
M-421176-187S-0425	M-421201-187L-0425	WG-4187	○ ○	107,95 - 139,70	9,65	16	19,05	11,91	421324-187GC	434259	TK-02651
M-421177-187S-055	M-421202-187L-055	WG-4187	○ ○	139,70 - 190,50	9,65	16	19,05	11,91	421324-187GC	434259	TK-02651
M-421178-187S-075	M-421203-187L-075	WG-4187	○ ○	190,50 - 317,50	9,65	16	19,05	11,91	421324-187GC	434259	TK-02651
M-421179-187S-125	M-421204-187L-125	WG-4187	○ ○	317,50 - 1016,0	9,65	16	19,05	11,91	421324-187GC	434259	TK-02651
M-421180-250S-030	M-421205-250L-030	WG-6250	○ ○	76,20 - 107,95	14,22	25,40	28,58	11,91	421325-250GC	434259	TK-02652
M-421181-250S-0425	M-421206-250L-0425	WG-6250	○ ○	107,95 - 152,40	14,22	25,40	28,58	11,91	421325-250GC	434259	TK-02652
M-421182-250S-060	M-421207-250L-060	WG-6250	○ ○	152,40 - 215,90	14,22	25,40	28,58	11,91	421325-250GC	434259	TK-02652
M-421183-250S-085	M-421208-250L-085	WG-6250	○ ○	215,90 - 393,70	14,22	25,40	28,58	11,91	421325-250GC	434259	TK-02652
M-421184-250S-155	M-421209-250L-155	WG-6250	○ ○	393,70 - 1016,0	14,22	25,40	28,58	11,91	421325-250GC	434259	TK-02652
M-421185-312S-030	M-421210-312L-030	WG-8312	○ ○	76,20 - 127,00	19,05	33,27	38,10	11,91	421326-312GC	434259	TK-02653
M-421186-312S-050	M-421211-312L-050	WG-8312	○ ○	127,00 - 228,60	19,05	33,27	38,10	11,91	421326-312GC	434259	TK-02653
M-421187-312S-090	M-421212-312L-090	WG-8312	○ ○	228,60 - 482,60	19,05	33,27	38,10	11,91	421326-312GC	434259	TK-02653
M-421188-312S-190	M-421213-312L-190	WG-8312	○ ○	482,60 -	19,05	33,27	38,10	11,91	421326-312GC	434259	TK-02653
M-421189-375S-030	M-421214-375L-030	WG-8375	○ ○	76,20 - 127,00	19,05	33,27	38,10	11,91	421327-375GC	434259	TK-02654
M-421190-375S-050	M-421215-375L-050	WG-8375	○ ○	127,00 - 228,60	19,05	33,27	38,10	11,91	421327-375GC	434259	TK-02654
M-421191-375S-090	M-421216-375L-090	WG-8375	○ ○	228,60 - 482,60	19,05	33,27	38,10	11,91	421327-375GC	434259	TK-02654
M-421192-375S-190	M-421217-375L-190	WG-8375	○ ○	482,60 -	19,05	33,27	38,10	11,91	421327-375GC	434259	TK-02654

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade.


See page GP 10 and GP 11 for ceramic and carbide inserts.

See pages GP 53-54 for additional shank options.


10 Business Days or Less 

Stocked Standard 

# Face Grooving Support Blade D

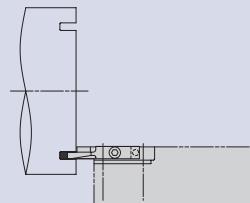

Left-Hand  
Shank Shown

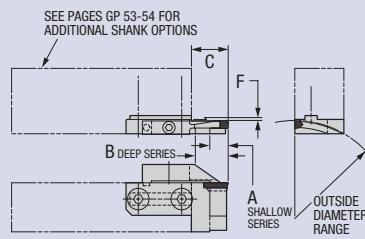

SEE PAGES GP 53-54 FOR  
ADDITIONAL SHANK OPTIONS

Part Number		Gage	Stock		Outside Diameter Range	Dimensions (millimeters)				Standard Components		*Tune-Up Kit Includes All Standard Components
Shallow Series	Deep Series	Insert	Shallow	Deep		A	B	C	F	Clamp	Clamp Screw	
M-421268-125S-030	M-421293-125L-030	WG-4125	○	○	76,20 - 88,90	9,65	16	19,05	0,79	421318-125GC	434259	TK-02677
M-421269-125S-035	M-421294-125L-035	WG-4125	○	○	88,90 - 107,95	9,65	16	19,05	0,79	421318-125GC	434259	TK-02677
M-421270-125S-0425	M-421295-125L-0425	WG-4125	○	○	107,95 - 139,70	9,65	16	19,05	0,79	421318-125GC	434259	TK-02677
M-421271-125S-055	M-421296-125L-055	WG-4125	○	○	139,70 - 190,50	9,65	16	19,05	0,79	421318-125GC	434259	TK-02677
M-421272-125S-075	M-421297-125L-075	WG-4125	○	○	190,50 - 317,50	9,65	16	19,05	0,79	421318-125GC	434259	TK-02677
M-421273-125S-125	M-421298-125L-125	WG-4125	○	○	317,50 - 1016,0	9,65	16	19,05	0,79	421318-125GC	434259	TK-02677
M-421274-187S-030	M-421299-187L-030	WG-4187	○	○	76,20 - 88,90	9,65	16	19,05	0,79	421319-187GC	434259	TK-02678
M-421275-187S-035	M-421300-187L-035	WG-4187	○	○	88,90 - 107,95	9,65	16	19,05	0,79	421319-187GC	434259	TK-02678
M-421276-187S-0425	M-421301-187L-0425	WG-4187	○	○	107,95 - 139,70	9,65	16	19,05	0,79	421319-187GC	434259	TK-02678
M-421277-187S-055	M-421302-187L-055	WG-4187	○	○	139,70 - 190,50	9,65	16	19,05	0,79	421319-187GC	434259	TK-02678
M-421278-187S-075	M-421303-187L-075	WG-4187	○	○	190,50 - 317,50	9,65	16	19,05	0,79	421319-187GC	434259	TK-02678
M-421279-187S-125	M-421304-187L-125	WG-4187	○	○	317,50 - 1016,0	9,65	16	19,05	0,79	421319-187GC	434259	TK-02678
M-421280-250S-030	M-421305-250L-030	WG-6250	○	○	76,20 - 107,95	14,22	25,40	28,58	0,79	421320-250GC	434259	TK-02679
M-421281-250S-0425	M-421306-250L-0425	WG-6250	○	○	107,95 - 152,40	14,22	25,40	28,58	0,79	421320-250GC	434259	TK-02679
M-421282-250S-060	M-421307-250L-060	WG-6250	○	○	152,40 - 215,90	14,22	25,40	28,58	0,79	421320-250GC	434259	TK-02679
M-421283-250S-085	M-421308-250L-085	WG-6250	○	○	215,90 - 393,70	14,22	25,40	28,58	0,79	421320-250GC	434259	TK-02679
M-421284-250S-155	M-421309-250L-155	WG-6250	○	○	393,70 - 1016,0	14,22	25,40	28,58	0,79	421320-250GC	434259	TK-02679
M-421285-312S-030	M-421310-312L-030	WG-8312	○	○	76,20 - 127,00	19,05	33,27	38,10	0,79	421321-312GC	434259	TK-02680
M-421286-312S-050	M-421311-312L-050	WG-8312	○	○	127,00 - 228,60	19,05	33,27	38,10	0,79	421321-312GC	434259	TK-02680
M-421287-312S-090	M-421312-312L-090	WG-8312	○	○	228,60 - 482,60	19,05	33,27	38,10	0,79	421321-312GC	434259	TK-02680
M-421288-312S-190	M-421313-312L-190	WG-8312	○	○	482,60 -	19,05	33,27	38,10	0,79	421321-312GC	434259	TK-02680
M-421289-375S-030	M-421314-375L-030	WG-8375	○	○	76,20 - 127,00	19,05	33,27	38,10	0,79	421322-375GC	434259	TK-02681
M-421290-375S-050	M-421315-375L-050	WG-8375	○	○	127,00 - 228,60	19,05	33,27	38,10	0,79	421322-375GC	434259	TK-02681
M-421291-375S-090	M-421316-375L-090	WG-8375	○	○	228,60 - 482,60	19,05	33,27	38,10	0,79	421322-375GC	434259	TK-02681
M-421292-375S-190	M-421317-375L-190	WG-8375	○	○	482,60 -	19,05	33,27	38,10	0,79	421322-375GC	434259	TK-02681

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the support blade.

See page GP 10 and GP 11 for ceramic and carbide inserts.

See pages GP 53-54 for additional shank options.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

 Stocked Standard

 10 Business Days or Less

## NOTES:

**Greenleaf Sales**  
**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Face Grooving Tools - Ordering Instructions


Face grooving tools must be matched to a specific radius and are, therefore, manufactured to order for your particular application.

We offer tools either with integral support blades (SFG) or with separate replaceable blades (AFG). Four combinations are available relative to hand of tool and hand of radius.


When ordering replaceable blade styles, we suggest the purchase of additional back-up blades at time of original order.

For your convenience in ordering or request for quotation, we have published sample blank engineering data forms. You must provide *ALL* of the dimensional data listed to ensure the correct tool being manufactured.


*Note: Tools will be quoted either with radius relieved blades or angular relieved blades, according to groove diameter. Radius relieved blades are illustrated.*

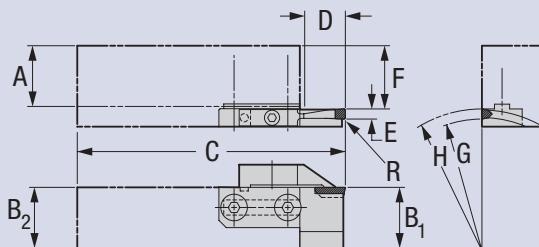


AFGVLL

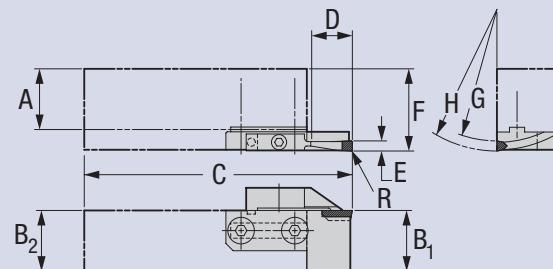

AFGVLR




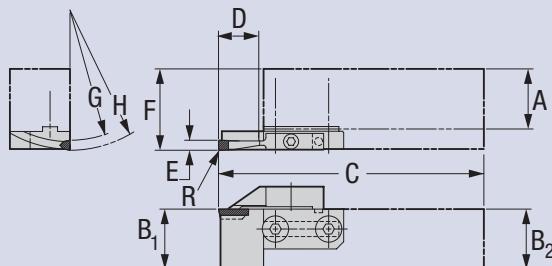


AFGVRL

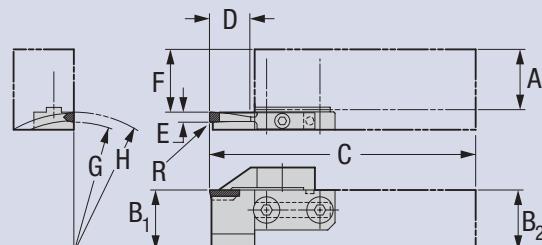

AFGVRR


AFGV__	A	C	F
Drawing #	B <sub>1</sub>	D (depth of cut)	G (radius)
R (radius)	B <sub>2</sub>	E	H (radius)

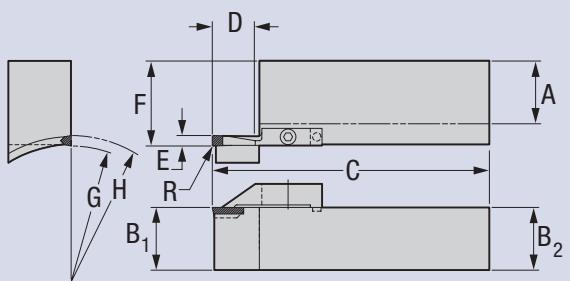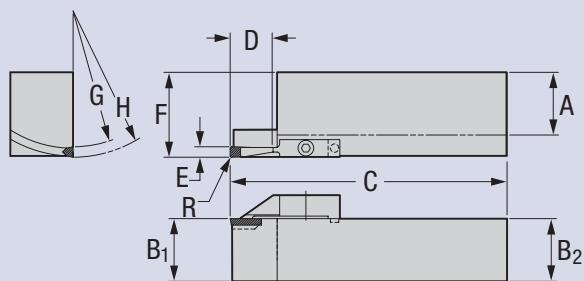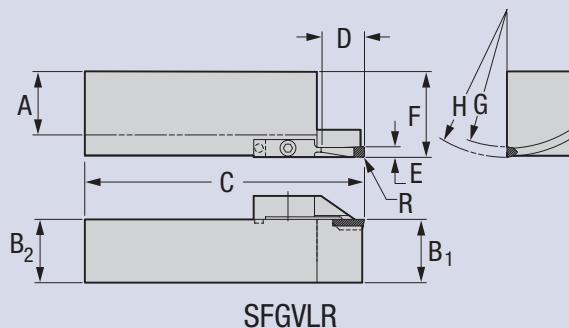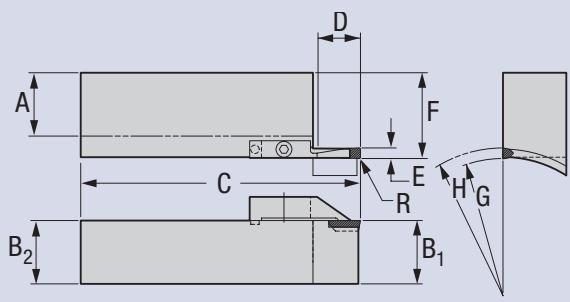

SFGV__	A	C	F
Drawing #	B <sub>1</sub>	D (depth of cut)	G (radius)
R (radius)	B <sub>2</sub>	E	H (radius)

# Straight Shank Holder

For Support Blades

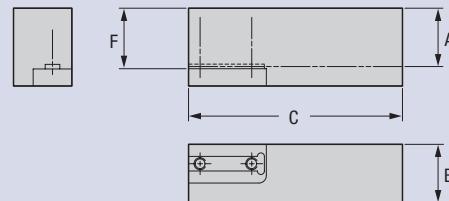


Part Number		Stock		Dimensions (millimeters)				Standard Component	*Tune-Up Kit Includes All Standard Components
Right	Left	R	L	A	B	C	F	Mounting Screw	
M-411055	M-411056	●	●	25	25	125	26	FHCS M8-1.25x25mm	TK-02682
M-411059	M-411449	●	●	32	32	150	33	FHCS M8-1.25x25mm	TK-02682
M-411015	M-411016	○	○	40	40	200	41	FHCS M8-1.25x25mm	TK-02682

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

# Round Shank Holder

For Support Blades

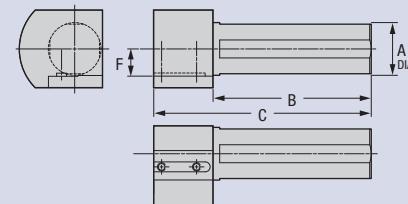

Part Number		Stock		Dimensions (millimeters)				Standard Component	*Tune-Up Kit Includes All Standard Components
Right	Left	R	L	A	B	C	F	Mounting Screw	
M-529678	M-529679	○	○	32	150	200	23	FHCS M8-1.25x25mm	TK-02682
M-529680	M-529681	●	●	40	150	200	27	FHCS M8-1.25x25mm	TK-02682
M-529682	M-529683	●	●	50	150	200	32	FHCS M8-1.25x25mm	TK-02682
M-529684	M-529685	○	○	60	150	200	37	FHCS M8-1.25x25mm	TK-02682

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard

 10 Business Days or Less

# KM Shank

Face Mount

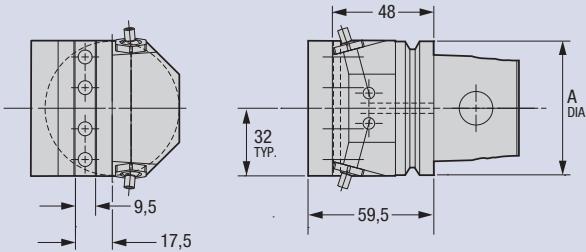

Part Number		Dimensions (millimeters)	Standard Component	*Tune-Up Kit Includes All Standard Components
† Face Mount	Stock	A	Mounting Screw	
M-SBH-KM50-F	○	50	FHCS M8-1.25x25mm	TK-02682
M-SBH-KM63-F	○	63	FHCS M8-1.25x25mm	TK-02682


High-pressure coolant – 1,500 PSI Max (100 bar)

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

† These tools based on KM63UT shank.

# KM Shank

Side Mount

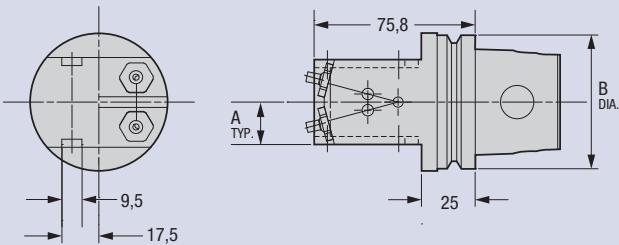

Part Number		Dimensions (millimeters)	Standard Component	*Tune-Up Kit Includes All Standard Components
† Side Mount	Stock	A	B	Mounting Screw
M-SBH-KM50-S	○	17,5	50	FHCS M8-1.25x25mm
M-SBH-KM63-S	○	20	63	FHCS M8-1.25x25mm

High-pressure coolant – 1,500 PSI Max (100 bar)

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

† These tools based on KM63UT shank.


## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

10 Business Days or Less  Stocked Standard

## Capto Shank

Face Mount

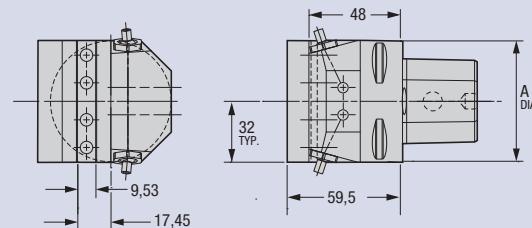


Part Number		Dimensions (millimeters)	Standard Component	*Tune-Up Kit Includes All Standard Components
Face Mount	Stock	A	Mounting Screw	
M-SBH-C5-F	○	50	FHCS M8-1.25x25mm	TK-02682
M-SBH-C6-F	○	63	FHCS M8-1.25x25mm	TK-02682

High-pressure coolant – 1,500 PSI Max (100 bar)

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

## Capto Shank

Side Mount

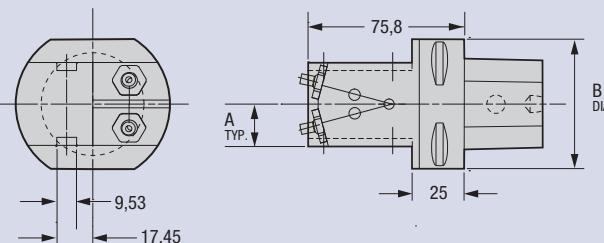

Part Number		Dimensions (millimeters)	Standard Component	*Tune-Up Kit Includes All Standard Components
Side Mount	Stock	A	B	Mounting Screw
M-SBH-C5-S	○	17.5	50	FHCS M8-1.25x25mm
M-SBH-C6-S	○	20	63	FHCS M8-1.25x25mm

High-pressure coolant – 1,500 PSI Max (100 bar)

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the toolholder.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

 Stocked Standard

 10 Business Days or Less



## NOTES:

*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

**Greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



*Ring Max™ Inserts.....RM 03-08*

*Ring Max™ II.....RM 09-22*

*Ring Max™ III.....RM 23-33*

*Ring Max™ Cartridges.....RM 34-36*

*Ring Max™ STX .....RM 37-44*

**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Ring Max™ Grooving Inserts

Utilizing the latest cutting tool technology and coatings, there is a Greenleaf high-performance insert grade for every ring groove need:

- WG-300® whisker-reinforced ceramics for Inconel 625 clad overlay
- Carbide grade G-915 for stainless steel
- Carbide grade GA5036 for alloy steel



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*


[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## Ring Max™ Grooving Insert Identification System

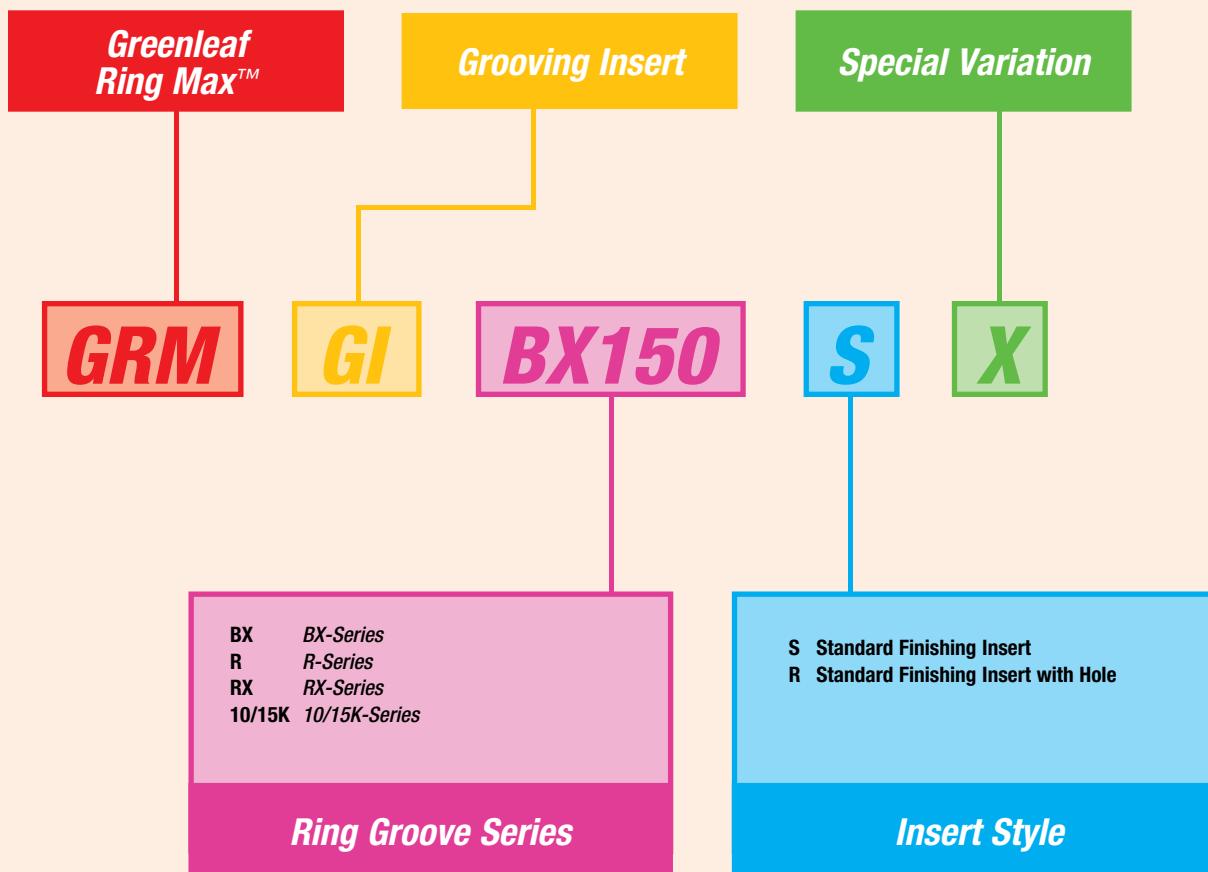

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com





**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Ring Max™ Grooving Insert Reference Guide

*Dimensions*

Insert Style		Stocking		Insert Geometry																																																																																																					
 <b>Ring Max™ Inserts</b> <b>GRM-GI</b>	 <b>W630</b>	 <b>G695</b>	 <b>Dimensions (inches)</b>	 <b>Groove Sizes</b>																																																																																																					
<b>Part Number</b>	<b>Stocking Status</b>	<b>Stocking Status</b>	<b>Dimensions</b>	<b>Insert Geometry</b>																																																																																																					
<b>API RING GROOVE MACHINING</b>		<b>Ring Max™ Inserts</b> <b>GRM-GI</b>																																																																																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Insert</th> <th style="width: 10%;">Part Number</th> <th style="width: 10%;">W630</th> <th style="width: 10%;">G695</th> <th style="width: 10%;">Dimensions (inches)</th> <th style="width: 10%;">Notes</th> </tr> </thead> <tbody> <tr> <td>GRM-G-8X150S</td> <td>GRM-G-8X150S</td> <td>●</td> <td>●</td> <td>0.625   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-8X151S</td> <td>GRM-G-8X151S</td> <td>●</td> <td>●</td> <td>0.625   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-8X152S</td> <td>GRM-G-8X152S</td> <td>●</td> <td>●</td> <td>0.625   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-8X153S</td> <td>GRM-G-8X153S</td> <td>●</td> <td>●</td> <td>0.750   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-8X154S</td> <td>GRM-G-8X154S</td> <td>●</td> <td>●</td> <td>0.750   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-8X155R</td> <td>GRM-G-8X155R</td> <td>●</td> <td>●</td> <td>0.875   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-8X156R</td> <td>GRM-G-8X156R</td> <td>●</td> <td>●</td> <td>0.875   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-8X160R</td> <td>GRM-G-8X160R</td> <td>●</td> <td>●</td> <td>1.000   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-8X169R</td> <td>GRM-G-8X169R</td> <td>●</td> <td>●</td> <td>1.000   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-RSET1-5Z*</td> <td>GRM-G-RSET1-5Z*</td> <td>●</td> <td>●</td> <td>1.000   0.250   0.031</td> <td></td> </tr> <tr> <td>GRM-G-R460</td> <td>GRM-G-R460</td> <td>●</td> <td>●</td> <td>1.000   0.250   0.030</td> <td></td> </tr> <tr> <td>GRM-G-R572-5Z*</td> <td>GRM-G-R572-5Z*</td> <td>●</td> <td>●</td> <td>1.000   0.250   0.030</td> <td></td> </tr> <tr> <td>GRM-G-R229150S</td> <td>GRM-G-R229150S</td> <td>●</td> <td>●</td> <td>0.604   0.188   0.015</td> <td></td> </tr> <tr> <td>GRM-G-10W150S</td> <td>GRM-G-10W150S</td> <td>●</td> <td>●</td> <td>0.625   0.250   0.030</td> <td></td> </tr> </tbody> </table>		Insert	Part Number	W630	G695	Dimensions (inches)	Notes	GRM-G-8X150S	GRM-G-8X150S	●	●	0.625   0.250   0.031		GRM-G-8X151S	GRM-G-8X151S	●	●	0.625   0.250   0.031		GRM-G-8X152S	GRM-G-8X152S	●	●	0.625   0.250   0.031		GRM-G-8X153S	GRM-G-8X153S	●	●	0.750   0.250   0.031		GRM-G-8X154S	GRM-G-8X154S	●	●	0.750   0.250   0.031		GRM-G-8X155R	GRM-G-8X155R	●	●	0.875   0.250   0.031		GRM-G-8X156R	GRM-G-8X156R	●	●	0.875   0.250   0.031		GRM-G-8X160R	GRM-G-8X160R	●	●	1.000   0.250   0.031		GRM-G-8X169R	GRM-G-8X169R	●	●	1.000   0.250   0.031		GRM-G-RSET1-5Z*	GRM-G-RSET1-5Z*	●	●	1.000   0.250   0.031		GRM-G-R460	GRM-G-R460	●	●	1.000   0.250   0.030		GRM-G-R572-5Z*	GRM-G-R572-5Z*	●	●	1.000   0.250   0.030		GRM-G-R229150S	GRM-G-R229150S	●	●	0.604   0.188   0.015		GRM-G-10W150S	GRM-G-10W150S	●	●	0.625   0.250   0.030		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Group</th> <th style="width: 10%;">Groove Sizes</th> </tr> </thead> <tbody> <tr> <td>R-SET1SK</td> <td>R-21, R-23, R-24, R-26, R-27, R-30, R-31, R-34, R-35, R-37, R-38, R-41, R-44, R-45, R-47, R-48, R-50, R-52, R-53, R-57, R-61, R-65, R-69, R-82, R-84, R-89, R-99, R-275</td> </tr> <tr> <td>R-SET1PK</td> <td>R-23, R-24, R-26, R-27, R-31, R-35, R-37, R-39, R-41, R-44, R-45, R-47, R-48, R-50, R-52, R-53, R-57, R-61, R-65, R-69, R-82, R-84, R-89, R-99, R-275</td> </tr> <tr> <td>R-SET2SK</td> <td>R-12, R-13, R-14, R-15, R-16, R-17, R-18, R-19, R-20, R-22, R-23, R-29, R-33, R-36, R-40, R-43, R-48, R-52</td> </tr> <tr> <td>10K/15KSK</td> <td>10K-21/16", 10K-37/16", 10K-37/14"</td> </tr> </tbody> </table>				Group	Groove Sizes	R-SET1SK	R-21, R-23, R-24, R-26, R-27, R-30, R-31, R-34, R-35, R-37, R-38, R-41, R-44, R-45, R-47, R-48, R-50, R-52, R-53, R-57, R-61, R-65, R-69, R-82, R-84, R-89, R-99, R-275	R-SET1PK	R-23, R-24, R-26, R-27, R-31, R-35, R-37, R-39, R-41, R-44, R-45, R-47, R-48, R-50, R-52, R-53, R-57, R-61, R-65, R-69, R-82, R-84, R-89, R-99, R-275	R-SET2SK	R-12, R-13, R-14, R-15, R-16, R-17, R-18, R-19, R-20, R-22, R-23, R-29, R-33, R-36, R-40, R-43, R-48, R-52	10K/15KSK	10K-21/16", 10K-37/16", 10K-37/14"
Insert	Part Number	W630	G695	Dimensions (inches)	Notes																																																																																																				
GRM-G-8X150S	GRM-G-8X150S	●	●	0.625   0.250   0.031																																																																																																					
GRM-G-8X151S	GRM-G-8X151S	●	●	0.625   0.250   0.031																																																																																																					
GRM-G-8X152S	GRM-G-8X152S	●	●	0.625   0.250   0.031																																																																																																					
GRM-G-8X153S	GRM-G-8X153S	●	●	0.750   0.250   0.031																																																																																																					
GRM-G-8X154S	GRM-G-8X154S	●	●	0.750   0.250   0.031																																																																																																					
GRM-G-8X155R	GRM-G-8X155R	●	●	0.875   0.250   0.031																																																																																																					
GRM-G-8X156R	GRM-G-8X156R	●	●	0.875   0.250   0.031																																																																																																					
GRM-G-8X160R	GRM-G-8X160R	●	●	1.000   0.250   0.031																																																																																																					
GRM-G-8X169R	GRM-G-8X169R	●	●	1.000   0.250   0.031																																																																																																					
GRM-G-RSET1-5Z*	GRM-G-RSET1-5Z*	●	●	1.000   0.250   0.031																																																																																																					
GRM-G-R460	GRM-G-R460	●	●	1.000   0.250   0.030																																																																																																					
GRM-G-R572-5Z*	GRM-G-R572-5Z*	●	●	1.000   0.250   0.030																																																																																																					
GRM-G-R229150S	GRM-G-R229150S	●	●	0.604   0.188   0.015																																																																																																					
GRM-G-10W150S	GRM-G-10W150S	●	●	0.625   0.250   0.030																																																																																																					
Group	Groove Sizes																																																																																																								
R-SET1SK	R-21, R-23, R-24, R-26, R-27, R-30, R-31, R-34, R-35, R-37, R-38, R-41, R-44, R-45, R-47, R-48, R-50, R-52, R-53, R-57, R-61, R-65, R-69, R-82, R-84, R-89, R-99, R-275																																																																																																								
R-SET1PK	R-23, R-24, R-26, R-27, R-31, R-35, R-37, R-39, R-41, R-44, R-45, R-47, R-48, R-50, R-52, R-53, R-57, R-61, R-65, R-69, R-82, R-84, R-89, R-99, R-275																																																																																																								
R-SET2SK	R-12, R-13, R-14, R-15, R-16, R-17, R-18, R-19, R-20, R-22, R-23, R-29, R-33, R-36, R-40, R-43, R-48, R-52																																																																																																								
10K/15KSK	10K-21/16", 10K-37/16", 10K-37/14"																																																																																																								

\* Denotes multiple groove sizes (See chart to right.)  
Depending on groove size, some Ring Max™ inserts may have a hole.  
All pre-clad groove inserts are designed and built to suit customer specifications.  
NOTE: API groove specification GAISD-104-2 is used for all finish inserts.

RM 08


  
**Greenleaf Sales**  
 Phone: +814-763-2915 • 800-458-1850 • Fax: 814-763-4423  
 sales@greenleafcorporation.com • www.greenleafglobalsupport.com


  
 Inserts and Steel Products: Standard Stocked  
 Inserts Only: Standard Stocked  
 Steel Products Only: Standard Stocked  
 -10 Business Days or Less

## **CARBIDE**

### **COATED**

**GA5036** A high-performance MT-CVD coated grade for milling steels at high speed. GA5036 should be used when milling forged and cast steels and selected ductile irons. GA5036 has a unique combination of toughness and heat resistance making it suitable for heavy- and light-duty milling at high cutting speeds.

**G-915** Multi-layer PVD-coated grade, excellent for milling and turning high-temp alloys, stainless steel, and low-carbon steels. The multi-layer PVD coating adds heat and abrasion resistance to the tough, shock-resistant substrate. G-915 should be run at moderate speeds and moderate to high feeds in milling and interrupted turning applications.

## **CERAMIC**


**WG-300®** Whisker-reinforced ceramic with excellent wear and shock resistance at high surface speeds. WG-300 is very effective at machining nickel- and cobalt-based super alloys, and other hard materials at metal removal rates up to 10 times higher than carbide.

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Ring Max™ Inserts

## GRM-GI

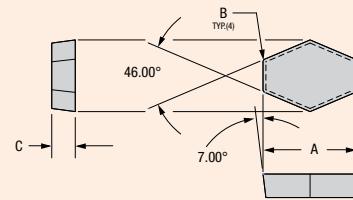

Insert	Part Number	Dimensions (mm)					
		WG-300	G-915	GA5036	A	B	C
	GRM-GI-BX150S	●	●	○	15,88	6,35	0,79
	GRM-GI-BX151S	●	●	○	15,88	6,35	0,79
	GRM-GI-BX152S	●	●	○	19,05	6,35	0,79
	GRM-GI-BX153S	●	○	○	19,05	6,35	0,79
	GRM-GI-BX154S	●	●	○	19,05	6,35	0,79
	GRM-GI-BX155R	●	○	●	22,23	6,35	0,79
	GRM-GI-BX156R	●	○	○	25,73	7,93	0,79
	GRM-GI-BX169R	●	○	○	25,40	6,35	0,79
	GRM-GI-RSET1-SX*	●	●	○	25,40	6,35	0,79
	GRM-GI-R46R	○	○	○	25,40	6,35	1,52
	GRM-GI-RSET2-SX*	●	○	○	15,88	3,96	0,79
	GRM-GI-RX201/5SX*	○	○	○	15,34	4,78	0,38
	GRM-GI-10K/15KSX*	●	○	○	15,88	6,35	0,76
		WG-300	G-915	GA5036			

Group	Groove Sizes
R-SET1SX	R-21, R-23, R-24, R-26, R-27, R-30, R-31, R-34, R-35, R-37, R-39, R-41, R-44, R-45, R-49, R-53, R-57, R-61, R-65, R-69, R-82, R-84, R-99
R-SET2SX	R-12, R-13, R-14, R-15, R-16, R-17, R-18, R-19, R-20, R-22, R-25, R-29, R-33, R-36, R-40, R-43, R-48, R-52
10K/15KSX	10K-2 <sup>1</sup> / <sub>16</sub> ", 10K-3 <sup>1</sup> / <sub>16</sub> ", 15K-3 <sup>1</sup> / <sub>16</sub> "

\* Denotes multiple groove sizes (See chart to right.)

NOTE: Depending on groove size, some Ring Max™ inserts may have a hole.  
All pre-clad groove inserts are designed and built to suit customer specifications.

NOTE: API groove specification GA/ISO-10423 is used for all finish inserts.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

### Inserts and Steel Products

● Stocked Standard

### Inserts Only

○ Stocked or Available Upon Request

### Steel Products Only

○ 10 Business Days or Less

## Ring Max™ II Ring Groove Tooling

The Ring Max™ II cutters are designed to use fewer components for even greater dimensional accuracy and repeatability from groove to groove. Their unique design ensures accurate seating and secure locking of the insert cartridge into the cutter body.

Standard features and benefits include:

- Roughing and finishing of BX, R and RX API ring grooves in Inconel 625 clad overlay in less than one minute
- Adjustable and replaceable cartridge design for easy maintenance
- Machining the groove and chamfers in one operation
- Availability for grooving in stainless and alloy steel



Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:


[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



# Ring Max™ II – Finishing Head Identification System

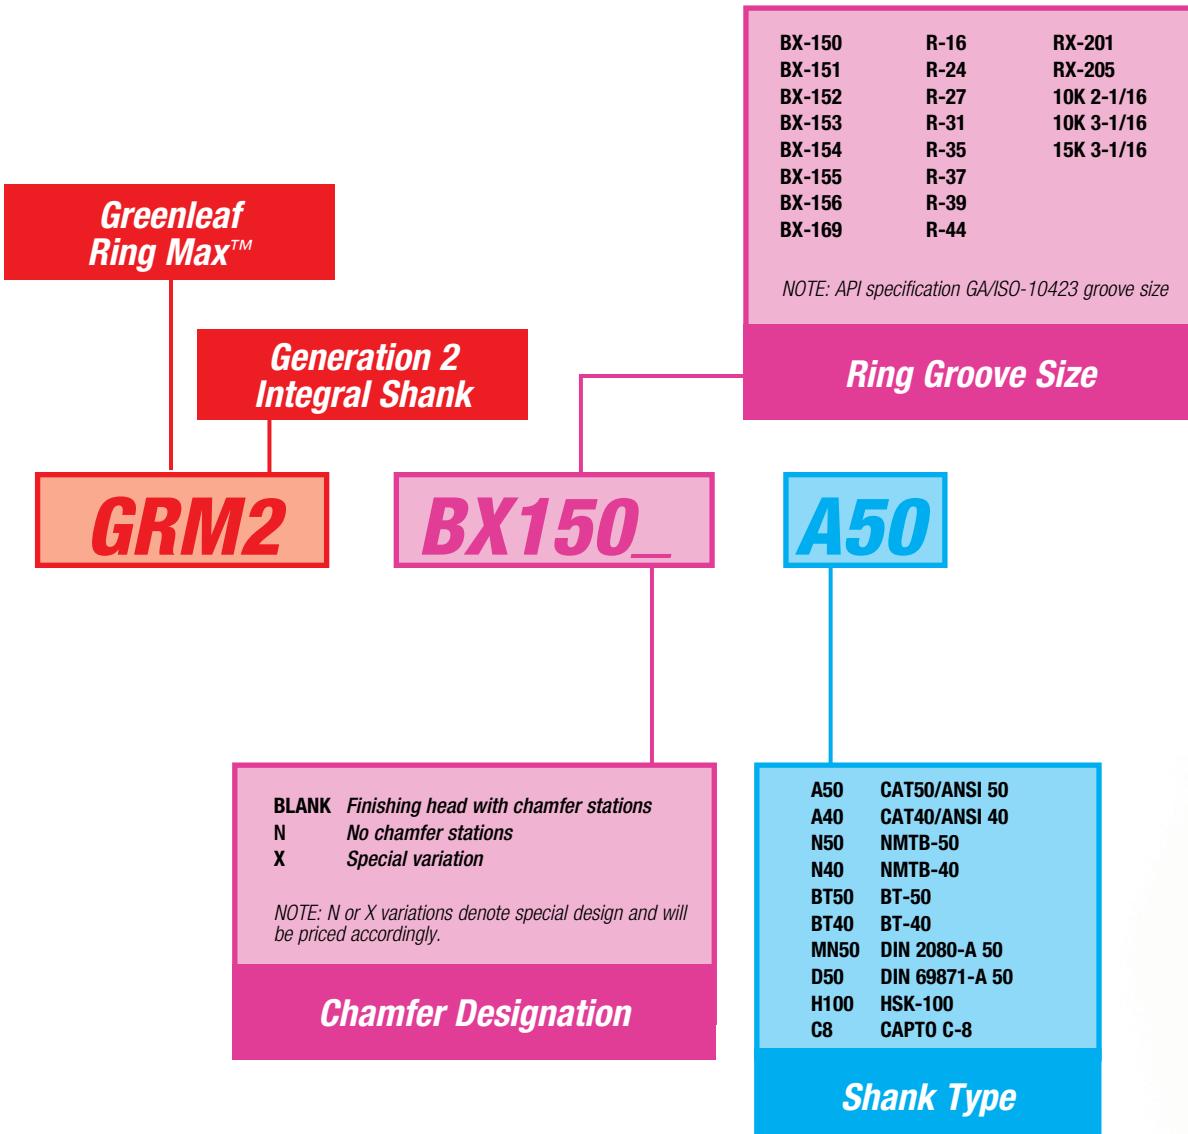

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




# Ring Max™ II – Ring Groove Tooling Usage Reference Guide


Tooling Style	Tooling Geometry	Part Number	Dimensions																																																																																																			
<p><b>Ring Max™ BX-Series</b></p> <p>See chart below.</p> <table border="1"> <thead> <tr> <th>Part Number</th> <th>Stock</th> <th>Dimensions (inches)</th> <th>Standard Components</th> <th>Inserts</th> </tr> </thead> <tbody> <tr> <td>Grove Series - Shank Type*</td> <td>See chart below.</td> <td>A = 0.020 B = 0.002 C = 0.00</td> <td>Grooving Insert Changer Assembly</td> <td>Changer Insert</td> </tr> <tr> <td>GRMZ-BX150------</td> <td>stocked sizes</td> <td>2.895 0.452 0.230</td> <td>GRMZC01</td> <td>GRM-G-BX150S SPZN-322</td> </tr> <tr> <td>GRMZ-BX151------</td> <td>stocked sizes</td> <td>3.064 0.468 0.230</td> <td>GRMZC01</td> <td>GRM-G-BX151S SPZN-322</td> </tr> <tr> <td>GRMZ-BX152------</td> <td>stocked sizes</td> <td>3.307 0.480 0.230</td> <td>GRMZC01</td> <td>GRM-G-BX152S SPZN-322</td> </tr> <tr> <td>GRMZ-BX153------</td> <td>stocked sizes</td> <td>3.408 0.506 0.230</td> <td>GRMZC01</td> <td>GRM-G-BX153S SPZN-322</td> </tr> <tr> <td>GRMZ-BX154------</td> <td>stocked sizes</td> <td>4.687 0.608 0.310</td> <td>GRMZC01</td> <td>GRM-G-BX154S SPZN-322</td> </tr> <tr> <td>GRMZ-BX155------</td> <td>stocked sizes</td> <td>5.925 0.700 0.310</td> <td>GRMZC01</td> <td>GRM-G-BX155S SPZN-322</td> </tr> <tr> <td>GRMZ-BX156------</td> <td>stocked sizes</td> <td>6.032 0.933 0.450</td> <td>GRMZC01</td> <td>GRM-G-BX156S SPZN-322</td> </tr> <tr> <td>GRMZ-BX157------</td> <td>stocked sizes</td> <td>6.957 0.689 0.390</td> <td>GRMZC01</td> <td>GRM-G-BX157S SPZN-322</td> </tr> </tbody> </table> <p>* See chart to right.</p>	Part Number	Stock	Dimensions (inches)	Standard Components	Inserts	Grove Series - Shank Type*	See chart below.	A = 0.020 B = 0.002 C = 0.00	Grooving Insert Changer Assembly	Changer Insert	GRMZ-BX150------	stocked sizes	2.895 0.452 0.230	GRMZC01	GRM-G-BX150S SPZN-322	GRMZ-BX151------	stocked sizes	3.064 0.468 0.230	GRMZC01	GRM-G-BX151S SPZN-322	GRMZ-BX152------	stocked sizes	3.307 0.480 0.230	GRMZC01	GRM-G-BX152S SPZN-322	GRMZ-BX153------	stocked sizes	3.408 0.506 0.230	GRMZC01	GRM-G-BX153S SPZN-322	GRMZ-BX154------	stocked sizes	4.687 0.608 0.310	GRMZC01	GRM-G-BX154S SPZN-322	GRMZ-BX155------	stocked sizes	5.925 0.700 0.310	GRMZC01	GRM-G-BX155S SPZN-322	GRMZ-BX156------	stocked sizes	6.032 0.933 0.450	GRMZC01	GRM-G-BX156S SPZN-322	GRMZ-BX157------	stocked sizes	6.957 0.689 0.390	GRMZC01	GRM-G-BX157S SPZN-322	<p><b>Ring Max™ II R-Series</b></p> <p>See chart below.</p> <table border="1"> <thead> <tr> <th>Part Number</th> <th>Stock</th> <th>Dimensions (inches)</th> <th>Standard Components</th> <th>Inserts</th> </tr> </thead> <tbody> <tr> <td>Grove Series - Shank Type*</td> <td>See chart below.</td> <td>A = 0.020 B = 0.002 C = 0.00</td> <td>Grooving Insert Changer Assembly</td> <td>Changer Insert</td> </tr> <tr> <td>GRMZ-R16------</td> <td>stocked sizes.</td> <td>2.000 0.344 0.250</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>GRMZ-R24A------</td> <td>stocked sizes.</td> <td>3.750 0.469 0.320</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>GRMZ-R31------</td> <td>stocked sizes.</td> <td>4.000 0.469 0.320</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>GRMZ-R35------</td> <td>stocked sizes.</td> <td>5.975 0.469 0.320</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>GRMZ-R47------</td> <td>stocked sizes.</td> <td>6.075 0.469 0.320</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>GRMZ-R52------</td> <td>stocked sizes.</td> <td>7.275 0.469 0.320</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>GRMZ-R64------</td> <td>stocked sizes.</td> <td>7.825 0.469 0.320</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>GRMZ-R46------</td> <td>stocked sizes.</td> <td>8.313 0.531 0.390</td> <td>GRMZC01</td> <td>GRM-GC-R46R SPZN-322</td> </tr> </tbody> </table> <p>* See chart to right.</p>	Part Number	Stock	Dimensions (inches)	Standard Components	Inserts	Grove Series - Shank Type*	See chart below.	A = 0.020 B = 0.002 C = 0.00	Grooving Insert Changer Assembly	Changer Insert	GRMZ-R16------	stocked sizes.	2.000 0.344 0.250	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	GRMZ-R24A------	stocked sizes.	3.750 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	GRMZ-R31------	stocked sizes.	4.000 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	GRMZ-R35------	stocked sizes.	5.975 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	GRMZ-R47------	stocked sizes.	6.075 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	GRMZ-R52------	stocked sizes.	7.275 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	GRMZ-R64------	stocked sizes.	7.825 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	GRMZ-R46------	stocked sizes.	8.313 0.531 0.390	GRMZC01	GRM-GC-R46R SPZN-322	<p><b>Stocking Information</b></p> <p><b>Shank Options</b></p> <p><b>Standard Components</b></p>
Part Number	Stock	Dimensions (inches)	Standard Components	Inserts																																																																																																		
Grove Series - Shank Type*	See chart below.	A = 0.020 B = 0.002 C = 0.00	Grooving Insert Changer Assembly	Changer Insert																																																																																																		
GRMZ-BX150------	stocked sizes	2.895 0.452 0.230	GRMZC01	GRM-G-BX150S SPZN-322																																																																																																		
GRMZ-BX151------	stocked sizes	3.064 0.468 0.230	GRMZC01	GRM-G-BX151S SPZN-322																																																																																																		
GRMZ-BX152------	stocked sizes	3.307 0.480 0.230	GRMZC01	GRM-G-BX152S SPZN-322																																																																																																		
GRMZ-BX153------	stocked sizes	3.408 0.506 0.230	GRMZC01	GRM-G-BX153S SPZN-322																																																																																																		
GRMZ-BX154------	stocked sizes	4.687 0.608 0.310	GRMZC01	GRM-G-BX154S SPZN-322																																																																																																		
GRMZ-BX155------	stocked sizes	5.925 0.700 0.310	GRMZC01	GRM-G-BX155S SPZN-322																																																																																																		
GRMZ-BX156------	stocked sizes	6.032 0.933 0.450	GRMZC01	GRM-G-BX156S SPZN-322																																																																																																		
GRMZ-BX157------	stocked sizes	6.957 0.689 0.390	GRMZC01	GRM-G-BX157S SPZN-322																																																																																																		
Part Number	Stock	Dimensions (inches)	Standard Components	Inserts																																																																																																		
Grove Series - Shank Type*	See chart below.	A = 0.020 B = 0.002 C = 0.00	Grooving Insert Changer Assembly	Changer Insert																																																																																																		
GRMZ-R16------	stocked sizes.	2.000 0.344 0.250	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
GRMZ-R24A------	stocked sizes.	3.750 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
GRMZ-R31------	stocked sizes.	4.000 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
GRMZ-R35------	stocked sizes.	5.975 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
GRMZ-R47------	stocked sizes.	6.075 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
GRMZ-R52------	stocked sizes.	7.275 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
GRMZ-R64------	stocked sizes.	7.825 0.469 0.320	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
GRMZ-R46------	stocked sizes.	8.313 0.531 0.390	GRMZC01	GRM-GC-R46R SPZN-322																																																																																																		
<p><b>Ring Max™ BX-Series</b></p> <p>See chart below.</p> <table border="1"> <thead> <tr> <th>Shank Description</th> <th>Ordering Code</th> <th>Stocked Sizes</th> </tr> </thead> <tbody> <tr> <td>CAT50/ANSI 50</td> <td>A50</td> <td>GRMZ-BT150-A50 GRMZ-BT154-A50</td> </tr> <tr> <td>CAT40/ANSI 40</td> <td>A40</td> <td>GRMZ-BT150-B710 GRMZ-BT154-B710</td> </tr> <tr> <td>NMTB-40</td> <td>N40</td> <td>GRMZ-BT151-A50 GRMZ-BT154-050</td> </tr> <tr> <td>BT-50</td> <td>B750</td> <td>GRMZ-BT151-B710 GRMZ-BT155-A40</td> </tr> <tr> <td>BT-50</td> <td>B740</td> <td>GRMZ-BT151-B710 GRMZ-BT155-A40</td> </tr> <tr> <td>DIN 2080-A-50</td> <td>M50</td> <td>GRMZ-BT152-040 GRMZ-BT155-B710</td> </tr> <tr> <td>DIN 2080-A-50</td> <td>D50</td> <td>GRMZ-BT152-B710 GRMZ-BT155-050</td> </tr> <tr> <td>HSK-100</td> <td>H100</td> <td>GRMZ-BT152-D50 GRMZ-BT169-A50</td> </tr> <tr> <td>CAT70-C-5</td> <td>C5</td> <td></td> </tr> </tbody> </table> <p><b>Greenleaf Sales</b> Phone: 814-763-2915 • 800-458-1850 • Fax: 814-763-4423 sales@greenleafcorporation.com • www.greenleafglobalsupport.com</p>	Shank Description	Ordering Code	Stocked Sizes	CAT50/ANSI 50	A50	GRMZ-BT150-A50 GRMZ-BT154-A50	CAT40/ANSI 40	A40	GRMZ-BT150-B710 GRMZ-BT154-B710	NMTB-40	N40	GRMZ-BT151-A50 GRMZ-BT154-050	BT-50	B750	GRMZ-BT151-B710 GRMZ-BT155-A40	BT-50	B740	GRMZ-BT151-B710 GRMZ-BT155-A40	DIN 2080-A-50	M50	GRMZ-BT152-040 GRMZ-BT155-B710	DIN 2080-A-50	D50	GRMZ-BT152-B710 GRMZ-BT155-050	HSK-100	H100	GRMZ-BT152-D50 GRMZ-BT169-A50	CAT70-C-5	C5		<p><b>Ring Max™ II R-Series</b></p> <p>See chart below.</p> <table border="1"> <thead> <tr> <th>Part Number</th> <th>Stock</th> <th>Dimensions (inches)</th> <th>Standard Components</th> <th>Inserts</th> </tr> </thead> <tbody> <tr> <td>CAT50/ANSI 50</td> <td>A50</td> <td>GRMZ-BT150-A50</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>CAT40/ANSI 40</td> <td>A40</td> <td>GRMZ-BT150-B710</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>NMTB-50</td> <td>N50</td> <td>GRMZ-BT151-A50</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>NMTB-40</td> <td>N40</td> <td>GRMZ-BT151-B710</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>BT-50</td> <td>B750</td> <td>GRMZ-BT151-B710</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>BT-50</td> <td>B740</td> <td>GRMZ-BT151-B710</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>DIN 2080-A-50</td> <td>M50</td> <td>GRMZ-BT152-040</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>DIN 2080-A-50</td> <td>D50</td> <td>GRMZ-BT152-B710</td> <td>GRMZC01</td> <td>GRM-GC-RSET1 1 SX SPZN-322</td> </tr> <tr> <td>HSK-100</td> <td>H100</td> <td>GRMZ-BT152-D50</td> <td>GRMZC01</td> <td>GRM-GC-R46R SPZN-322</td> </tr> <tr> <td>CAT70-C-5</td> <td>C5</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p><b>Greenleaf Sales</b> Phone: 814-763-2915 • 800-458-1850 • Fax: 814-763-4423 sales@greenleafcorporation.com • www.greenleafglobalsupport.com</p>	Part Number	Stock	Dimensions (inches)	Standard Components	Inserts	CAT50/ANSI 50	A50	GRMZ-BT150-A50	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	CAT40/ANSI 40	A40	GRMZ-BT150-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	NMTB-50	N50	GRMZ-BT151-A50	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	NMTB-40	N40	GRMZ-BT151-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	BT-50	B750	GRMZ-BT151-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	BT-50	B740	GRMZ-BT151-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	DIN 2080-A-50	M50	GRMZ-BT152-040	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	DIN 2080-A-50	D50	GRMZ-BT152-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322	HSK-100	H100	GRMZ-BT152-D50	GRMZC01	GRM-GC-R46R SPZN-322	CAT70-C-5	C5																			
Shank Description	Ordering Code	Stocked Sizes																																																																																																				
CAT50/ANSI 50	A50	GRMZ-BT150-A50 GRMZ-BT154-A50																																																																																																				
CAT40/ANSI 40	A40	GRMZ-BT150-B710 GRMZ-BT154-B710																																																																																																				
NMTB-40	N40	GRMZ-BT151-A50 GRMZ-BT154-050																																																																																																				
BT-50	B750	GRMZ-BT151-B710 GRMZ-BT155-A40																																																																																																				
BT-50	B740	GRMZ-BT151-B710 GRMZ-BT155-A40																																																																																																				
DIN 2080-A-50	M50	GRMZ-BT152-040 GRMZ-BT155-B710																																																																																																				
DIN 2080-A-50	D50	GRMZ-BT152-B710 GRMZ-BT155-050																																																																																																				
HSK-100	H100	GRMZ-BT152-D50 GRMZ-BT169-A50																																																																																																				
CAT70-C-5	C5																																																																																																					
Part Number	Stock	Dimensions (inches)	Standard Components	Inserts																																																																																																		
CAT50/ANSI 50	A50	GRMZ-BT150-A50	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
CAT40/ANSI 40	A40	GRMZ-BT150-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
NMTB-50	N50	GRMZ-BT151-A50	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
NMTB-40	N40	GRMZ-BT151-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
BT-50	B750	GRMZ-BT151-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
BT-50	B740	GRMZ-BT151-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
DIN 2080-A-50	M50	GRMZ-BT152-040	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
DIN 2080-A-50	D50	GRMZ-BT152-B710	GRMZC01	GRM-GC-RSET1 1 SX SPZN-322																																																																																																		
HSK-100	H100	GRMZ-BT152-D50	GRMZC01	GRM-GC-R46R SPZN-322																																																																																																		
CAT70-C-5	C5																																																																																																					

**Ring Groove Tooling**


**Ring Max™ II**  
BX Series  
*page: RM 14*



**Ring Max™ II**  
R Series  
*page: RM 15*



**Ring Max™ II**  
RX Series  
10/15K Series  
*page: RM 16*

**Reference**

**Ring Max™ II**  
Models  
*page: RM 17*

**Special Toolchanger Clearance**

Request Form  
*page: RM 18*

**Pre-Clad Head**  
Quote Request Form  
*page: RM 19*

**Ring Max™ II Pre-Clad**  
Models  
*page: RM 20*


**Machining Methods**  
Reference Guide  
*page: RM 21*

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Ring Max™ II

BX Series

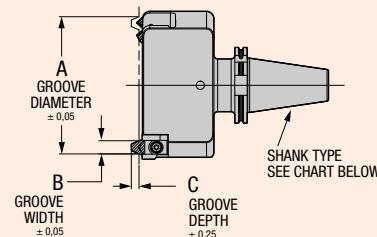

Part Number	Stock	Dimensions (mm)			Standard Components		Inserts	
		A	B	C	Grooving Cartridge	Chamfer Cartridge	Grooving Insert	Chamfer Insert
GRM2-BX150-----	See chart below for stocked sizes.	73,53	11,48	5,84	GRM-GC-BX-150	GRMCC01	GRM-GI-BX150S	SPGN-322
GRM2-BX151-----		77,83	11,89	5,84	GRM-GC-BX-151	GRMCC01	GRM-GI-BX151S	SPGN-322
GRM2-BX152-----		86,28	12,70	6,10	GRM-GC-BX-152	GRMCC01	GRM-GI-BX152S	SPGN-322
GRM2-BX153-----		102,82	14,12	7,11	GRM-GC-BX-153	GRMCC01	GRM-GI-BX153S	SPGN-322
GRM2-BX154-----		119,05	15,44	7,87	GRM-GC-BX-154	GRMCC01	GRM-GI-BX154S	SPGN-322
GRM2-BX155-----		150,67	17,78	8,64	GRM-GC-BX-155	GRMCC01	GRM-GI-BX155R	SPGN-322
GRM2-BX156-----		241,88	23,44	11,43	GRM-GC-BX-156	GRMCC01	GRM-GI-BX156R	SPGN-322
GRM2-BX169-----		176,71	16,97	9,91	GRM-GC-BX-169	GRMCC01	GRM-GI-BX169R	SPGN-322

\* See chart to right.

Shank Description	Ordering Code
CAT50/ANSI 50	A50
CAT40/ANSI 40	A40
NMTB-50	N50
NMTB-40	N40
BT-50	BT50
BT-40	BT40
DIN 2080-A 50	MN50
DIN 69871-A 50	D50
HSK-100	H100
CAPTO C-8	C8


Stocked Sizes
GRM2-BX150-A50
GRM2-BX150-BT50
GRM2-BX150-D50
GRM2-BX151-A50
GRM2-BX151-BT50
GRM2-BX155-A40
GRM2-BX155-D50
GRM2-BX152-A40
GRM2-BX152-A50
GRM2-BX152-BT50
GRM2-BX156-A50
GRM2-BX169-A50

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Ring Max™ II

R Series

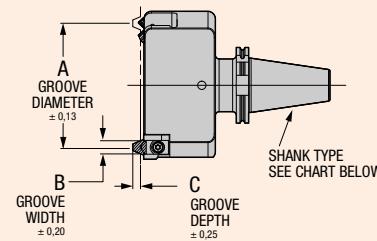

Part Number	Stock	Dimensions (mm)			Standard Components		Inserts	
		A	B	C	Grooving Cartridge	Chamfer Cartridge	Grooving Insert	Chamfer Insert
GRM2-R16-_____	See chart below	50,80	8,74	6,35	GRM-GC-RSET 2 X	GRMCC01	GRM-GI-RSET 2 SX	SPGN-322
GRM2-R24-_____		95,25	11,91	8,13	GRM-GC-RSET 1 X	GRMCC01	GRM-GI-RSET 1 SX	SPGN-322
GRM2-R27-_____	for stocked sizes.	107,95	11,91	8,13	GRM-GC-RSET 1 X	GRMCC01	GRM-GI-RSET 1 SX	SPGN-322
GRM2-R31-_____		123,83	11,91	8,13	GRM-GC-RSET 1 X	GRMCC01	GRM-GI-RSET 1 SX	SPGN-322
GRM2-R35-_____		136,53	11,91	8,13	GRM-GC-RSET 1 X	GRMCC01	GRM-GI-RSET 1 SX	SPGN-322
GRM2-R37-_____		149,23	11,91	8,13	GRM-GC-RSET 1 X	GRMCC01	GRM-GI-RSET 1 SX	SPGN-322
GRM2-R39-_____		161,93	11,91	8,13	GRM-GC-RSET 1 X	GRMCC01	GRM-GI-RSET 1 SX	SPGN-322
GRM2-R44-_____		193,68	11,91	8,13	GRM-GC-RSET 1 X	GRMCC01	GRM-GI-RSET 1 SX	SPGN-322
GRM2-R46-_____		211,15	13,49	9,91	GRM-GC-R46	GRMCC01	GRM-GI-R46R	SPGN-322



\* See chart to right.

Shank Description	Ordering Code
CAT50/ANSI 50	A50
CAT40/ANSI 40	A40
NMTB-50	N50
NMTB-40	N40
BT-50	BT50
BT-40	BT40
DIN 2080-A 50	MN50
DIN 69871-A 50	D50
HSK-100	H100
CAPTO C-8	C8

Stocked Sizes
GRM2-R24-A50
GRM2-R24-D50
GRM2-R24N-A50
GRM2-R24N-D50

# Ring Max™ II

RX Series  
10K and 15K Series

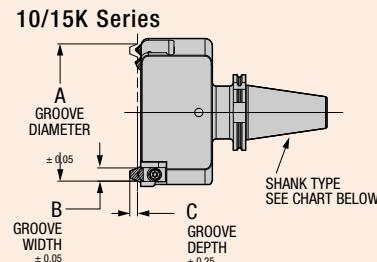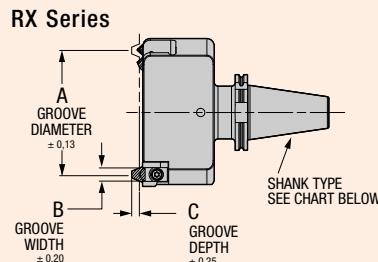

Part Number	Stock	Dimensions (mm)			Standard Components		Inserts	
		A	B	C	Grooving Cartridge	Chamfer Cartridge	Grooving Insert	Chamfer Insert
GRM2-RX201N-_____	See chart below for stocked sizes.	46,05	5,56	4,06	GRM-GCRX201/5-X	N/A	GRM-GI-RX201/5SX	N/A
GRM2-RX205N-_____		57,15	5,56	4,06	GRM-GCRX201/5-X	N/A	GRM-GI-RX201/5SX	N/A
GRM2-10K2-_____		117,42	9,58	6,55	GRM-GC10/15K-X	GRMCC01	GRM-GI-10/15KSX	SPGN-322
GRM2-10K3N-_____		146,00	9,58	6,55	GRM-GC10/15K-X	N/A	GRM-GI-10/15KSX	N/A
GRM2-10K5-_____		222,20	9,58	6,55	GRM-GC10/15K-X	GRMCC01	GRM-GI-10/15KSX	SPGN-322
GRM2-15K3-_____		168,22	9,58	6,55	GRM-GC10/15K-X	GRMCC01	GRM-GI-10/15KSX	SPGN-322

\* See chart to right.


Shank Description	Ordering Code
CAT50/ANSI 50	A50
CAT40/ANSI 40	A40
NMTB-50	N50
NMTB-40	N40
BT-50	BT50
BT-40	BT40
DIN 2080-A 50	MN50
DIN 69871-A 50	D50
HSK-100	H100
CAPTO C-8	C8

Stocked Sizes
Ring Max™ II RX and 10/15K Series are not standard stocked items.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

# Ring Max™ II – Assembled & Exploded Views Reference Guide

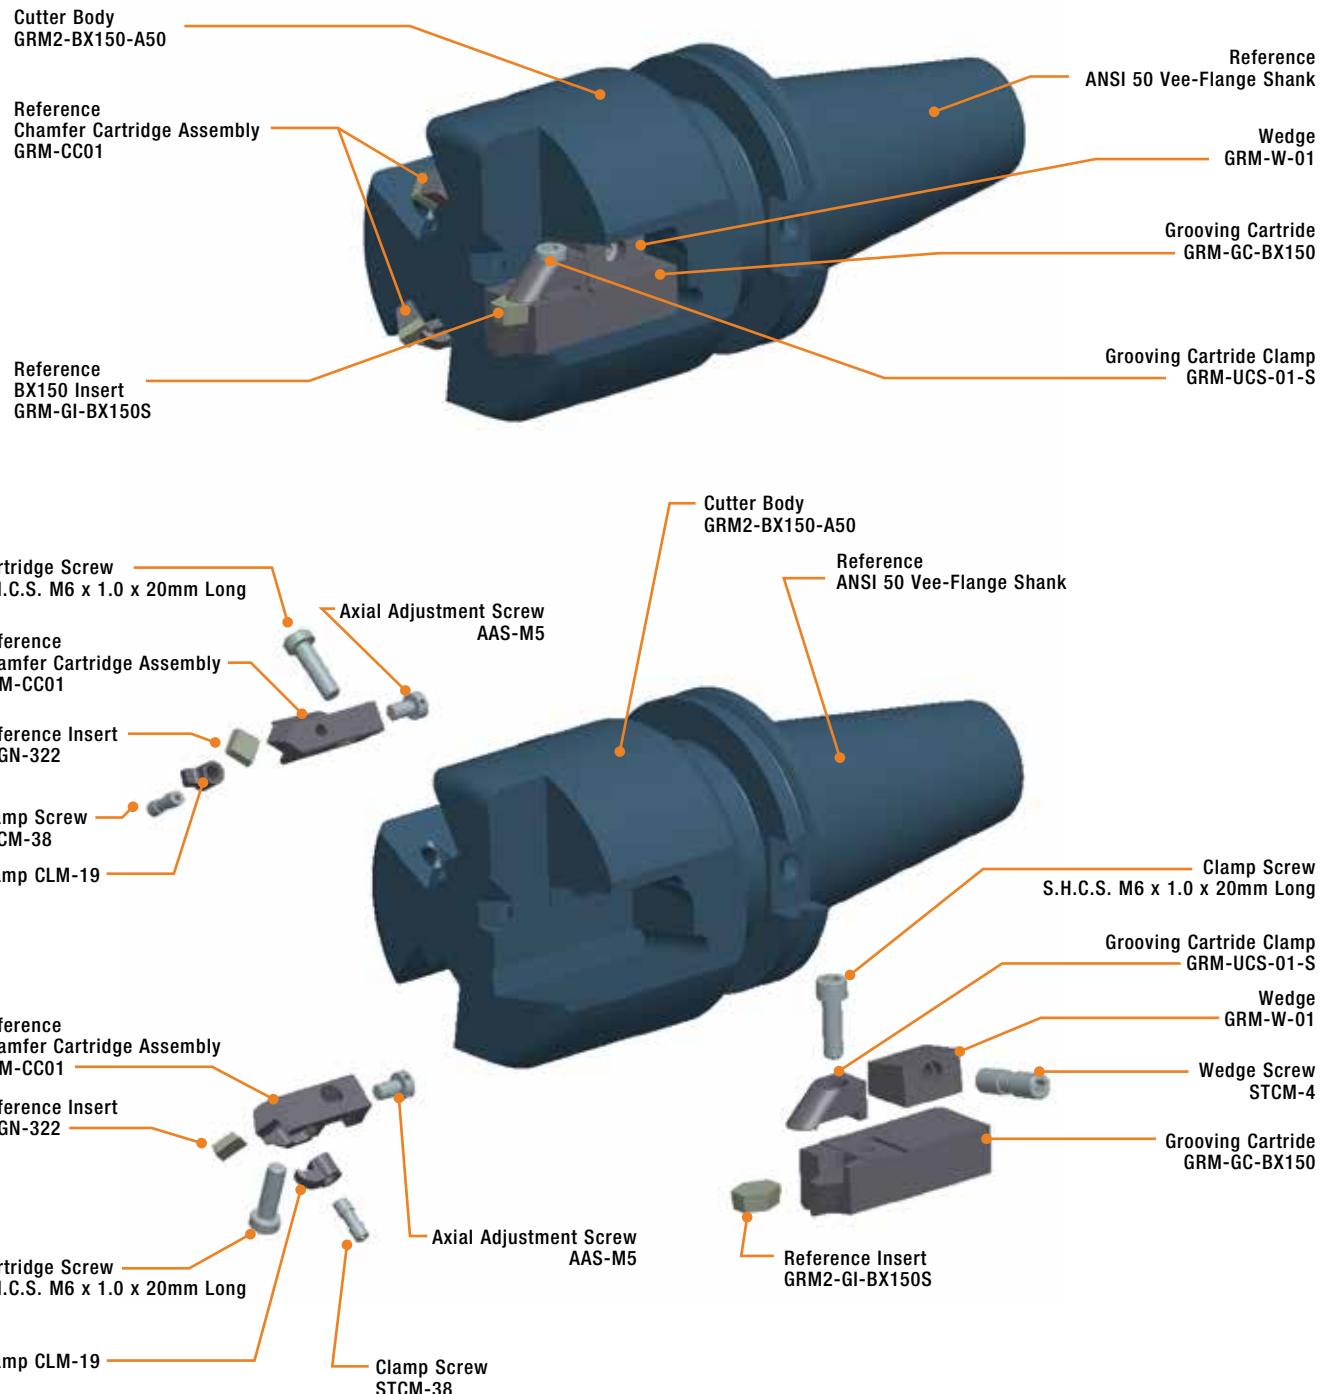

## Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**FOR FAST RESPONSE**, complete form and send  
via **EMAIL**  
[engineering@greenleafcorporation.com](mailto:engineering@greenleafcorporation.com)  
via **FAX**  
814-763-4040


## Special Toolchanger Clearance Request Form

### Part Information:

Reference Groove Number: \_\_\_\_\_ Reference Shank Size: \_\_\_\_\_

A distance: \_\_\_\_\_ B diameter: \_\_\_\_\_ C radius: \_\_\_\_\_

Additional comments: \_\_\_\_\_

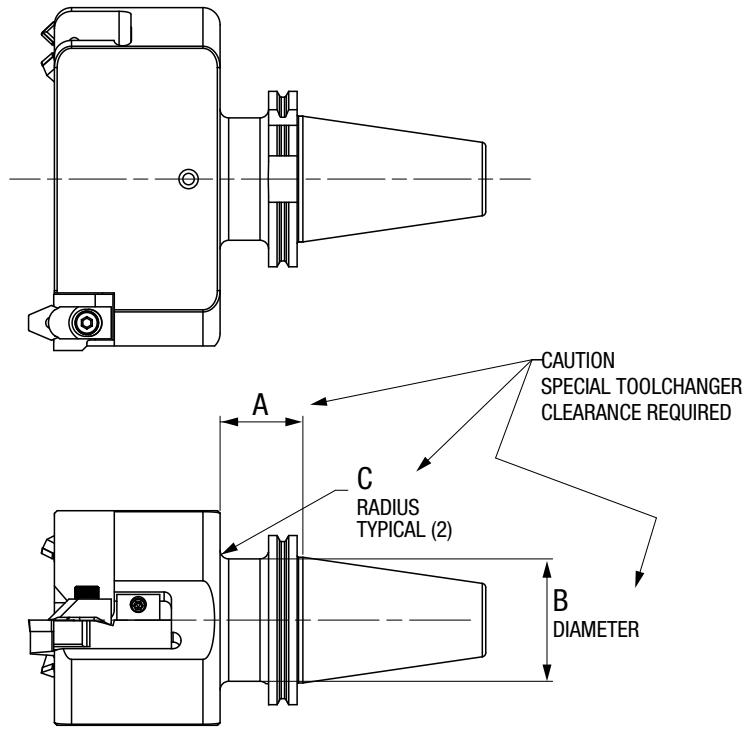

Company \_\_\_\_\_

Customer Number \_\_\_\_\_

Attention \_\_\_\_\_

Customer Inquiry Number \_\_\_\_\_

Street \_\_\_\_\_

Ship to City \_\_\_\_\_ Country \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

Send Copy to \_\_\_\_\_

Phone \_\_\_\_\_ FAX \_\_\_\_\_

\_\_\_\_\_

Email \_\_\_\_\_ Sales Rep \_\_\_\_\_

Date Received \_\_\_\_\_ Due Date \_\_\_\_\_



## Pre-Clad Head Quote Request Form

**FOR FAST QUOTE,** complete form and send  
via **EMAIL**  
[engineering@greenleafcorporation.com](mailto:engineering@greenleafcorporation.com)  
via **FAX**  
814-763-4040



### Part Information:

Part Name: \_\_\_\_\_

Clad Material: \_\_\_\_\_ Insert Grade: \_\_\_\_\_

Quote quantities: Heads: \_\_\_\_\_ Cartridges: \_\_\_\_\_ Inserts: \_\_\_\_\_

Additional comments: \_\_\_\_\_

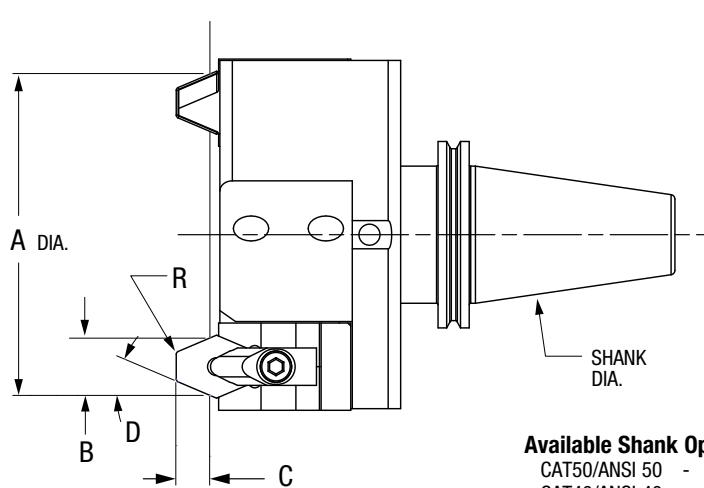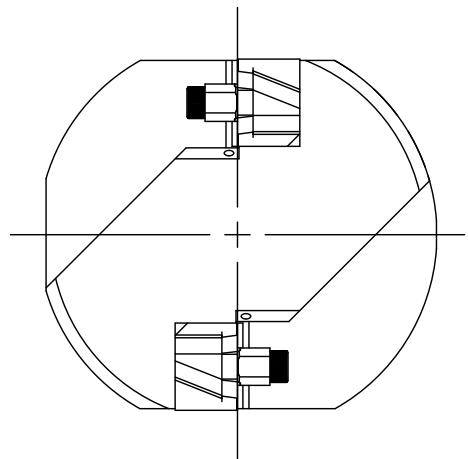

### Available Shank Options:

CAT50/ANSI 50	-	A50
CAT40/ANSI 40	-	A40
NMTB-50	-	N50
NMTB-40	-	N40
BT-50	-	BT50
BT-40	-	BT40
DIN 2080-A 50	-	MN50
DIN 69871-A 50	-	D50
HSK-100	-	H100
CAPTO C-8	-	C8

Dimensions (Please provide required tolerances.)					Shank
A ±_____	B ±_____	C ±_____	D ±_____	R ±_____	

Company \_\_\_\_\_

Customer Number \_\_\_\_\_

Attention \_\_\_\_\_

Customer Inquiry Number \_\_\_\_\_

Street \_\_\_\_\_

Ship to City \_\_\_\_\_ Country \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

Send Copy to \_\_\_\_\_



Phone \_\_\_\_\_ FAX \_\_\_\_\_

Email \_\_\_\_\_ Sales Rep \_\_\_\_\_

Date Received \_\_\_\_\_

Quote  
Due Date

# Ring Max™ BX-152 Pre-Clad – Assembled & Exploded Views Reference Guide

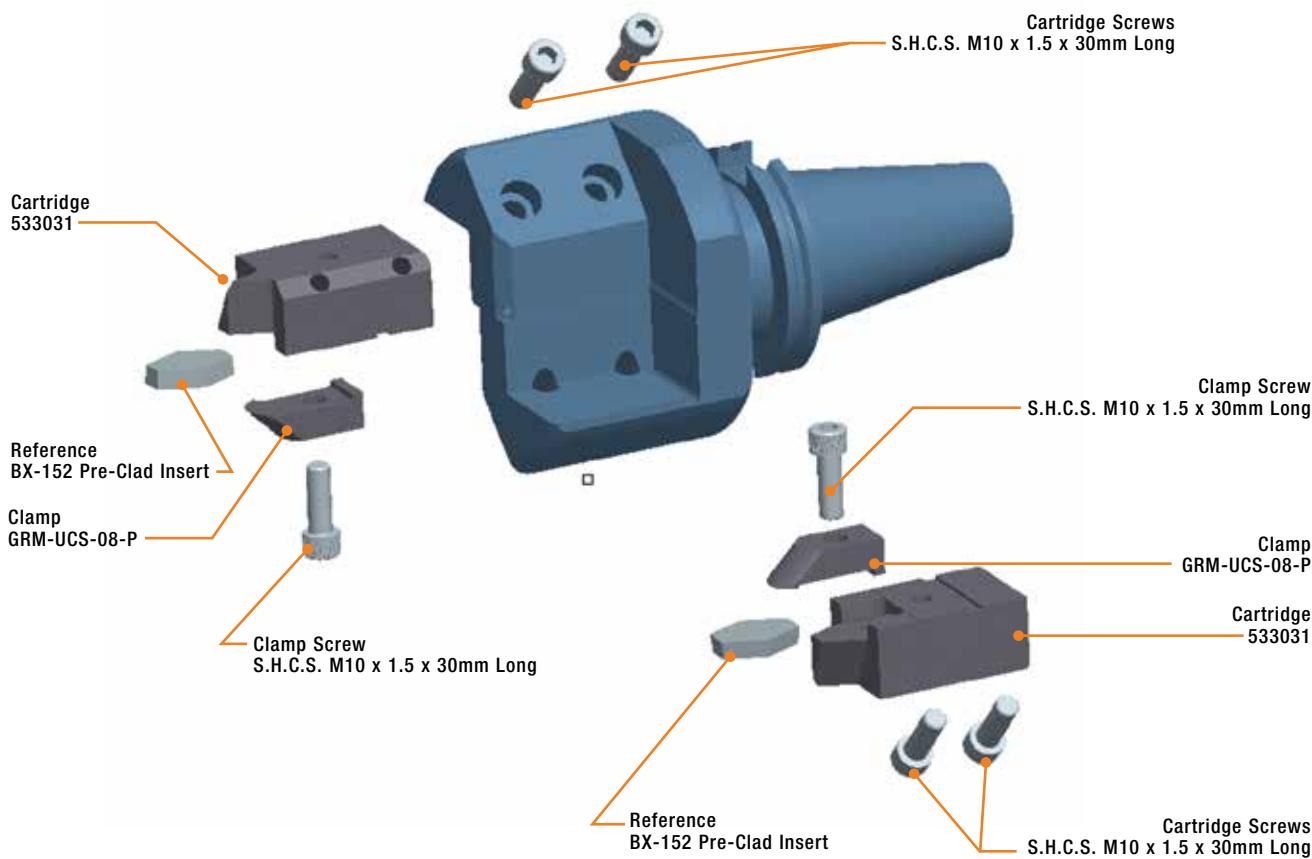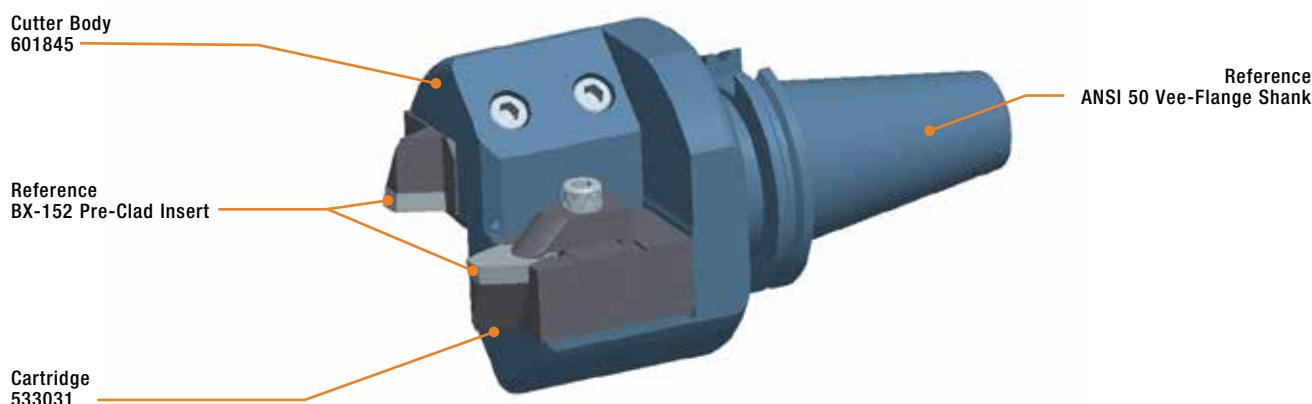

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Ring Max™ – Machining Methods Reference Guide

## Method One

Use these instructions for setting gage points and establishing target ring groove depths using an optical comparator.

### Step One:

Using an optical comparator, find and set the gage points at the groove's A diameter at mid-tolerance. The groove's B dimension will be within the allowable tolerance range.


### Step Two:

Once the gage points in Step One have been determined, measure and record the tool's Z length and the actual measured C dimension over the insert nose.

*NOTE: The measured C dimension is the target machining depth and will be within the groove's allowable part tolerance.*

### Example for BX-152

A	B	C	Z
Part print dimension and tolerance 86.233mm $+0.10$ $-0.00$	Target this diameter for gage points 86.283mm	Part print dimension and tolerance 12.649mm $+0.10$ $-0.00$	Measure and target this depth for programming 5.84mm

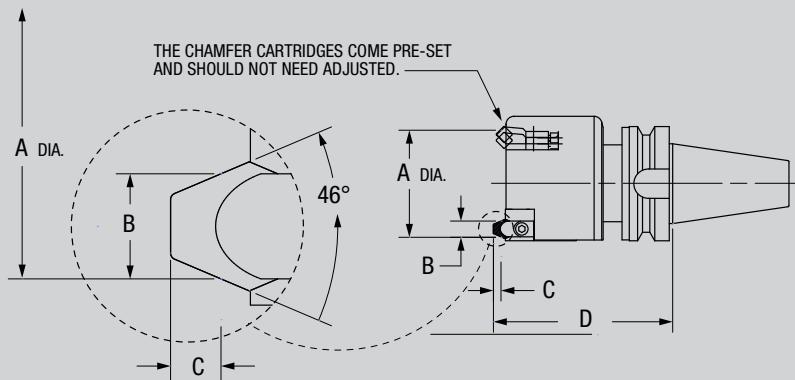

## Method Two

This method is used to machine ring grooves in a rough and finish pass.


### Step One:

Machine the groove but reduce the groove depth to leave stock for the finish pass.

### Step Two:

Measure the groove's A diameter and use the chart below to determine the additional D depth necessary to bring the A diameter into mid-tolerance.

If the A groove diameter is undersize by:	Increase the groove depth D by:
0.025mm	0.029mm
0.050mm	0.059mm
0.075mm	0.088mm
0.100mm	0.118mm
0.125mm	0.147mm
0.150mm	0.177mm
0.175mm	0.206mm
0.200mm	0.236mm
0.225mm	0.265mm
0.250mm	0.295mm
0.275mm	0.324mm
0.300mm	0.353mm

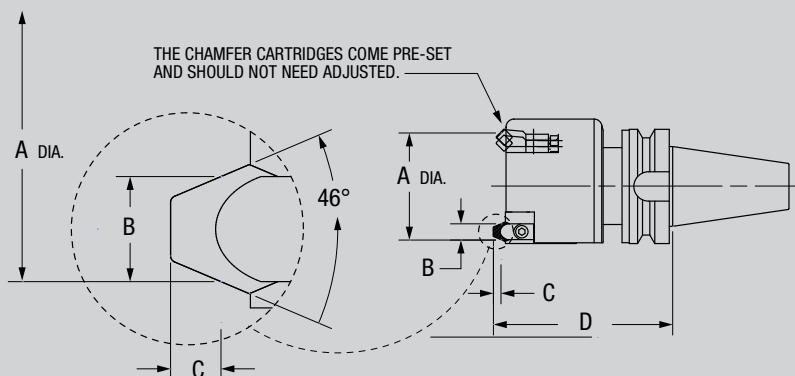

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Ring Max™ III Ring Groove Tooling

The Ring Max™ III is a high-precision, two-piece modular system for shop versatility. This system offers many head and shank configurations, including adaptability to Greenleaf's Excelerator® face mills. The Ring Max™ III line delivers the ultimate economical and flexible solution for any shop machining multiple API ring groove sizes.

Standard features and benefits include:

- Roughing and finishing of BX, R and RX API ring grooves in Inconel 625 clad overlay in less than one minute
- Adjustable and replaceable cartridge design for easy maintenance
- Machining the groove and chamfers in one operation
- Availability for grooving in stainless and alloy steel



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*


[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




## Ring Max™ III – Finishing Head Identification System

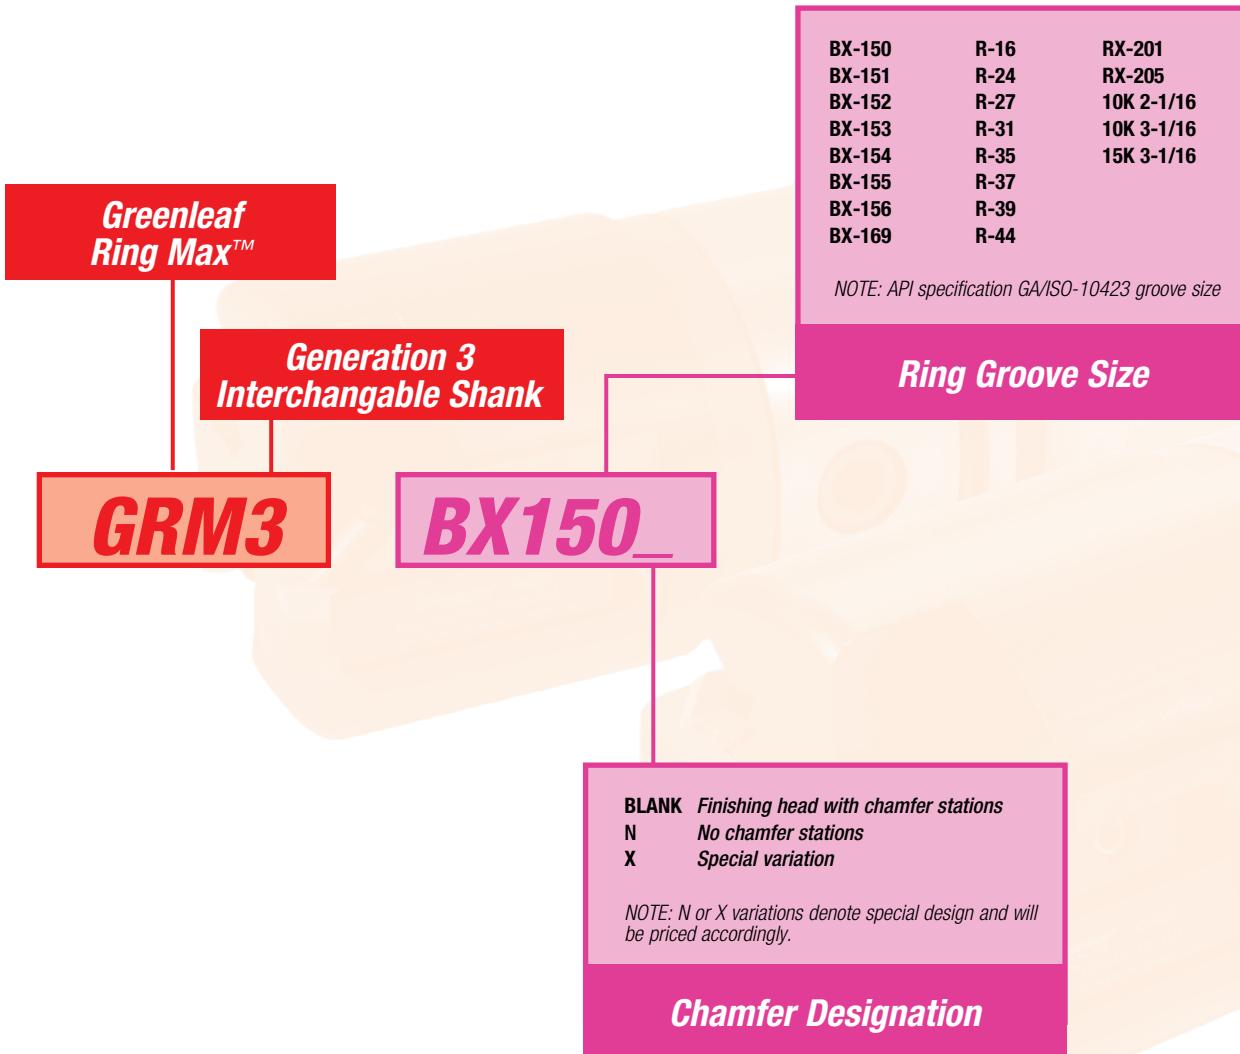

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com



**Greenleaf Sales**  
**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



Ring Max™ III – Ring Groove Tooling Usage Reference Guide

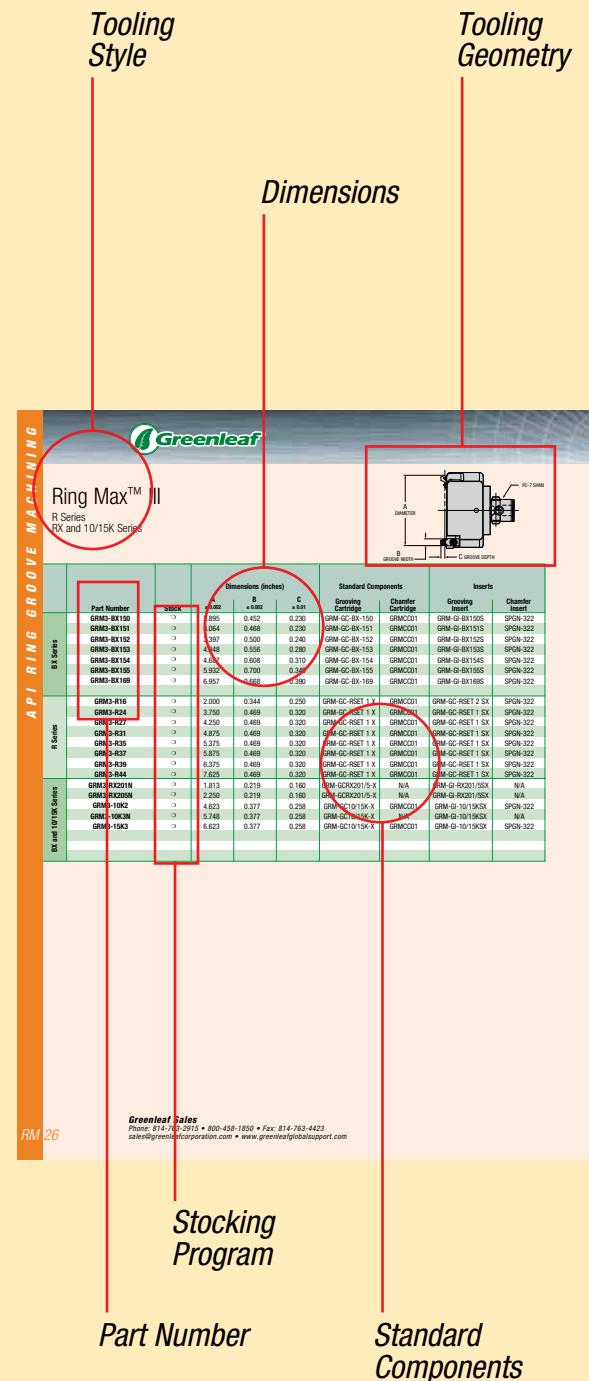


**Greenleaf Sales**

**greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com


**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)

**EU** +31-45-404-1774 • [eu@greenleafcorporation.com](mailto:eu@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com](mailto:info@greenleafcorporation.com)


**CN +86-731-89954790 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com**

**Ring Groove Tooling**


**Ring Max™ III**  
BX Series  
R Series  
RX Series  
10/15K Series  
*page: RM 28*



**Ring Max™**  
Shank Options  
*page: RM 29*


**Ring Max™ III**

Models  
*page: RM 30*

**Ring Max™ III Pre-Clad**




Models  
*page: RM 31*

**Pre-Clad Head**


Quote Request Form  
*page: RM 32*

**Machining Methods**

Reference Guide  
*page: RM 33*



**Ring Max™**  
Grooving Cartridge  
*page: RM 35*



**Ring Max™**  
Chamfer Cartridge  
*page: RM 36*

**Reference**
**R**

Models

*page: RM 30*

**R**

Models

*page: RM 31*

**P**

Quote Request Form

*page: RM 32*

**M**

Reference Guide

*page: RM 33*

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


# Ring Max™ III

BX Series


R Series

RX and 10/15K Series

BX and 10/15K Series

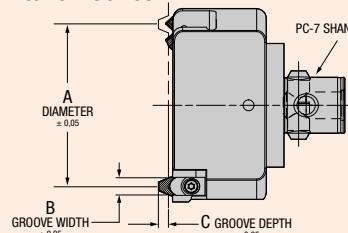

R and RX Series

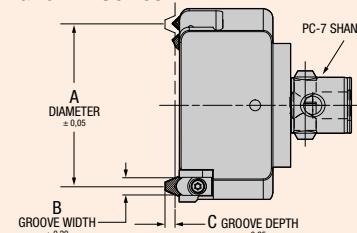

	Part Number	Stock	Dimensions (mm)			Standard Components		Inserts	
			A	B	C	Grooving Cartridge	Chamfer Cartridge	Grooving Insert	Chamfer Insert
BX Series	GRM3-BX150	○	73,53	11,48	5,84	GRM-GI-BX-150	GRMCC01	GRM-GI-BX150S	SPGN-322
	GRM3-BX151	○	77,83	11,89	5,84	GRM-GI-BX-151	GRMCC01	GRM-GI-BX151S	SPGN-322
	GRM3-BX152	●	86,28	12,70	6,10	GRM-GI-BX-152	GRMCC01	GRM-GI-BX152S	SPGN-322
	GRM3-BX153	○	102,82	14,12	7,11	GRM-GI-BX-153	GRMCC01	GRM-GI-BX153S	SPGN-322
	GRM3-BX154	●	119,05	15,44	7,87	GRM-GI-BX-154	GRMCC01	GRM-GI-BX154S	SPGN-322
	GRM3-BX155	●	150,67	17,78	8,64	GRM-GI-BX-155	GRMCC01	GRM-GI-BX155S	SPGN-322
	GRM3-BX169	○	176,71	16,97	9,91	GRM-GI-BX-169	GRMCC01	GRM-GI-BX169S	SPGN-322
R Series	GRM3-R16	○	50,80	8,74	6,35	GRM-GI-RSET 2 AX	GRMCC01	GRM-GC-RSET 2 SX	SPGN-322
	GRM3-R24	●	95,25	11,91	8,13	GRM-GI-RSET 1 X	GRMCC01	GRM-GC-RSET 1 SX	SPGN-322
	GRM3-R27	○	107,95	11,91	8,13	GRM-GI-RSET 1 X	GRMCC01	GRM-GC-RSET 1 SX	SPGN-322
	GRM3-R31	○	123,83	11,91	8,13	GRM-GI-RSET 1 X	GRMCC01	GRM-GC-RSET 1 SX	SPGN-322
	GRM3-R35	○	136,53	11,91	8,13	GRM-GI-RSET 1 X	GRMCC01	GRM-GC-RSET 1 SX	SPGN-322
	GRM3-R37	○	149,23	11,91	8,13	GRM-GI-RSET 1 X	GRMCC01	GRM-GC-RSET 1 SX	SPGN-322
	GRM3-R39	○	161,93	11,91	8,13	GRM-GI-RSET 1 X	GRMCC01	GRM-GC-RSET 1 SX	SPGN-322
	GRM3-R44	○	193,68	11,91	8,13	GRM-GI-RSET 1 X	GRMCC01	GRM-GC-RSET 1 SX	SPGN-322
RX and 10/15K Series	GRM3-RX201N	○	46,05	5,56	4,06	GRM-GIRX201/5-X	N/A	GRM-GI-RX201/5SX	N/A
	GRM3-RX205N	○	57,15	5,56	4,06	GRM-GIRX201/5-X	N/A	GRM-GI-RX201/5SX	N/A
	GRM3-10K2	○	117,42	9,58	6,55	GRM-GI10/15K-X	GRMCC01	GRM-GI-10/15KSX	SPGN-322
	GRM3-10K3N	○	146,00	9,58	6,55	GRM-GI10/15K-X	N/A	GRM-GI-10/15KSX	N/A
	GRM3-15K3	○	168,22	9,58	6,55	GRM-GI10/15K-X	GRMCC01	GRM-GI-10/15KSX	SPGN-322

NOTE: Due to blank availability, special designs may need to be a two-piece weld construction or no quote.

## Greenleaf Sales

Phone: 814-763-2915 • 800-458-1850 • Fax: 814-763-4423  
sales@greenleafcorporation.com • www.greenleafglobalsupport.com

Inserts and  
Steel Products

Stocked  
Standard

Inserts Only

Stocked  
or Available  
Upon Request


Steel Products Only

10 Business  
Days or Less


# Ring Max™ III

## Shank Options


Adapter Designation	Shank A	Shank B
04-GRMA50-000		CAT-50 (ANSI-50) Vee Flange
04-GRMD50-000		DIN-69871 (ISO-50) Vee Flange
04-GRMNMTB50-000	PC-7	NMTB-50 Vee Flange
04-GRMBT50-000		BT-50 Vee Flange
04-GRMHSK100-000		HSK-100A

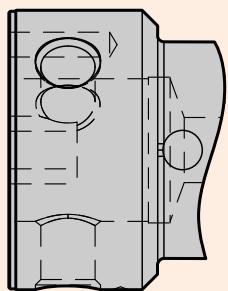


PC-7 Connector

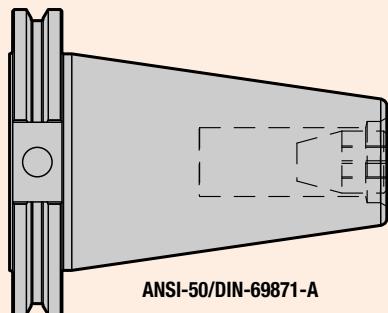


ANSI-50/DIN-69871-A

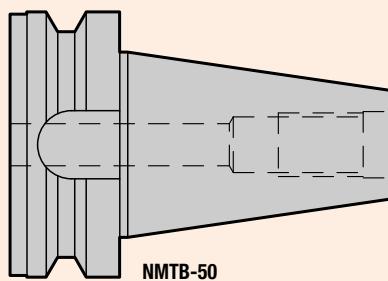

NMTB-50


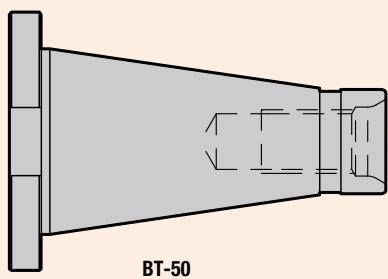


BT-50

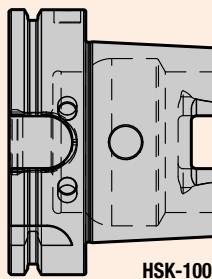


HSK-100

# Ring Max™ GRM3-BX155 – Assembled and Exploded Views Reference Guide

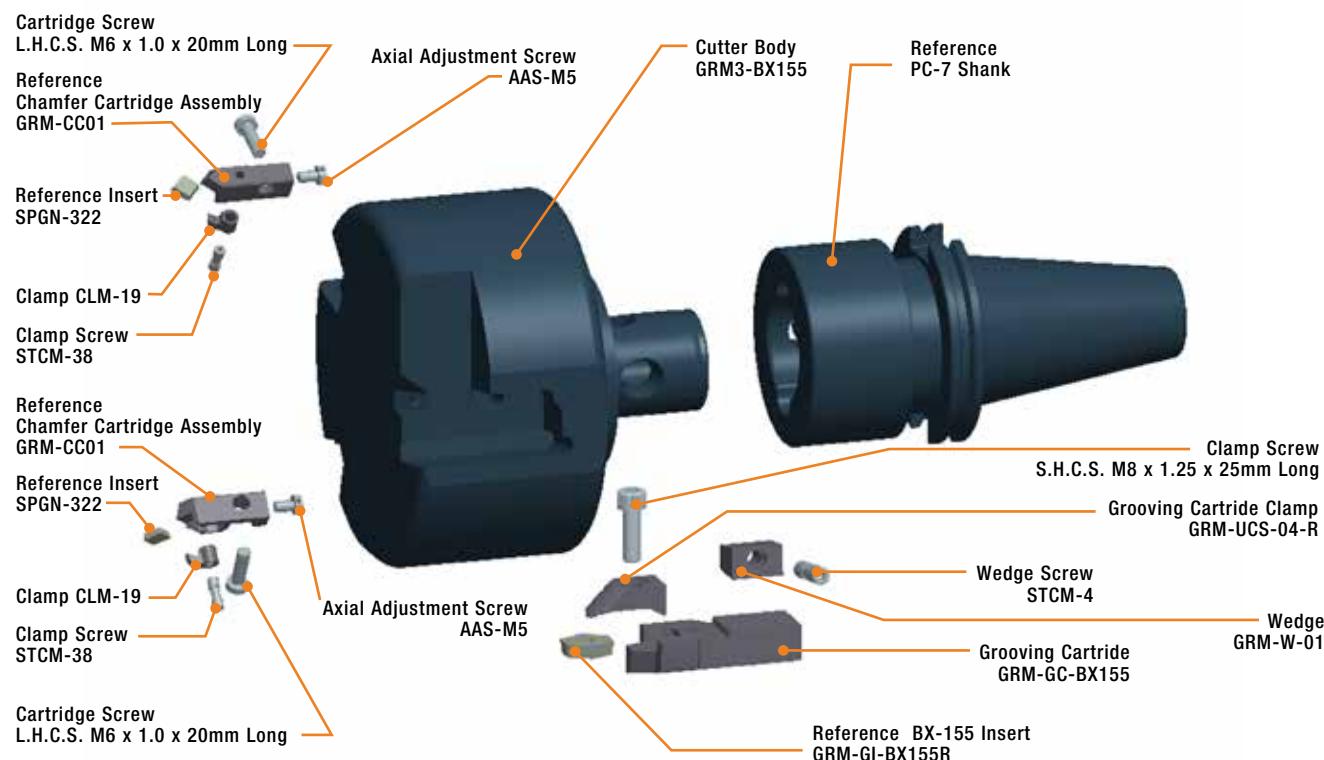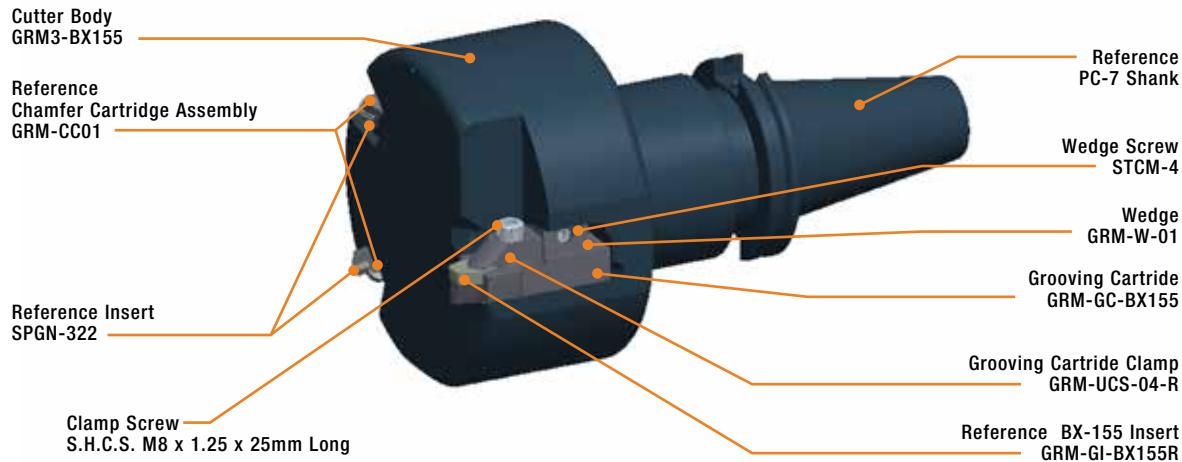

## Ring Max™ Pre-Clad – Assembled and Exploded Views Reference Guide

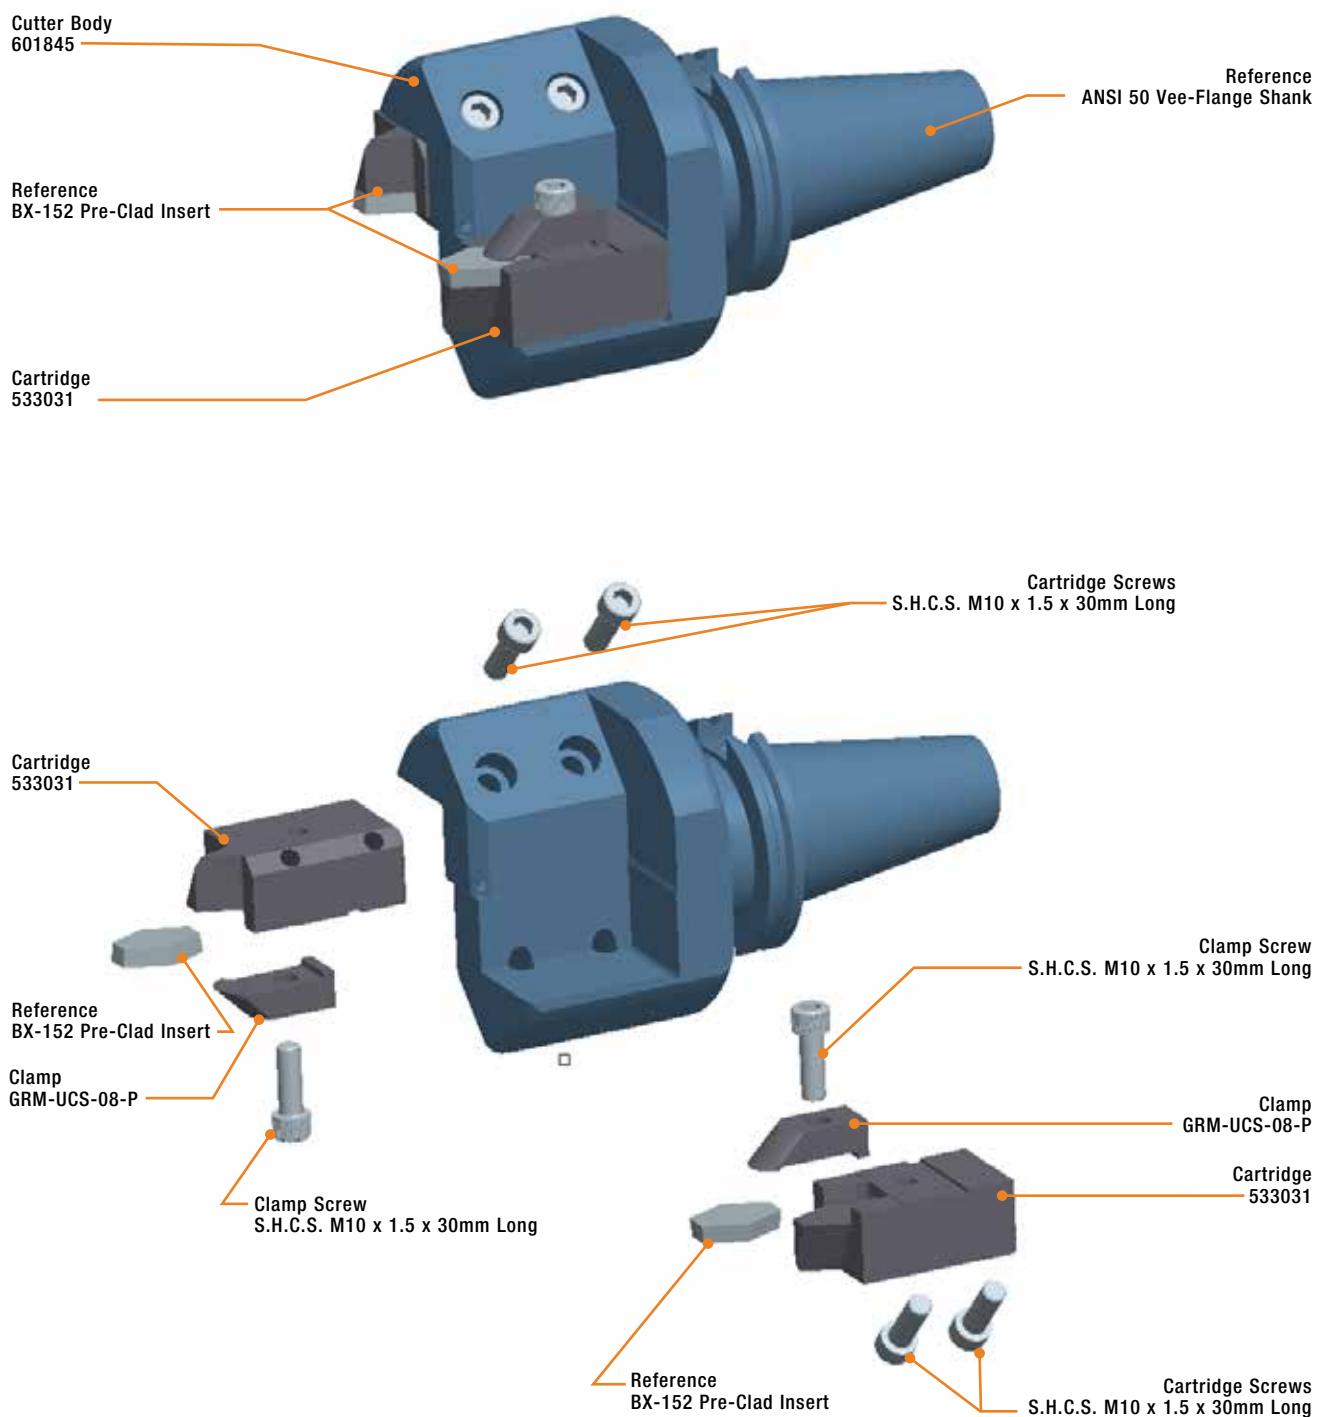



**FOR FAST RESPONSE**, complete form and send  
via **EMAIL**  
[engineering@greenleafcorporation.com](mailto:engineering@greenleafcorporation.com)  
via **FAX**  
814-763-4040

## Pre-Clad Head Quote Request Form



### Part Information:

Part Name: \_\_\_\_\_

Clad Material: \_\_\_\_\_ Insert Grade: \_\_\_\_\_

Quote quantities: Heads: \_\_\_\_\_ Cartiridges: \_\_\_\_\_ Inserts: \_\_\_\_\_

Additional comments: \_\_\_\_\_

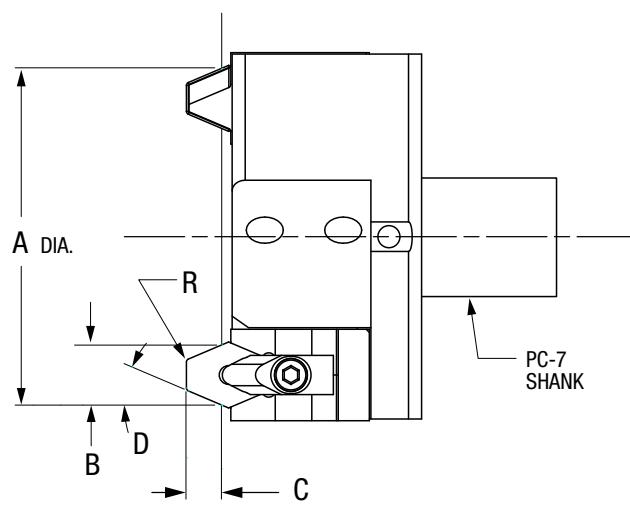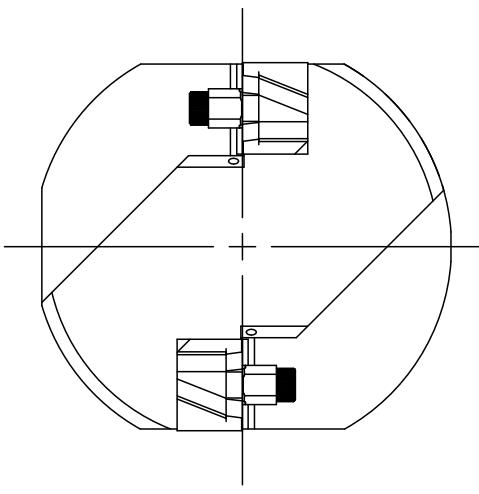

Dimensions (Please provide required tolerances.)				
A ±_____	B ±_____	C ±_____	D ±_____	R ±_____

Company \_\_\_\_\_

Customer Number \_\_\_\_\_

Attention \_\_\_\_\_

Rep Number \_\_\_\_\_

Street \_\_\_\_\_

Ship to City \_\_\_\_\_ Country \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

Send Copy to \_\_\_\_\_

Phone \_\_\_\_\_ FAX \_\_\_\_\_

\_\_\_\_\_

Email \_\_\_\_\_ Sales Rep \_\_\_\_\_

Date Received \_\_\_\_\_

Quote  
Due Date  
\_\_\_\_\_

# Ring Max™ – Machining Methods Reference Guide

## Method One

Use these instructions for setting gage points and establishing target ring groove depths using an optical comparator.

### Step One:

Using an optical comparator, find and set the gage points at the groove's A diameter at mid-tolerance. The groove's B dimension will be within the allowable tolerance range.


### Step Two:

Once the gage points in Step One have been determined, measure and record the tool's Z length and the actual measured C dimension over the insert nose.

*NOTE: The measured C dimension is the target machining depth and will be within the groove's allowable part tolerance.*

### Example for BX-152

A	B	C	Z
Part print dimension and tolerance 86.233mm $+0.10$ $-0.00$	Target this diameter for gage points 86.283mm	Part print dimension and tolerance 12.649mm $+0.10$ $-0.00$	Measure and target this depth for programming 5.84mm

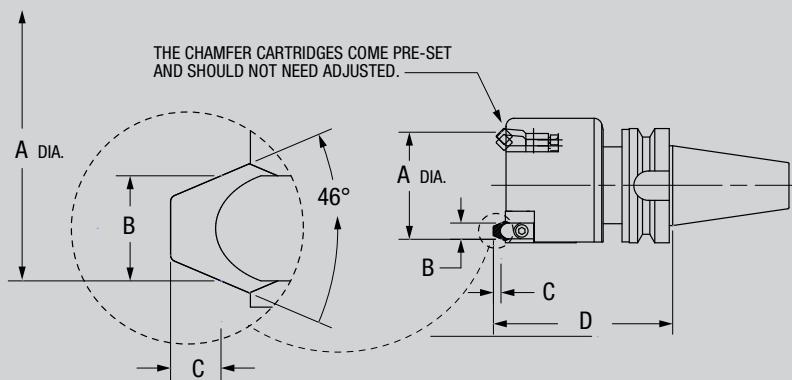

## Method Two


This method is used to machine ring grooves in a rough and finish pass.

### Step One:

Machine the groove but reduce the groove depth to leave stock for the finish pass.

### Step Two:

Measure the groove's A diameter and use the chart below to determine the additional D depth necessary to bring the A diameter into mid-tolerance.

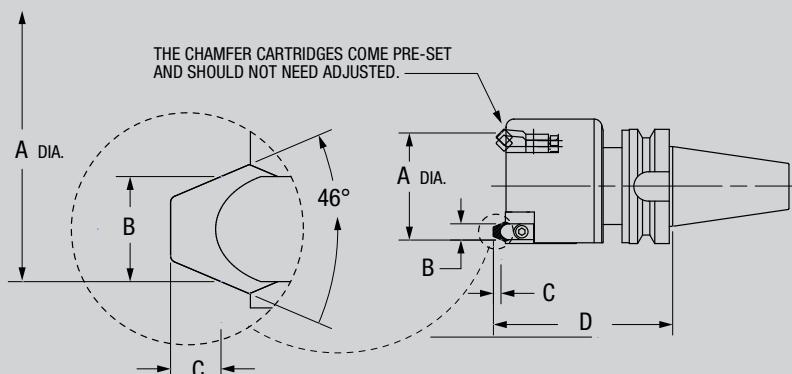


If the A groove diameter is undersize by:	Increase the groove depth D by:
0.025mm	0.029mm
0.050mm	0.059mm
0.075mm	0.088mm
0.100mm	0.118mm
0.125mm	0.147mm
0.150mm	0.177mm
0.175mm	0.206mm
0.200mm	0.236mm
0.225mm	0.265mm
0.250mm	0.295mm
0.275mm	0.324mm
0.300mm	0.353mm

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com


## Ring Max™ – Grooving Cartridge Identification System

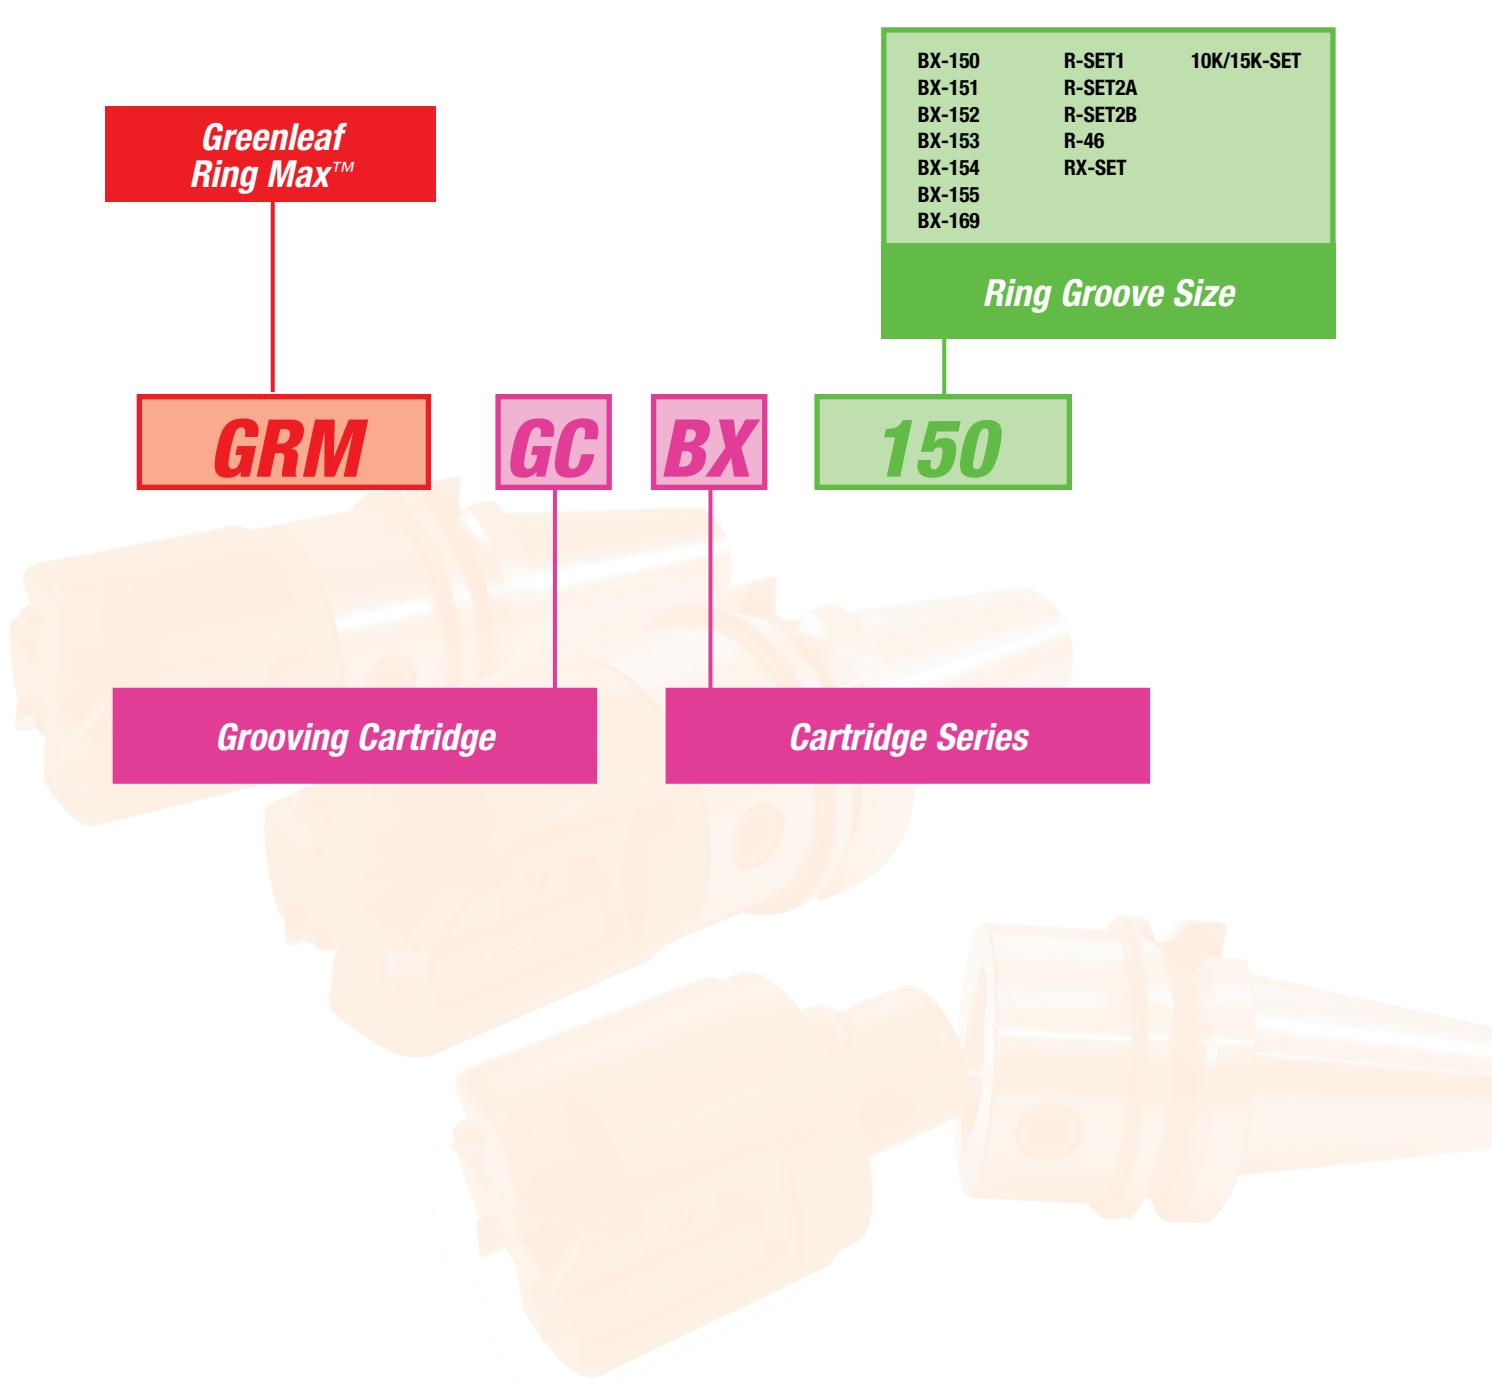**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Ring Max™

Grooving Cartridge

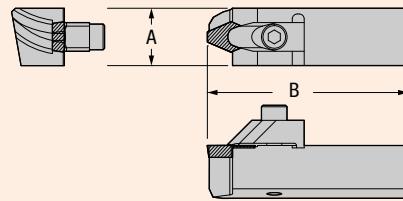

Cartridge		Stock	Dimensions (mm)		Standard Components		Inserts
Groove Size	Part Number		A	B	Clamp	Clamp Screw	
BX-150	<b>GRM-GC-BX-150</b>	●	25,40	66,68	GRMUCS01S	M6-1.0 SHCS	GRM-GI-BX150S
BX-151	<b>GRM-GC-BX-151</b>	●	25,40	66,68	GRMUCS01S	M6-1.0 SHCS	GRM-GI-BX151S
BX-152	<b>GRM-GC-BX-152</b>	●	25,40	66,68	GRMUCS01S	M6-1.0 SHCS	GRM-GI-BX152S
BX-153	<b>GRM-GC-BX-153</b>	●	25,40	66,68	GRMUCS01S	M6-1.0 SHCS	GRM-GI-BX153S
BX-154	<b>GRM-GC-BX-154</b>	●	28,37	66,68	GRMUCS01S	M6-1.0 SHCS	GRM-GI-BX154S
BX-155	<b>GRM-GC-BX-155</b>	●	31,98	79,38	GRMUCS04R	M8-1.25 SHCS	GRM-GI-BX155R
BX-156	<b>GRM-GC-BX-156</b>	●	30,18	79,38	GRMUCS04R	M8-1.25 SHCS	GRM-GI-BX156R
BX-169	<b>GRM-GC-BX-169</b>	●	25,40	79,38	GRMUCS04R	M8-1.25 SHCS	GRM-GI-BX169R
R-SET1*	<b>GRM-GCRSET1-X</b>	●	25,40	79,38	GRMUCS03S	M6-1.0 SHCS	GRM-GI-RSET1SX
R-SET2A*	<b>GRM-GCRSET2A-X</b>	○	19,05	66,68	GRMUCS05S	M5-0.8 SHCS	GRM-GI-RSET2SX
R-SET2B*	<b>GRM-GCRSET2B-X</b>	○	25,40	66,68	GRMUCS03S	M5-0.8 SHCS	GRM-GI-RSET2SX
R-46	<b>GRM-GCR46</b>	○	25,40	79,38	GRMUCS04r	M8-1.25 SHCS	GRM-GI-R46R
RX-SET*	<b>GRM-GCRX201/5-X</b>	○	19,05	66,68	GRMUCS05S	M5-0.8 SHCS	GRM-GI-RX201/5SX
10/15K-SET*	<b>GRM-GC10/15-X</b>	○	25,40	66,68	GRMUCS05S	M5-0.8 SHCS	GRM-GI-10/15KSX

\* Denotes multiple groove sizes (See chart below.)

## Multiple-Groove Compatibility

Single cartridges can produce multiple grooves when used in the proper gage diameter Ring Max™ grooving head. Use this chart for compatibility.

Group	Groove Sizes
<b>R-SET1</b>	R-21, R-23, R-24, R-26, R-27, R-31, R-35, R-37, R-39, R-41, R-44, R-45, R-49, R-53, R-57, R-65, R-69, R-82, R-84
<b>R-SET2A</b>	R-12, R-13, R-14, R-15, R-16, R-17, R-18, R-19, R-20
<b>R-SET2B</b>	R-22, R-25, R-29, R-33, R-36, R-40, R-43, R-48, R-52
<b>RX-SET</b>	RX-201, RX-205
<b>10/15K-SET</b>	10K-2 <sup>1</sup> / <sub>16</sub> ", 10K-3 <sup>1</sup> / <sub>16</sub> ", 10K-5 <sup>1</sup> / <sub>16</sub> ", 15K-3 <sup>1</sup> / <sub>16</sub> "


**Inserts and Steel Products Only**  
10 Business Days or Less    
**Inserts Only**  
Stocked or Available Upon Request    
**Steel Products**  
Stocked Standard

**Greenleaf Sales**  
**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



# Ring Max™

Chamfer Cartridge

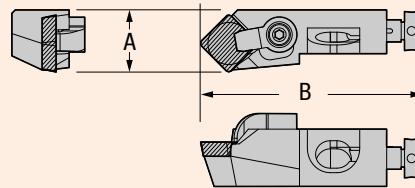

Cartridge	Stock	Dimensions (mm)		Standard Components			Inserts Purchased Separately	Mounting Screw Supplied with Grooving Head
		A	B	Clamp	Clamp Screw	Adj. Screw		
GRM-CC01	●	14,00	50,06	CLM-19	STCM-38	AAS-M5	SPGN-322	M6-1.0 LHCS

All Ring Max™ heads for generation 2 and 3 use the same chamfer cartridges.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Inserts and Steel Products

● Stocked Standard

○ Stocked or Available Upon Request

○ 10 Business Days or Less

## Ring Max™ STX – Lathe Tooling

The Ring Max™ STX system provides the same productivity gains as the Ring Max™ II and Ring Max™ III systems in a square shank tool. Whether you are machining a large diameter groove, or a standard BX, R, or RX groove, the Ring Max™ STX system is your solution for maximizing productivity in multiple API ring groove sizes.

Standard features and benefits include:

- Roughing and finishing of BX, R and RX API ring grooves in Inconel 625 clad overlay in less than one minute
- Utilization of the same clamping system and inserts as the Ring Max™ II and Ring Max III™ cutter systems.
- Available in common standard inch and metric shank sizes.
- Availability for grooving in stainless and alloy steel



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*


[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




## Ring Max™ STX – Lathe Tooling Identification System

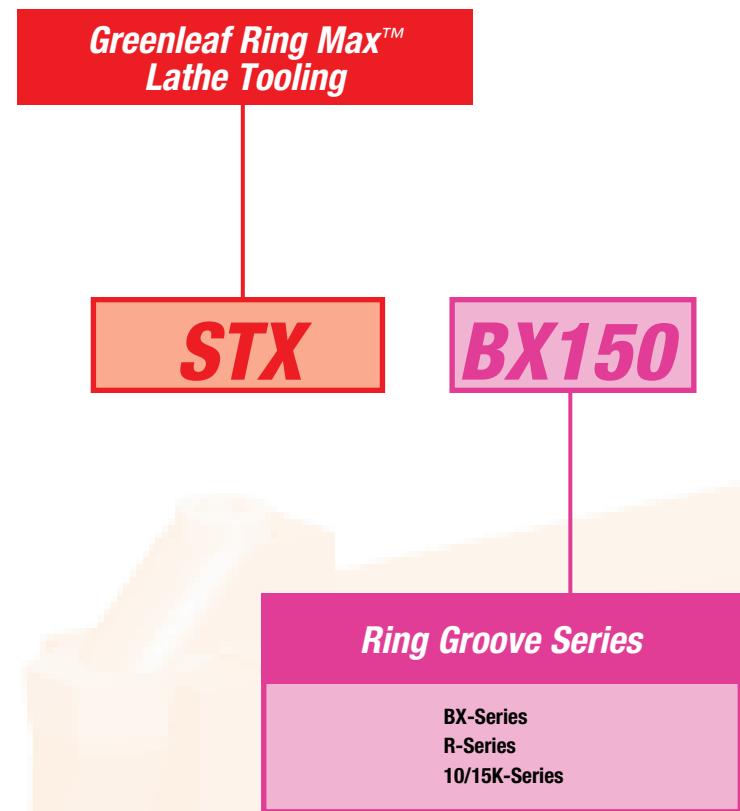

### Greenleaf Sales

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

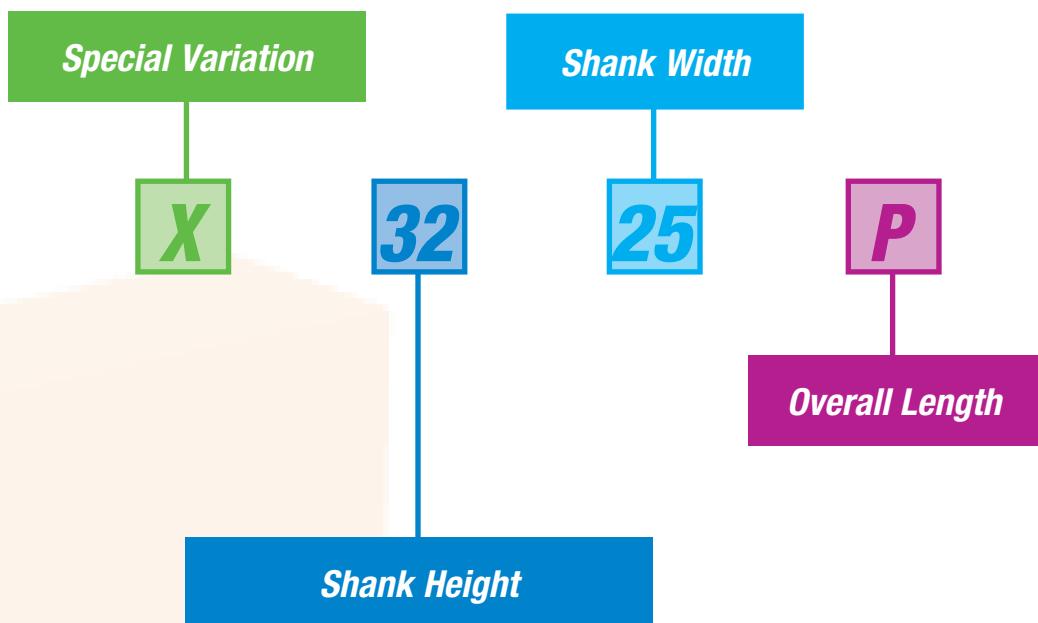

# Ring Max™ STX – Lathe Tooling Usage Reference Guide

**Tooling Style**

**Part Number**

**Tooling Geometry**

**Standard Components**

**Dimensions**

**Stocking Information**

**Multiple-Groove Compatibility**

Single cartridges can produce multiple grooves.  
Use this chart for compatibility.

Group	Groove Sizes
R-SET1SX	R-21, R-23, R-24, R-25, R-27, R-31, R-35, R-37, R-39, R-41, R-44, R-45, R-48, R-51, R-53, R-55, R-65, R-69, R-82, R-84
R-SET2SX	R-12, R-15, R-18, R-21, R-24, R-27, R-31, R-35, R-37, R-39, R-41, R-44, R-45, R-48, R-51, R-53, R-55, R-65, R-69, R-82, R-84
10/19SX	10/19K, 19K-2 <sup>1</sup> / <sub>2</sub> ", 19K-3 <sup>1</sup> / <sub>2</sub> "

**Ring Max™ STX**  
Lathe Tooling

**A PI RING GROOVE MACHINING**

**Holder**

Groove Size	Holder	Part Number	A	B	C	D	E	F
BX-150	STXK191040	↗	0.452	0.230	6.000	1.000	1.000	1.000
BX-150	STXK190800	↗	0.452	0.230	6.000	1.000	1.250	1.250
BX-151	STXK191140	↗	0.468	0.230	6.000	1.000	1.000	1.000
BX-152	STXK191080	↗	0.468	0.230	6.000	1.000	1.250	1.250
BX-152	STXK191240	↗	0.500	0.240	6.000	1.000	1.000	1.000
BX-152	STXK191280	↗	0.500	0.240	6.000	1.000	1.250	1.250
BX-154	STXK191160	↗	0.468	0.230	6.000	1.000	1.000	1.000
BX-154	STXK191480	↗	0.608	0.230	6.000	1.000	1.250	1.250
BX-155	STXK191160	↗	0.700	0.342	6.000	1.000	1.000	1.000
BX-155	STXK190800	↗	0.700	0.342	6.000	1.000	1.250	1.250
BX-156	STXK191160	↗	0.820	0.400	6.000	1.000	1.000	1.000
BX-156	STXK190800	↗	0.820	0.400	6.000	1.000	1.250	1.250
BX-169	STXK191160	↗	0.688	0.39	6.000	1.000	1.000	1.000
BX-169	STXK190800	↗	0.688	0.39	6.000	1.000	1.250	1.250
R-SET1SX*	STXK191160	↗	0.469	0.39	6.000	1.000	1.000	1.000
R-SET1SX*	STXK191480	↗	0.469	0.39	6.000	1.000	1.250	1.250
R-SET2SX*	STXK191160	↗	0.469	0.39	6.000	1.000	1.000	1.000
R-SET2SX*	STXK190800	↗	0.469	0.39	6.000	1.000	1.250	1.250
R-46R	STXK190800	↗	0.331	0.390	6.000	1.000	1.000	1.000
R-46R	STXK190800	↗	0.331	0.390	6.000	1.000	1.250	1.250
10/19SX*	STX1919K160	↗	0.377	0.258	6.000	1.000	1.000	1.000
10/19SX*	STX1919K80	↗	0.377	0.258	6.000	1.000	1.250	1.250

\* Denotes multiple groove sizes (See chart below right)

**Standard Components**


Groove Size	Standard Components	Clamp	Screws	Inserts	For Production Separately
BX-150	GRMUS10S	M6-1.0 SHCS	GRM-GI-81125		
BX-150	GRMUS080F	M6-1.0 SHCS	GRM-GI-81125		
BX-152	GRMUS10S	M6-1.0 SHCS	GRM-GI-81132		
BX-154	GRMUS10S	M6-1.0 SHCS	GRM-GI-81145		
BX-155	GRMUS10AS	M8-1.25 SHCS	GRM-GI-81150		
BX-169	GRMUS10AS	M8-1.25 SHCS	GRM-GI-81150		
BX-169	GRMUS04S	M8-1.25 SHCS	GRM-GI-81168		
R-SET1SX*	GRMUS04S	M8-1.0 SHCS	GRM-GI-8115X		
R-SET2SX*	GRMUS04S	M8-0.8 SHCS	GRM-GI-8212X		
R-46R	GRMUS04S	M8-0.8 SHCS	GRM-GI-8484R		
10/19SX*	GRMUS05S	M8-0.8 SHCS	GRM-GI-10119X		

**Dimensions**

**Stocking Information**

**Greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

RM 34

**RING MAX™ Lathe Tooling****Ring Max™ STX**

Lathe Tooling

page: RM 42

**Reference****Ring Max™ STX**

Models

page: RM 43

**Lathe Tool**

Quote Request Form


page: RM 44

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Ring Max™ STX

Lathe Tooling

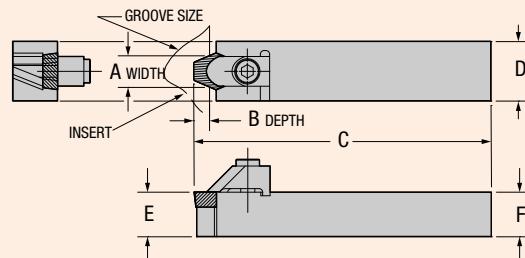

Holder		Stock	Dimensions (mm)					
Groove Size	Part Number		A <sup>†</sup>	B <sup>†</sup>	C	D	E	F
BX-150	STXBX1502525P	○	11,48	5,84	170	25	25	25
	STXBX1503225P	○	11,48	5,84	170	25	32	32
BX-151	STXBX1512525P	○	11,89	5,84	170	25	25	25
	STXBX1513225P	○	11,89	5,84	170	25	32	32
BX-152	STXBX1522525P	○	12,70	6,10	170	25	25	25
	STXBX1523225P	○	12,70	6,10	170	25	32	32
BX-154	STXBX1542525P	○	15,44	7,87	170	25	25	25
	STXBX1543225P	○	15,44	7,87	170	25	32	32
BX-155	STXBX1552525P	○	17,78	8,64	170	25	25	25
	STXBX1553225P	○	17,78	8,64	170	25	32	32
BX-156	STXBX1562525P	○	23,44	11,43	170	25	25	25
	STXBX1563225P	○	23,44	11,43	170	25	32	32
BX-169	STXBX1692525P	○	16,97	9,91	170	25	25	25
	STXBX1693225P	○	16,97	9,91	170	25	32	32
R-SET1SX*	STXRSET12525P	○	11,91	8,13	170	25	25	25
	STXRSET13225P	○	11,91	8,13	170	25	32	32
R-SET2SX*	STXRSET22525P	○	8,74	6,35	170	25	25	25
	STXRSET23225P	○	8,74	6,35	170	25	32	32
R-46R	STXR462525P	○	13,49	9,91	170	25	25	25
	STXR463225P	○	13,49	9,91	170	25	32	32
10/15KSX*	STX1015KX2525P	○	9,58	6,55	170	25	25	25
	STX1015KX3225P	○	9,58	6,55	170	25	32	32

\* Denotes multiple groove sizes (See chart below right.)

<sup>†</sup> Groove width and depth tolerances comply with API Standard 6A/ISO 10423.

Groove Size	Standard Components		Inserts Purchased Separately
	Clamp	Clamp Screw	
BX-150	GRMUCS01S	M6-1.0 SHCS	GRM-GI-BX150S
BX-151	GRMUCS01S	M6-1.0 SHCS	GRM-GI-BX151S
BX-152	GRMUCS01S	M6-1.0 SHCS	GRM-GI-BX152S
BX-154	GRMUCS01R	M6-1.0 SHCS	GRM-GI-BX154S
BX-155	GRMUCS04R	M8-1.25 SHCS	GRM-GI-BX155R
BX-156	GRMUCS04R	M8-1.25 SHCS	GRM-GI-BX156R
BX-169	GRMUCS04S	M8-1.25 SHCS	GRM-GI-BX169R
R-SET1SX*	GRMUCS03S	M6-1.0 SHCS	GRM-GI-RSET1SX
R-SET2SX*	GRMUCS05S	M5-0.8 SHCS	GRM-GI-RSET2SX
R-46R	GRMUCS04R	M8-1.25 SHCS	GRM-GI-R46R
10/15KSX*	GRMUCS05S	M5-0.8 SHCS	GRM-GI-10/15KSX

## Multiple-Groove Compatibility

Single cartridges can produce multiple grooves.


Use this chart for compatibility.

Group	Groove Sizes
R-SET1SX	R-21, R-23, R-24, R-26, R-27, R-31, R-35, R-37, R-39, R-41, R-44, R-45, R-49, R-53, R-57, R-65, R-69, R-82, R-84
R-SET2SX	R-12, R-13, R-14, R-15, R-16, R-17, R-18, R-19, R-20
10/15KSX	10/15K, 10K-2 <sup>1</sup> / <sub>16</sub> ", 10K-3 <sup>1</sup> / <sub>16</sub> "


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Inserts and Steel Products




Inserts Only  
Stocked or Available Upon Request



Steel Products Only



## Ring Max™ STX – Assembled and Exploded Views Reference Guide

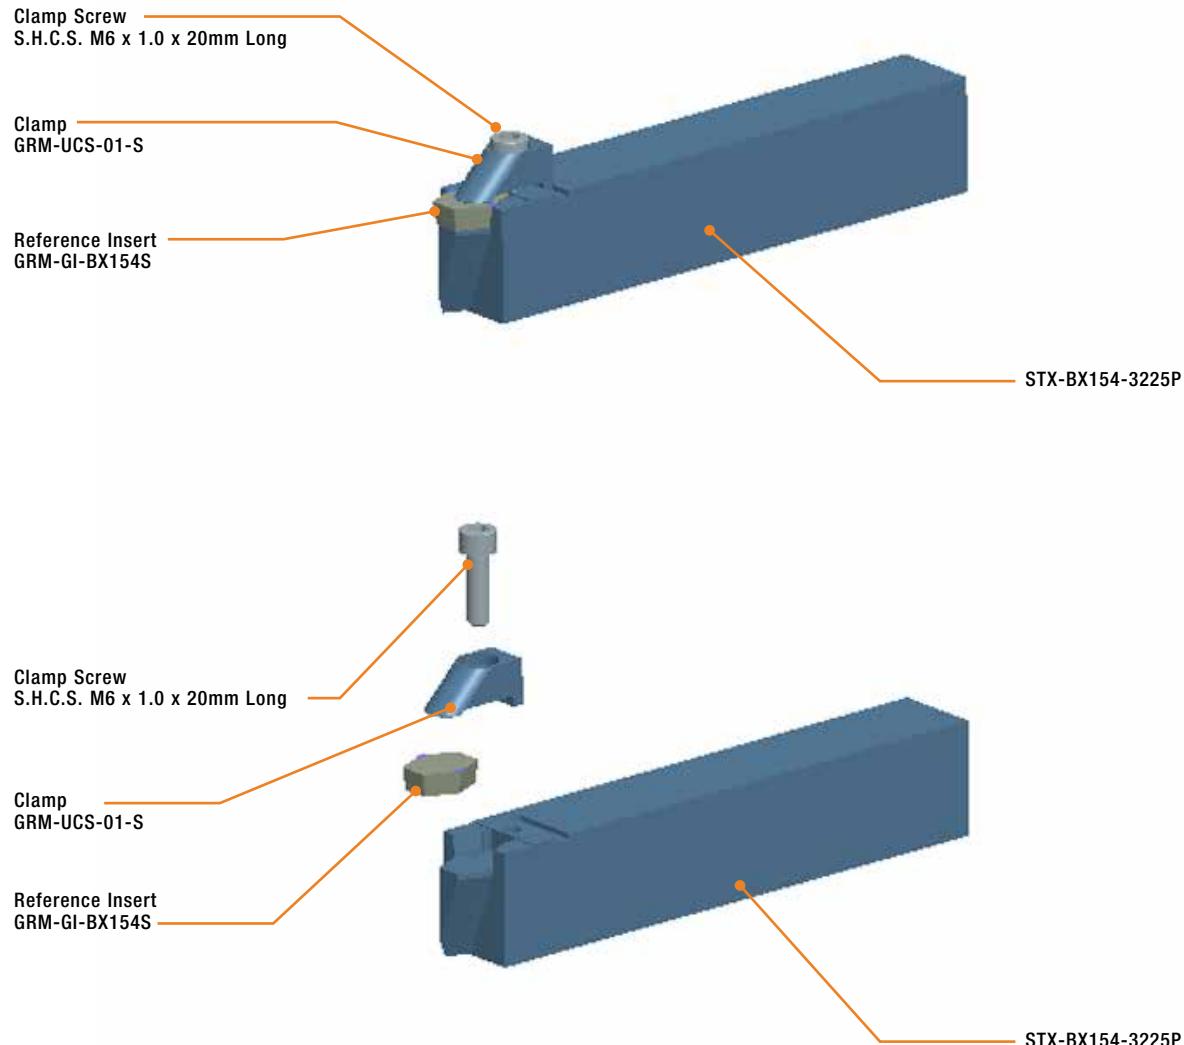



**FOR FAST RESPONSE**, complete form and send  
via **EMAIL**  
[engineering@greenleafcorporation.com](mailto:engineering@greenleafcorporation.com)  
via **FAX**  
814-763-4040

## Lathe Tool Quote Request Form


### Part Information:

Part Name: \_\_\_\_\_

Clad Material: \_\_\_\_\_ Insert Grade: \_\_\_\_\_

Quote quantities: Heads: \_\_\_\_\_ Cartiridges: \_\_\_\_\_ Inserts: \_\_\_\_\_

Additional comments: \_\_\_\_\_

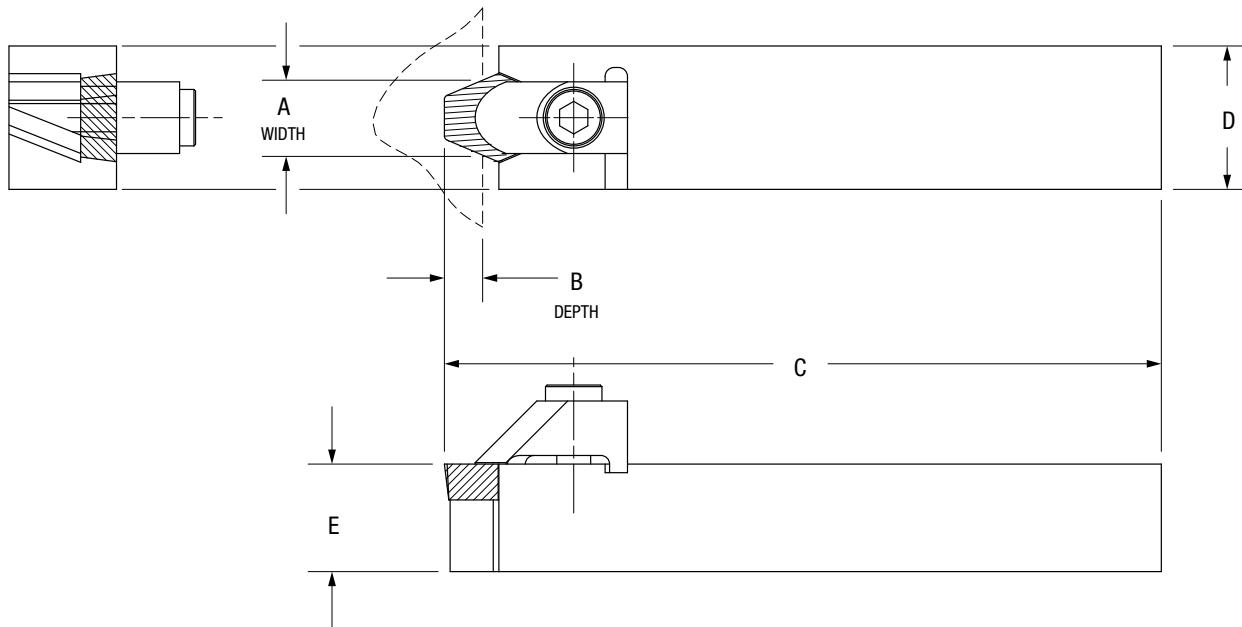

Dimensions (*Please provide required tolerances.*)

A $\pm$ _____	B $\pm$ _____	C $\pm$ _____	D $\pm$ _____	E $\pm$ _____

Company \_\_\_\_\_

Customer Number \_\_\_\_\_

Attention \_\_\_\_\_

Rep Number \_\_\_\_\_

Street \_\_\_\_\_

Ship to City \_\_\_\_\_ Country \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

Send Copy to \_\_\_\_\_

Phone \_\_\_\_\_ FAX \_\_\_\_\_

\_\_\_\_\_

Email \_\_\_\_\_ Sales Rep \_\_\_\_\_

Date Received \_\_\_\_\_

Quote  
Due Date  
\_\_\_\_\_




**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

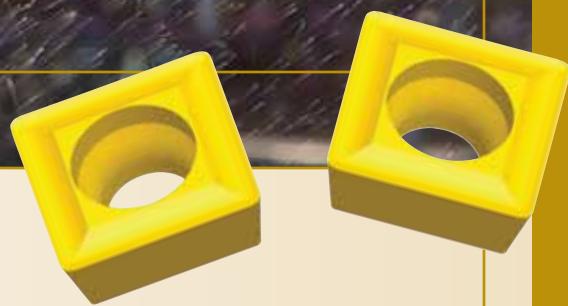

<i>Holemill™ Drilling System .....</i>	<i>ID 04</i>
<i>Technical Data .....</i>	<i>ID 05</i>



**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Indexable Drilling

The Holemill™ is an indexable drill utilizing Greenleaf's advanced coated-carbide grades for higher speeds, quieter cutting, longer tool life and reduced horsepower consumption. Inserts are positive squares (SPMT) for four indexes per insert. The Holemill is available from 24mm to 40mm diameters in increments of 1mm.





*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Holemill™ System

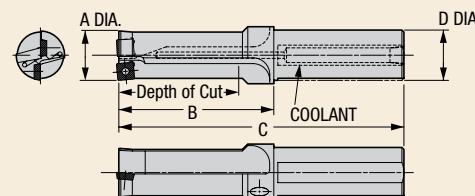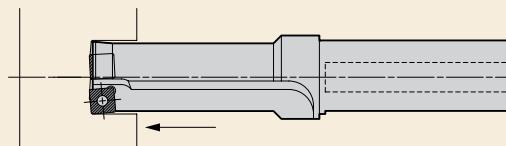


Part Number	Stock	Gage		Dimensions (millimeters)					Standard Components	* Tune-Up Kit	
		Insert Inboard	Qty	Insert Outboard	Qty	A	Depth of Cut	B	C		
M-HM3X-24	○	SPMT-070308-X2	1	SPMT-070308-X2	1	24	72	99	164	32	PT-543-T
M-HM3X-25	○	SPMT-070308-X2	1	SPMT-070308-X2	1	25	75	104	169	32	PT-543-T
M-HM3X-26	○	SPMT-070308-X2	1	SPMT-09T308-X2	1	26	78	107	172	32	PT-543-T & PT-559-T
M-HM3X-27	○	SPMT-070308-X2	1	SPMT-09T308-X2	1	27	81	110	175	32	PT-543-T & PT-559-T
M-HM3X-28	○	SPMT-070308-X2	1	SPMT-09T308-X2	1	28	84	118	183	32	PT-588-T & PT-559-T
M-HM3X-29	○	SPMT-09T308-X2	1	SPMT-09T308-X2	1	29	87	121	186	32	PT-559-T
M-HM3X-30	○	SPMT-09T308-X2	1	SPMT-09T308-X2	1	30	90	124	189	32	PT-559-T
M-HM3X-31	○	SPMT-09T308-X2	1	SPMT-09T308-X2	1	31	93	127	192	32	PT-559-T
M-HM3X-32	○	SPMT-09T308-X2	1	SPMT-09T308-X2	1	32	96	135	200	32	PT-559-T
M-HM3X-33	○	SPMT-09T308-X2	1	SPMT-120408-X2	1	33	99	138	213	40	PT-559-T & PT-588-T
M-HM3X-34	○	SPMT-09T308-X2	1	SPMT-120408-X2	1	34	102	141	216	40	PT-559-T & PT-588-T
M-HM3X-35	○	SPMT-09T308-X2	1	SPMT-120408-X2	1	35	105	144	219	40	PT-559-T & PT-588-T
M-HM3X-36	○	SPMT-09T308-X2	1	SPMT-120408-X2	1	36	108	147	222	40	PT-559-T & PT-588-T
M-HM3X-37	○	SPMT-09T308-X2	1	SPMT-120408-X2	1	37	111	150	225	40	PT-559-T & PT-588-T
M-HM3X-38	○	SPMT-120408-X2	1	SPMT-120408-X2	1	38	114	153	228	40	PT-588-T
M-HM3X-39	○	SPMT-120408-X2	1	SPMT-120408-X2	1	39	117	156	231	40	PT-588-T
M-HM3X-40	○	SPMT-120408-X2	1	SPMT-120408-X2	1	40	120	159	234	40	PT-588-T

\* Tune-Up Kits include one complete set of Standard Components to allow you to refurbish the Holemill.

## Holemill™ Inserts

### SPMT-X2

P	M	K	S
G-935	G-915	G-915	G-935
●	●	●	●
G-935	G-915	G-915	G-935
●	●	●	●

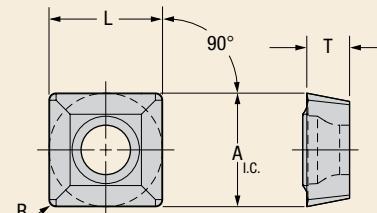

Inserts	Part Number	Insert Position	Dimensions (millimeters)				
			ANSI	A	L	T	R
 SPMT	SPMT-070308-X2	Inboard	SPMT-2.522-X2	7,92	7,92	3,18	0,79
	SPMT-070308-X2	Outboard	SPMT-2.522-X2	7,92	7,92	3,18	0,79
	SPMT-09T308-X2	Inboard	SPMT-32.52-X2	9,53	9,53	3,96	0,79
	SPMT-09T308-X2	Outboard	SPMT-32.52-X2	9,53	9,53	3,96	0,79
	SPMT-120408-X2	Inboard	SPMT-432-X2	12,70	12,70	4,75	0,79
	SPMT-120408-X2	Outboard	SPMT-432-X2	12,70	12,70	4,75	0,79

P	M	K	S
G-935	G-915	G-915	G-935
●	●	●	●
G-935	G-915	G-915	G-935
●	●	●	●

**G-915 (PVD coated)** Excellent for high-temp alloys, stainless steel, and low-carbon steels. Should be run at moderate speeds and moderate to high feeds.


**G-935 (PVD coated)** Multi-layer grade for steel milling and turning applications requiring additional resistance to mechanical and thermal shock. The multi-layered PVD coating increases the speed capability and wear resistance in tough milling and interrupted turning applications.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com



Stocked Standard



Stocked or Available Upon Request




Not Recommended

# Feed and Speed for Greenleaf Holemill™

Material	Hardness (Rc)	Vc M/M	Feed Rate per Revolution (MMPR)	
			25,40 – 50 Dia.	50 – 80 Dia.
Unalloyed Steel	up to 25	140–305	0,1–0,2	0,13–0,25
C-10, C-15, 9SMnPb36				
High-Carbon Steel	25–40	60–180	0,1–0,2	0,13–0,25
36Mn7, 100Cr6				
Low-Alloy Steel	15–30	120–275	0,1–0,2	0,13–0,25
42CrMo4, 20MoCrS4				
High-Alloy Tool Steel	up to 30	75–180	0,1–0,2	0,13–0,25
X155CrVMo12-1, 40CrMnNiMo8-6-4, X40CrMoV51				
High-Temp Alloys	up to 45	25–70	0,075–0,13	0,075–0,13
ISO-S Material				
Stainless Steel	up to 32	75–170	0,075–0,18	0,1–0,2
Austenitic Alloys				

## Greenleaf Holemill™ Operational Information

For best results in static drilling, set up the Greenleaf Holemill with the drill in the turret in an attitude that puts the inserts parallel to the ways of the machine with the inboard insert located toward the operator as shown.

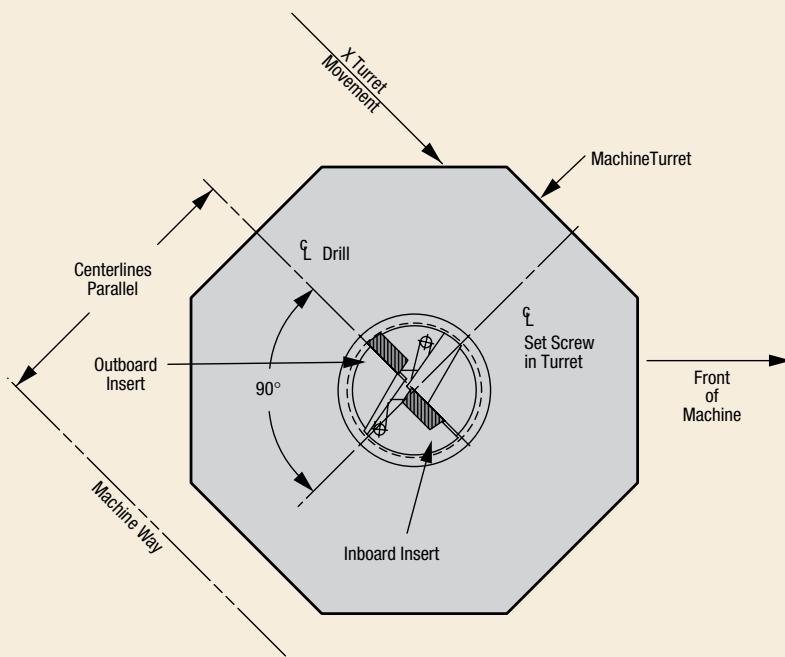

Static Drilling




**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



<i>Introduction</i> .....	TS 03
<i>Grade Descriptions</i> .....	TS 04
<i>Usage Reference Guide</i> .....	TS 06
<i>Pictorial Index</i> .....	TS 07
<i>Inserts</i> .....	TS 08-10
<i>Toolholders</i> .....	TS 11




**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Tube Scarfing

Greenleaf's modern tube scarfing system using indexable inserts offers greatly increased productivity potential from decreased downtime, longer tool life, faster tool change time, decreased tool costs and elimination of regrinding problems. In addition, a superior seam can be expected since an accurate radius form is always available on each side of the insert.

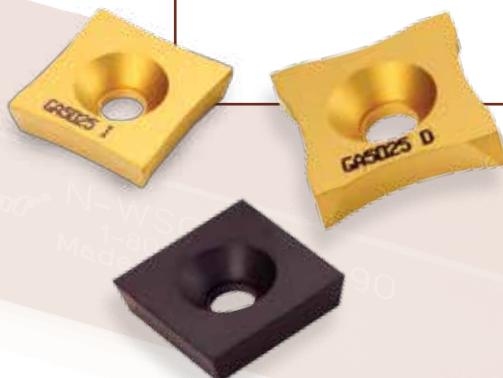

*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## CARBIDE

**Greenleaf offers a comprehensive line of carbide inserts in grades ranging from sub-micron C-1 through C-8 classifications. An industry pioneer in coated carbide, Greenleaf offers a variety of uncoated, MT-CVD coated and PVD-coated grades. Carbide inserts are available in ANSI standard geometries.**

### COATED

**GA5023** An MT-CVD ceramic-coated grade developed for abrasive wear and shock resistance.

**GA5025** An MT-CVD ceramic-coated grade offering superior heat resistance and long tool life.

## CERAMIC


**Greenleaf is the industry leader in the development and manufacture of ceramic and coated ceramic inserts in ANSI standard and special geometries. One of the most prominent is:**

**GEM-19™** An Al<sub>2</sub>O<sub>3</sub> ceramic grade for high-speed operations and demanding finish requirements.



### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## *Insert Style*

## *Flank Clearance*


S-SPUB-63		Greenleaf®	
Shape Scarfing	Product Number	GAUGES	Dimensions (inches/mm)
	S-SPUB-63-B	●	Up to .22
	S-SPUB-63-C	●	22-36
	S-SPUB-63-D	●	36-56
	S-SPUB-63-E	●	44
	S-SPUB-63-F	●	36-47
	S-SPUB-63-G	●	48-56
	S-SPUB-63-H	●	78-98
	S-SPUB-63-I	●	98-123
	S-SPUB-63-J	●	123-156
	S-SPUB-63-K	●	149-174
	S-SPUB-63-L	●	174-200
	S-SPUB-63-M	●	200 and Up
	S-SPUB-63-S	●	NONE
	S-SPUB-63-S	●	132
	S-SPUB-63-S	●	9.5

S.C.DUD. 20

**S-SPUB-86**  
Additional thickness and flank clearance for heavy-wa  
pipe and pipe diameters over 127mm available.

Shape/Scarffing	Product Number	Bore Dia. - mm	Dimensions [millimetres]	
			Tube Side - mm	Barriers
S-SPUB-06-B		Up to 22		12
S-SPUB-06-C		22-26		15
S-SPUB-06-D		26-30		20
S-SPUB-06-E		30-37		25
S-SPUB-06-F		41-47		30
S-SPUB-06-G		57-79		40
S-SPUB-06-H		79-99		50
S-SPUB-06-I		99-123		63
S-SPUB-06-J		123-149		75
S-SPUB-06-K		149-174		88
S-SPUB-06-L		174-203		103
S-SPUB-06-M		200 and Up		NONE
S-SPUB-06-N				127
S-SPUB-06-S				241
S-SPUB-06-P				198

**MT-CVD Coated Carbide**




## *Insert IC and Thickness*

## Pipe Diameter

Shape: Scarfing	Product Number	Tube Size - mm	Dimensions (millimeters)
	S-SGBB-43-B	Up to 12	12
	S-SGBB-43-C	22-28	15
	S-SGBB-43-D	29-36	20
	S-SGBB-43-E	37-43	25
	S-SGBB-43-F	47-57	30
	S-SGBB-43-G	51-79	35
	S-SGBB-43-H	79-100	50
	S-SGBB-43-I	98-123	63
	S-SGBB-43-J	123-149	75
	S-SGBB-43-K	149-175	85
	S-SGBB-43-L	176-200	101
	S-SGBB-43-M	200 and Up	NONE
	S-SGBB-43-N	44	22
	S-SGBB-43-O	53	25
	S-SGBB-43-P		9.5
			152

S-SGUE-63

Additional flank clearance for coated tube operation



S. SNUJN\_4C

S-SNUN-46

Shape Scoring	Product Number	Tube Size	Dimensions (millimeters)
		Radius	
	S-SMUN-4C	Up to .22	12
	S-SMUN-4C-E	.26-.38	15
	S-SMUN-4E	.38-.47	20
	S-SMUN-4E-F	41-.57	30
	S-SMUN-4G	.57-.79	40
	S-SMUN-4H	.79-.91	50

**Greenleaf Sales**

TS 08

**Greenleaf Sales**  
Phone: 814-763-2915 • 800-458-1850 • Fax: 814-763-4423

Stocking Status

## *Insert Radius*

**Greenleaf Sales**

**greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com

**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)




**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)

**Inserts**

**S-SPUB-63**
*page: TS 08*

**S-SPUB-86**
*page: TS 08*

**S-SGUB-63**
*page: TS 09*

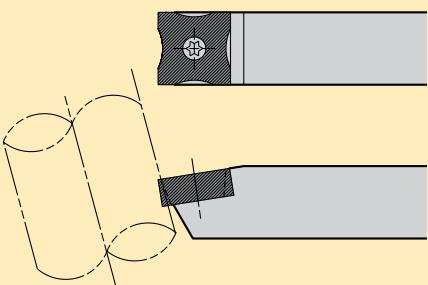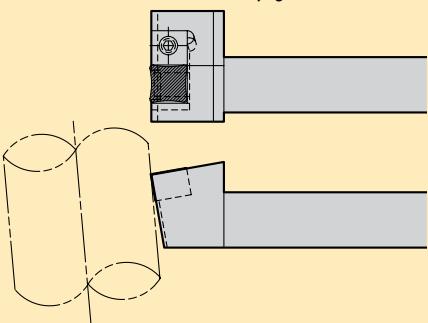**S-SNUN-46**
*page: TS 09*

**ID Scarfing  
Insert**
*page: TS 10*
**Toolholders**
**M-SSCPS**
*page: TS 11*

**M-WSCNN**
*page: TS 11*

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




## S-SPUB-63

Shape: Scarfing	Product Number	GA5023	GA5025	Tube Size - mm	Dimensions (millimeters)
					Radius
	S-SPUB-63-B	○	●	Up to 22	12
	S-SPUB-63-C	○	●	22-28	15
	S-SPUB-63-D	●	●	28-38	20
	S-SPUB-63-R	○	○	44	22
	S-SPUB-63-E	●	●	38-47	25
	S-SPUB-63-F	●	●	47-57	30
	S-SPUB-63-G	●	●	57-79	40
	S-SPUB-63-H	●	●	79-98	50
	S-SPUB-63-I	●	●	98-123	63
	S-SPUB-63-J	●	●	123-149	75
	S-SPUB-63-K	○	●	149-174	88
	S-SPUB-63-L	○	●	174-200	101
	* S-SPUB-63-M	●	●	200 and Up	NONE
	S-SPUB-63-P	○	○		152
	S-SPUB-63-S	○	●		9,5

MT-CVD Coated Carbide

\*Note: This insert has 11° positive clearance all around.

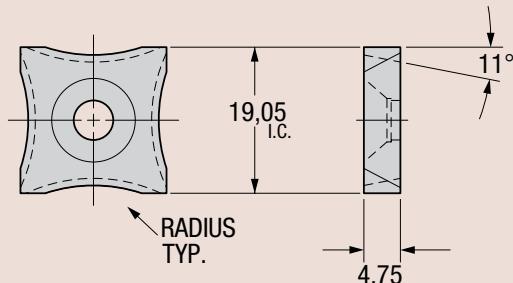


## S-SPUB-86

Additional thickness and flank clearance for heavy-wall pipe and pipe diameters over 127mm available.

Shape: Scarfing	Product Number	GA5023	GA5025	Tube Size - mm	Dimensions (millimeters)
					Radius
	S-SPUB-86-B	○	○	Up to 22	12
	S-SPUB-86-C	○	○	22-28	15
	S-SPUB-86-D	○	○	28-38	20
	S-SPUB-86-E	○	●	38-47	25
	S-SPUB-86-F	○	●	47-57	30
	S-SPUB-86-G	○	●	57-79	40
	S-SPUB-86-H	○	●	79-98	50
	S-SPUB-86-I	○	●	98-123	63
	S-SPUB-86-J	○	●	123-149	75
	S-SPUB-86-K	○	●	149-174	88
	S-SPUB-86-L	○	●	174-200	101
	* S-SPUB-86-M	○	●	200 and Up	NONE
	S-SPUB-86-N	○	○		127
	S-SPUB-86-S	○	○		241
	S-SPUB-86-P	○	●		158

MT-CVD Coated Carbide

\*Note: This insert has 13° positive clearance all around.

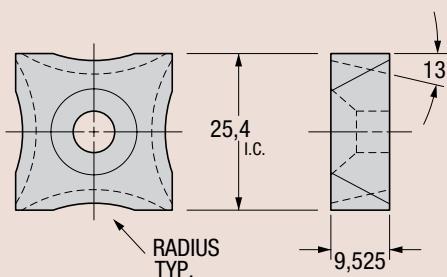

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

Stocked Standard  
 Stocked or Available Upon Request



## S-SGUB-63


Additional flank clearance for coated tube operations.

Shape: Scarfing	Product Number	GA5025	Tube Size - mm	Dimensions (millimeters)
				Radius
	S-SGUB-63-B	●	Up to 22	12
	S-SGUB-63-C	●	22-28	15
	S-SGUB-63-D	●	28-38	20
	S-SGUB-63-E	●	38-47	25
	S-SGUB-63-F	●	47-57	30
	S-SGUB-63-G	●	57-79	40
	S-SGUB-63-H	●	79-98	50
	S-SGUB-63-I	○	98-123	63
	S-SGUB-63-J	○	123-149	75
	S-SGUB-63-K	○	149-174	88
	S-SGUB-63-L	○	174-200	101
	* S-SGUB-63-M	●	200 and Up	NONE
	S-SGUB-63-R	○	44	22
	S-SGUB-63-S	○		9,5
	S-SGUB-63-P	○		152



MT-CVD Coated Carbide

\*Note: This insert has 30° positive clearance all around.

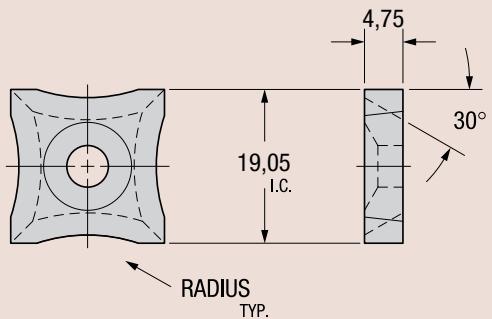


## S-SNUN-46

Ceramic-Style Insert

Shape: Scarfing	Product Number	GEM-19	Tube Size	Dimensions (millimeters)
				Radius
	S-SNUN-46-B	○	Up to 22	12
	S-SNUN-46-C	○	22-28	15
	S-SNUN-46-D	○	28-38	20
	S-SNUN-46-E	○	38-47	25
	S-SNUN-46-F	○	47-57	30
	S-SNUN-46-G	○	57-79	40
	S-SNUN-46-H	○	79-98	50



Al<sub>2</sub>O<sub>3</sub>

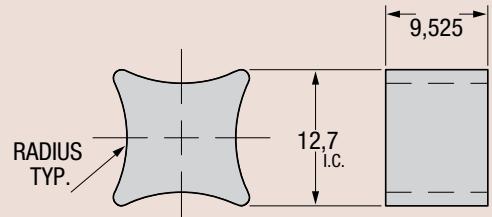

Stocked  
or Available  
Upon Request



Stocked Standard

**Greenleaf Sales**  
 US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




## ID Scarfing Insert

*Other sizes available upon request.*

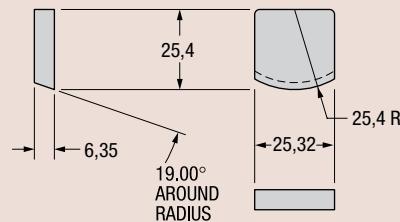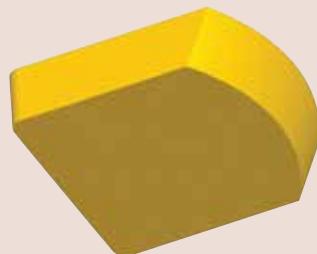




## M-SSCPS

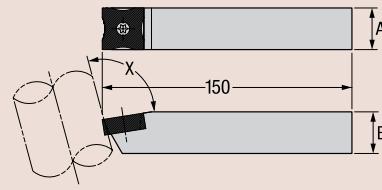

Product Number	Gage Insert	Stock	Angle X	Dimensions (mm's)		Standard Component 	Tune-Up Kit Includes All Standard Components
				A	B		
M-SSCPS-2090	S-SPUB-63	●	90°	20	20	TORX SCREW #10-32 x 1/2 TFHCS	TK-00576
M-SSCPS-2095	S-SPUB-63	○	95°	20	20	TORX SCREW #10-32 x 1/2 TFHCS	TK-00576
M-SSCPS-20100	S-SPUB-63	●	100°	20	20	TORX SCREW #10-32 x 1/2 TFHCS	TK-00576
M-SSCPS-20105	S-SPUB-63	●	105°	20	20	TORX SCREW #10-32 x 1/2 TFHCS	TK-00576
M-SSCPS-2590	S-SPUB-86	○	90°	25	25	TORX SCREW 1/4-20 x 3/4 TFHCS	TK-00760
M-SSCPS-2595	S-SPUB-86	○	95°	25	25	TORX SCREW 1/4-20 x 3/4 TFHCS	TK-00760
M-SSCPS-25100	S-SPUB-86	○	100°	25	25	TORX SCREW 1/4-20 x 3/4 TFHCS	TK-00760
M-SSCPS-25105	S-SPUB-86	●	105°	25	25	TORX SCREW 1/4-20 x 3/4 TFHCS	TK-00760

## M-WSCNN Ceramic Insert Holder

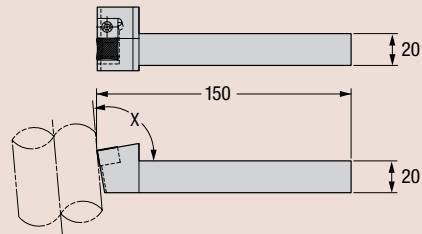


Product Number	Gage Insert	Stock	Angle X	Standard Components		Tune-Up Kit Includes All Std. Components
				Wedge	Wedge Screw	
M-WSCNN-2090	S-SNUN-46	○	90°	313393	STCM-11	TK-02624
M-WSCNN-2095	S-SNUN-46	○	95°	313393	STCM-11	TK-02624
M-WSCNN-20100	S-SNUN-46	○	100°	313393	STCM-11	TK-02624
M-WSCNN-20105	S-SNUN-46	○	105°	313393	STCM-11	TK-02624

Stocked or Available Upon Request  Stocked Standard



**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

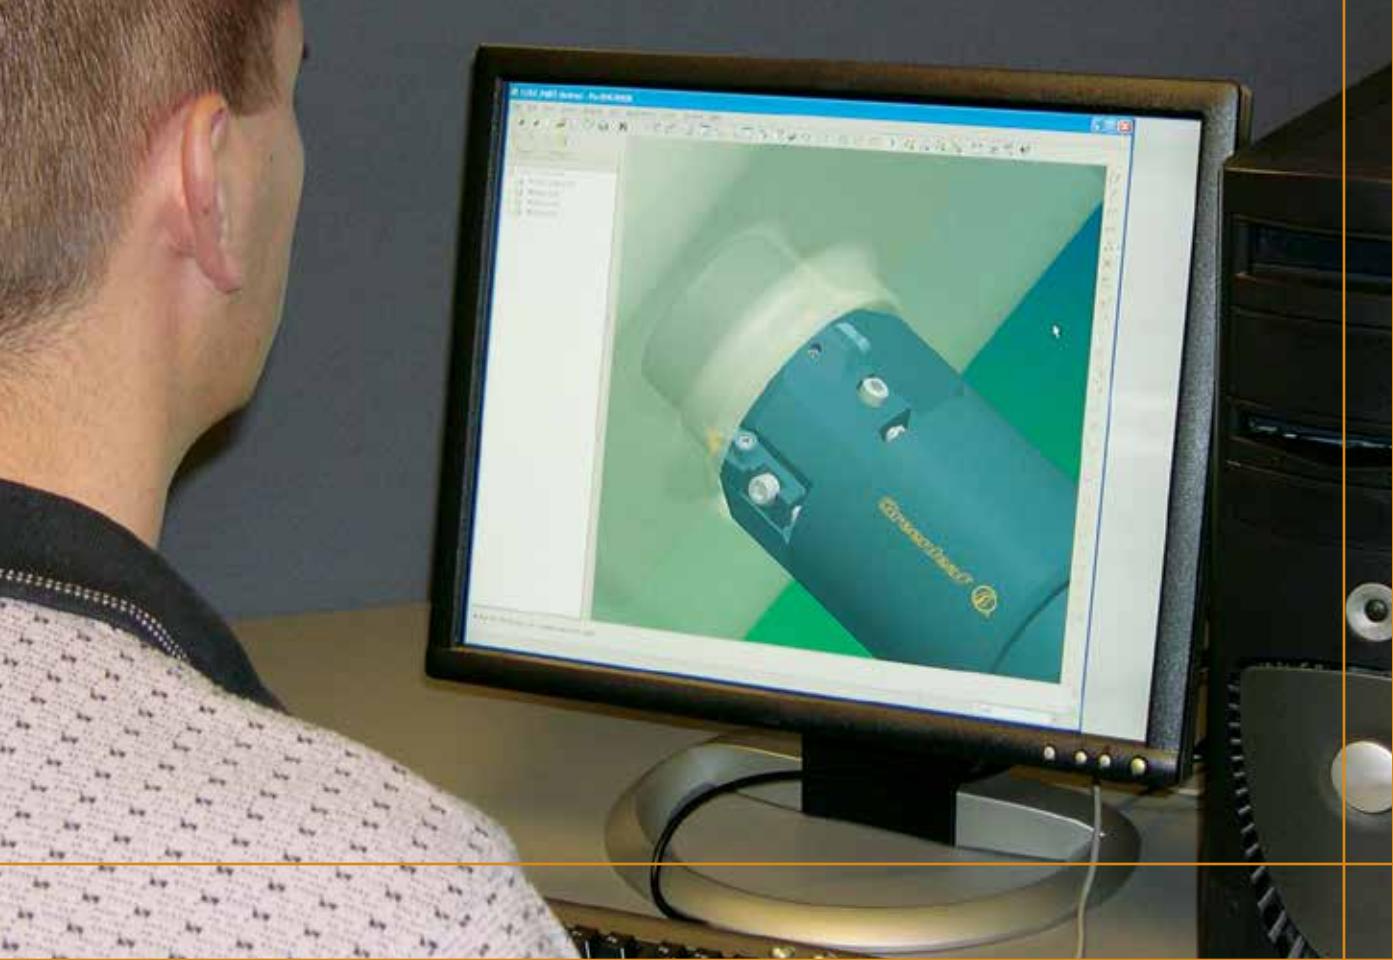

*Aerospace Tools  
Milling Cutters  
Special Inserts  
Special Designs/Layouts*

*Special Tool Design Information Checklist*



## Special Engineering


Greenleaf Corporation is a leading supplier of cutting-tool technology, specializing in the manufacture of high-performance tungsten carbide and ceramic inserts, as well as inventive tool-holding systems. Greenleaf continues to build on 60 years of innovation which centers on supplying customers with productive solutions to their metalcutting needs.

Today, Greenleaf Corporation is positioned to serve the evolving needs of companies in all major segments of the metalcutting industry including gas turbine, steel, medical, roll turning, automotive, machine tools and rail. Greenleaf's products are engineered to provide optimal performance against a wide range of materials under the most rigorous metalcutting conditions.

Special engineered or custom engineered products is a visible strength of the Greenleaf product line. Customers from around the world utilize the Greenleaf engineering services to address their specific, and often complex, requirements. For example, a cantilevered heavy metal head (*pictured at right*) was held to  $\pm 0,012$  inch tolerance for a VTL in the aerospace industry. Ask us to determine if we can assist you in your cutting tool special requirements.

In addition to specially engineered tooling systems and a comprehensive line of carbide inserts, Greenleaf offers high-quality ceramic and ceramic-composite materials which can be custom designed for specific machining applications.

From its headquarters in Saegertown, Pennsylvania, and a facility in North Carolina, Greenleaf maintains its commitment to pioneering breakthroughs in cutting-tool technology and to delivering ***Excellence*** solutions for customers around the world.

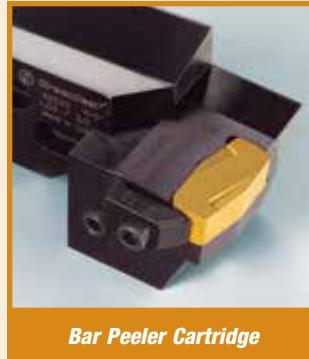

**Bar Peeler Cartridge**



**KM and Capto Shank**



**Heavy Metal Head**



**Keyslot**



**Quick Change Roll Tool**



**Race Track Groovers**



**Roll Turning**

### Greenleaf Sales

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
 EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
 CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


*Dovetail Cutter*

*Heligroove Group*

*Hogmill*

*Hook Groove Holder*

*Long Shaft End Mill*

*Plungeface Cutter*

*Pod Bore Head*

*Special Form Insert*

*Roll Lathe Tool*

*V-Bottom*

*Aero Grooving Tools*

*Roll Turning Tool*

*Heavy Turning*

*Tri-Thread Groover*

*Powerlock® Grooving Inserts*
**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## Special Tool Design Information Checklist



**FOR FAST QUOTE**, complete form and send  
via **EMAIL**  
[engineering@greenleafcorporation.com](mailto:engineering@greenleafcorporation.com)  
via **FAX**  
814-763-4040

### Operation Information

Specify Operation:  Milling  Turning  Boring  Other: \_\_\_\_\_  
Hand of Tool:  Right Hand  Left Hand  Neutral

Specify size and style of mounting bore or shank: \_\_\_\_\_

### Machine Information

Type of Machine: \_\_\_\_\_ Horsepower or KW: \_\_\_\_\_  
Condition:  New  Good  Fair  Poor

### Part Information:

Part Name: \_\_\_\_\_ Part End Use: \_\_\_\_\_

Part Material: \_\_\_\_\_ Hardness: \_\_\_\_\_ Condition: \_\_\_\_\_

Furnish part drawing. *(Note areas to be machined and specify centerline of tool along with direction of feed and rotation.)*

Furnish IGES or DXF file of part drawing if a tool layout is being requested.

Furnish process sheets if available.

Furnish digital photos of art or machine mounting if possible.

Quote quantities: Tooling: \_\_\_\_\_ Inserts: \_\_\_\_\_

*If parts are currently being machined, please complete this section:*

Furnish drawings, sketch or sample of existing tools.

Describe problems with existing tools: \_\_\_\_\_

Specify preferred insert style, grade, and edge prep: \_\_\_\_\_

Additional comments: \_\_\_\_\_

---

Company \_\_\_\_\_

Customer Number \_\_\_\_\_

Attention \_\_\_\_\_

Customer Inquiry Number \_\_\_\_\_

Street \_\_\_\_\_

Ship to City \_\_\_\_\_ Country \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

Send Copy to \_\_\_\_\_

Phone \_\_\_\_\_ FAX \_\_\_\_\_

Email \_\_\_\_\_ Sales Rep \_\_\_\_\_

Date Received \_\_\_\_\_

Quote  
Due Date




**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

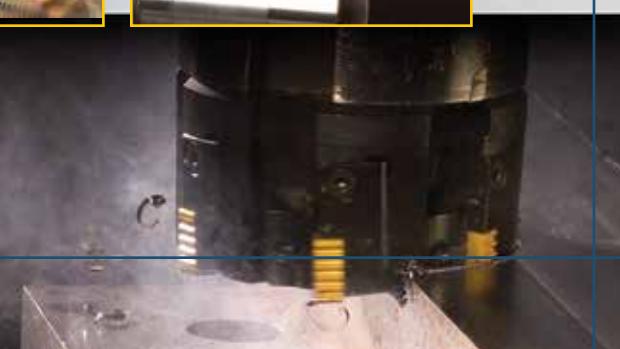

### ***Carbide***

<i>Grade Descriptions .....</i>	<b>ATI 02-03</b>
<i>Feed and Speed Data .....</i>	<b>ATI 04-09</b>
<i>Chipform Application Range .....</i>	<b>ATI 10</b>
<i>Insert Grade Reference .....</i>	<b>ATI 12-13</b>

### ***Ceramic***

<i>Grade Descriptions .....</i>	<b>ATI 14</b>
<i>Feed and Speed Data .....</i>	<b>ATI 16-18</b>
<i>Edge Preparation.....</i>	<b>ATI 19</b>
<i>and Application Guide</i>	
<i>Insert Grade Reference .....</i>	<b>ATI 20-21</b>

***Formulas for Turning and Facing .....*** **ATI 22**

***Optional Clamps .....*** **ATI 23**

***Ceramic Productivity Manual .....*** **ATI 25-74**

## CARBIDE

**Greenleaf offers a comprehensive line of carbide inserts in grades ranging from sub-micron C-1 through C-8 classifications. An industry pioneer in coated carbide, Greenleaf offers a variety of uncoated, MT-CVD coated and PVD-coated grades. Carbide inserts are available in ANSI standard geometries with multi-purpose chip-breakers for heavy roughing through finishing.**

### COATED – MT-CVD

**GA5023** A high-speed performance grade for turning and milling cast iron. GA5023 features an advanced MT-CVD coating specifically developed for abrasive wear resistance. Application ranges from roughing to finishing on most cast iron materials including gray iron, ductile, nodular and other alloyed irons. The high wear and shock resistance of GA5023 allows machining at high speeds and a variety of feeds.

**GA5025** A high-speed MT-CVD coated grade for turning, light roughing and finishing of carbon and alloy steels, as well as selected stainless steels.

**GA5026** A high-speed grade developed for turning nickel- and cobalt-based super-alloys, stainless steels, and refractory metals. The advanced MT-CVD coating over a micro-grain substrate offers high wear resistance. GA5026 has exceptional resistance to the notching and deformation common to machining high strength materials. Apply at high speeds and light feeds in turning and selected milling applications.

**GA5035** A high-performance MT-CVD coated grade for turning all types of steels, and selected stainless steels. GA5035 can be used in rough, semi-finish, and finish turning situations requiring resistance to heat deformation, thermal shock, and abrasion. GA5035 should be applied at high speeds and a range of feeds.

**GA5036** A high-performance MT-CVD coated grade for milling steels at high speed. GA5036 should be used when milling forged and cast steels and selected ductile irons. GA5036 has a unique combination of toughness and heat resistance making it suitable for heavy and light duty milling at high cutting speeds.

**GA5125** New high-performance MT-CVD coated carbide milling grade especially suited for manganese steel. GA5125 is also applicable on chrome-moly steel, tool steel and similar high alloy steels. GA5125 provides excellent resistance to abrasion, crater wear, thermal shock, deformation and edge build-up. GA5125 should be applied at high speeds with moderate feed rates.

### COATED – PVD

**G-910** PVD-coated grade for milling high-temp alloys, stainless steel, and low carbon steels. G-910 is a medium-speed grade and should be applied at moderate to high feed rates.

**G-9120** PVD-coated grade for milling and turning steel castings and steel forgings. G-9120 is engineered to maximize productivity at moderate to heavy feed rates and depths of cut.

**G-915** Multi-layer PVD-coated grade, excellent for cut off, milling and turning high-temp alloys, stainless steel, and low carbon steels. The multi-layer PVD coating adds heat and abrasion resistance to the tough, shock-resistant substrate. G-915 should be run at moderate speeds and moderate to high feeds in milling and interrupted turning applications.

**G-920** PVD-coated grade for turning and milling high-strength materials such as high-temp alloys, titanium and stainless steel. G-920 is also an excellent grade for aluminum and refractory metals. This grade has the resistance to deformation and notching required for higher speeds than G-910.

**G-9230** PVD-coated grade developed for medium to heavy machining of nickel alloys, cobalt alloys, titanium alloys, stainless steels and alloyed irons. G-9230 has superior wear resistance and toughness and is excellent for cast and forged scale machining conditions.

**G-925** Multi-layer PVD-coated grade specifically designed for machining abrasive and difficult-to-machine materials. Typical applications include high-temp alloys, titanium and other refractory metals, stainless steel, and many cast irons. G-925 exhibits excellent resistance to notching and deformation. Apply at moderate to high speeds and moderate feeds.

**G-935** Multi-layer PVD-coated grade for steel milling and turning applications requiring additional resistance to mechanical and thermal shock. The multi-layered PVD coating increases the speed capability and wear resistance in tough milling and interrupted turning applications.

#### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

## **UNCOATED**

**G-01** Developed for milling high-temp alloys, stainless steel, and low-carbon steels at low speeds and moderate to high feeds. Also can be used for turning in the same application range on severe interruption or old machinery.

**G-01M** A tough, sub-micron grade used for milling and roughing austenitic stainless steels, and stainless steel castings – even when rolling or casting skin is present. The edge strength of G-01M allows the use of sharp edges, high positive rakes, and intermittent cuts.

**G-10** For roughing all cast irons under severe conditions, including broaching. The edge strength of G-10 makes it a good choice for roughing high-temp alloys with positive rakes and machining non-ferrous materials when toughness is of prime importance. Apply at moderate speeds and feeds.

**G-02** An excellent general-purpose cast iron grade. G-02 can be applied to milling and turning cast iron at moderately high speeds and medium feeds. G-02 is also a good choice for machining aluminum with positive rakes, and light roughing of some high-temp alloys and stainless steels.

**G-20M** A sub-micron C-2 carbide grade suited for use in turning and milling titanium and nickel-based super-alloys. G-20M has the strength and edge wear characteristics to resist notching when turning high-strength materials.

**G-23** A finishing grade for all cast irons and other short-chipping non-ferrous materials, such as brass and bronze. Apply at moderately high speeds and moderate feed rates.

**G-40** Finish turning of cast iron and other hard-wearing materials at high speeds and light feeds in good conditions.

**G-50** Heavy roughing grade for steel and steel castings under difficult conditions, and ferritic stainless steels in most applications. G-50 is tough enough to enable the use of positive rakes for turning.

**G-53** Excellent general-purpose milling grade for steel and steel alloys at moderate speeds and feeds. Good combination of toughness and wear resistance for milling, or as an all-around grade for mixed production applications. G-53 is not recommended for continuous turning.

**G-60** Heavy rough turning of steel, steel castings, and steel forgings. Apply G-60 at moderate speeds and heavy feed rates and depths of cut. More wear resistant than G-50, but lower in toughness.

**G-74** Roughing or finishing grade for steel and steel castings. G-74 has higher shock resistance than G-70, and should be applied at high speeds and moderate to heavy feeds. Well suited for turning of steel rolls.

## **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Uncoated Carbide Grade Machining Recommendations for Turning

Type of Material	Hardness		Maximum Surface Speed (M/Min)								
	R/C	BHN	G-60 G-53	G-70	G-50	G-10 G-02	G-23	G-20M	G-01M	G-40	G-74
<b>Non-Alloy Carbon Steel:</b>											
C < 0.25 %		110	187	202	119	N/A	N/A	N/A	N/A	N/A	202
C < 0.80 %	6	150	143	156	91	N/A	N/A	N/A	N/A	N/A	156
C < 1.40 %	33	310	114	124	73	N/A	N/A	N/A	N/A	N/A	124
<b>Low-Alloy Steels:</b>											
Annealed, Medium - High Carbon	12	180	119	130	75	N/A	N/A	N/A	N/A	N/A	130
Hardened	36	330	78	83	49	N/A	N/A	N/A	N/A	N/A	83
<b>High-Alloy Steels:</b>											
Annealed	16	200	73	78	47	N/A	N/A	N/A	N/A	N/A	78
Hardened	41	380	52	57	34	N/A	N/A	N/A	N/A	N/A	57
<b>High-Alloy Tool Steel:</b>											
Hardened	36	330	75	81	47	N/A	N/A	N/A	N/A	N/A	81
<b>Cast Steel:</b>											
Non-Alloy	6	150	143	156	91	N/A	N/A	N/A	N/A	N/A	156
Low-Alloy	16	200	114	124	73	N/A	N/A	N/A	N/A	N/A	124
High-Alloy	16	200	101	109	65	N/A	N/A	N/A	N/A	N/A	109
<b>Stainless Steels:</b>											
Ferritic, 400 Series	16	200	114	124	73	N/A	N/A	N/A	N/A	N/A	124
Austenitic, 300 Series	16	200	N/A	N/A	N/A	81	104	91	N/A	N/A	N/A
<b>Gray, Perlitic Cast Irons:</b>											
Low Tensile	12	180	N/A	N/A	N/A	117	156	130	92	214	N/A
High Tensile	26	260	N/A	N/A	N/A	52	65	60	46	107	N/A
<b>Nodular / Malleable Irons:</b>											
Short Chipping	6	150	176	192	114	N/A	N/A	N/A	N/A	N/A	192
Long Chipping	21	230	104	114	65	N/A	N/A	N/A	N/A	N/A	114
<b>Aluminum Alloys:</b>			N/A	N/A	N/A	363	467	389	305	580	N/A
<b>Brass, Copper, Bronze:</b>			N/A	N/A	N/A	130	156	143	107	214	N/A
<b>Hardened Steels (&gt; 50 Rc):</b>			N/A	N/A	N/A	N/A	N/A	N/A	N/A	15	13
<b>Chilled, Hardened Irons (&gt; 50 Rc):</b>			N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Titanium, Refractory Metals:</b>			N/A	N/A	N/A	26	39	34	21	N/A	N/A
<b>Nickel &amp; Iron Based Superalloys:</b>											
Inconels			N/A	N/A	N/A	21	N/A	26	18	N/A	N/A
Hastelloys			N/A	N/A	N/A	31	N/A	36	27	N/A	N/A
Waspalloys			N/A	N/A	N/A	21	N/A	26	18	N/A	N/A
Renes			N/A	N/A	N/A	16	N/A	21	12	N/A	N/A
Monels			N/A	N/A	N/A	16	N/A	21	12	N/A	N/A
<b>Cobalt Based Superalloys:</b>											
Stellites			N/A	N/A	N/A	13	N/A	16	12	N/A	N/A
Haynes Alloys			N/A	N/A	N/A	13	N/A	16	12	N/A	N/A

Finishing: 0,08 to 0,38 mm/rev

General Purpose: 0,20 to 0,51 mm/rev

Medium Roughing: 0,38 to 0,76 mm/rev

Heavy Roughing: > 0,76 mm/rev

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com

EU +31-45-404-1774 • eurooffice@greenleafcorporation.com

CN +86-731-89954796 • info@greenleafcorporation.com.cn

www.greenleafglobalsupport.com • www.greenleafcorporation.com

# Uncoated Carbide Grade Machining Recommendations for Milling

Type of Material	Hardness		Maximum Surface Speeds (M/Min)									
	R/C	BHN	G-60 G-53	G-70	G-50	G-10 G-02	G-23	G-20M	G-01M	G-40	G-74	
<b>Non-Alloy Carbon Steel:</b>												
C < 0.25 %		110	220	238	140	N/A	N/A	N/A	N/A	N/A	N/A	N/A
C < 0.80 %	6	150	168	183	107	N/A	N/A	N/A	N/A	N/A	N/A	N/A
C < 1.40 %	33	310	134	146	85	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Low-Alloy Steels:</b>												
Annealed, Medium - High Carbon	12	180	140	153	88	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Hardened	36	330	92	98	58	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>High-Alloy Steels:</b>												
Annealed	16	200	85	92	55	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Hardened	41	380	61	67	40	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>High-Alloy Tool Steel:</b>												
Hardened	36	330	88	95	55	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Cast Steel:</b>												
Non-Alloy	6	150	168	183	107	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Low-Alloy	16	200	134	146	85	N/A	N/A	N/A	N/A	N/A	N/A	N/A
High-Alloy	16	200	119	128	76	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Stainless Steels:</b>												
Ferritic, 400 Series	16	200	134	146	85	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Austenitic, 300 Series	16	200	N/A	N/A	N/A	95	122	107	N/A	N/A	N/A	N/A
<b>Gray, Perlitic Cast Irons:</b>												
Low Tensile	12	180	N/A	N/A	N/A	137	183	153	N/A	N/A	N/A	N/A
High Tensile	26	260	N/A	N/A	N/A	61	76	70	N/A	N/A	N/A	N/A
<b>Nodular / Malleable Irons:</b>												
Short Chipping	6	150	207	226	134	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Long Chipping	21	230	122	134	76	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Aluminum Alloys:</b>			N/A	N/A	N/A	427	549	458	N/A	N/A	N/A	N/A
<b>Brass, Copper, Bronze:</b>			N/A	N/A	N/A	153	183	168	N/A	N/A	N/A	N/A
<b>Hardened Steels (&gt; 50 Rc):</b>			N/A	15	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Chilled, Hardened Irons (&gt; 50 Rc):</b>			N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Titanium, Refractory Metals:</b>			N/A	N/A	N/A	31	46	40	N/A	N/A	N/A	N/A
<b>Nickel &amp; Iron Based Superalloys:</b>												
Inconels			N/A	N/A	N/A	24	N/A	31	N/A	N/A	N/A	N/A
Hastelloys			N/A	N/A	N/A	37	N/A	43	N/A	N/A	N/A	N/A
Waspalloys			N/A	N/A	N/A	24	N/A	31	N/A	N/A	N/A	N/A
Renes			N/A	N/A	N/A	18	N/A	24	N/A	N/A	N/A	N/A
Monels			N/A	N/A	N/A	18	N/A	24	N/A	N/A	N/A	N/A
<b>Cobalt Based Superalloys:</b>												
Stellites			N/A	N/A	N/A	15	N/A	18	N/A	N/A	N/A	N/A
Haynes Alloys			N/A	N/A	N/A	15	N/A	18	N/A	N/A	N/A	N/A

Feeds should be in the range of 0,08 to 0,30 mm/tooth.

Higher speeds require lower feeds, whereas, low speeds use higher feed rates.

A good general starting point for feed rate in milling is 0,10 mm/tooth.

# MT-CVD Coated Carbide Grade Machining Recommendations for Turning

Type of Material	Hardness		Maximum Surface Speeds (M/Min)		
	R/C	BHN	GA5025 GA5035	GA5026	GA5023
<b>Non-Alloy Carbon Steel</b>					
<i>C &lt; 0.25 %</i>		110	337	N/A	N/A
<i>C &lt; 0.80 %</i>	6	150	259	N/A	N/A
<i>C &lt; 1.40 %</i>	33	310	207	N/A	N/A
<b>Low-Alloy Steels</b>					
<i>Annealed, Medium - High Carbon</i>	12	180	218	N/A	N/A
<i>Hardened</i>	36	330	140	N/A	N/A
<b>High-Alloy Steels</b>					
<i>Annealed</i>	16	200	130	N/A	N/A
<i>Hardened</i>	41	380	93	N/A	N/A
<b>High-Alloy Tool Steel</b>					
<i>Hardened</i>	36	330	135	N/A	N/A
<b>Cast Steel</b>					
<i>Non-Alloy</i>	6	150	259	N/A	N/A
<i>Low-Alloy</i>	16	200	207	N/A	N/A
<i>High-Alloy</i>	16	200	181	N/A	N/A
<b>Stainless Steels</b>					
<i>Ferritic, 400 Series</i>	16	200	N/A	N/A	195
<i>Ferritic, 400 Series</i>	32	310	183	N/A	N/A
<i>Austenitic, 300 Series</i>	16	200	N/A	N/A	130
<b>Gray, Perlitic Cast Irons</b>					
<i>Low Tensile</i>	12	180	N/A	183	246
<i>High Tensile</i>	26	260	N/A	107	88
<b>Nodular / Malleable Irons</b>					
<i>Short Chipping</i>	6	150	N/A	N/A	355
<i>Long Chipping</i>	21	230	N/A	N/A	213
<b>Aluminum Alloys</b>			N/A	610	N/A
<b>Brass, Copper, Bronze</b>			N/A	214	N/A
<b>Hardened Steels (&gt; 50 Rc)</b>			N/A	N/A	N/A
<b>Chilled, Hardened Irons (&gt; 50 Rc)</b>			N/A	N/A	N/A
<b>Titanium, Refractory Metals</b>			N/A	61	N/A
<b>Nickel &amp; Iron Based Superalloys</b>					
<i>Inconels</i>			N/A	79	N/A
<i>Hastelloys</i>			N/A	104	N/A
<i>Wasalloys</i>			N/A	79	N/A
<i>Renes</i>			N/A	67	N/A
<i>Monels</i>			N/A	67	N/A
<b>Cobalt Based Superalloys</b>					
<i>Stellites</i>			N/A	55	N/A
<i>Haynes Alloys</i>			N/A	55	N/A

Finishing: 0,08 to 0,38 mm/rev

General Purpose: 0,20 to 0,51 mm/rev

Medium Roughing: 0,38 to 0,76 mm/rev

Heavy Roughing: > 0,76 mm/rev

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com

EU +31-45-404-1774 • eurooffice@greenleafcorporation.com

CN +86-731-89954796 • info@greenleafcorporation.com.cn

www.greenleafglobalsupport.com • www.greenleafcorporation.com

# MT-CVD Coated Carbide Grade Machining Recommendations for Milling

Type of Material	Hardness		Maximum Surface Speeds (M/Min)			
	R/C	BHN	GA5036	GA5026	GA5023	GA5125
<b>Non-Alloy Carbon Steel:</b>						
C < 0.25 %		110	320	N/A	N/A	N/A
C < 0.80 %	6	150	259	N/A	N/A	N/A
C < 1.40 %	33	310	214	N/A	N/A	N/A
<b>Low-Alloy Steels:</b>						
Medium - High Carbon, Annealed	12	180	214	N/A	N/A	N/A
Hardened	36	330	171	N/A	N/A	N/A
<b>High-Alloy Steels:</b>						
Annealed	16	200	153	N/A	N/A	N/A
Hardened	41	380	122	N/A	N/A	N/A
Manganese Steel	20	230	N/A	N/A	N/A	153
<b>High-Alloy Tool Steel:</b>						
Hardened	36	330	137	N/A	N/A	N/A
<b>Cast Steel:</b>						
Non-Alloy	6	150	223	N/A	N/A	N/A
Low-Alloy	16	200	174	N/A	N/A	N/A
High-Alloy	16	200	153	N/A	N/A	N/A
<b>Stainless Steels:</b>						
Ferritic, 400 Series	16	200	N/A	N/A	232	N/A
Ferritic, 400 Series	32	310	153	N/A	201	N/A
Austenitic, 300 Series	16	200	N/A	137	153	N/A
<b>Gray, Perlitic Cast Irons:</b>						
Low Tensile	12	180	N/A	183	290	N/A
High Tensile	26	260	N/A	107	104	N/A
<b>Nodular / Malleable Irons:</b>						
Short Chipping	6	150	N/A	N/A	418	N/A
Long Chipping	21	230	N/A	N/A	250	N/A
<b>Aluminum Alloys:</b>			N/A	549	N/A	N/A
<b>Brass, Copper, Bronze:</b>			N/A	214	N/A	N/A
<b>Hardened Steels (&gt; 50 Rc):</b>			N/A	N/A	N/A	N/A
<b>Chilled, Hardened Irons (&gt; 50 Rc):</b>			N/A	N/A	N/A	N/A
<b>Titanium, Refractory Metals:</b>			N/A	61	N/A	N/A
<b>Nickel &amp; Iron Based Superalloys:</b>						
Inconels			N/A	40	N/A	N/A
Hastelloys			N/A	52	N/A	N/A
Waspalloys			N/A	40	N/A	N/A
Renes			N/A	34	N/A	N/A
Monels			N/A	34	N/A	N/A
<b>Cobalt Based Superalloys:</b>						
Stellites			N/A	27	N/A	N/A
Haynes Alloys			N/A	27	N/A	N/A

Feeds should be in the range of 0,08 to 0,30 mm/tooth.

Higher speeds require lower feeds, whereas, low speeds use higher feed rates.

A good general starting point for feed rate in milling is 0,10 mm/tooth.

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# PVD-Coated Carbide Grade Machining Recommendations for Milling and Turning

Type of Material	Hardness		Maximum Surface Speeds (M/Min)				
	R/C	BHN	G-9120 G-935	G-9230 G-925	G-920	G-910	G-915
<b>Non-Alloy Carbon Steel:</b>							
C < 0.25 %		110	458	N/A	N/A	198	250
C < 0.80 %	6	150	366	N/A	N/A	153	192
C < 1.40 %	33	310	305	N/A	N/A	122	153
<b>Low-Alloy Steels:</b>							
Medium - High Carbon, Annealed	12	180	275	N/A	N/A	130	162
Hardened	36	330	183	N/A	N/A	82	104
<b>High-Alloy Steels:</b>							
Annealed	16	200	183	N/A	N/A	78	98
Hardened	41	380	122	N/A	N/A	56	70
<b>High-Alloy Tool Steel:</b>							
Hardened	36	330	183	N/A	N/A	81	101
<b>Cast Steel:</b>							
Non-Alloy	6	150	366	N/A	N/A	153	192
Low-Alloy	16	200	305	N/A	N/A	122	153
High-Alloy	16	200	259	N/A	N/A	107	134
<b>Stainless Steels:</b>							
Ferritic, 400 Series	16	200	N/A	N/A	N/A	153	192
Ferritic, 400 Series	32	310	177	N/A	N/A	114	143
Austenitic, 300 Series	16	200	N/A	137	107	79	99
<b>Gray, Perlitic Cast Irons:</b>							
Low Tensile	12	180	336	183	153	N/A	N/A
High Tensile	26	260	122	107	76	N/A	N/A
<b>Nodular / Malleable Irons:</b>							
Short Chipping	6	150	458	N/A	N/A	N/A	N/A
Long Chipping	21	230	275	N/A	N/A	N/A	N/A
<b>Aluminum Alloys:</b>			259	549	458	N/A	N/A
<b>Brass, Copper, Bronze:</b>			198	214	168	N/A	N/A
<b>Hardened Steels (&gt; 50 Rc):</b>			N/A	N/A	N/A	N/A	N/A
<b>Chilled, Hardened Irons (&gt; 50 Rc):</b>			N/A	N/A	N/A	N/A	N/A
<b>Titanium, Refractory Metals:</b>			N/A	61	46	24	29
<b>Nickel &amp; Iron Based Superalloys:</b>							
Inconels			N/A	40	31	21	26
Hastelloys			N/A	52	43	31	37
Waspalloys			N/A	40	31	21	26
Renes			N/A	34	24	15	18
Monels			N/A	34	24	15	18
<b>Cobalt Based Superalloys:</b>							
Stellites			N/A	27	18	15	18
Haynes Alloys			N/A	27	18	15	18

**Milling**

Feeds should be in the range of 0,08 to 0,30 mm/tooth.

Higher speeds require lower feeds, whereas, low speeds use higher feed rates.

A good general starting point for feed rate in milling is 0,10 mm/tooth.

**Turning**

Finishing: 0,08 to 0,38 mm/rev

General Purpose: 0,20 to 0,51 mm/rev

Medium Roughing: 0,38 to 0,76 mm/rev

Heavy Roughing: > 0,76 mm/rev

**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com

EU +31-45-404-1774 • eurooffice@greenleafcorporation.com






CN +86-731-89954796 • info@greenleafcorporation.com.cn

www.greenleafglobalsupport.com • www.greenleafcorporation.com

# Suggested Cutting Speeds (M/Min) for TurboForm® (TF) Inserts

Alloy	AMS#	Uncoated G-20M	PVD G-920 G-925	MT-CVD GA5026
A-286	5732	32	40	66
Astroloy		29	37	60
Custom 455 Stainless	5617	34	43	70
Greek Ascloy	5616	61	76	126
Hastelloy B		44	55	91
Hastelloy C	5750	44	55	91
Hastelloy D		44	55	91
Hastelloy G		44	55	91
Hastelloy N	5771	44	55	91
Hastelloy S	5711	44	55	91
Hastelloy W	5755	32	40	66
Hastelloy X	5754	32	40	66
Haynes 188	5772	21	26	43
Haynes 25	5759	21	26	43
Haynes 263		21	26	43
IN-100	5397	15	18	30
Inconel 600	5665	34	43	70
Inconel 601	5715	34	43	70
Inconel 617		34	43	70
Inconel 625	5666	28	35	58
Inconel 702		28	35	58
Inconel 706	5702	28	35	58
Inconel 718	5662	24	31	50
Inconel 721		34	43	70
Inconel 722	5717	34	43	70
Inconel 751		28	35	58
Inconel X-750	5668	24	31	50
Incoloy 825		15	18	30
Incoloy 903		29	37	60
Incoloy 925		24	31	50
Monel 400		28	35	58
Monel 401		28	35	58
Monel 404		28	35	58
Monel 502		28	35	58
Monel K500		28	35	58
Monel R405		28	35	58
MP-35-N	5758	28	35	58
Nickel 200		28	35	58
Nickel 201		28	35	58
Nickel 205		28	35	58
Nickel 211		28	35	58
Nickel 220		28	35	58
Nimonic 75		28	35	58
Nimonic 80		28	35	58
Nimonic 90		28	35	58
Nimonic 95		28	35	58
Nimonic Alloy 901 Mod	5661	28	35	58

Alloy	AMS#	Uncoated G-20M	PVD G-920 G-925	MT-CVD GA5026
Nitralloy 230		29	37	60
Nitralloy N		29	37	60
Permanickel 300		29	37	60
Rene 41	5712	20	24	40
Rene 63		20	24	40
Rene 77		20	24	40
Rene 80		20	24	40
Rene 95		20	24	40
Stainless Steel 15-5PH	5659	28	35	58
Stainless Steel 17-4PH	5622	28	35	58
Udimet 500	5751	24	31	50
Udimet 630		21	26	43
Udimet 700		21	26	43
Udimet 710		21	26	43
Udimet M-252	5756	24	31	50
Waspaloy	5706	24	31	50

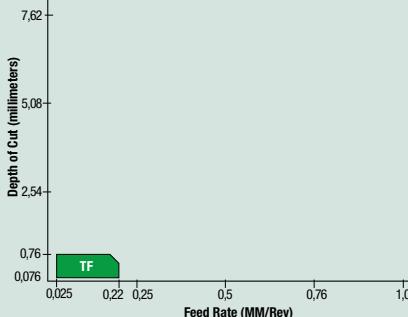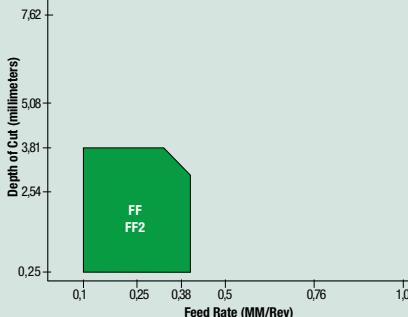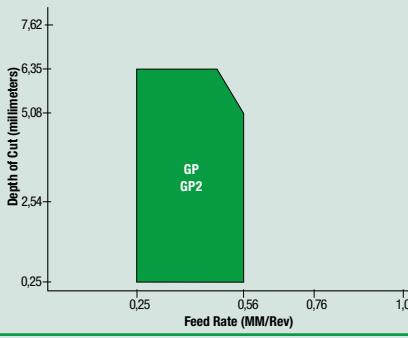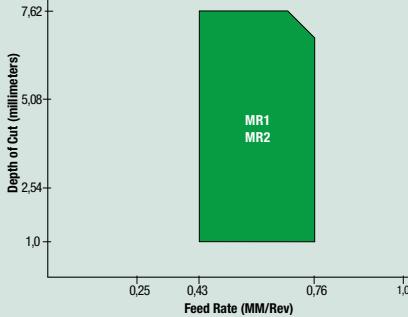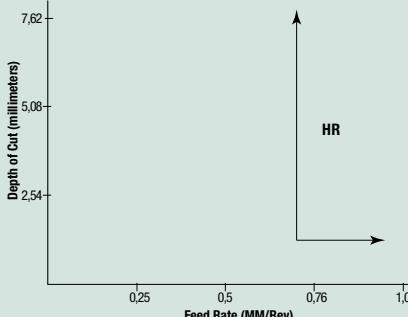PRECISION FINISHING	<b>TF</b>  <p>Precision ground chipbreaker for nickel alloys. Good for feeds up to 0,22/rev and depths to 0,76.</p>	
FINISHING	<b>FF and FF2</b>  <p>For finishing all types of material. Designed for feeds up to 0,47/rev and 3,81 depth of cut.</p>	
GENERAL PURPOSE	<b>GP and GP2</b>  <p>General purpose chipbreaker. Feed rates up to 0,56/rev and 6,35 depth of cut.</p>	
MEDIUM ROUGHING	<b>MR and MR2</b>  <p>Used for medium roughing of all material. Feeds up to 0,71/rev and depths up to 7,62.</p>	
HEAVY ROUGHING	<b>HR</b>  <p>Heavy roughing for all materials. Feeds above 0,58/rev. One-sided chipbreaker for heaviest feeds (MM).</p> <p>Example: CNMM-190612 HR</p>	


**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Insert Grade Reference for Turning, Grooving and Profiling

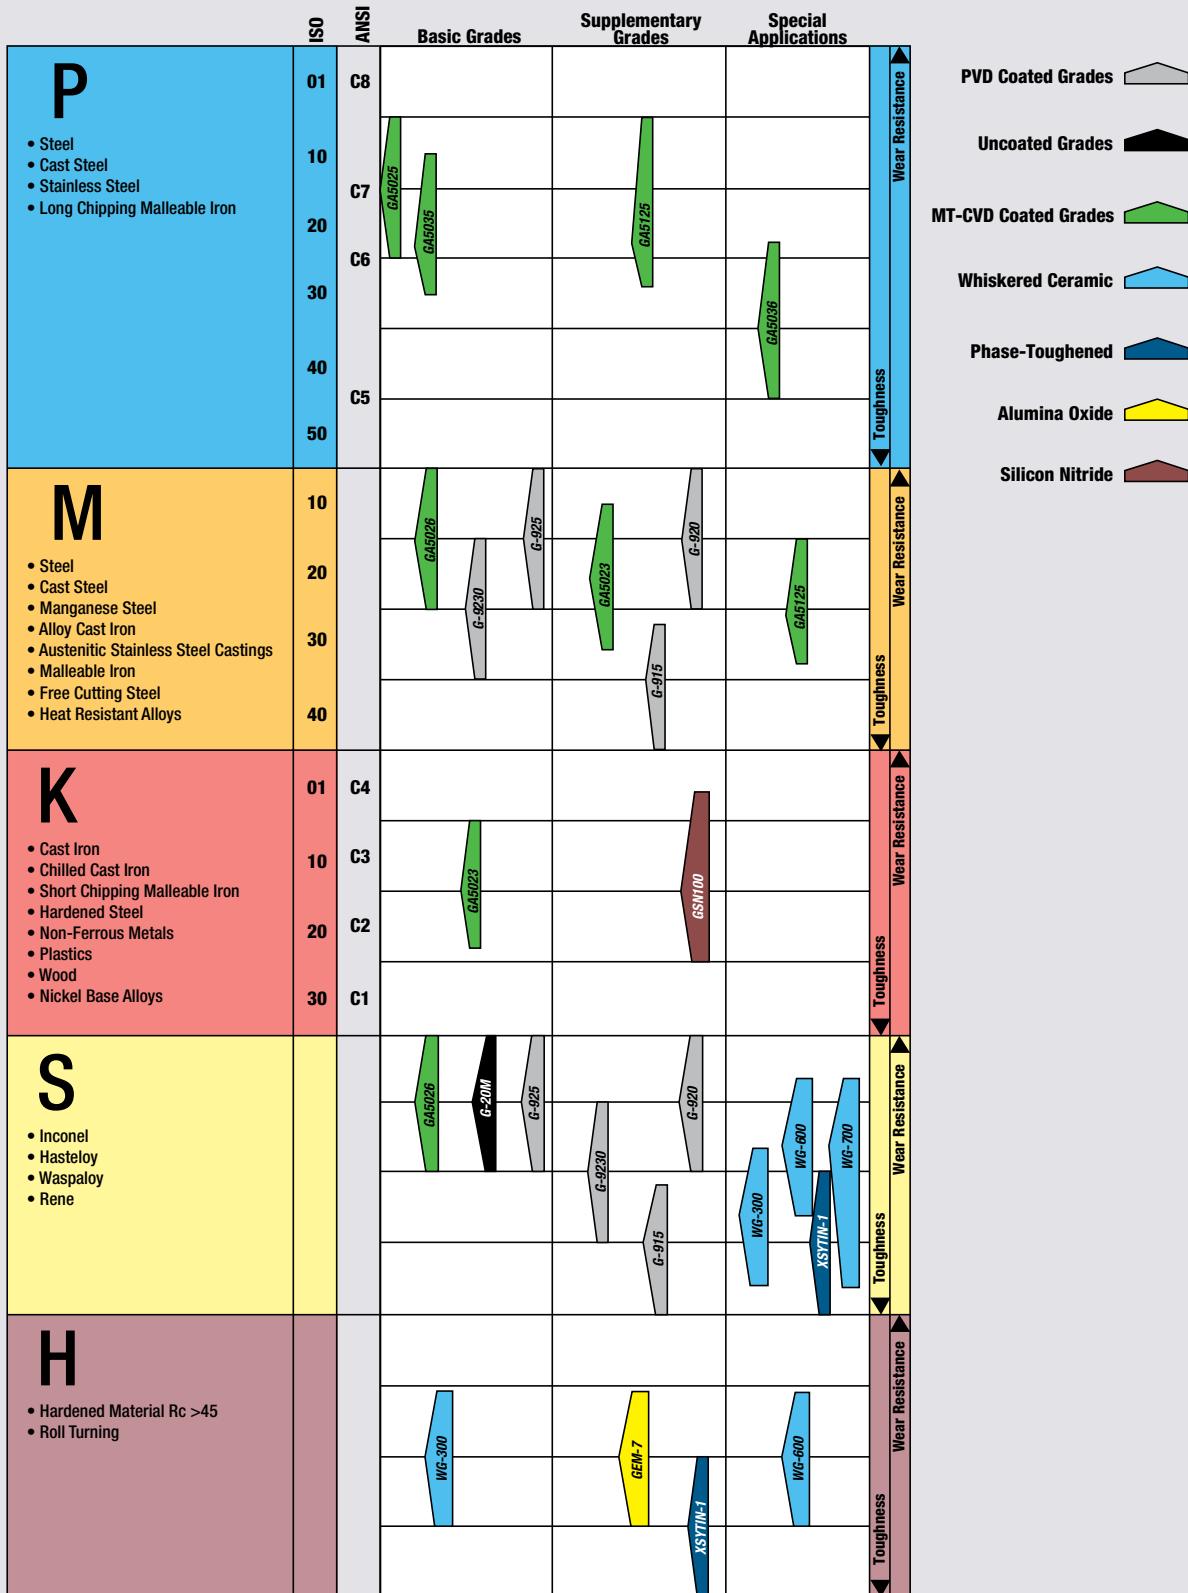

**Greenleaf Sales**

**US +814-763-2915 • sales@greenleafcorporation.com**


**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com

**CN** +86-731-89954796 • info@greenleafcorporation.com

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Insert Grade Reference for Milling

	ISO	ANSI	Basic Grades	Supplementary Grades	Special Applications	
<b>P</b>  • Steel • Cast Steel • Stainless Steel • Long Chipping Malleable Iron	01	C8				
	10					
	20	C7				
	30	C6	G-53	G-935		
	40	C5		GA5036	GA5125	
	50				G-915	G-910
<b>M</b>  • Steel • Cast Steel • Manganese Steel • Alloy Cast Iron • Austenitic Stainless Steel Castings • Malleable Iron • Free Cutting Steel • Heat Resistant Alloys	10					
	20		G-53			
	30			G-915		
	40			GA5036	GA5125	G-9230
<b>K</b>  • Cast Iron • Chilled Cast Iron • Short Chipping Malleable Iron • Hardened Steel • Non-Ferrous Metals • Plastics • Wood • Nickel Base Alloys	01	C4				
	10	C3	GA5023			
	20	C2		G-915		
	30	C1			G-910	SSNI100
<b>S</b>  • High Temperature Alloys • Inconel • Waspaloy • Hasteloy • Rene			G-925		XSYTN-1	WG-300
				G-915		WG-600
<b>H</b>  • Hardened Material (Rc >45)			WG-600		XSYTN-1	WG-300
						WG-600

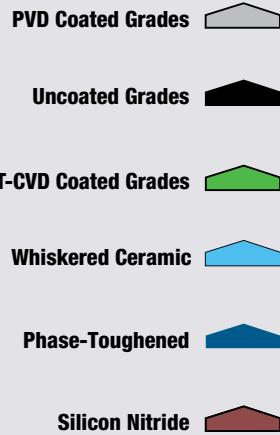



## CERAMIC

**Greenleaf is the industry leader in the development and manufacture of ceramic and coated ceramic inserts in ANSI standard and special geometries. Some of the most prominent include:**

**WG-300®** Whisker-reinforced ceramic with excellent wear and shock resistance at high surface speeds. WG-300 is very effective at machining nickel and cobalt based super-alloys, and other hard materials at metal removal rates up to 10 times higher than carbide.

**WG-600®** Coated whisker-reinforced ceramic offering longer tool life and better performance over uncoated ceramics due to outstanding thermal properties and shock-resistance at high cutting speeds. Application areas include rough and finish turning, as well as high-performance milling of high-strength alloys, hardened steels and select stainless steels.

*U.S. Patent No. 6,447,896 B1.*

**WG-700™** New whisker-reinforced Al<sub>2</sub>O<sub>3</sub> ceramic substrate featuring improved toughness and a unique high-speed coating. WG-700 is ideal for machining nickel- and cobalt-based super alloys and other difficult-to-machine materials. WG-700 exhibits high metal-removal rates with exceptional tool life. *U.S. Patent No. 6,447,896 B1.*

**XSYTIN™-1** New phase-thoughened ceramic capable of extreme feed rates. XSYTIN™-1 excels at machining a wide variety of materials including steels, cast and ductile irons, high-temperature alloys and other challenging metals. XSYTIN™-1 is ideal for use in interrupted cuts, scale, abrasive casting materials and milling.

**GSN100™** New engineered blend of silicon nitride and proprietary toughening agents that redefines productivity in the machining of cast iron. GSN100 delivers outstanding tool life at high cutting speeds in turning, grooving and milling applications.

**GEM-7™** Al<sub>2</sub>O<sub>3</sub> + TiC composite ceramic with a high degree of predictability in roll turning and hard alloy (up to 65 R/c) machining.

**GEM-19™** Cold pressed and sintered Al<sub>2</sub>O<sub>3</sub> ceramic for economical roughing and finishing of cast iron grades application range on severe interruption or old machinery.


### Greenleaf Sales

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


# Cutting Steel with GEM-7™ and GEM-19™

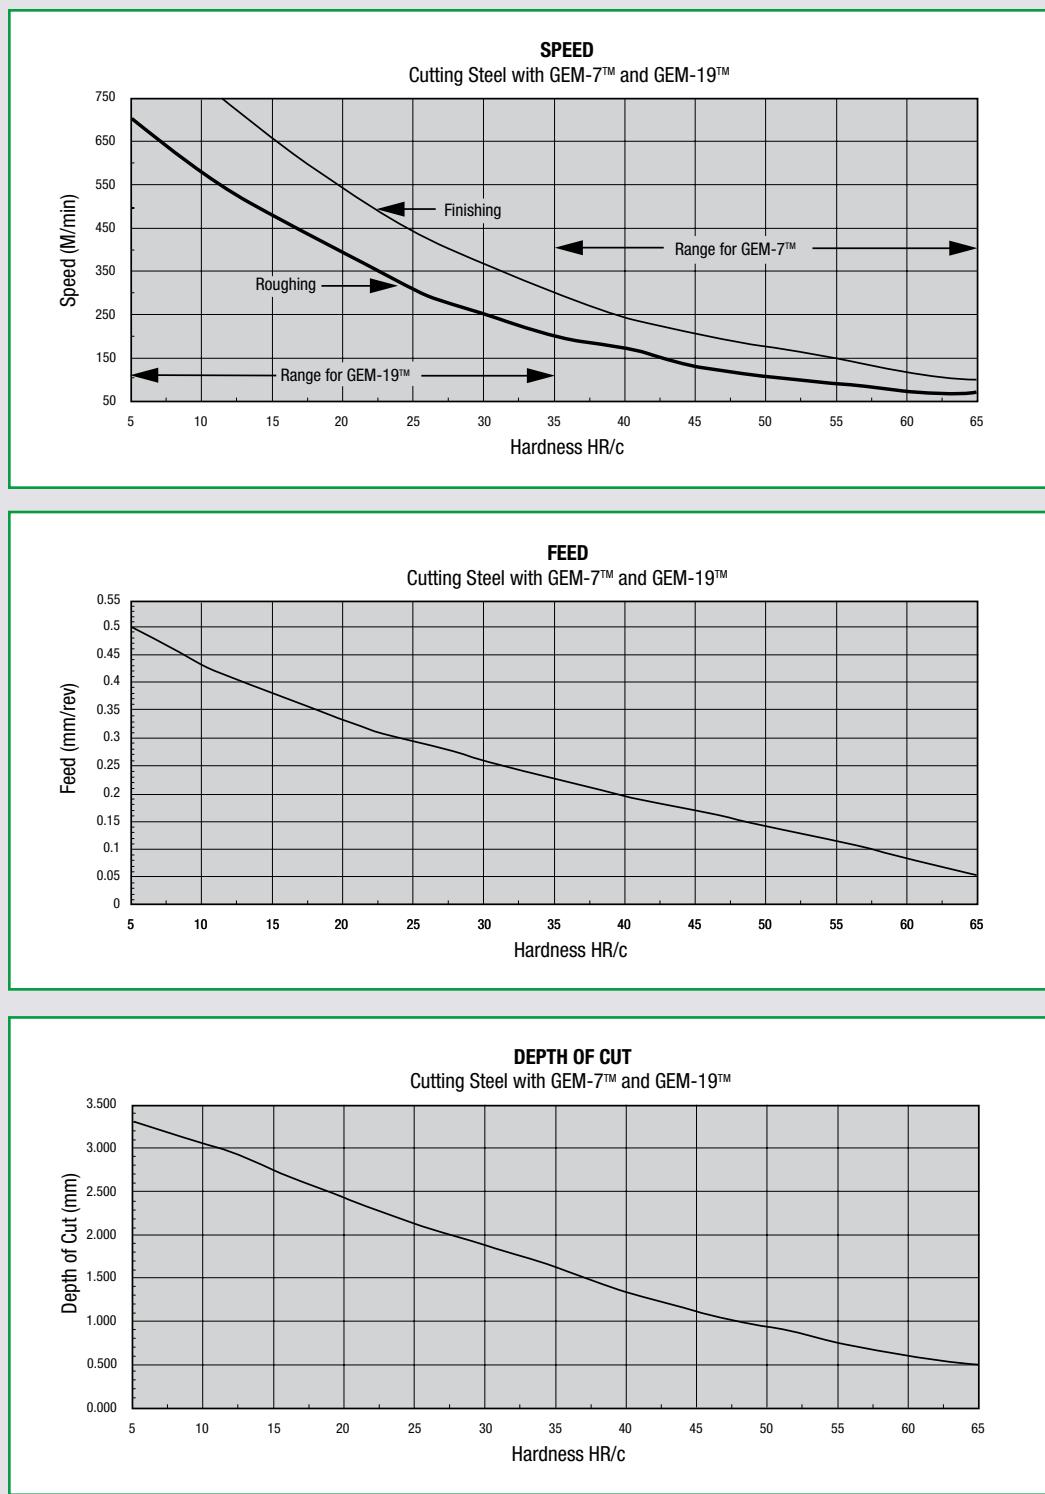

## Greenleaf Sales




US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Cutting Cast Iron with GEM-7™ and GEM-19™

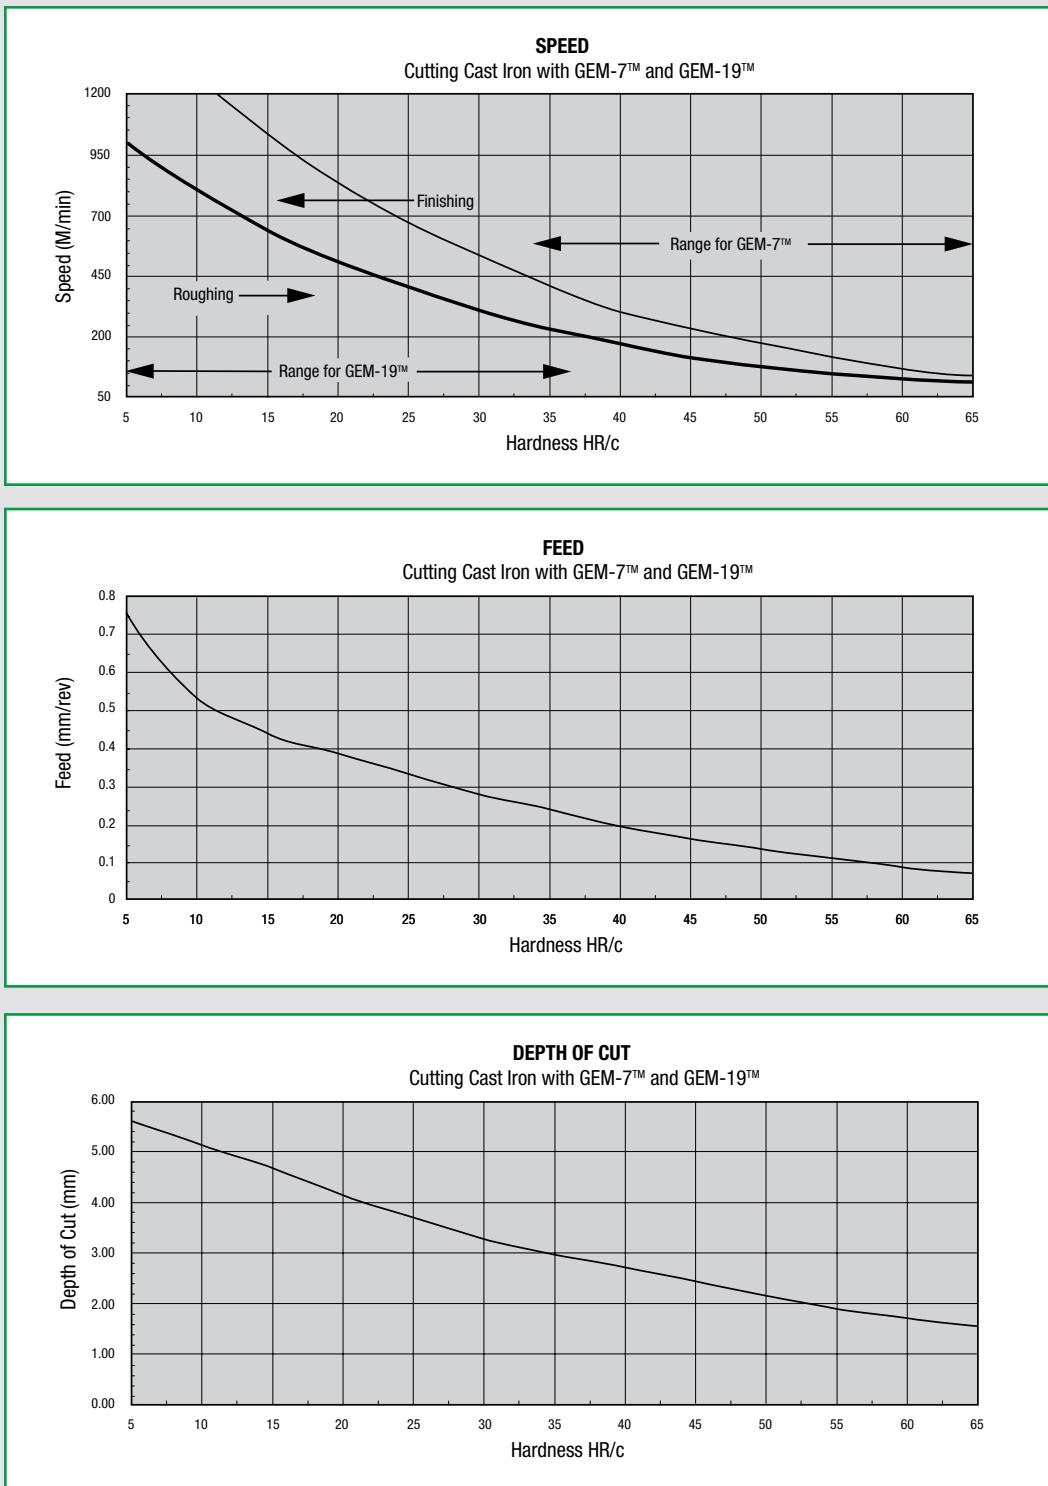
**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)




# Cutting Cast Iron with GSN100™

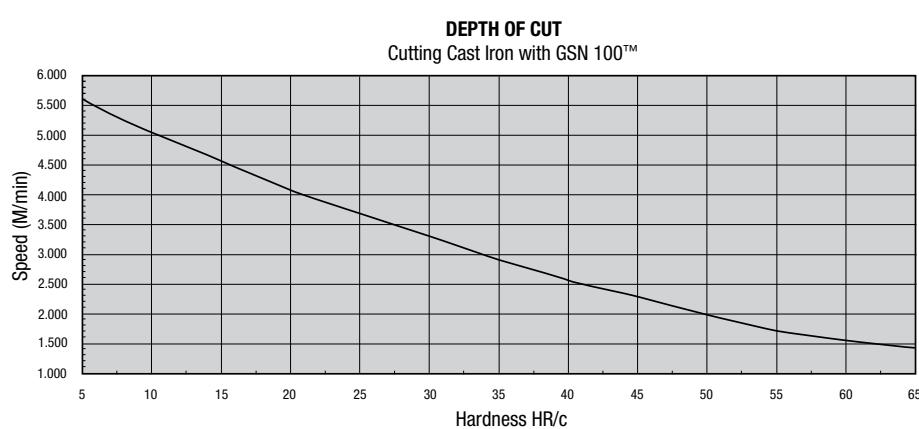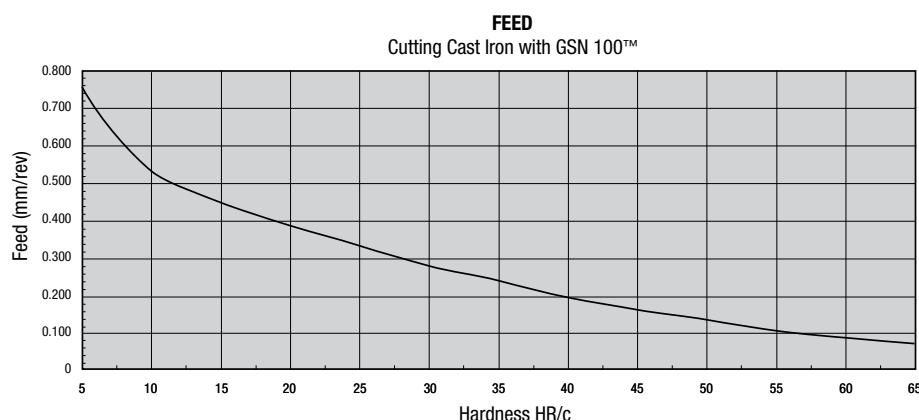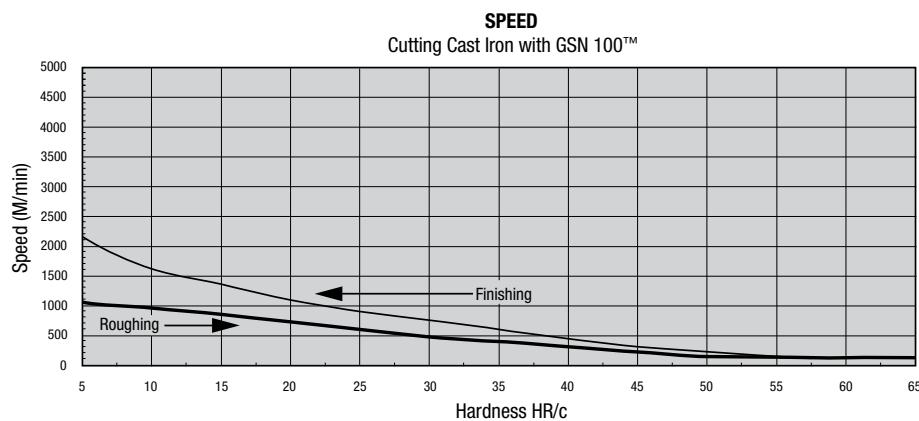

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Edge Preparations and Application Guide

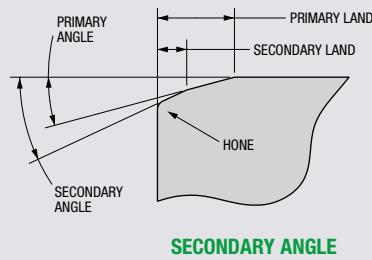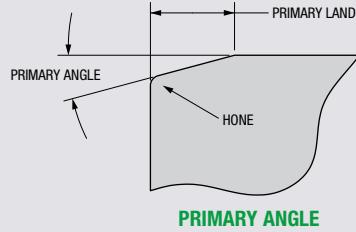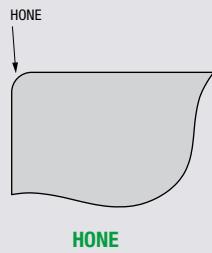


Edge Prep	Hone	Primary Land	Primary Angle	Secondary Land	Secondary Angle	Application
A	0,013 - 0,025mm R					For light finishing and grooving, also added to designated negative lands (i.e. T1, T2, T9).
B	0,025 - 0,051mm R					Used in addition to heavy machining chamfers and designated negative lands (i.e. T4, T10).
T1		0,051 - 0,102mm	20°			General purpose for turning and light milling in clean high-temp. alloys and materials <50R/C.
T1A	0,013 - 0,025mm R	0,051 - 0,102mm	20°			Used where more protection is needed than T1 such as in scale and light interruptions, hard turning.
T2		0,152 - 0,203mm	20°			General purpose chamfer for light to medium feed rates, cast-iron machining.
T2A	0,013 - 0,025mm R	0,152 - 0,203mm	20°			Scale applications, light interruptions, weld overlays, finish turning and milling of hardened materials.
T3		0,330 - 0,381mm	30°			Used on smaller IC inserts as an alternative to T7.
T3A	0,013 - 0,025mm R	0,330 - 0,381mm	30°			Used on smaller IC inserts as an alternative to T7A.
T4B	0,025 - 0,051mm R	1,90	10°	0,17	25°	Heavy machining <19mm IC - Roll turning, 090700, 120700, CDH-22, CDH-33.
T5B	0,025 - 0,051mm R	1,52	15°	0,17	30°	Heavy machining - alternative to T4B.
T7		0,381 - 0,508mm	20°			For use in similar applications as T2 - use in heavier feed areas.
T7A	0,013 - 0,025mm R	0,381 - 0,508mm	20°			For use in similar applications as T2A - use in heavier feed areas.
T9		0,152 - 0,203mm	30°			General purpose chamfer for medium to heavy feed rates, milling, cast-iron machining <16mm IC.
T9A	0,013 - 0,025mm R	0,152 - 0,203mm	30°			For medium to heavy feed rates, milling, cast-iron machining for heavier interruptions <16mm IC.
T10A	0,013 - 0,025mm R	2,290 - 2,540mm	15°	0,17	30°	Heavy machining, iron and steel roll turning >19mm IC, CDH-43, CDH-53.
T10B	0,025 - 0,051mm R	2,290 - 2,540mm	15°	0,17	30°	Heavy machining, iron and steel roll turning >19mm IC, CDH-43, CDH-53.

**Greenleaf Sales**

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


# Insert Grade Reference for Turning, Grooving and Profiling

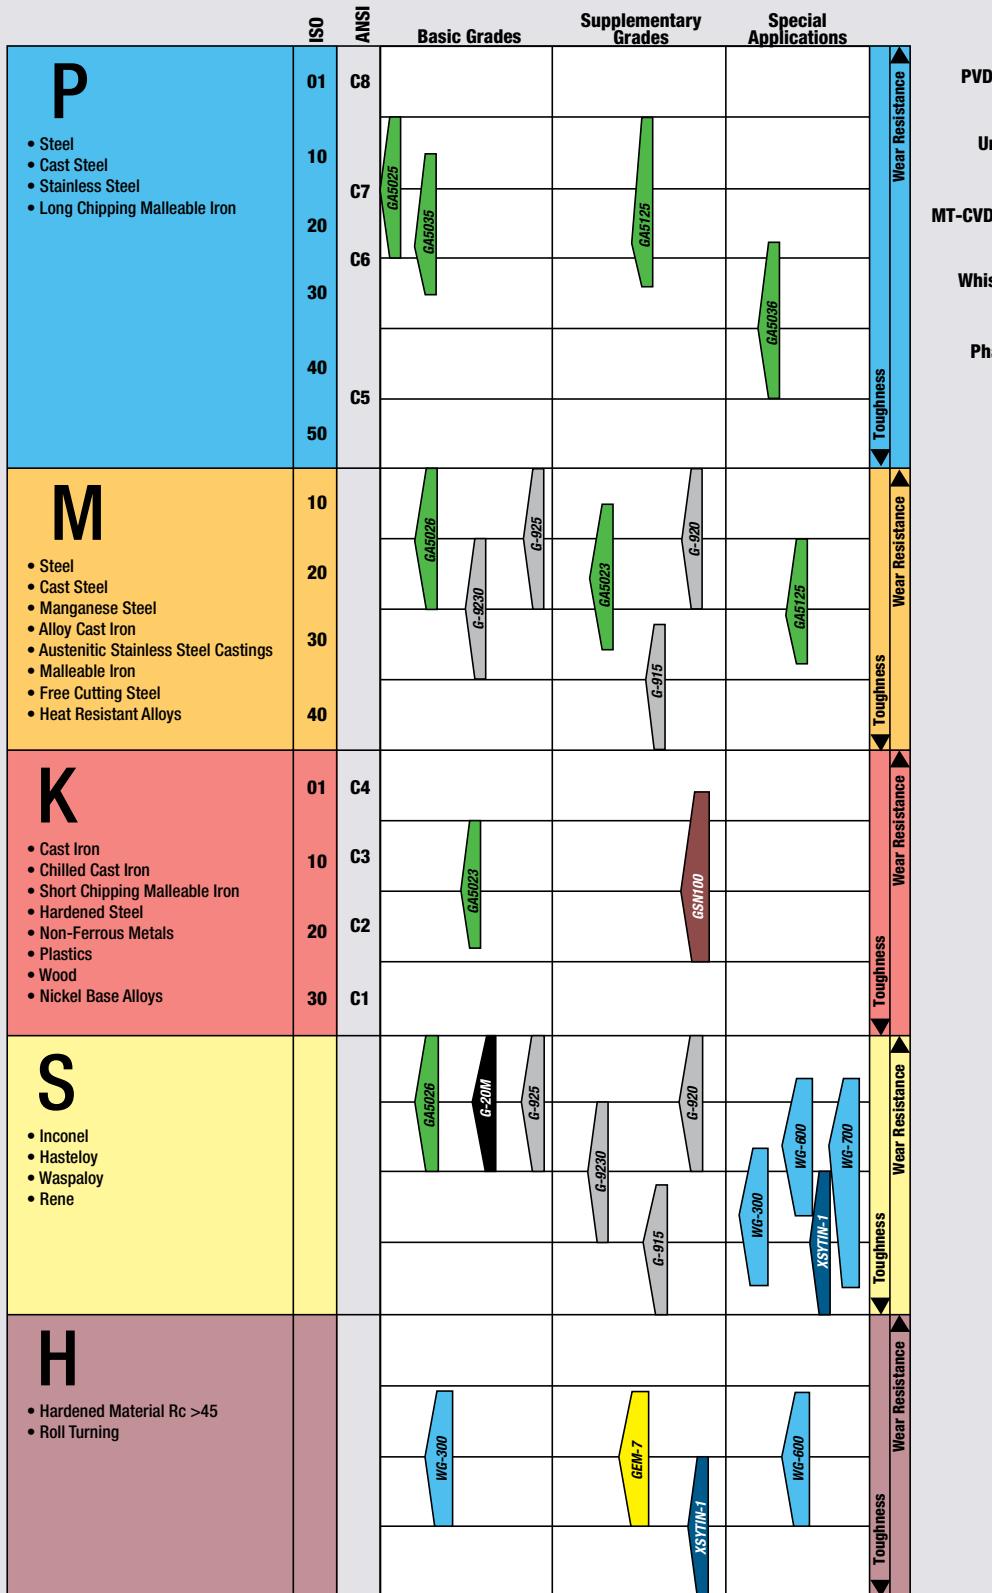

- PVD Coated Grades
- Uncoated Grades
- MT-CVD Coated Grades
- Whiskered Ceramic
- Phase-Toughened
- Alumina Oxide
- Silicon Nitride


# Insert Grade Reference for Milling

	ISO	ANSI	Basic Grades	Supplementary Grades	Special Applications	
<b>P</b>  • Steel • Cast Steel • Stainless Steel • Long Chipping Malleable Iron	01	C8				
	10					
	20	C7				
	30	C6	G-53	G-935		
	40	C5		GA5036	GA5125	
	50				G-915	G-910
<b>M</b>  • Steel • Cast Steel • Manganese Steel • Alloy Cast Iron • Austenitic Stainless Steel Castings • Malleable Iron • Free Cutting Steel • Heat Resistant Alloys	10					
	20		G-53			
	30			G-915		
	40			GA5036	GA5125	G-9230
<b>K</b>  • Cast Iron • Chilled Cast Iron • Short Chipping Malleable Iron • Hardened Steel • Non-Ferrous Metals • Plastics • Wood • Nickel Base Alloys	01	C4				
	10	C3	GA5023			
	20	C2		G-915		
	30	C1			G-910	SSNI00
<b>S</b>  • High Temperature Alloys • Inconel • Waspaloy • Hasteloy • Rene			G-925		XSYTN-1	WG-300
				G-915		WG-600
<b>H</b>  • Hardened Material (Rc >45)			WG-600		XSYTN-1	WG-300
						WG-600

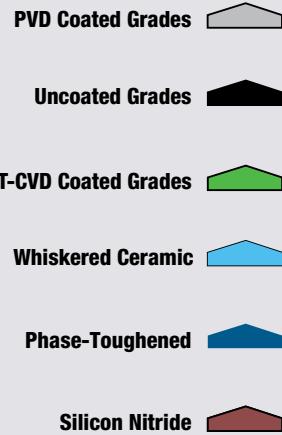

## Formulas for Turning and Facing

### Imperial

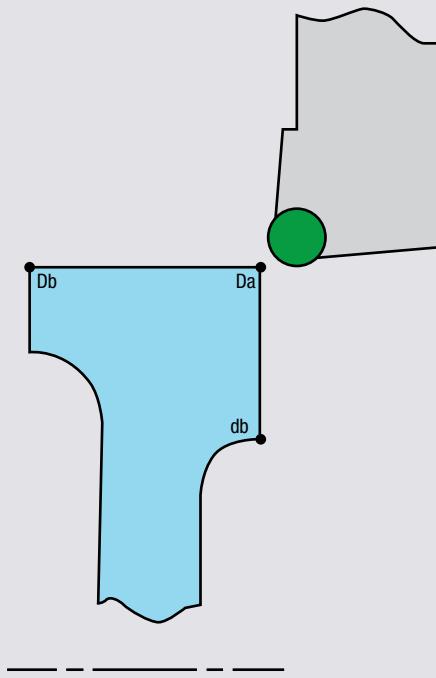

### Turning

$$SFM = \frac{\text{Dia.} \times \pi \times \text{RPM}}{12}$$

$$\text{RPM} = \frac{\text{SFM} \times 12}{\text{Dia.} \times \pi}$$

$$T = \frac{\text{LOC}}{\text{IPR} \times \text{RPM}} \quad \text{LOC Da to Db} = \frac{\text{SFM} \times 12 \times \text{IPR} \times T}{\text{Dia.} \times \pi}$$

### Facing

To calculate the time (T) for a facing operation from starting point (Da) to finishing point (db):

$$\text{Time Da to db} = \frac{\pi (\text{Da}^2 - \text{db}^2)}{48 \times \text{SFM} \times \text{IPR}}$$

To calculate the endpoint (db) for facing from starting point (Da) to finishing point (db):

$$\text{db} = \sqrt{\text{Da}^2 - (15.279 \times T \times \text{SFM} \times \text{IPR})}$$

If db is minus, you have passed center.

**SFM** = Surface Speed (feet/minute)

**IPR** = Feed Rate (inches/revolution)

**LOC** = Length of cut (inches)

**T** = Time (min.)

**π** = 3.1416


**D** = Large Diameter (inches)

**d** = Small Diameter (inches)

$$15.279 = \frac{48}{\pi}$$

*Note: The constant speed capabilities of the lathe are assumed in the above facing calculations.*

### Metric

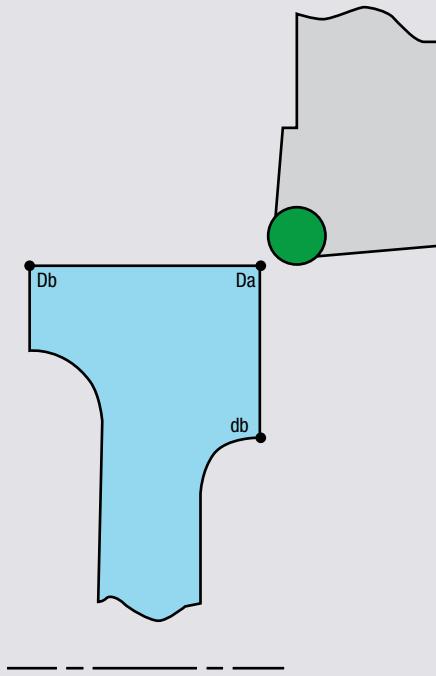

### Turning

$$V = \frac{\text{Dia.} \times \pi \times \text{RPM}}{1000}$$

$$\text{RPM} = \frac{V \times 1000}{\text{Dia.} \times \pi}$$

$$T = \frac{\text{LOC}}{\text{S} \times \text{RPM}} \quad \text{LOC Da to Db} = \frac{V \times 1000 \times \text{S} \times T}{\text{Dia.} \times \pi}$$

### Facing

To calculate the time (T) for a facing operation from starting point (Da) to finishing point (db):

$$\text{Time Da to db} = \frac{\pi (\text{Da}^2 - \text{db}^2)}{4000 \times V \times S}$$

To calculate the endpoint (db) for facing from starting point (Da) to finishing point (db):

$$\text{db} = \sqrt{\text{Da}^2 - (1273,2 \times T \times V \times S)}$$

If db is minus, you have passed center.

**V** = Surface Speed (meters/minute)

**S** = Feed Rate (mm/revolution)

**LOC** = Length of cut (mm)

**T** = Time (min.)

**π** = 3.1416

**D** = Large Diameter (mm)

**d** = Small Diameter (mm)

$$1273,2 = \frac{4000}{\pi}$$

*Note: The constant speed capabilities of the lathe are assumed in the above facing calculations.*

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com

EU +31-45-404-1774 • eurooffice@greenleafcorporation.com

CN +86-731-89954796 • info@greenleafcorporation.com.cn

www.greenleafglobalsupport.com • www.greenleafcorporation.com

## Optional Clamps


To give maximum flexibility and provide for maximum clamping advantage in any given cutting situation, there are alternative clamps available. The variation in these clamps is the reach. Barrel diameters are common.

A typical example of alternate clamp usage would be in holding an insert without a hole. In this case, the lock pin would be removed and the clamp substituted so that maximum top clamping capability may be applied.

We have chosen as standard for each tool catalogued a clamp and differential screw combination for use with inserts with holes (pinlock). A longer reach clamp should be used when using top clamp alone. If conditions indicate, another combination would be advantageous. Please note as follows:


- Clamps CLM6, CLM7 and CLM19 are interchangeable. The difference is in the reach only.
- CLM9, CLM12 and CLM30 are all interchangeable, the difference being in the reach only.
- CLM20 and CLM22 are interchangeable, the difference being in the reach only.

Barrel diameters "B" and thread sizes are common. The reach "C", height "D", and "E" and "G" dimensions may be different. It is very important that sufficient clearance exist in the toolholder for the clamp to drop down far enough into the holder to attain clamping action on the insert.

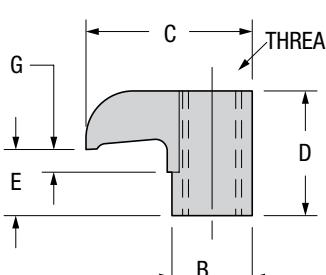


Order Number	B	C	D	E	G	Thread
CLM6	7,87	14,73	11,18	4,83	2,29	M5 x 0.8
CLM7	7,87	16,26	7,87	1,65	-	M5 x 0.8
CLM9	10,87	19,05	16,76	8,89	3,05	M8 x 1
CLM12	10,87	22,35	17,53	8,89	3,05	M8 x 1
CLM19	7,87	13,97	7,11	1,65	-	M5 x 0.8
CLM20	9,47	18,54	10,16	3,30	-	M6 x 1
CLM22	9,47	21,59	13,46	7,11	3,30	M6 x 1
CLM24	12,52	25,40	19,81	11,68	3,30	M10 x 1.25
CLM30	10,87	25,40	16,76	8,89	3,05	M8 x 1


CLM20      CLM22

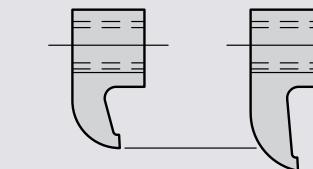

CLM19

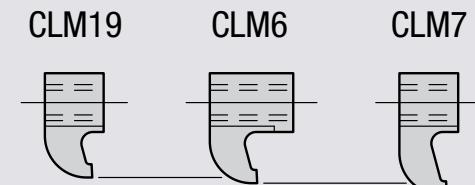

CLM12

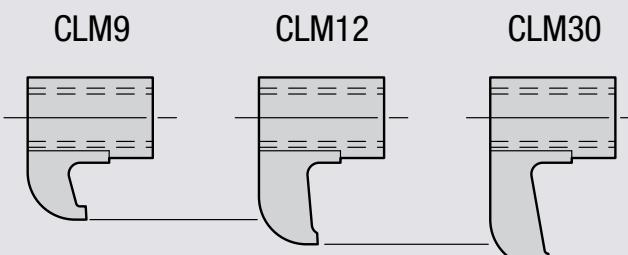

CLM30

### Clamp Interchangeability



**Greenleaf Sales**

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Greenleaf Advanced Whisker-Reinforced Ceramic Inserts

Greenleaf advanced whisker-reinforced ceramic inserts exhibit excellent wear and shock resistance at high surface speeds. These insert grades are very effective at machining nickel- and cobalt-based super alloys and other hard materials at metal removal rates up to 10 times greater than carbide.

The Ceramic Productivity Manual will help you to machine more effectively with WG-300®, WG-600® and WG-700™. For additional technical support, contact a Greenleaf representative at 1-814-763-2915.



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)

## **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Index

	<i>Page</i>
What is a Whisker-Reinforced Ceramic.....	ATI 28
WG-300® Fracture Surface .....	ATI 28
Physical Properties .....	ATI 29
How to Use the Properties of Greenleaf Advanced Ceramics .....	ATI 30
Relative Strength at Elevated Temperatures .....	ATI 31
Ceramic Application Guidelines.....	ATI 31
Strength Comparison of Ceramic Inserts.....	ATI 32-34
The Application of Greenleaf Advanced Ceramics .....	ATI 36
Anticipated Tool Life .....	ATI 37
Speed and Feed vs. Depth of Cut for Round Inserts	ATI 38-39
Lead-Angle Effect on Round vs .....	ATI 40
Straight-Edged Inserts	
Lead-Angle Effect with Other Than Round Inserts.....	ATI 41
Recommended Depth of Cut for Round Inserts .....	ATI 41
Recommended Depth of Cut for Insert Nose Radii .....	ATI 42
Recommended Percentage (%) Reduction .....	ATI 43
of Feed Per Revolution for Other Than Round Inserts (Except Grooving)	
Theoretical Surface Roughness vs.....	ATI 44
Feed and Insert Radius	
The Effect of Increased Clearance on Tool Life .....	ATI 45
Edge Preparation for Nickel-Based Alloys .....	ATI 46
Coolant.....	ATI 47
Notching and Correct Tool Path .....	ATI 48
Pre-Chamfer Parts Whenever Possible .....	ATI 48
Both on Entry and Exit Surface	
The Chamfer Ramp Approach.....	ATI 48-49
To Exit a Cut .....	ATI 50
Programming Alternatives .....	ATI 50-55
for Roughing Operations	
Turning to a Shoulder .....	ATI 56
Double Notching – Not Recommended .....	ATI 57
for Notch-Sensitive Situations	
Finishing a Fillet .....	ATI 58-60
Grooving .....	ATI 61-64
Cut-Off Operation with Ceramic Inserts.....	ATI 65
Thin-Wall Applications .....	ATI 65-66
Interrupted Cuts.....	ATI 66-67
Surface Hardening .....	ATI 67
Smearing .....	ATI 67
Impingement .....	ATI 68
Boring Holes .....	ATI 68
Wear Mechanisms .....	ATI 69
Indexing of Inserts .....	ATI 70
Turning Hard Materials 45-65 Rc.....	ATI 71
Milling of Nickel-Based Alloys.....	ATI 71-72
Targeted Application Areas for Greenleaf Advanced Whisker-Reinforced Ceramic .....	ATI 73
Starting Point from Advanced Ceramics Graph .....	ATI 73-74
for Various Materials	

# Illustrations

<i>Fig.</i>	<i>Title</i>	<i>Page</i>
1	Fracture Surface 3000x .....	ATI 28
2	Physical Properties.....	ATI 29
3	Deck-of-Cards Principle .....	ATI 30
4	Heat Dissipation in Ceramic Machining .....	ATI 30
5	Relative Strength at Elevated Temperatures.....	ATI 31
6	Ceramic Application Guidelines .....	ATI 31
7	Insert Shapes and Strengths .....	ATI 32
<i>Fig.</i>	<i>Title</i>	<i>Page</i>
8	Relative Strength for Various Insert Radii .....	ATI 32
9	Relative Strength for Various Insert Thicknesses	ATI 32
10	Toolholder System .....	ATI 33
11	Straight-Edged Inserts vs. Round .....	ATI 34
12	Shank-Diameter-to-Bar-Length Ratio for Ceramic Inserted Boring Bars .....	ATI 34
13	Advanced Ceramics Machining .....	ATI 36
Recommendations		

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

# Illustrations *continued*

<b>Fig. Title</b>	<b>Page</b>
14 Anticipated Tool Life .....	ATI 37
15 Surface Speed and Feed Rate (%) .....	ATI 38
vs.Depth of Cut of Radii (IMPERIAL)	
16 Surface Speed and Feed Rate (%) .....	ATI 39
vs.Depth of Cut of Radii (METRIC)	
17 Lead-Angle Effect on Round .....	ATI 40
vs. Straight-Edged Inserts and the	
Theoretical Chip Thickness	
18 Lead-Angle Effect.....	ATI 41
19 Recommended Depth of Cut for .....	ATI 41
Round Inserts	
20 Recommended Depth of Cut for .....	ATI 42
Insert Nose Radii	
21 Feed Adjustment for Straight-Sided Inserts .....	ATI 43
22 Theoretical Surface Roughness .....	ATI 44
23 The Effect of Increased Clearance.....	ATI 45
on Tool Life	
24 Standard Edge Preparations .....	ATI 46
25 Coolant.....	ATI 47
26 Chamfering Techniques.....	ATI 48
27 Straight Facing.....	ATI 48
28 Chamfering and Facing .....	ATI 48
29 Ramp Approach to Pre-Chamfering .....	ATI 49
(Straight-Edged Inserts)	
30 Ramp Approach to Pre-Chamfering .....	ATI 49
(Finishing)	
31 Ramp Approach to Pre-Chamfering .....	ATI 49
(Corner Examples)	
32 Pre-Chamfer to Eliminate Burrs.....	ATI 50
33 Rethink Depth of Cut.....	ATI 50
34 Multiple Passes at the Same Depth of Cut.....	ATI 51
35 Multiple Passes at Varying Depths of Cut .....	ATI 51
36 Multiple Passes Using Ramping.....	ATI 51
37 Ramping/Negative Inserts.....	ATI 52
38 Ramping/RPGN-RCGN .....	ATI 52
39 Optimized Ramping Technique .....	ATI 53
40 Optimization of Ramping Technique .....	ATI 54
with 1/2" Round Inserts	
41 Various Ramping Methods.....	ATI 55
42 Boring a Cavity with WG-300® .....	ATI 55
43 Chip Being Trapped Against Shoulder .....	ATI 56

<b>Fig. Title .....</b>	<b>Page</b>
44 Avoid Leaving Scallops at Shoulder .....	ATI 56
45 Tool Engagement Angle.....	ATI 56
46 Double Notching/Carbide Method – <i>Beware</i> .....	ATI 57
47 Double Notching/Ceramic Method .....	ATI 57
48 Finishing a Fillet Using an 80°-Diamond.....	ATI 58
Insert (Plunge Cut)	
49 Finishing a Fillet Using a Grooving Tool .....	ATI 59
and a Round Insert	
50 Turning to a Shoulder in Cavities with .....	ATI 59
V-Bottom Grooving Inserts	
51 Ramping Effect on Shoulder Cuts .....	ATI 60
52 Grooving Feeds .....	ATI 61
53 Thin-Wall Grooving .....	ATI 62
54 Widening Cavity Techniques.....	ATI 62
55 Additional Cavity Techniques.....	ATI 63
56 Additional Cavity Techniques .....	ATI 63
57 Ramping in Cavities.....	ATI 64
58 Producing a Test Sample .....	ATI 64
59 Ceramic Inserts Used in Cut-Off Operations.....	ATI 65
60 Thin-Wall Heat Penetration.....	ATI 65
61 Cutting Direction Resultant Forces.....	ATI 65
62 Interrupted Cuts .....	ATI 66
63 Edge Preparations .....	ATI 67
64 Smearing .....	ATI 67
65 Impingement .....	ATI 68
66 Spindle Overhang Increasing .....	ATI 68
67 Spindle Overhang Decreasing.....	ATI 68
68 Tool Wear .....	ATI 69
69 Indexing of Round Inserts (Due to Notching).....	ATI 70
70 Indexing of Round Inserts.....	ATI 70
(Due to Notching and Wear)	
71 WG-300® Machining Recommendations.....	ATI 71
for Hardened Materials	
72 Recommended Speed Increase for Milling .....	ATI 72
with Various Declining Widths of Cut	

## Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## What is a Whisker-Reinforced Ceramic?

**Greenleaf WG-300®, developed by Greenleaf Corporation, is the first commercially available ceramic composite using the technology of whisker reinforcement. It can operate up to 10 times the speed used for uncoated carbide tools.**

Greenleaf WG-600® is the first commercially available coated, whisker-reinforced ceramic composite. Greenleaf WG-600 offers up to 30% speed improvement and up to 3 times tool life over uncoated ceramics.

Greenleaf WG-700™ is the newest whisker-reinforced ceramic substrate. Featuring improved toughness and a unique high-speed coating, WG-700 is ideal for machining nickel- and cobalt-based super alloys and other difficult-to-cut materials. WG-700 offers high metal removal rates with exceptional tool life.

The basic concept involves reinforcing a hard ceramic matrix with extremely strong, stiff, silicon-carbide crystals, commonly called whiskers.

These whiskers are grown under carefully controlled conditions and, due to their high purity and lack of grain boundaries, approach the theoretical maximum strength obtainable. This strength is calculated to be in the order of 1 million psi (6,900 MPa) tensile!

The super-strong whiskers are dispersed into a matrix of fine-grained aluminum oxide where they act much like

glass filaments do in fiberglass, for example, by adding tensile strength and improving the fracture toughness of the brittle matrix.

The increase in the fracture toughness of the material is such that inserts are now offered without hones as a standard, making them suitable for finish cuts on most forged nickel-based alloys without "smearing."

A properly manufactured whisker-reinforced ceramic has outstanding thermal and mechanical shock resistance. It can withstand intermittent cut applications, such as in milling, without breakage.

## WG-300® Fracture Surface

The fracture toughness of a whisker-reinforced ceramic is enhanced by the phenomenon of whisker "pull-out." A close examination of the fracture surface at 3000x will reveal not only a clear indication of the whiskers randomly dispersed throughout the matrix, but also the obvious hexagonal holes where whiskers have actually been pulled out in the fracture process. A large amount of energy is required to pull the whiskers out. This greatly enhances the fracture toughness and the high predictability of the inserts.

Greenleaf WG -300® will not fail by catastrophic breakage unless grossly misapplied, but will be gradually consumed in a predictable wear pattern. This wear pattern will be unlike the wear modes of carbide tools. It is the subject of a later paragraph in this section and should be studied and clearly understood for successful results.

**Figure 1**



### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

SEM Photomicrograph 3000x

## Physical Properties

Physical properties are only a rough indicator of cutting tool performance. Ceramic cutting tools should always be evaluated in actual service where the synergisms of material properties and cutting-tool engineering can be clearly seen.

Particular note should be made that "Modulus of Rigidity" or "Transverse Rupture Strength" is expressed according to the accepted laboratory procedures for ceramics.

Here, a 2" (50,8 mm) long sample is broken by a four-point bend test. It is more common to refer to the 9/16" (14,3 mm) long three-point test in the case of carbide, and some manufacturers use this test also for ceramics. Naturally, the T.R.S. values for ceramic on the 2" (50,8 mm) sample are appreciably lower than they would be on a 9/16" (14,3 mm) test bar.

**Figure 2 – Physical Properties**

<b>Microstructure</b>	2 Phase Polycrystalline > 50% Alumina < 50% Silicon Carbide Whiskers
<b>Density</b>	= 3.74 g/cc
<b>Melting Point</b>	2040°C (3,700° F)
<b>Hardness</b>	≥ 94.4 RA
<b>Modulus of Rigidity (E) } (4-Point Bend)</b>	TRS = { 100,000 P.S.I. ± 6,000 690 MPa ± 41
<b>Young's Modulus (E) Modulus of Rigidity(G)</b>	= 57 X 10 <sup>6</sup> P.S.I. = 23 X 10 <sup>6</sup> P.S.I.
<b>Poisson's Ratio (M) <math>M = \frac{E}{2G} - 1</math></b>	= .23
<b>Fracture Toughness (Measures resistance of crack growth from stress)</b>	
<b>Cemented Carbide</b>	= 13.0
<b>Hot Pressed Composite</b>	= 3.8
<b>WG Ceramics</b>	= 10.0


### Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## How to Use the Properties of Greenleaf Advanced Ceramics

During the metal-removal operation, material is displaced ahead of the tool by being forced through a “shear zone” and subsequently sliding over the rake face of the tool as a chip. This action has been studied by numerous researchers including “Piispanen and Merchant,” who demonstrated the mechanism of chip formation, likening it to the sideways slide of a deck of cards, caused by the rake face of the tool. (Figure 3)

**Figure 3 – Deck-of-Cards Principle**

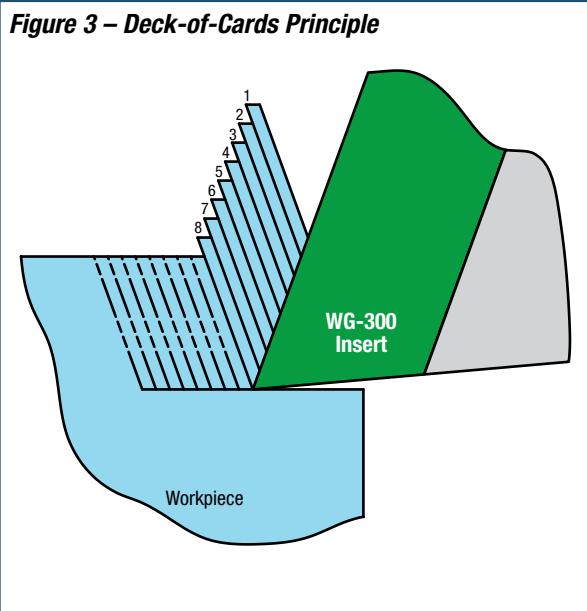


The chip is formed first by grain boundary distortion in front and below the shear plane, followed by grain boundary dislocation. This results in a chip that is always thicker than the layer of material being removed.

A large amount of shear stress is required to cause plastic deformation and shear to occur in the “shear zone,” and this results in the generation of significant quantities of heat. In fact, as much as 75% of the heat generated during cutting is produced in this way. The other 25% comes from the sliding of the chip over the tool rake face and the contact of the flank of the tool with the workpiece. (Figure 4)

Most of the heat generated during metal cutting is dissipated by the chip carrying it away. As cutting speeds increase, the metal-cutting process becomes more adiabatic. In other words, the heat generated in

the “shear zone” cannot be conducted away during the very short time in which the metal passes through this zone. We can benefit from the heat generation, temperature rise and softening effects in the “shear zone.”

**Figure 4 – Heat Dissipation in Ceramic Machining**

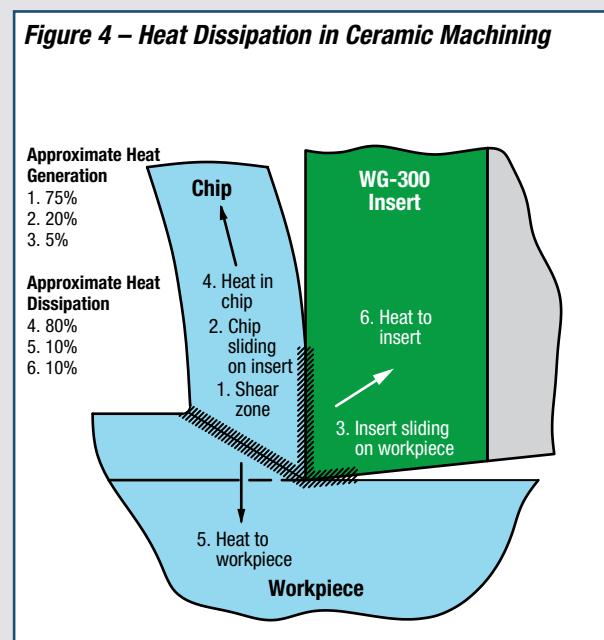

The heat generated in the “shear zone” has been traditionally thought of as a negative factor since it is also associated with heat-related failure of cemented carbide cutting tools. This often leads to the need to slow down the cutting operation to a point where carbide inserts will give acceptable life.

Whisker-reinforced ceramics are able to withstand high temperatures while maintaining strength and hardness, and it has been shown that contrary to traditional methods of machining, we can, in fact, use the heat generated in the shear zone ahead of the tool to our advantage. There is an optimum speed outside the range of carbide tools where the heat generated lessens the cutting forces by softening the metal and aiding in the grain boundary dislocation.

This advantage can be very dramatic, sometimes moving the possible metal-cutting speeds from a few hundred feet per minute to thousands of feet per minute!

Such is the case with Greenleaf’s whisker-reinforced ceramics when applied to most forged nickel-based alloys. Optimum speeds can be achieved with temperatures exceeding 1000° Celsius.

The excellent thermal shock resistance of whisker-reinforced ceramics results in a cutting material which can be used either dry, wet or even intermittently cooled without fear of catastrophic tool failure from thermal cracking.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com


The outstanding hardness of Greenleaf whisker-reinforced ceramic inserts, combined with the high strength imparted by the reinforcing silicon-carbide whiskers, makes possible the machining of many materials previously workable only by grinding. Heat-treated alloy steels, die steels, weld overlays, and hard irons with interrupted cuts are just a few of the successful applications completed on a daily basis.

If your job is in the 45Rc to 65Rc range, chances are that Greenleaf's whisker-reinforced ceramic inserts can increase productivity and cut machining costs substantially.

## Relative Strength at Elevated Temperatures

It is important to recognize that laboratory hardness and strength tests are conducted at room temperatures. Under actual cutting conditions where temperature at the tool/chip interface may reach over 1000° C, Greenleaf whisker-

**Figure 5 – Relative Strength at Elevated Temperatures**

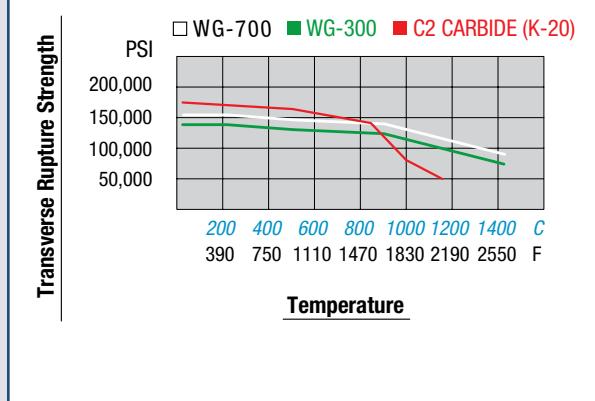

reinforced ceramics will retain high strength and hardness well beyond the point at which a tungsten-carbide material has softened, deformed or failed completely. Productivity advantages multiply quickly in this range of application.

## Ceramic Application Guidelines

### Rethink the process

The correct application of ceramic tooling on a CNC machine necessitates reprogramming of the part. Since we are doing this, we might just as well re-examine the entire process. Are we using the best geometry,

largest radius, thickest insert, best tool path, etc.? When you have studied this application guide, you will be more aware of the variables and best approaches to the job using ceramic cutting tools.

Integrate the following tested methods into your programs:

### Figure 6 – Ceramic Application Guidelines


1. Use a toolholder system designed for ceramic inserts.
2. Use the strongest insert shape possible.
3. Use the largest corner radius possible.
4. Use the correct edge preparation for the application.
5. Use the thickest inserts available for roughing.
6. Use a toolholder or boring bar with the largest possible cross section.
7. Consider heavy metal or carbide bars for boring applications.
8. Prechamfer on entry and exit whenever possible.
9. Keep toolholder overhang to a minimum.
10. **Rethink the process**

## Strength Comparison of Ceramic Inserts

### Use the strongest insert shape

In declining order of corner strength, the strongest inserts are: Round, 100° Diamond, Square, 80° Diamond, Triangle, 55° Diamond, and 35° Diamond. Always use the strongest possible shape to maximize corner strength and metal-removal capability.


**Figure 7 – Insert Shapes and Strengths**

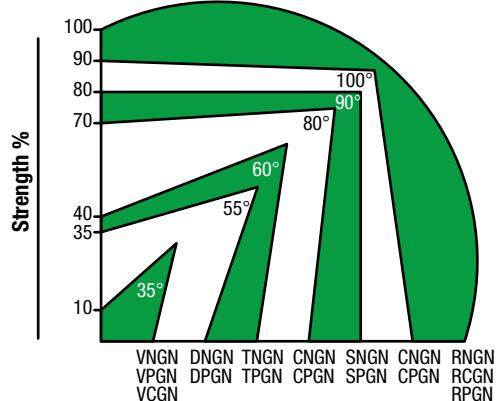

### Use the largest corner radius possible

The larger the corner radius, the stronger the corner. Do not attempt to do all roughing operations with a small corner radius just because the finished fillet calls for a small radius. Use a round insert or large radius insert for roughing and change the tool for the final cuts.

**Figure 8 – Relative Strength for Various Insert Radii**

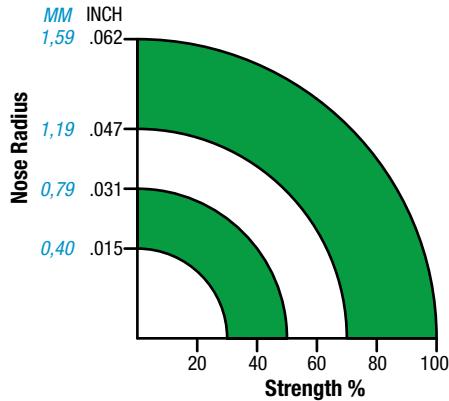


### Use thick inserts for roughing

Increased insert thickness results in far better impact resistance, better heat dispersion, and longer tool life.

This adds to greater predictability of performance and less downtime.


**Figure 9 – Relative Strength for Various Insert Thicknesses**

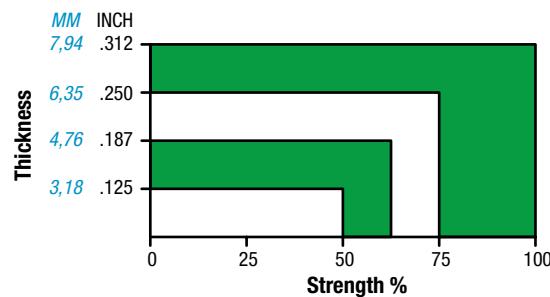

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Figure 10 – Toolholder System**

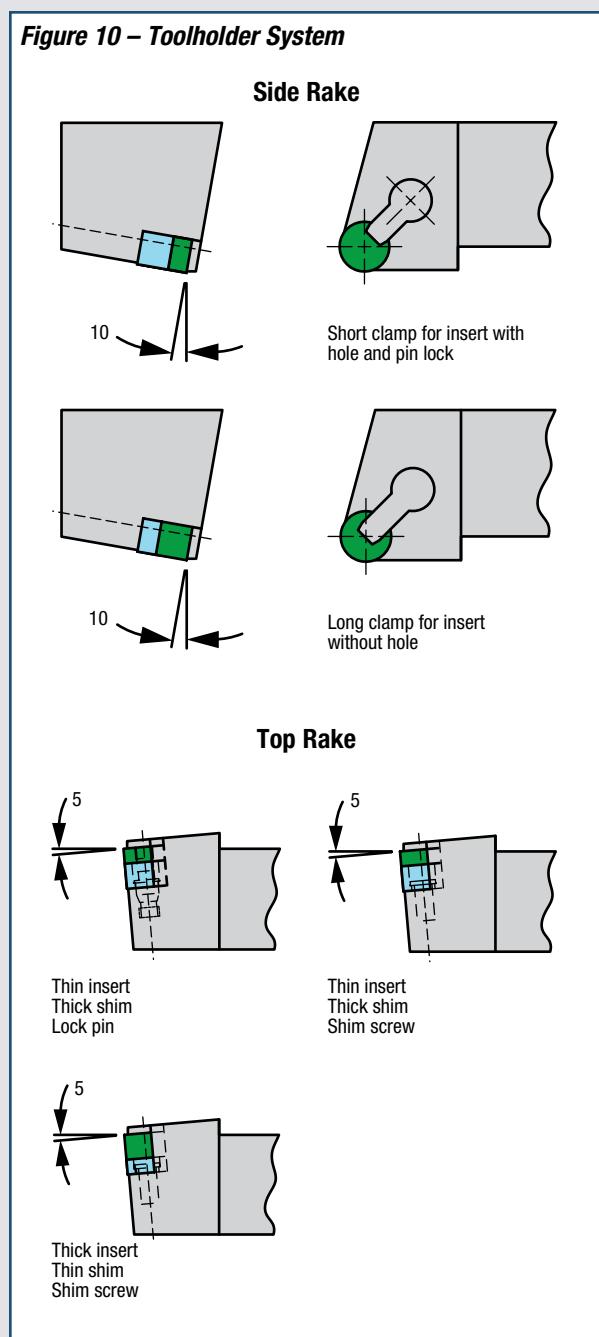

## Use the Greenleaf toolholder system

The use of Greenleaf toolholders and accessories permits:

- Either standard or thick inserts to be used in the same toolholder by changing shim seats.
- The toolholders can be used for pinlock-style inserts by exchanging the shim screw for a tilt pin.
- Alternative lengths of clamps are available with the holder being supplied standard with the large clamp to ensure good retention of ceramic inserts without holes.
- In the case of negative-rake tooling, we have found that the normal carbide tool geometry of -5° top and side rake may be changed very advantageously to -5° top rake, and -10° side rake for materials under 45Rc hardness. Greenleaf tools for use with whisker-reinforced ceramics are illustrated in the Ceramic Toolholders in the Turning section of this catalog and have been designed to take advantage of this increased negative rake which will give longer tool life. The increased pressure associated with a greater negative rake is insignificant and not evident at the high velocity and temperatures at which these tools are used.

**NOTE:**

***Greenleaf toolholders for v-bottom inserts are designed to take 7° side-clearance inserts as well as 11°.***


## Use toolholder or boring bar with greatest cross sectional area

Stability of the tool and freedom from deflection are paramount to consistent performance. If the tool post will accept 1-1/4" (32 mm) shanks, do not be satisfied to take a 1" (25 mm) shank and shim it to suit. This is false economy.

### Straight-edged inserts versus rounds

Long overhangs for tools are necessary when working with turrets in order to clear other tools. In these cases, straight-edged inserts should be applied to eliminate radial tool forces and avoid chatter.

**Figure 11 – Straight-Edged Inserts vs. Round**

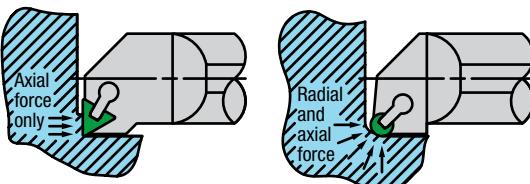

## Keep overhang to a minimum


Any deflection will lead to vibrations, which are particularly damaging to ceramic tools. Unnecessary tool overhang is the principle cause of vibration. It should be noted, the force required to produce a particular deflection decreases by the cube of the overhang! That means that doubling the overhang will increase deflection eight (8) times if all other conditions are constant.

Boring bars, in particular, usually operate with much greater length-to-diameter ratios than turning tools. In this case, "heavy" metal or solid-carbide bars are often easily justified.

Solid-carbide boring bars have three (3) times the modulus of elasticity of a steel bar. This means that a carbide bar will only deflect 1/3 as much as a comparable steel bar under identical circumstances.

As a general rule, when machining nickel-based alloys, steel boring bars will give adequate performance at overhang-to-bar diameter ratios of up to 3:1. Special boring bars manufactured from "heavy" metals give an advantage over steel bars and can be used at ratios up to 5:1. Carbide boring bars extend this range to ratios up to 7:1.

**Figure 12 – Shank Diameter-to-Bar-Length Ratio for Ceramic Inserted Boring Bars**

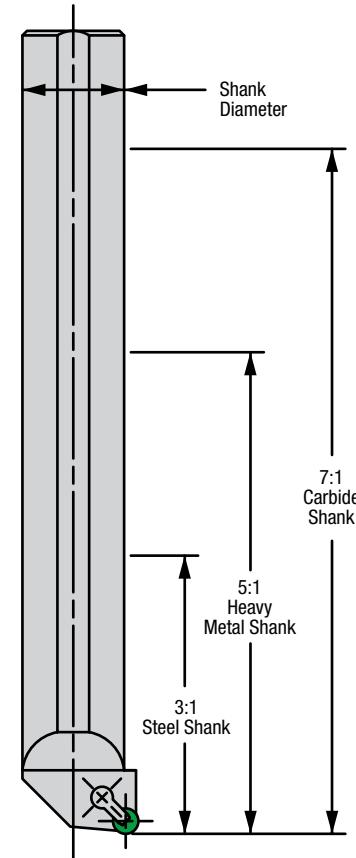

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## NOTES:

**Greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## The Application of Greenleaf Advanced Ceramics

Feed and speed recommendations are expressed in the graph below (*Figure 13*). This graph is based on empirical data gathered during extensive testing under shop conditions.

The most significant factors are the hardness of the material and the surface condition. It is on the basis of these parameters that the data are presented.


To achieve optimum cutting conditions, it is necessary to regulate not only the speed but also the feed. There must be a carefully balanced relationship between the speed and the feed. The higher temperatures required can be generated

by a slower speed than the optimum, provided that the chip is thinned by reducing the feed.

Any reduction of speed from the recommended starting points without a corresponding decrease in feed results in a thicker, cooler chip and an increase in cutting forces. This may result in shortened tool life or failure by chipping and breakage.

It must be noted that thick chips provide a larger heat sink and tend to be cooler and stiffer, and that thin chips do not have sufficient heat absorbing capacity and tend to be too hot. For each metal hardness and surface condition, there is a speed and a feed at which the best temperature balance is obtained.

**Figure 13 – Greenleaf Advanced Ceramics Machining Recommendations**

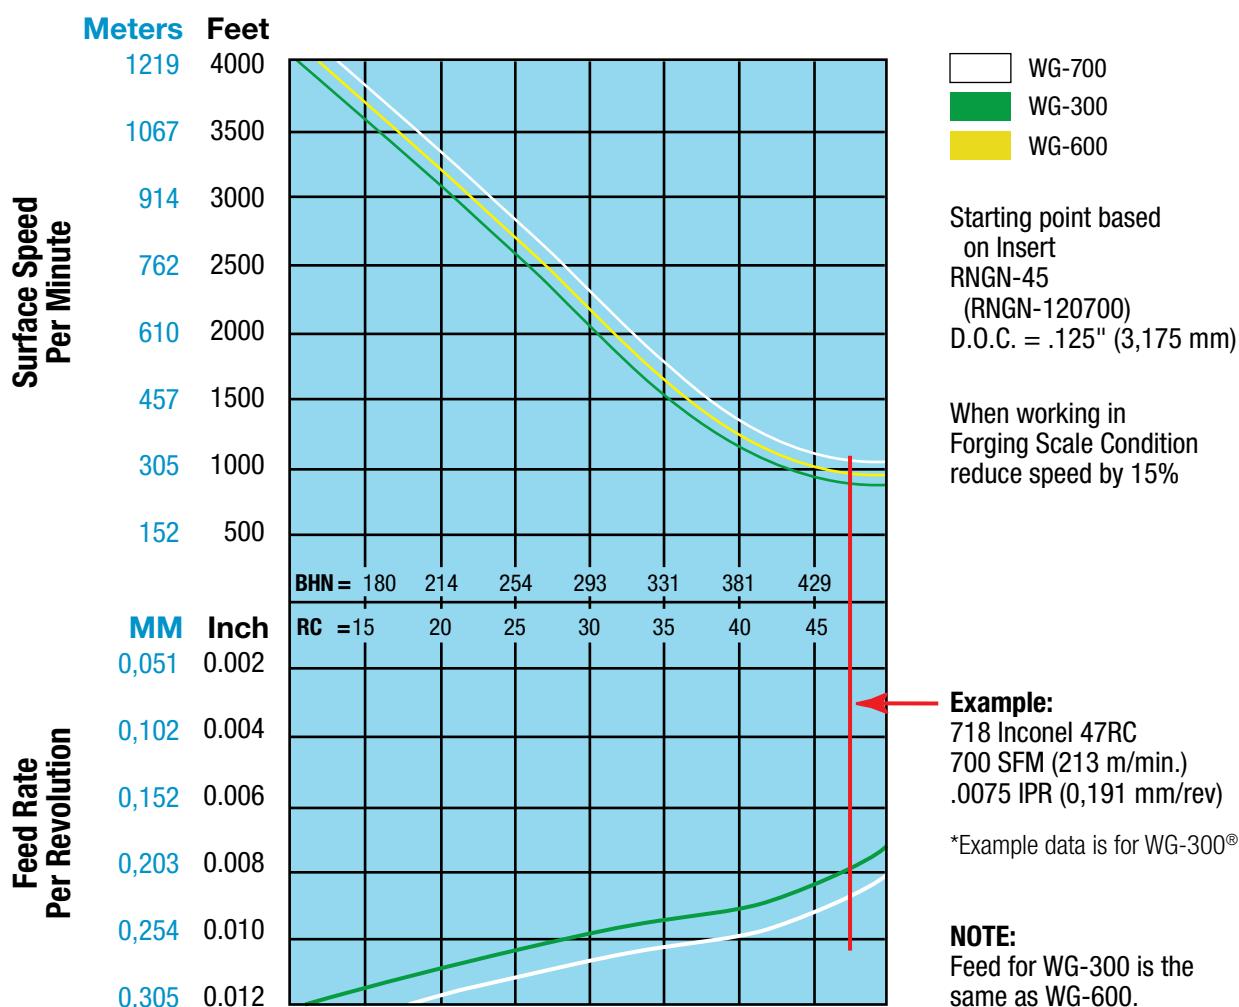

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

## How to use Figure 13 graph:

- 1) Feed and speed are based on RNGN-45 (12 07 00) round inserts. When using inserts with weaker shapes such as triangles, etc., some reduction of feed will be required. (Figure 21)
  - 2) **You must know the physical hardness of the material.**
  - 3) The recommendations are based on an average depth of cut of .125" (3,175 mm). Deeper depths will require some reduction of speed and feed, and shallower depths can be cut at elevated speeds and feeds.  
See Figures 15 & 16.
  - 4) From the material hardness, move vertically downward to the curve and then horizontally to the left to read the recommended feed rate per revolution.
  - 5) Whenever the recommended speed is not achievable on the machine tool, then the recommended feed must be reduced by the same percentage (%), i.e.  
Speed recommended – 2000 SFM (610 m/min.)  
Feed recommended – .010" I.P.R. (0,254 mm)  
Top speed on machine –  
1000 SFM (305 m/min.) = 50% of  
recommended speed then use feed of  
.005" I.P.R. (0,127 mm)
- The feed and speed are based upon the ability of the ceramic insert to withstand high temperatures and to run with a chip thickness which results in heat being concentrated in the shear zone ahead of the tool. This will reduce cutting pressure and minimize wear. If the speed is reduced without a corresponding reduction in feed, this effect will be lost and performance will fall off due to chipping of the cutting edge from a colder chip.
- General starting speeds should be eight times the uncoated carbide speeds and four times coated carbide speeds.
- Compared to sialon materials, speed and then feed should be increased 25% to 50%.

## Rule of thumb when cutting nickel-based cast material rather than forged material:

1. Increase speed from graph recommended by factor of 2x.
2. Decrease recommended feed to one half of value.
3. Maintain a depth of cut of less than .060" (1,5 mm) for an RNGN-45 (12 07 00) insert.
4. Use plentiful supply of coolant.

Aged and solution treated nickel-based cast alloys – use same parameters as forged materials, except less than .075 (2 mm) DOC for an RNGN-45 (12 07 00) insert.

## Anticipated Tool Life

For programming purposes, it is useful to have a starting guideline for anticipated tool life. We present here some approximate values which are based upon actual experience at the maximum recommended depth of cut (1/4 of insert diameter) and at the speed given in the graph. It should be noted that these speeds are up to eight times those used with uncoated carbide tools. Even at the conservative starting values for tool life per corner given, the actual volume of metal removed per index also will be eight times that produced in the same period of time with carbide tools.

Another way of stating this is – five minutes of tool life with a Greenleaf advanced ceramic is equivalent, in work produced, to 40 minutes of life with a carbide tool! *In fact, a carbide tool will never last 40 minutes.*

**Figure 14 – Anticipated Tool Life**

### Starting Points for Time in Cut

Round Insert	Life per Index
.250" (6,3 mm)	3 min.
.375" (9,5 mm)	4 min.
.500" (12,7 mm)	5 min.

## Speed and Feed vs. Depth of Cut for Round Inserts

The round insert behaves differently from a straight-sided insert as depth of cut is changed.

Because the chip produced by a round insert is crescent shaped and reduces in thickness toward the finished surface, as the depth is reduced, the thinning chip, combined with increased lead angle, gives a significant drop in pressure at the workpiece surface/tool interface. This means that both speed and feed can be increased without detriment to tool life as depth reduces.

**Speed and feed should be increased by a like amount percentage (%) to achieve the best result.**


We can now refer to the graph **Surface Speed and Feed Rate/Percent (%) Versus Depth-of-Cut of Radii.** (Figure 15)

1) It will be seen from reference to this chart that the speed/feed graph is set up on .125" (3.18 mm) depth of cut, using a .250" (6.35 mm) radius tool or .500" (12.7 mm) round insert. This results in a depth equal to the 60° mark (90° being half the diameter or radius) and gives a reasonably conservative starting point for most Inconel 718 applications. A slightly shallower depth at around the 45° line will usually give the best tool life in exchange for a small decrease in metal removal rates.

2) Finishing cuts are usually taken at depths of cut less than those set up as reference points on the graph. (Figure 13)

When using round inserts, it will be possible to make substantial increases in both feed and speed beyond the values given in the graph if the depth of cut is less than "X" value.

**Figure 15 – Surface Speed and Feed Rate/Percent (%) vs. Depth of Cut of Radii (IMPERIAL)**

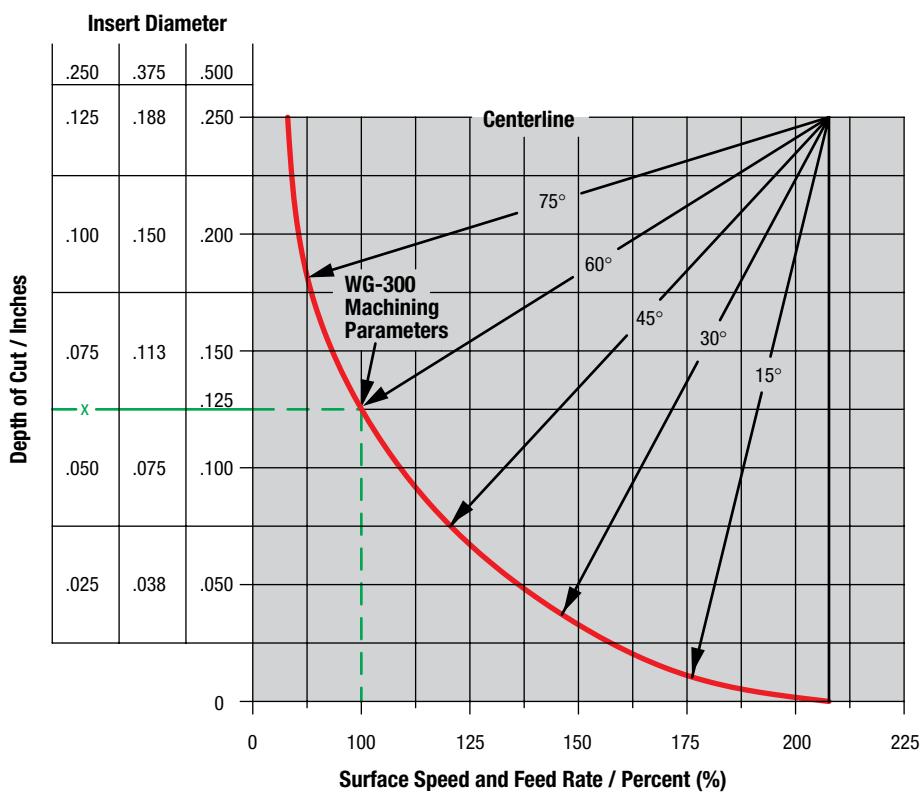

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

As always, the rule should be applied that feed and speed will be increased together and by the same percentage (%). Failure to regard this rule will result in cooler or hotter interface temperatures with corresponding drop-off of tool performance.

When taking a depth of cut that is less than the graph value for "X," refer to *Figures 15 and 16 (Imperial and Metric)*. Select the insert diameter that best suits the application and provides the depth-of-cut capability that is closest to the graph value of "X," then adjust the speed/feed according to the chart.

*For example:*


Column 1 is for .250" (6,35 mm) round insert  
or .125" (3,18 mm) radius.

Column 2 is for .375" (9,53 mm) round insert  
or .188" (4,76 mm) radius.

Column 3 is for .500" (12,7 mm) round insert  
or .250" (6,35 mm) radius.

1. Select approximate desired depth of cut  
*Example: .500" (12,7 mm) diameter round at .050" (1,27 mm) depth of cut is bottom box of column 3.*
2. Follow the line to the right until it intersects the heavy curved line.
3. Follow the line vertically downward to the bottom scale and read value of 137% (midway between 125% and 150%).
4. You may increase the speed and feed values in the graph (*Figure 13*) by 37% for this cut.

**Figure 16 – Surface Speed and Feed Rate/Percent (%) vs. Depth of Cut of Radii (METRIC)**

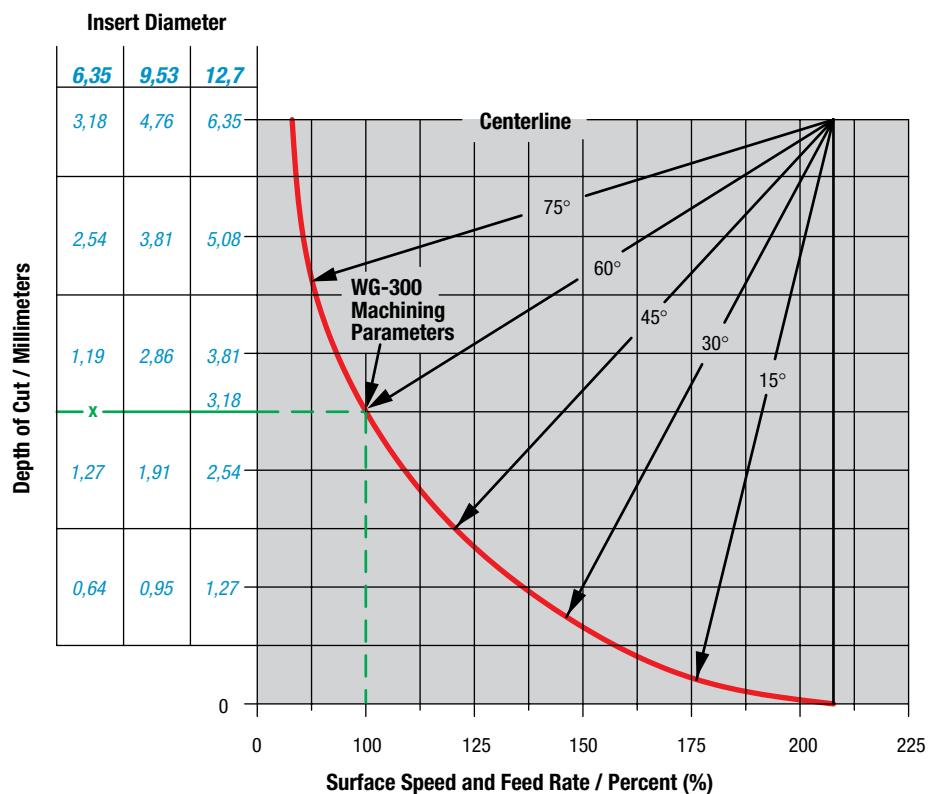

#### Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Lead-Angle Effect on Round Versus Straight-Edged Inserts

To emphasize the advantage of using round inserts, let us look at a comparison between the chip-thinning effect obtained at various depths on a round insert compared to the lead angle needed to get the same effect with a straight-edged insert.


If we assume operations with lighter depths of cut, then a round insert engaged up to 45° or halfway along the available cutting edge and advancing at .010" (0,25 mm) per revolution will produce an actual maximum chip thickness of 71% or .007" (0,18 mm).

The chip actually thins from this point gradually towards the finished surface. To thin the chip to .007" (0,18 mm) with a straight-edged insert requires a lead angle of 45°, which is about the maximum lead angle practical.

Beyond this point, the round insert can be used very easily at 30° or less. To get the same chip-thinning effect from a straight-edged insert requires 60° or more of lead angle which is just not practical.

In summary, the high lead-angle effect with corresponding reduction of pressure, especially at the depth-of-cut line, is more practical with round inserts.

**Figure 17 – Lead-Angle Effect on Round vs. Straight-Edged Inserts and the Theoretical Chip Thickness**

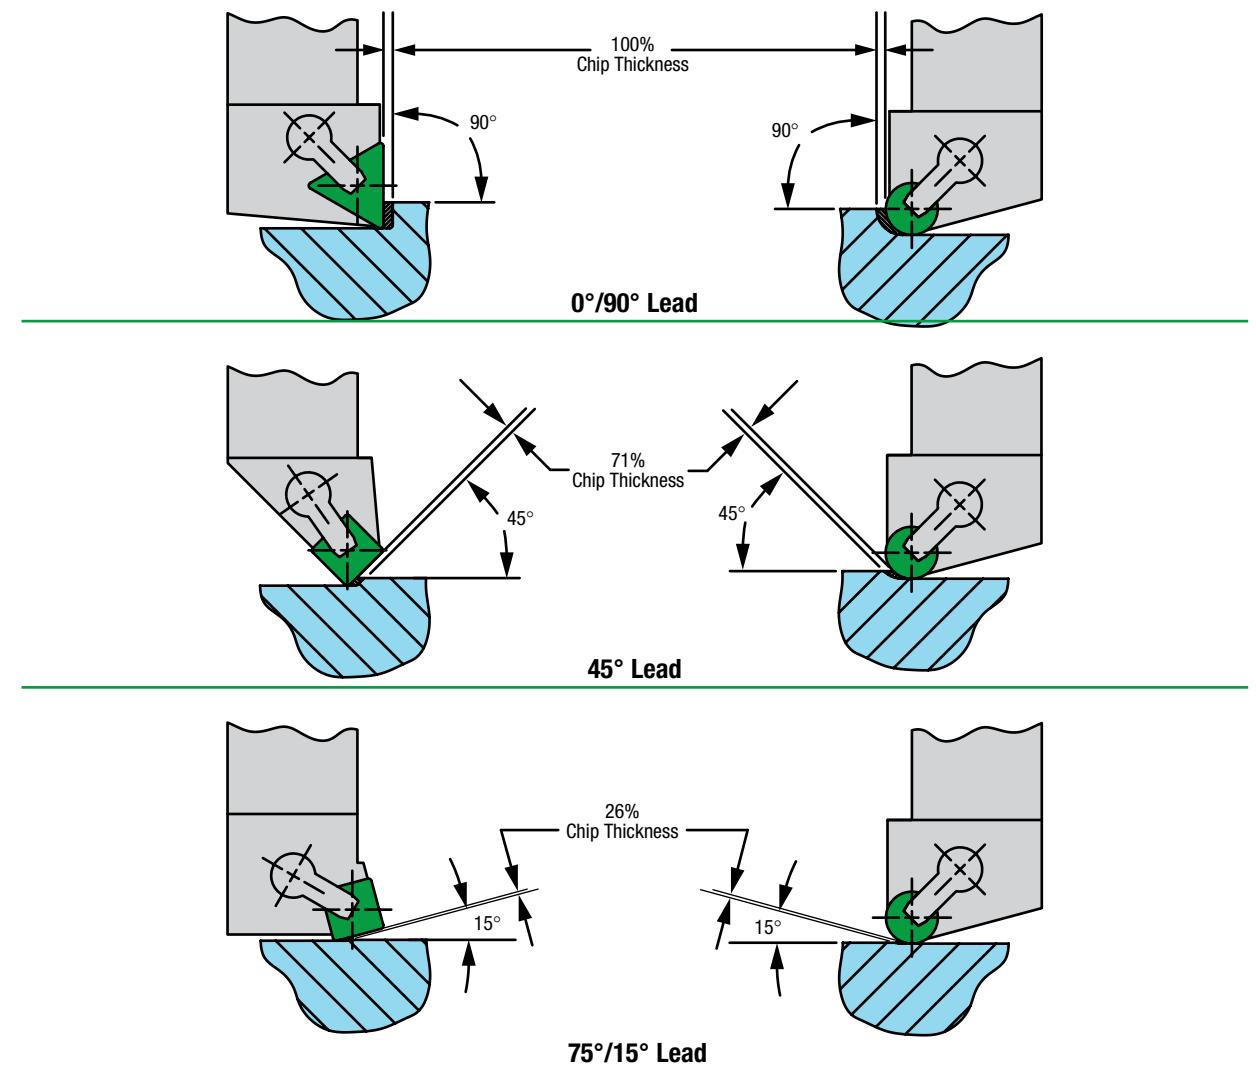

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


## Lead-Angle Effect with Other Than Round Inserts

In the cutting of nickel-based alloys, the lead angle employed is of significance. Larger lead angles reduce chip thickness, improving tool life and surface finish.

Figure 18 shows the change in lead-angle effect. It may be necessary to design tooling which does not stand on traditional carbide values to get optimum performance.

It should be noted that example (A) will produce more pressure on the part piece and may not be feasible on thin sections.

**Figure 18 – Lead-Angle Effect**

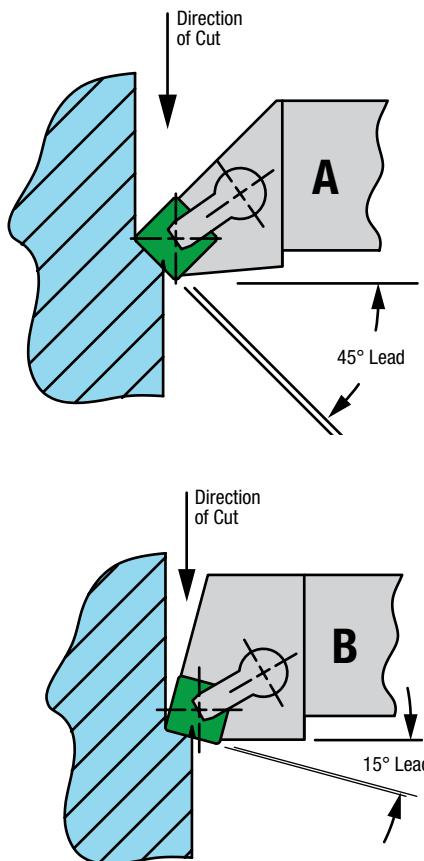


## Recommended Depth of Cut for Round Inserts

For best results, there must be a planned relationship between the insert radius and the proposed depth of cut, if the notching effect at the depth-of-cut line is to be minimized.

It will be seen by reference to the illustration, (*Figure 19*) that there will be a sudden decrease in lead-angle effect beyond a given depth on a given insert radius. This point lies at the intersection of a line drawn at 45° from the center of the insert. The effect of the decreasing lead angle is increased cutting pressures. The deeper the cut with a round insert beyond this point, the greater the depth-of-cut notching.

It is often a clear advantage in nickel-based alloys to make light cuts with relatively large-diameter round inserts. Here are the depths of cut that produce the optimum relationship on given insert sizes.

**Figure 19 – Recommended Depth of Cut for Round Inserts**

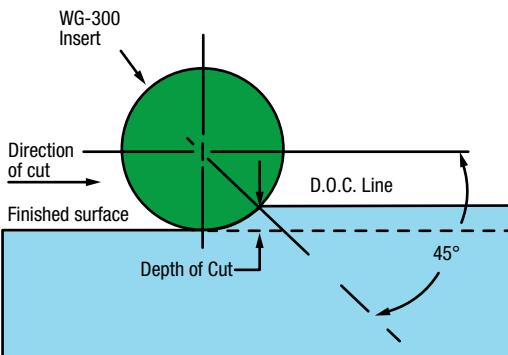

Insert Radius	Optimum Depth of Cut	
	Inches	Millimeter
.125	3.18	.037
.187	4.76	.052
.250	6.35	.073
.312	7.94	.092
.375	9.53	.110
.437	11.11	.128
.500	12.70	.147

Of course, depths lighter than those given will increase tool life at some penalty of metal removal rate. Refer back to *Figures 15 and 16* where we discuss the use of lighter depths of cut combined with increased feeds and speeds.

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Recommended Depth of Cut for Insert Nose Radii

It is very important in roughing operations with round inserts to leave the recommended amount of stock for finishing with straight inserts.


For maximum tool life when using straight-edged inserts with corner radii as opposed to round inserts, a similar effect as described with round inserts is obtained. In this case, the allowable depths of cut are related to the radius and not the insert size, assuming that the depth of cut being attempted is relatively light, such as in finishing operations.

The table to the right shows the *optimum* depth of cut at which maximum tool life (minimum notching) should start.

The accuracy for roughing therefore becomes more important, and the depth of recommended passes for finishing must be as illustrated in *Figure 20*:

A large radius, while having reduced notching tendency, will sometimes be impractical because of radius requirements on the workpiece. Larger insert radii may also cause the deflection of thin sections as a consequence of larger radial forces acting between the tool and the workpiece. A compromise between notching and these factors must often be made. However, it should be remembered that regardless of geometry, cutting force will be lower when using WG-300 high-speed techniques to plasticize the material.

**Figure 20 – Recommended Depth of Cut for Insert Nose Radii**

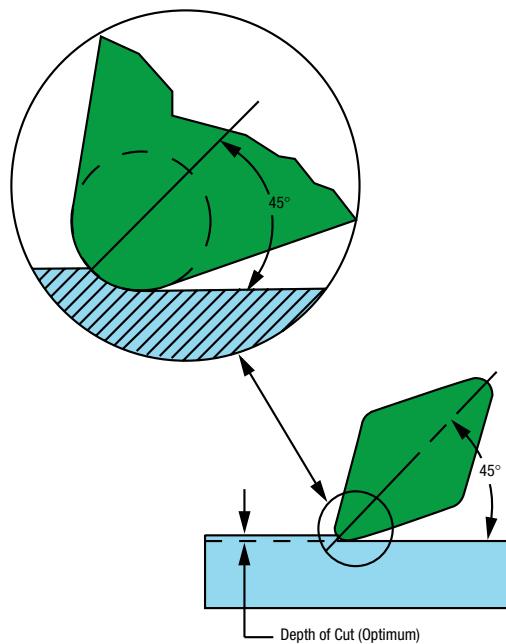

Insert Radius		Optimum Depth of Cut	
Inches	Millimeter	Inches	Millimeter
.015	0,38	.0046	0,12
.031	0,80	.0092	0,23
.048	1,21	.0139	0,35
.063	1,59	.0183	0,47
.094	2,38	.0275	0,70
.125	3,18	.0370	0,93

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Recommended Percentage (%) Reduction of Feed Per Revolution for Other Than Round Inserts (Except Grooving)

When applying inserts other than rounds, there are a number of variables present which have a direct effect on the ability of the insert to tolerate the cutting loads. These variables include the specific corner or nose radius of

the insert, the included angle of the corner (i.e. Triangle, Square or Diamond shape), the lead angle of the cutting tool to be used, the depth of cut selected, and the part piece being machined due to entry and exit angles.

It is possible to look at all of the variables and then apply percentage (%) reduction factors to the recommended feed of the graph (*Figure 13*) to compensate for them.

***In all cases the speed should be maintained as recommended.***

**Figure 21 – Feed Adjustment for Straight-Sided Inserts**

Nose radius	1/64	1/32	3/64	1/16	3/32	1/8
ANSI designation	1	2	3	4	6	8
ISO designation	.04	.08	.12	.16	.24	.32
Inches	.015	.031	.047	.062	.094	.125
mm	0,4	0,8	1,19	1,59	2,38	3,18
<b>Reduction percentage</b>	<b>19%</b>	<b>16%</b>	<b>13%</b>	<b>10%</b>	<b>5%</b>	<b>2%</b>
<b>DOC/inches</b>	<b>0-.050</b>	<b>.125</b>	<b>.250</b>	<b>.375</b>	<b>.500</b>	<b>.750</b>
<i>DOC/mm</i>	<i>0-1,27</i>	<i>3,18</i>	<i>6,35</i>	<i>9,53</i>	<i>12,7</i>	<i>19,05</i>
<b>Reduction percentage</b>	<b>5%</b>	<b>8%</b>	<b>13%</b>	<b>16%</b>	<b>18%</b>	<b>20%</b>
<b>Lead angle</b>	<b>0° &amp; -5°</b>	<b>15°</b>	<b>30°</b>	<b>45°</b>	<b>60°</b>	<b>75°</b>
<b>Reduction percentage</b>	<b>18%</b>	<b>17%</b>	<b>15%</b>	<b>12%</b>	<b>8%</b>	<b>5%</b>
<b>Included angle</b>	<b>35°</b>	<b>55°</b>	<b>60°</b>	<b>80°</b>	<b>90°</b>	<b>100°</b>
<b>Reduction percentage</b>	<b>17%</b>	<b>13%</b>	<b>10%</b>	<b>6%</b>	<b>4%</b>	<b>2%</b>
<b>Part diameter/inches</b>	<b>0-5</b>	<b>10</b>	<b>20</b>	<b>30</b>	<b>40</b>	<b>50</b>
<i>Part diameter/mm</i>	<i>0-127</i>	<i>254</i>	<i>508</i>	<i>762</i>	<i>1016</i>	<i>1270</i>
<b>Reduction percentage</b>	<b>18%</b>	<b>14%</b>	<b>10%</b>	<b>6%</b>	<b>2%</b>	<b>0%</b>

Select and add five reduction percentage (%) factors and subtract from feed rate of graph in *Figure 13*.

Example: CNGN 432 (120408)

Nose Radius 0.031 (0,8 mm)	= 16%
Assumed DOC .125 (3,18 mm)	= 8%
Lead -5°	= 18%
Included angle (80°)	= 6%
Assumed part dia. 20" (508 mm)	= 10%
	58%

58% reduction of feed rate recommended from graph (*Figure 13*).

### Greenleaf Sales

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Theoretical Surface Roughness vs. Feed and Insert Radius

### Rethink the process

The quality of the finished surface is affected directly by the radius of the tool and the feed rate at which the tool is advanced. The larger the radius, the faster the tool may be fed for a given degree of surface finish. The finish is usually stated as surface roughness in micro inches or micro meters.

The chart can be used to determine the combination of tool radius and feed rate for various roughness measurements from 8 micro inches (0,2 micro meters) to 250 micro inches (6,3 micro meters). *Using less feed rate than necessary results in premature tool wear causing bad finish, taper, and size problems.*

**Figure 22 – Theoretical Surface Roughness**

Roughness average											
Micro inches (Ra)	8 <i>0,2</i>	16 <i>0,4</i>	32 <i>0,8</i>	63 <i>1,6</i>	80 <i>2,0</i>	100 <i>2,5</i>	125 <i>3,1</i>	150 <i>3,8</i>	200 <i>5,0</i>	250 <i>6,3</i>	
Nose radius	Feed rate per revolution										
Inches <i>mm</i>	.0156 <i>0,40</i>	.002 <i>0,05</i>	.0025 <i>0,06</i>	.004 <i>0,10</i>	.0055 <i>0,14</i>	.0065 <i>0,17</i>	.007 <i>0,18</i>	.0075 <i>0,19</i>	.008 <i>0,20</i>	.010 <i>0,25</i>	.011 <i>0,23</i>
Inches <i>mm</i>	.0313 <i>0,79</i>	.003 <i>0,08</i>	.004 <i>0,10</i>	.0055 <i>0,14</i>	.008 <i>0,20</i>	.009 <i>0,23</i>	.010 <i>0,25</i>	.011 <i>0,28</i>	.012 <i>0,30</i>	.014 <i>0,35</i>	.016 <i>0,41</i>
Inches <i>mm</i>	.0469 <i>1,19</i>	.0035 <i>0,09</i>	.005 <i>0,13</i>	.007 <i>0,18</i>	.0095 <i>0,24</i>	.0105 <i>0,27</i>	.012 <i>0,30</i>	.013 <i>0,33</i>	.015 <i>0,38</i>	.017 <i>0,43</i>	.019 <i>0,42</i>
Inches <i>mm</i>	.0625 <i>1,59</i>	.004 <i>0,10</i>	.0055 <i>0,14</i>	.008 <i>0,20</i>	.011 <i>0,28</i>	.0125 <i>0,32</i>	.014 <i>0,35</i>	.015 <i>0,38</i>	.017 <i>0,43</i>	.020 <i>0,50</i>	.022 <i>0,56</i>
Inches <i>mm</i>	.0938 <i>2,38</i>	.0045 <i>0,11</i>	.007 <i>0,18</i>	.009 <i>0,23</i>	.013 <i>0,33</i>	.015 <i>0,33</i>	.017 <i>0,43</i>	.019 <i>0,43</i>	.021 <i>0,53</i>	.023 <i>0,58</i>	.026 <i>0,66</i>
Inches <i>mm</i>	.125 <i>3,13</i>	.0055 <i>0,14</i>	.008 <i>0,20</i>	.011 <i>0,23</i>	.016 <i>0,41</i>	.018 <i>0,45</i>	.020 <i>0,50</i>	.022 <i>0,56</i>	.024 <i>0,60</i>	.027 <i>0,69</i>	.031 <i>0,79</i>
Inches <i>mm</i>	.1875 <i>4,76</i>	.007 <i>0,18</i>	.0095 <i>0,24</i>	.0135 <i>0,34</i>	.017 <i>0,43</i>	.021 <i>0,53</i>	.025 <i>0,64</i>	.027 <i>0,69</i>	.030 <i>0,76</i>	.034 <i>0,86</i>	.040 <i>1,02</i>
Inches <i>mm</i>	.250 <i>6,35</i>	.008 <i>0,20</i>	.011 <i>0,28</i>	.016 <i>0,41</i>	.022 <i>0,56</i>	.025 <i>0,65</i>	.027 <i>0,69</i>	.031 <i>0,79</i>	.034 <i>0,86</i>	.040 <i>1,02</i>	.044 <i>1,12</i>

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## The Effect of Increased Clearance on Tool Life

Under normal tool wear circumstances, a tool is said to be "worn out" when the flank wear has developed to the point that surface finish has deteriorated outside of acceptable limits. This is determined when the width of the wear land has decreased clearance and increased heat and pressures in the tool workpiece interface area to the point that further use will lead to complete failure of the tool by severe chipping or catastrophic breakage. On nickel-based alloys, the depth-of-cut notch may become too severe before this flank wear has progressed to that limit.


However, assuming that notching is under reasonable control, tool life, as judged by wear land development, can be prolonged by increasing the tool side clearance. With "normal" hot-pressed or cold-pressed ceramic and composites, this clearance is usually limited to about  $7^\circ$  since the materials are too brittle and friable to permit a larger angle. Greenleaf advanced whisker-reinforced ceramics do not suffer from this problem, and large clearances can be used because of the greater edge strength. To view the difference that, for example, an  $11^\circ$  clearance makes compared to a  $7^\circ$  clearance, refer to the illustration. (Figure 23)

It will be seen that with a  $7^\circ$  clearance angle, .003" ( $0.07\text{ mm}$ ) of material will be worn from the insert to produce a .025" ( $0.64\text{ mm}$ ) wear land, whereas .005" ( $0.12\text{ mm}$ ) of material must be worn from an  $11^\circ$  clearance insert to produce the same amount of wear land. This will then equate to increased tool life between indexings.


It is recommended that tooling be carefully evaluated on all operations relative to using clearance angle inserts. In most cases, investments in new tools can be justified.

Remember, a Greenleaf tool is designed to take  $7^\circ$  side-clearance inserts as well as  $11^\circ$ .

**Figure 23 – The Effect of Increased Clearance on Tool Life**

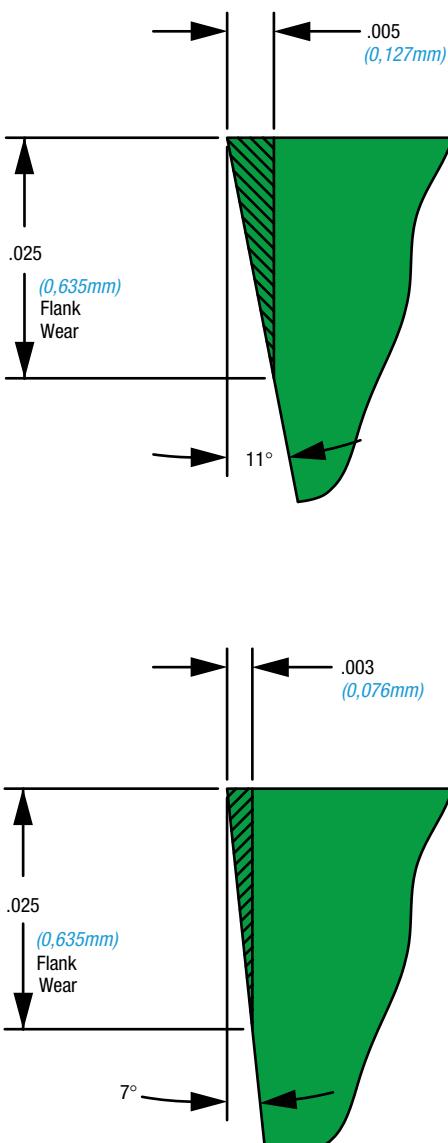

**Figure 24 – Standard Edge Preparations**

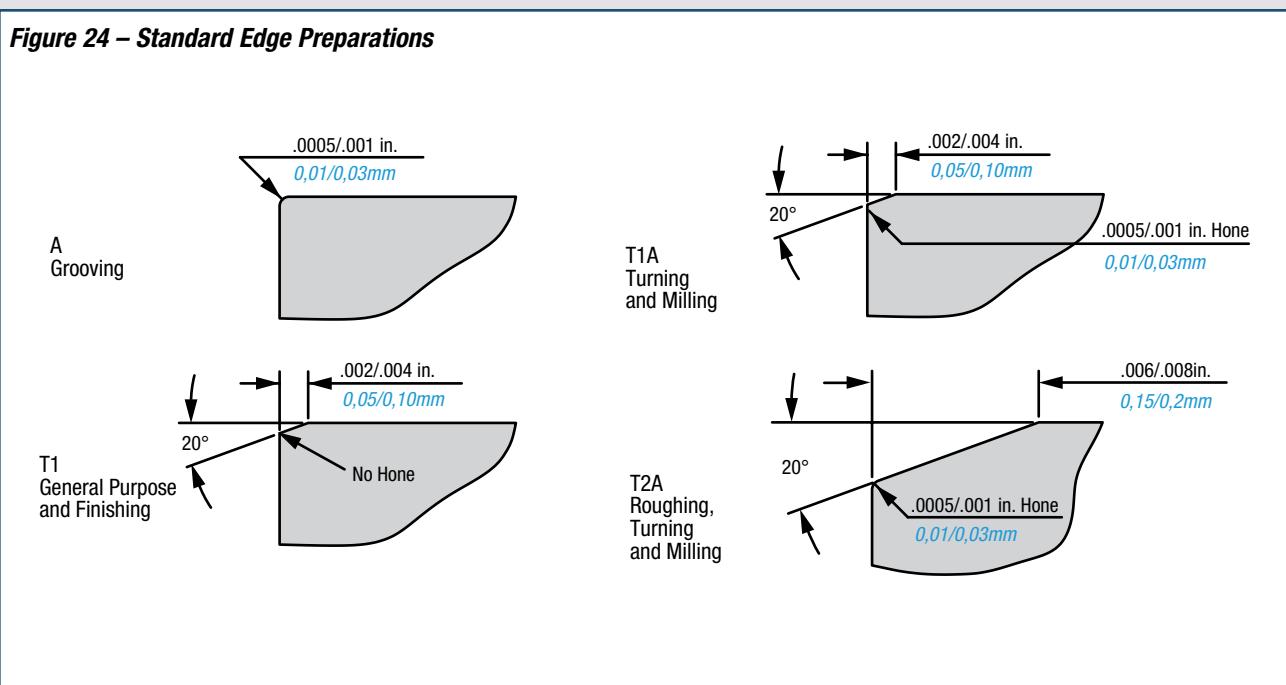

## Edge Preparation For Nickel-Based Alloys

Greenleaf advanced whisker-reinforced ceramics have inherently strong cutting edges, and it is recommended to use them without hones, except when making heavy roughing cuts or in scale conditions. A sharp cutting edge is a clear advantage in finishing operations to avoid "burnishing" and "smearing."

For most nickel-alloy operations involving light roughing and finishing in clean material, the T1 edge preparation should be standard. *No hone is used.*

In ceramic tool applications, edge preparation is critical to tool life and surface integrity. Edge preparations are used to change the shear forces at the edge to compressive forces, thereby guarding against chipping and breakage.

If we use a wide negative land on a tool and use a very light feed rate, we have in fact changed the geometry of the tool by doing all of the cutting on the land itself. This is incorrect use of a negative land giving rise to a new set of problems. We highly recommend using a T1 edge preparation (.002"-.004" x 20°) (0,05 mm-0,10 mm x 20°) for increased strength with minimum "smearing" effect during finishing operations. (See Figure 24 for more details.) It may be necessary to add a hone (T1A) when light scale conditions or minor interruptions are present.

For milling and roughing other than very heavy-duty machining, a T2A edge prep should be used (.006"-.008"x 20°+.0005" hone) (0,15 mm-0,2 mm x 20°+ 0,013 mm hone).

For most aircraft-type work, T1 and T2A should be the only edge conditions required.

Remember; *never* use a honed edge unless it has been shown conclusively that a hone is required. This should be in very few applications. *Always* start by testing the T1 edge preparation.

***The exceptions to the general stated rule would be:***

### Grooving

Because a grooving tool moves constantly forward into clean material, there is no notching problem in normal usage. Also, a grooving tool is usually a relatively fragile tool especially in the narrow-width grooves found in jet engine work.

For these reasons, we highly recommend that grooving tools do not have a negative land. This will keep cutting forces to a minimum.

*For grooving use an "A" hone only.*

### Heavy Interruptions

In severely interrupted cuts, we need to keep the cutting edge in compression to avoid shear forces. This will reduce chipping and breakage. The chip width is smaller than the negative land width.

#### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

## Coolant

The recommendation to use flood coolant on whisker-reinforced ceramics may appear to be something of a paradox. "How to Use the Properties of Greenleaf Advanced Whisker-Reinforced Ceramics", page ATI30, introduces the concept that heat produced by the application of WG-300 plasticizes the metal in front of the cutting edge. This action is desirable and heat is used advantageously. However, it is also desirable to cool the whole operation by flooding it with coolants—thus, the paradox.

Whisker-reinforced ceramics are a good heat conductor compared to ordinary ceramic materials. The heat is pulled away from the tool/workpiece interface into the body of the insert where the coolant can help to maintain a lower tool temperature. We can lower the temperature of the chip with coolant after it has formed and make it more manageable.

Coolant will also help keep the part piece temperature stable to aid in size control and reduce distortion. Use coolant liberally at all times. Unlike ordinary ceramics, the whisker-reinforced grades will not suffer breakage or cracking from intermittent coolant use.

**Figure 25 – Coolant**



The coolant does not decrease the temperature in the interface area; however, coolant often doubles tool life.

It is important to use clean coolant. This is not a problem when a central coolant system is used. With a stand-alone machine, the coolant must be checked very closely. Water evaporates faster than oil at these high temperatures. Adding more coolant will increase the soluble oil content, which leads to smoking, less cooling effect and shorter tool life. Contamination of the coolant from any material such as cigarette butts, coffee, etc., has proven very detrimental and should be monitored.

High coolant pressure on nickel-based alloys is not as important as volume. A minimum of a 3/8" (10 mm) inside diameter pipe is recommended.

The coolant must be directed exactly on the cutting area without any interference from clamps, screws, or otherwise. Oil-based, water-soluble, emulsion-type coolants have proven to be the best.

The use of straight oils is to be avoided since the hazards of oil smoke and fire exist.

### **Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


## Notching and Correct Tool Path

Of all the precautions that can be taken to reduce or eliminate notching, none are as important as programming the most desirable tool path. It is very important that machine programmers, along with operators and tool engineers, are aware of the programming options. We will examine a series of circumstances that represent standard procedures for carbide tools but produce rapid failure in a notch-sensitive, ceramic material.

## Pre-Chamfer Parts Whenever Possible

Pre-chamfering trues the part and ensures a progressive entry onto a true running surface. It also provides a regressive exit from the part and in both cases protects the cutting edge from damage. When using separate pre-chamfer operations as illustrated (Figure 26), the direction of feed is important to eliminate notching. Moving on a single axis, as in examples A and B, will cause notching. The direction should be at 90° to the chamfer as shown in example C to eliminate notching and increase tool life.

**Figure 26 – Chamfering Techniques**

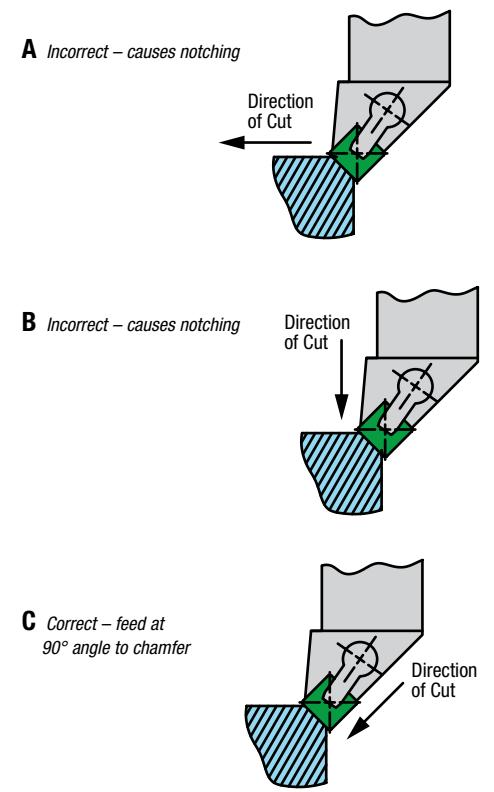


## The Chamfer Ramp Approach

In the illustration (Figure 27) which shows an actual operation on a jet engine rotor, we can see that feeding straight in will produce rapid notch wear. This notch will become a stress-concentration point leading to early failure.


A simple change in the programming of the part (Figure 28) can accomplish chamfering and facing of the part effectively in one continuous operation without any measurable difference in cutting time. This eliminates the separate pre-chamfer operation.

It is important that the program provide a “continuous move” around the part-piece edge. This will keep the material ahead of the cutting edge in a plasticized state, which is desirable for ceramic cutting methods. Another benefit is the elimination of the burr normally created with two operations, i.e. chamfer after or before the turning or facing operation.

**Figure 27 – Straight Facing**

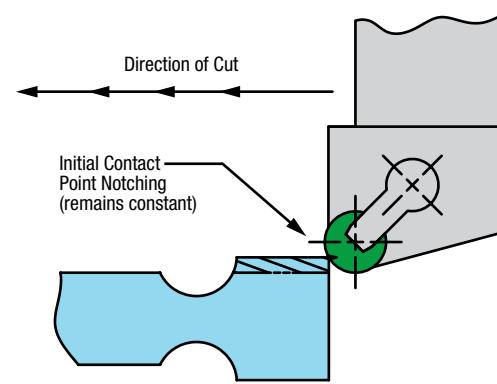

**Figure 28 – Chamfering and Facing**

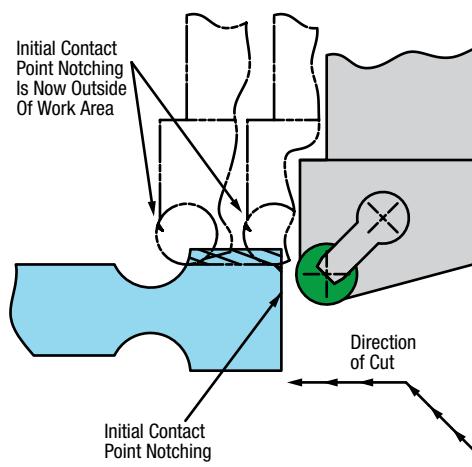

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

*continued*

The technique of generating a chamfer with the same tool used for the turning operation is valid and equally effective in terms of enhanced tool life with any shape of insert, any lead-angle tool and any given insert-corner radius.


In *Figure 29* we show a roughing operation using a square insert. Here we have programmed a  $45^\circ$  move to pre-chamfer the corner prior to the turning operation. This is done in one continuous motion with the  $45^\circ$  move transitioning into the straight turning. In this way, the section of insert in initial contact with the junction of two work-hardened surfaces is now outside the cut path. This will greatly reduce further notching tendencies.

The second example (*Figure 30*) shows a light finishing cut working on the radius of a tool. Once again, the  $45^\circ$  approach to the finish turned surface will reduce any notching effect initiated by the first contact. This programming approach can be used to leave a chamfer on the corner of the workpiece as well as either a radius or a sharp corner. (*See Figure 31*)


#### Chamfer advantages:

1. Increased tool life
2. No deburr time
3. Chips cannot hang up
4. Higher safety factor


**Figure 29 – Producing a Sharp Corner**

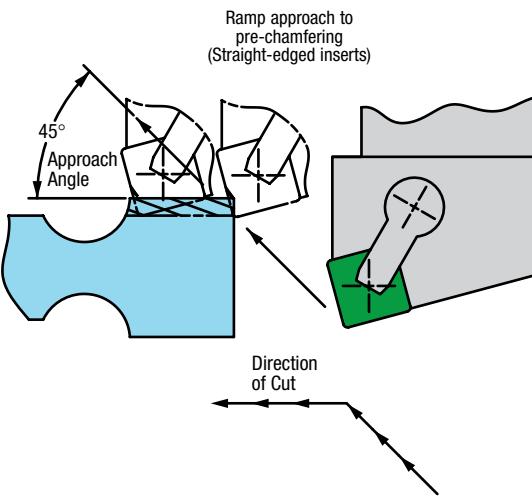

**Figure 30 – Producing a Sharp Corner**

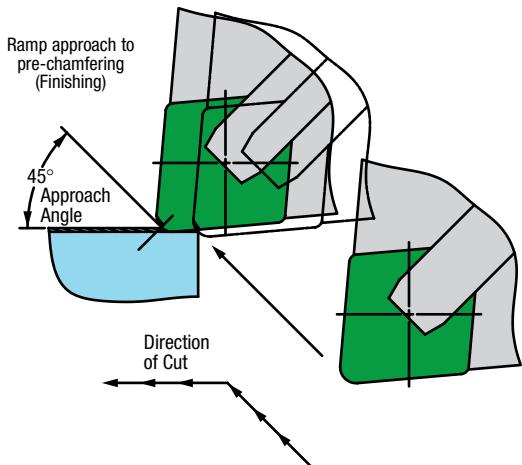

**Figure 31 – Ramp Approach for Entry of Nickel-Based Alloys (Round Inserts)**

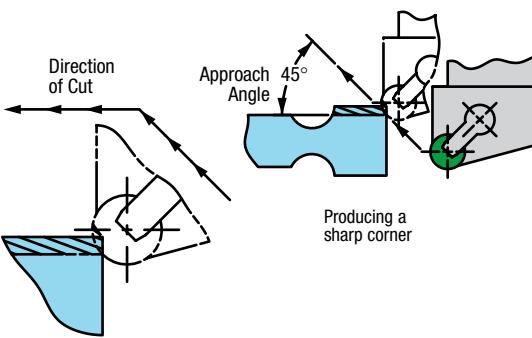

#### Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


## To Exit a Cut

Potential problems exist on exiting the cut if a chamfer preparation has not been made. If the exit is made on a sharp corner, on high-nickel materials in particular, a burr will result.

The burr will tend to constantly deflect or roll over and cause chipping or breakage of the cutting edge upon exit. In addition, the burr needs to be removed by a secondary operation.

The problem described tends to be more pronounced when cutting at high speeds since high heat is maintained ahead of the tool. This will mean that the material is in a more plastic condition and the rollover tendency is greater. Pre-chamfering helps correct this problem as shown. (Figure 32)

**Figure 32 – Pre-Chamfer to Eliminate Burrs**

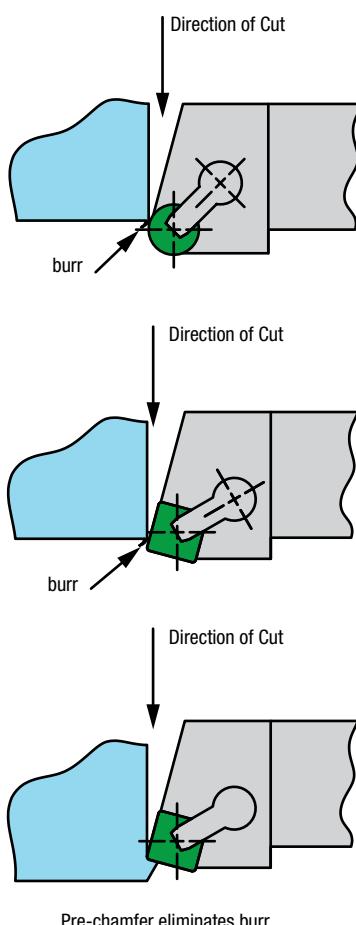


## Programming Alternatives for Roughing Operations

### Avoid or reduce multiple passes by taking deeper depths of cut

The strength of Greenleaf whisker-reinforced ceramics will enable much greater depths of cuts than other ceramic materials. For example, when turning with a Triangle or Diamond insert, take the greatest depth possible, even to the extent of 1/2 of the cutting edge. This not only reduces the number of passes required, it also will place any notch formed in a stronger section of the insert, leaving the tool radius area often unscathed and available for subsequent finish operations. (Figure 33)

A reduction of feed rate will be necessary in this case, and the feed rate recommendation chart should be used (Figure 21).

**Figure 33 – Rethink Depth of Cut**

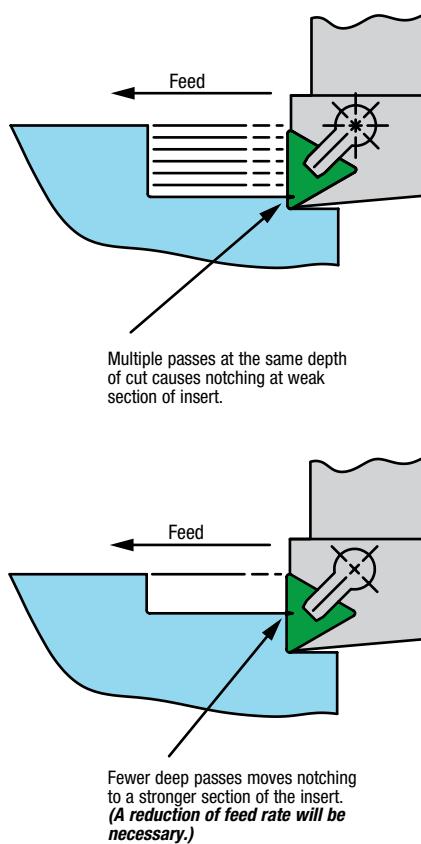

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Preserving Tool Life

When a large amount of stock has to be removed, it is often done by taking multiple passes at the same depth of cut. (Figure 34) This is not a good practice. A very rapid development of severe notching will result since the same point on the cutting edge is subjected to the depth-of-cut line. Consequently, many indexes are required, escalating costs due to downtime and tool costs.

Vary the depth-of-cut contact point at the workpiece/ insert interface. This can be best accomplished by two techniques:


### ***Variation in the depth of cut from pass to pass***

Gradually decrease the depth of cut per pass. This may take a very small amount of time but will be more than compensated for by increased tool life, less indexing of the insert, and less downtime. (Figure 35)


### ***Ramping***

Of all the techniques readily available on a CNC machine, "ramping" has proven to be the most important. By gradually feeding out while traversing the work, depth-of-cut notching can be, for all practical purposes, eliminated. The next cut is then programmed at a constant depth since the surface itself is now ramped. A similar effect is achieved. (Figure 36)


**Figure 34 – Multiple Passes at the Same Depth of Cut**

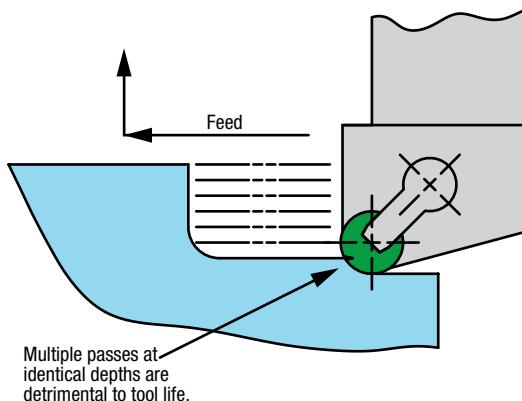

**Figure 35 – Multiple Passes at Varying Depths of Cut**

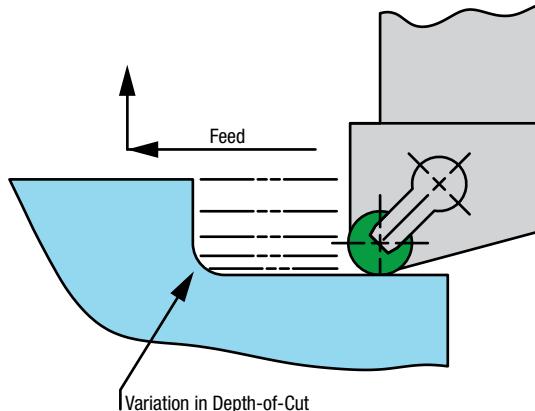

**Figure 36 – Multiple Passes Using Ramping Technique**

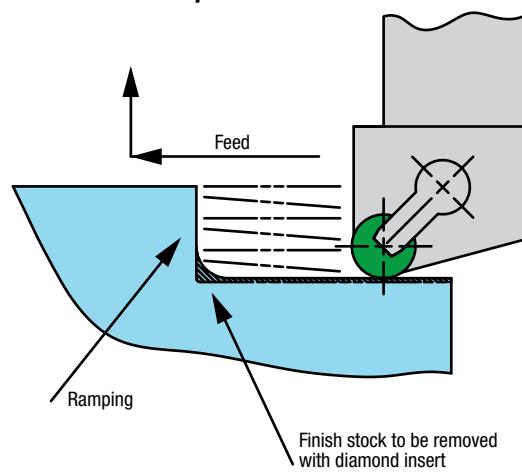

### ***Greenleaf Sales***


**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Ramping with negative round inserts

The ramp **must** start out with a deep cut, then the depth of cut must diminish. This constantly lifts the insert higher and more out of the cut, creating a ramp. The second cut is programmed straight and in the same direction, effectively removing the ramped surface left by the first cut. (*Figure 37*)

Tool life on the first cut is longer than on the second since the damaged cutting edge from the work-hardened surface is lifted out of the cut. Tool life on the second cut is shorter since the damaged cutting edge at the depth-of-cut line is buried more and more as it continues cutting straight and the ramp gets higher. However, tool life in both described ramped cuts is longer than in straight cuts.

**Figure 37 – Ramping/Negative Inserts/RNGN**

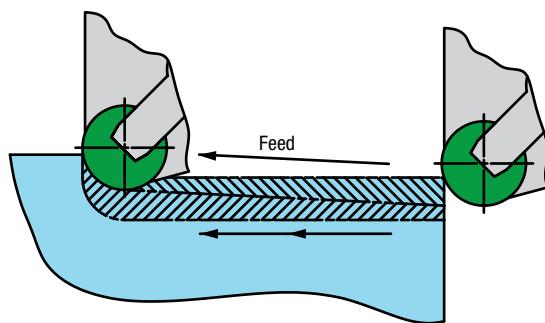


## Ramping with positive round inserts

When using RPGN or RCGN inserts, ramping can be done in both directions without indexing (*Figure 38*). Area "B," which is the bottom of the inserts, is constantly lifted out of the cut on the first pass, and the insert finishes with area "A". The second pass in the opposite direction will then use area "B" for finishing.

The above is not possible if the ramping is started from the lesser depth of cut then moves to the deeper depth of cut. Ramping is always better from a deep to a shallow depth.

**Figure 38 – Ramping/Positive Inserts/RPGN-RCGN**

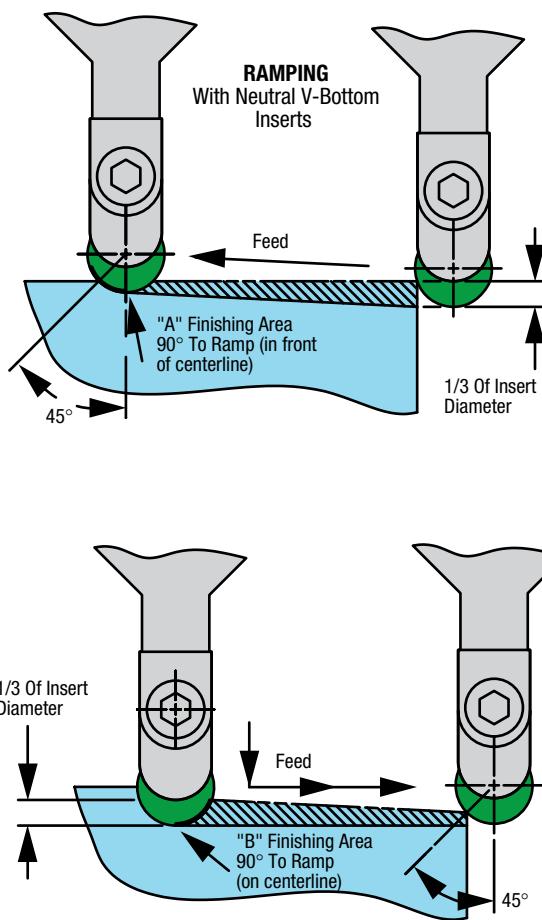

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## To Optimize Tool Life in a Ramping Mode

The time "C" is a maximum value in minutes. The actual length of the cut represented by "C" will vary with part piece diameter. The smaller the diameter of the workpiece,

the longer the length of cut. We suggest that time be limited to approximately five minutes for a .500" diameter (12,7 mm) insert. (Figure 39)

**Figure 39 – Optimized Ramping Technique**

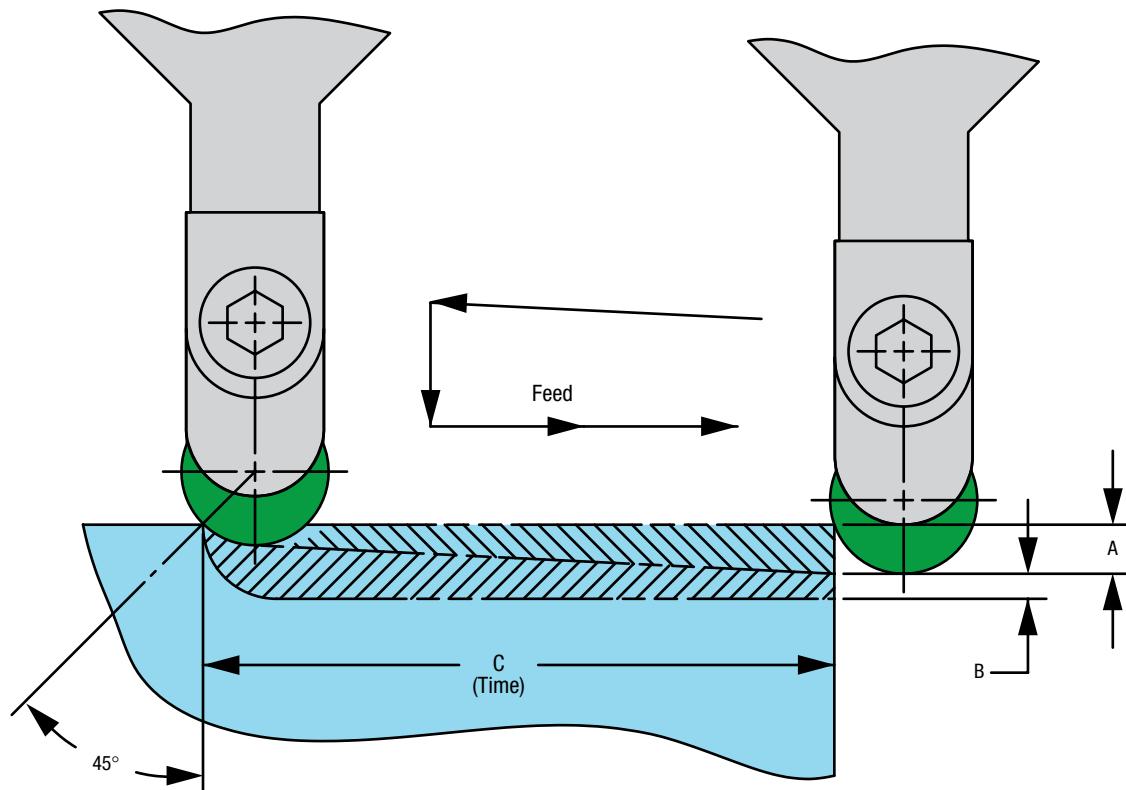

DIAMETER		"A"		"B"		"C"
inches	mm	inches	mm	inches	mm	minutes
.250	6,3	.080	2,0	.040	1,0	3
.375	9,5	.120	3,0	.060	1,5	4
.500	12,7	.160	4,0	.080	2,0	5

### Greenleaf Sales

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


### To Optimize Ramping Technique (Figure 40)

- Using a .500 diameter (12,7 mm) round insert, select recommended feed and speed from graph (Figure 13). This will equal 100% of feed, speed and a .125" (3,18 mm) depth of cut at the mid-point of the ramp.
- Start the ramping cut at a depth of approximately 1/3 the diameter (.160") (4,0 mm) and select the appropriate speed and feed percentage (%). (Figures 15 and 16)
- Proceed with ramping cut until the depth of cut is approximately .080" (2,0 mm). This is the 45° mark on a .500" (12,7 mm) diameter round insert. During the cut,

the feed and speed should be incrementally or continuously increased. At the conclusion of the cut, the parameters should be at the appropriate speed and feed percentage (%). (Figures 15 and 16).

- Cutting distance is measured in minutes and can be programmed for five minutes with a .500" diameter (12,7 mm) round insert. (Figure 14)

**Figure 40 – Optimization of Ramping Technique with 1/2" (12,7 mm) Round Inserts**

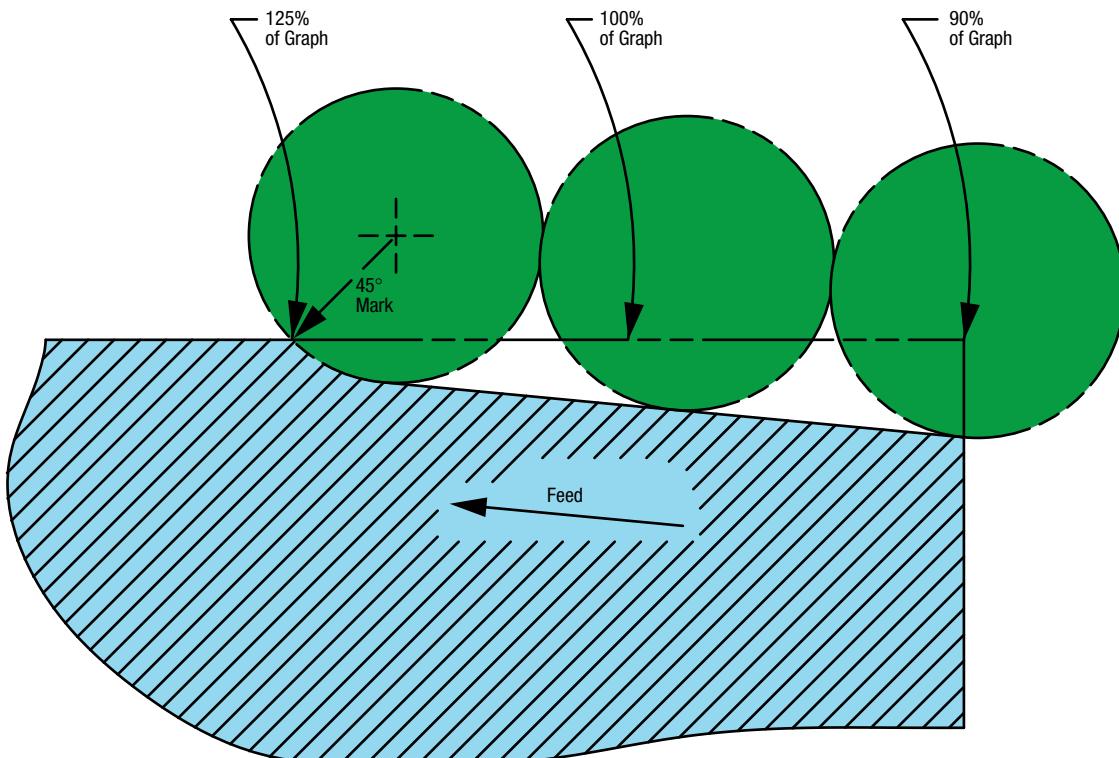

#### **Greenleaf Sales**


US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

To achieve the desired effect of a constantly changing depth of cut to eliminate notching, it is not necessary to think of ramping in terms of a straight line. For example, a wavy line achieves the same objective, perhaps more efficiently, by moving the hardened surface back and forth on the cutting edge. On both the first and second cuts, the material is gradually increased and then gradually decreased. (Figure 41)


Also illustrated are examples of plunging in and then ramping using a positive round insert or producing a ramp with a lead-angle tool using a straight-edged insert.

**Figure 41 – Various Ramping Methods**

**A Wavy line**

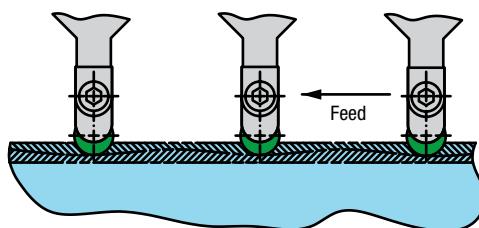

**B Plunging and ramping**

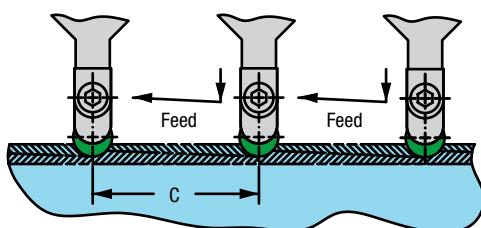

**C Ramping with lead-angle tool**


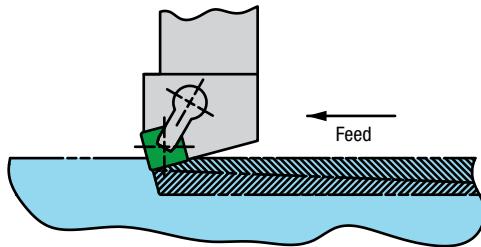


Figure 42 shows an operation boring a cavity on an Inconel 718 part on a Vertical Turret Lathe. As originally programmed, this operation required five tool indexes to bore out all of the material. Five times the tool returned to "home" position and was out of the cut.

By changing to a new program and converting from carbide to Greenleaf WG-300 with "ramping," the entire cavity was machined without a tool change. Productivity increased three (3) times and tool life increased by a factor of 20 to 1. Actual machine time was reduced from 318 minutes to 130 minutes.

Our files contain numerous cases of productivity gains of this magnitude by "ramping".

**Figure 42 – Boring a Cavity with Ceramics**

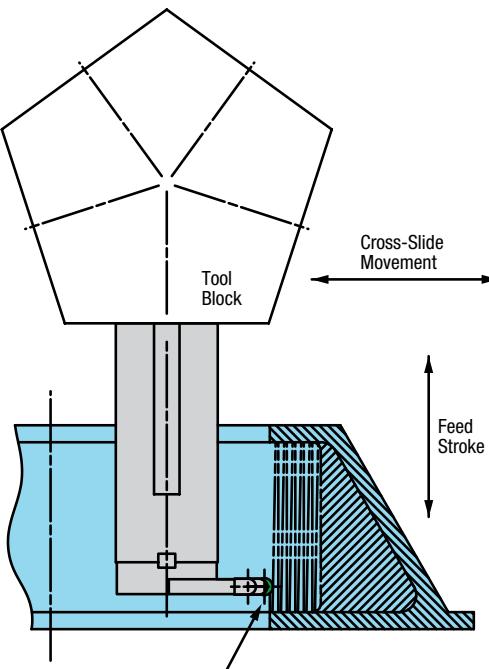

## Turning to a Shoulder


When rough or finish turning into a shoulder with high velocity techniques, it is most important to observe some basic rules.

With negative inserts in particular, it should be remembered that the chips are being pushed forward. As the shoulder is approached, the chips will be trapped, giving rise to an increase in tool pressure. (*Figure 43*) Also tool pressures increase as insert engagement increases near shoulders. This may result in tool breakage. *It is strongly recommended that the feed rate be reduced by about 50% when the tool is within .125" (3 mm) of the shoulder.* Reduction of the feed will tend to straighten out the chip as the chip temperature increases, reducing pressure on the insert cutting edge. **This applies to any shape of insert.**


When the tool stops at the shoulder and then withdraws, a hard crystallized layer of material is left. This may produce a series of steps when a square insert is used or scallops when using a round insert. (*Figure 44*)

Very poor tool life will be experienced in any subsequent operation to finish machine these stepped or scalloped surfaces. The solution is to program the tool to continue moving up the shoulder face upon completion of each pass. This will remove the scallops or steps while the material is still hot ahead of the cutting edge and leave a more readily machinable surface for finishing.

**Figure 43 – Chip Being Trapped Against Shoulder  
(increased engagement increases tool pressure)**

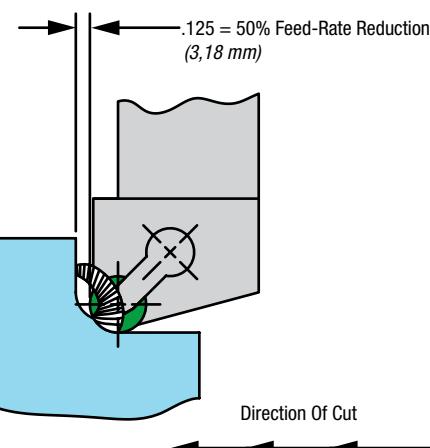


**Figure 44 – Avoid Leaving Scallops at Shoulder**

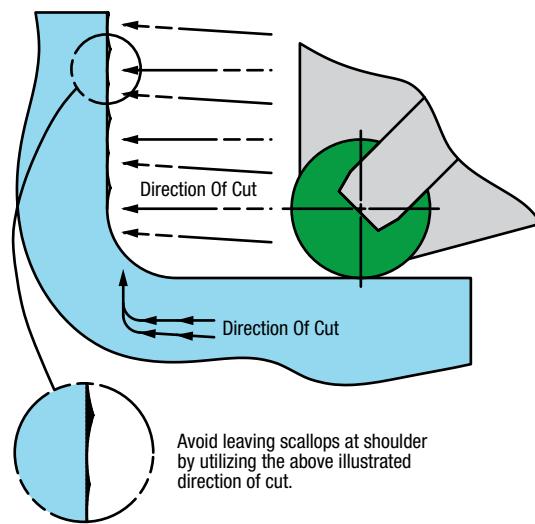

**Figure 45 – Tool Engagement Angle**

Maintaining a reduced engagement area as shown in *Figure 45* is preferred. If the increased engagement area is unavoidable, then a 50% feed reduction may be necessary.

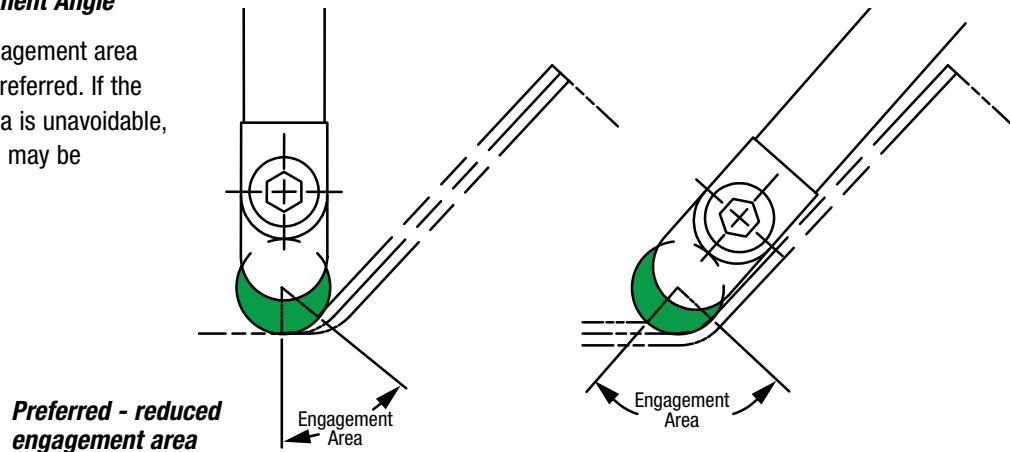

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com


## Double Notching – Not Recommended for Notch-Sensitive Situations

It is quite common to program a cut in both directions in CNC machining using carbide inserts. This may have been a matter of convenience to avoid a tool change. It should be noted however, that this is a very undesirable method in notch-sensitive situations such as in high-velocity machining with ceramics.

Here, the tool was fed first from the top and then along the bottom and a blend was made in the radius area. The problem is obvious. Notching has occurred on both sides of the insert. During the second cut, material jams into the first notch causing chipping. Stress may generate a failure crack from notch to notch and break off the corner.

(Figure 46)


**Figure 46 – Carbide Method Beware**

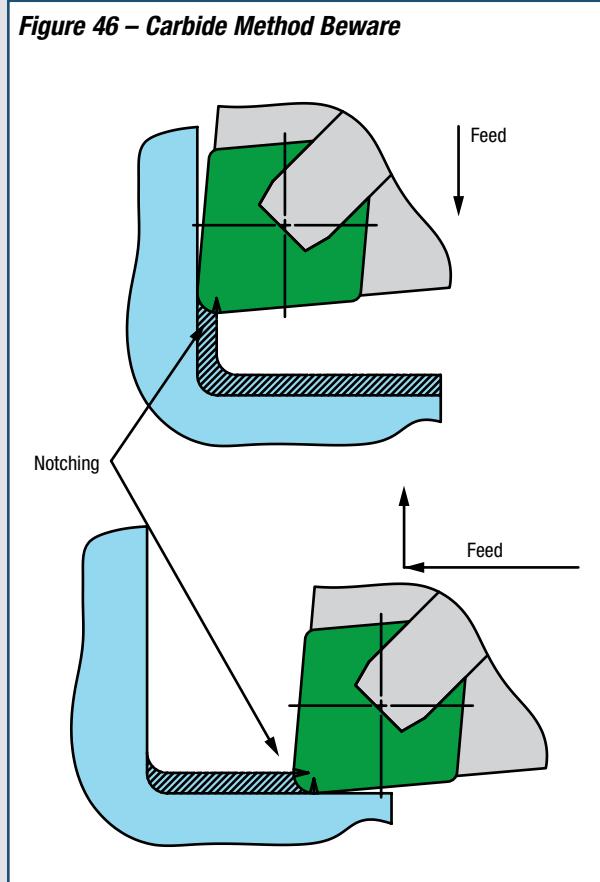

### Rethink the process

The correct procedure is to take more material off during the previous roughing application, then remove the amount of stock suitable for the nose radius of the insert (Figure 20) by staying below the 45° mark of the corner radius. This will minimize notching and allow a cut from both directions. (Figure 47)

**Figure 47 – Ceramic Method**

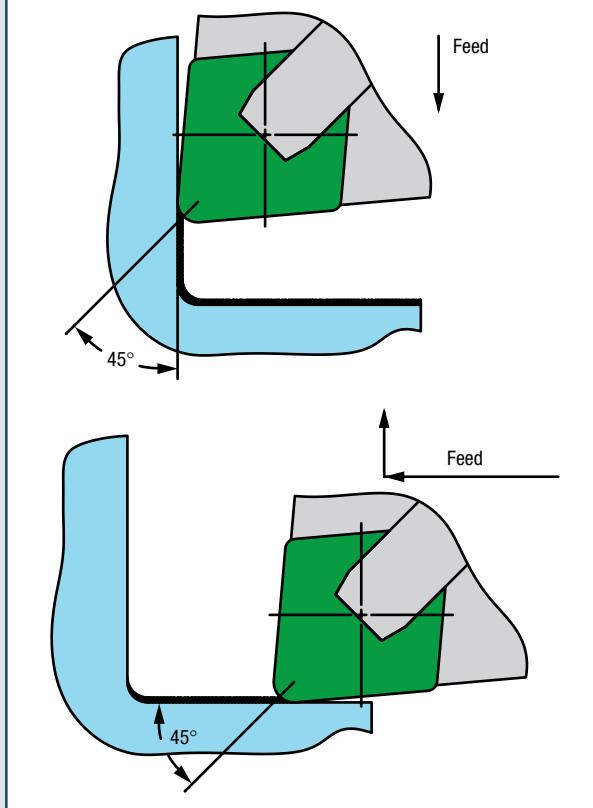

## Finishing a Fillet

Sound design criteria, especially on highly stressed parts such as jet engine components, calls for fillets or specific radii at the junction of most angles.

Problems encountered in finish machining of fillets can often be traced to the approach made in the rough-machine operations.

The amount of stock left for finishing and the shape and condition at the surface of this stock are affected greatly by the tool path and insert configuration used in roughing.

It is not uncommon for a programmer to call for a tool having the specific radius of the fillet and do the entire operation with this tool. This radius is usually small, therefore the tool is weak and must typically be indexed or changed to complete the operation.

There are a number of effective methods available to accomplish these corners, all of them superior to the common method of multiple passes with the weak radius tool.

### Method 1 (Figure 48)

**#1** – The material is roughed using a .500" (12,7 mm) diameter round insert. This leaves a .250" (6,35 mm) corner radius. In addition, stock for finishing has been left on both walls.


**#2** – The finished radius is now generated by plunging the 80° Diamond-shaped insert finishing tool at 45° into the corner. This plunging operation spreads the effect of the work-hardened surface across the nose of the tool without notching it. In addition, the tool is supported by equalized forces on both sides. A clean, accurate radius is also produced.

**#3** – The tool is then drawn across one of the faces to produce the finished surface. The long 5° reverse lead angle inherent in the 80° Diamond insert will produce a good finish without damage to the cutting edge.

**#4** – The second wall is finished by turning the tool to the corner and feeding out in the other direction, again working on the long lead angle.

### Method 1

Figure 48 – Finishing a Fillet Using an 80° Diamond Insert (Plunge Cut)

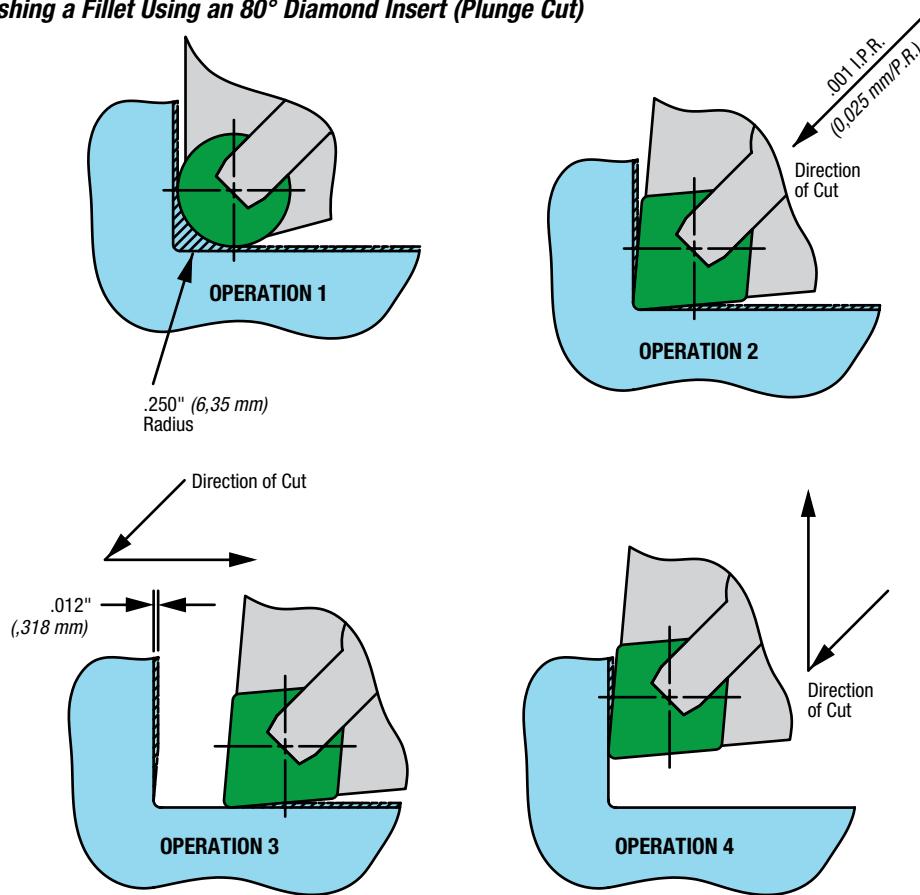

### Greenleaf Sales


US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Method 2

**Figure 49 – Finishing a Fillet Using a Grooving Tool and a Round Insert**

Very small radius fillets on parts are often produced with the fewest problems by using a grooving tool on the first operation. A grooving tool is self-stabilizing and always moving forward into clean material. This results in

efficient machining without tool notching and produces an accurate corner radius. The remaining material is then removed by ramping cuts with a round insert.

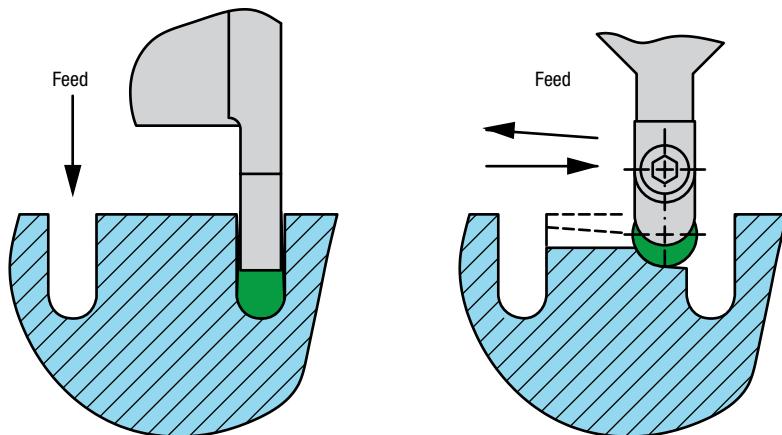


## Method 3

**Figure 50 – Turning to a Shoulder in Cavities with V-Bottom Grooving Inserts**

This example shows the profiling of the groove or cavity using a V-bottom grooving insert. It is important to keep the finish stock very light on the sides so that the cut is below the 45° mark on the insert radius. This will vary with the radius needed. The larger the radius, the greater the stock can be. (See Figure 20)

In the corner itself, we use the “ramp” inherent in the radius left by the round insert used for roughing to reduce or eliminate “notching” of the tool. This is a further benefit of roughing with round inserts or profiling the corner in the program.

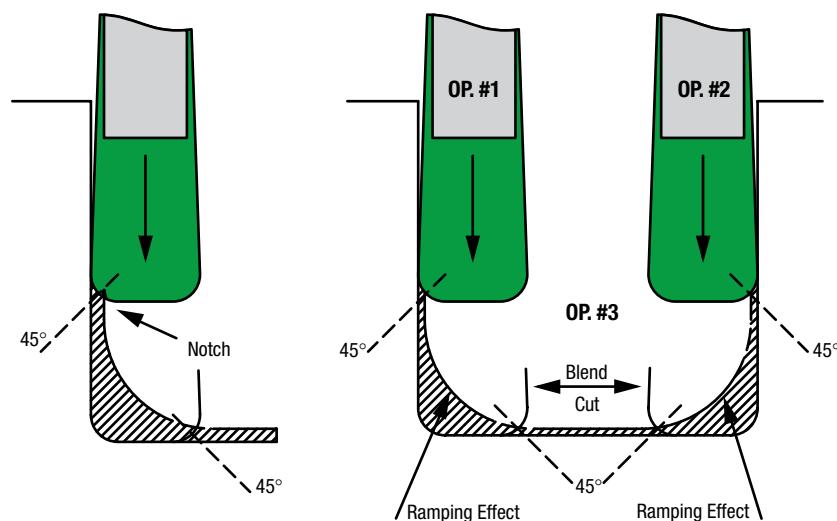

*Watch the depth-of-cut line!*






### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

### Method 4

**Figure 51– Ramping Effect on Shoulder Cuts**

In this method, a CNGN452 (12 07 08) insert is shown in the finish operation on a fillet roughed with a RNGN45 (12 07 00) insert leaving a .250" (6,3 mm) radius. The finish operation is performed by feeding several times into the fillet. It is essential when the wall is reached to *immediately* raise the tool vertical to remove the scallop which would otherwise be left on the wall. This material will tend to cool and present a hardened, irregular surface needing a subsequent operation (Figure 43). The finish passes described will tend to notch the tool and should be programmed at various depths to reduce this effect. The final pass should be less than the 45° line of the tool nose radius (Figure 20).

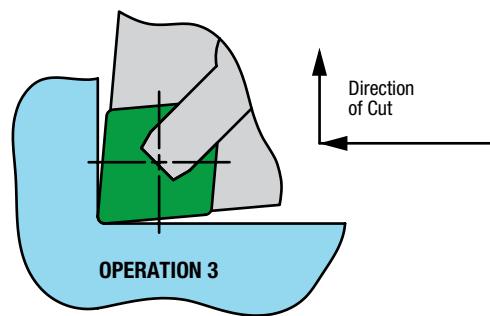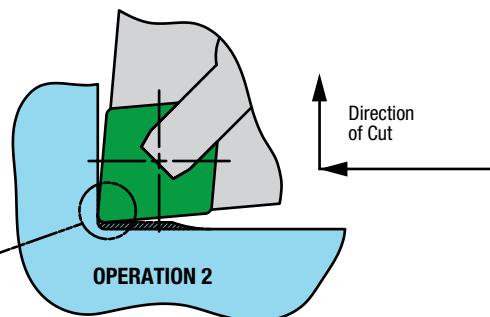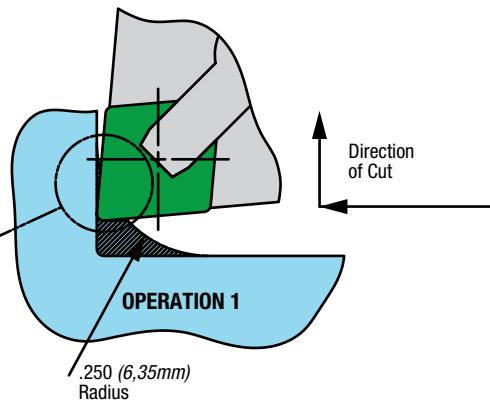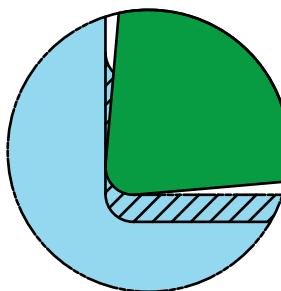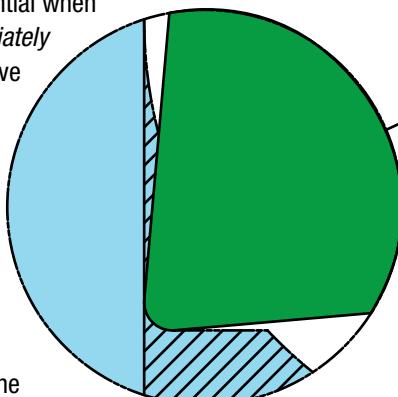


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Grooving

### Feed and speed for grooving

**Figure 52 – Grooving Feeds vs. Tool Width**

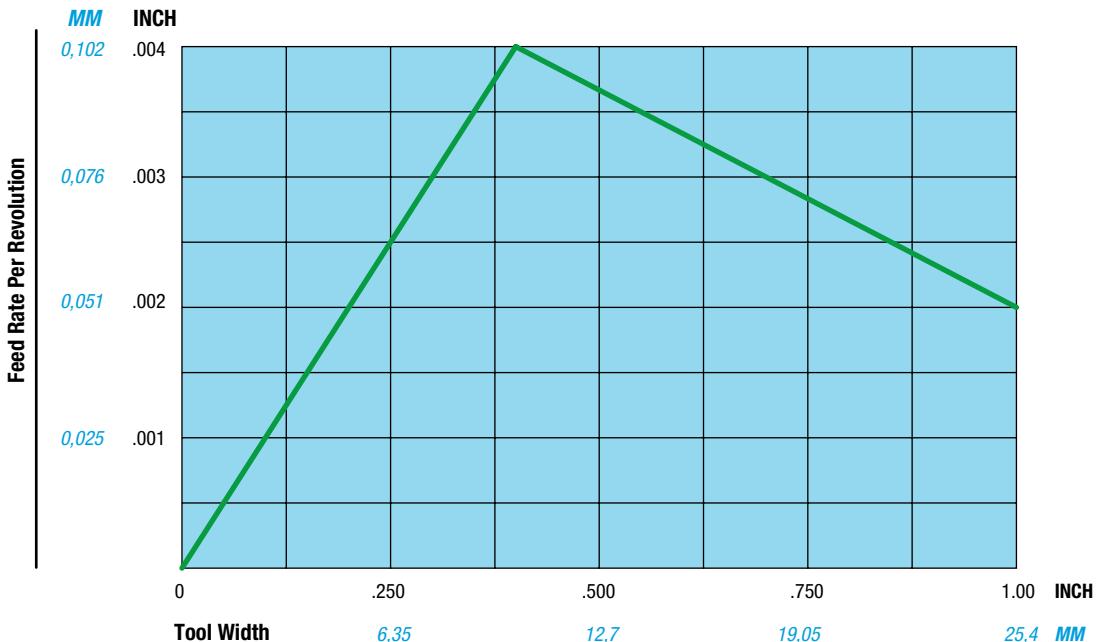

Select the correct speed from the graph using material hardness as the basis. (*Figure 13*)

A good starting point for feed rates in grooving has been shown to be one percent (1%) of the tool width for widths up to .400" (10 mm). For widths over .400" (10 mm) some reduction of this feed will be required. (*Figure 52*)

### Case history

**Material** Rene 95

**Part** 19" (483 mm) diameter

**Application** .375" (9,53 mm) wide O.D. Grove  
.500" (12,7 mm) deep

**Surface speed per minute** 400 feet (122 meters)

**Feed rate per revolution** 0.0035" (0,09 mm)


	<b>Carbide</b>	<b>WG-300®</b>
Burden rate	Cost \$ @ \$60/hr=\$35.00	Cost \$ @ \$60/hr.= \$3.50
Insert cost	\$15.00	\$50.00
Sub total	\$50.00	\$53.50
Cycle time	35 min.	3.5 min.
Time saved	0	31.5 min.
Total cost	\$= 0	@ \$60/hr.= \$31.50
	<b>\$50.00</b>	<b>\$22.00</b>

## Grooving Thin-Wall Sections

A problem may occur when attempting to machine deep grooves, leaving a thin wall standing. If the groove form calls for a radius in the root, then the heat and pressure generated by cutting the entire groove with the radius tool will cause the wall to curve away from the tool. (*Figure 53, 1*) This is a combined reaction of the actual pressure and heat of the cut plus the formation of a stressed surface layer.

Good practice dictates roughing the groove with a straight-edged tool (**2**) and finishing the radius area only with the radius tool. (**3**) (*Figures 53, 2 and 3*)

**Figure 53 – Thin-Wall Grooving**

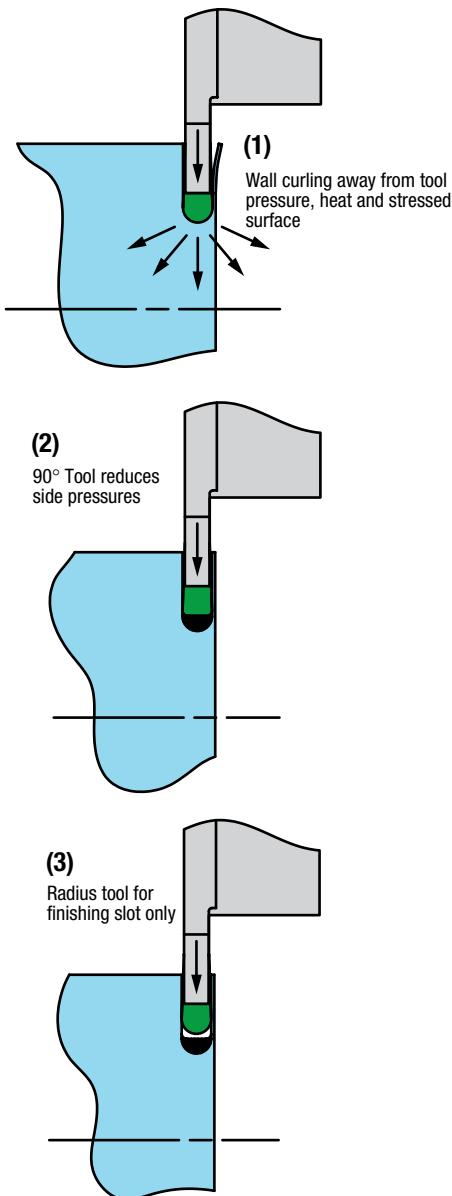


## Machining Cavities with Grooving Tools

There are several proven approaches to the machining of cavities using grooving tools. All of the methods shown are satisfactory, however, Methods B and D are the most effective.

### Method A (*Figure 54*)

The grooving tool is used to produce a groove in the normal manner by plunging straight into the work. The groove is then widened by using a ramping technique.

**Figure 54 – Widening Cavity Techniques**

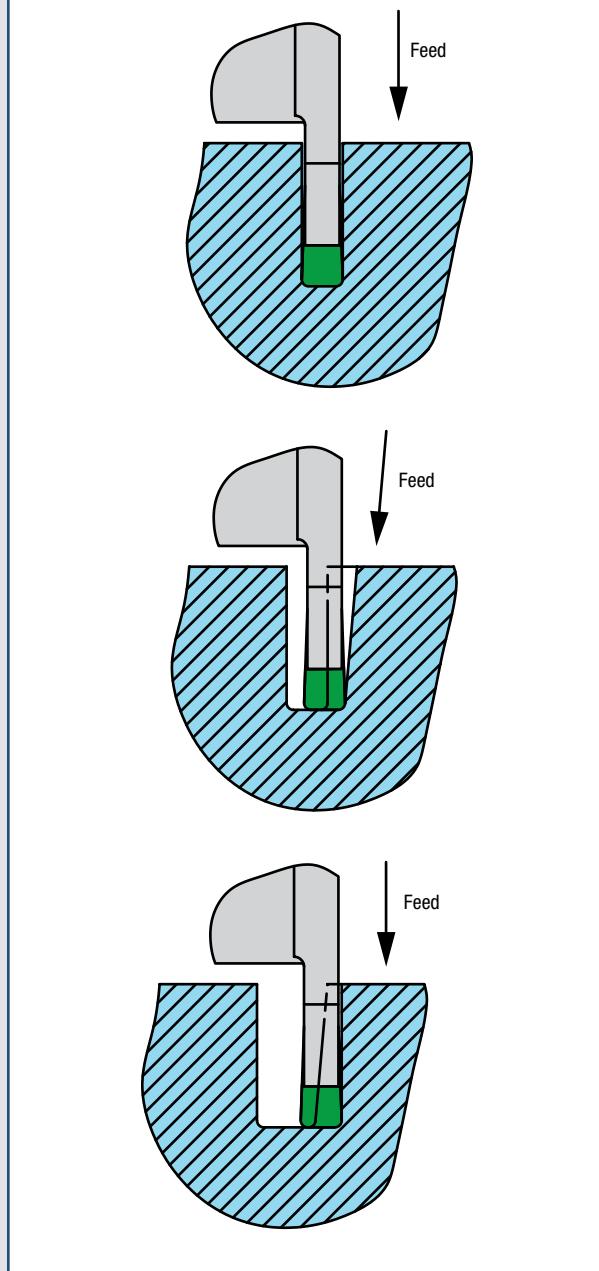

### Greenleaf Sales



US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

**Method B (Figure 55)**

Two grooves have been produced by plunging straight in. This allows both finished sidewalls and corner radii to be generated. The material between the grooves is removed with a round insert making a straight plunge cut to finish the cavity.

**Method C (Figure 56)**

The cavity is produced by a series of plunge cuts. In this case it is very important to keep the work-hardened surface of the previous cut working on the radius at or beyond the 45° mark to reduce notching. If this is disregarded, rapid notch wear will develop leading to the fracture of the insert corner.

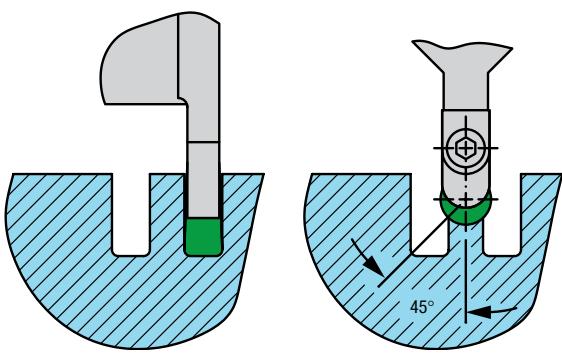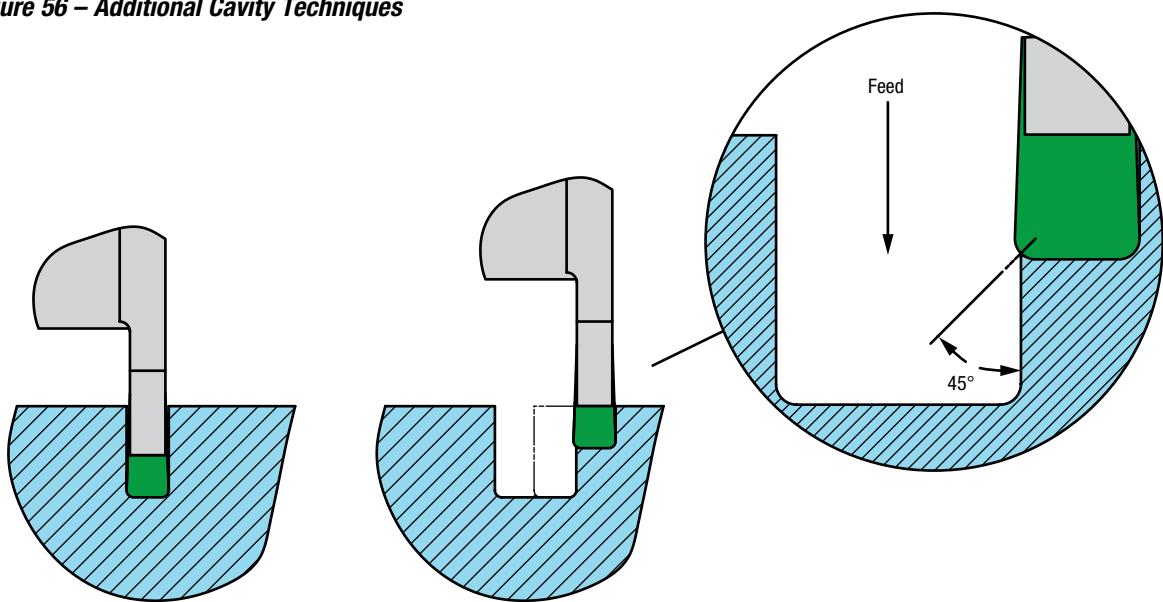
**Figure 55 – Additional Cavity Techniques**

**Figure 56 – Additional Cavity Techniques**

**Greenleaf Sales**

**US** +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
**EU** +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
**CN** +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)


### Method D (Figure 57)

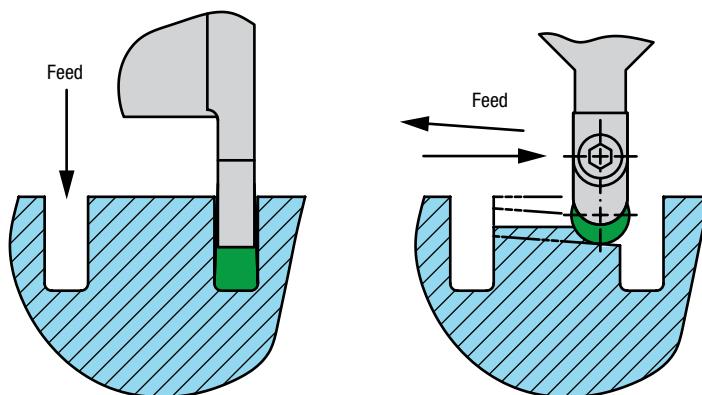The example shown in *Figure 57* is similar to *Figure 55*, except the cavity is wider and the material between the two grooves may be removed by a ramping operation with round inserts. This is an effective method of approaching a wide-cavity application.

**Figure 57– Ramping in Cavities**



**Figure 58 – Producing a Test Sample**

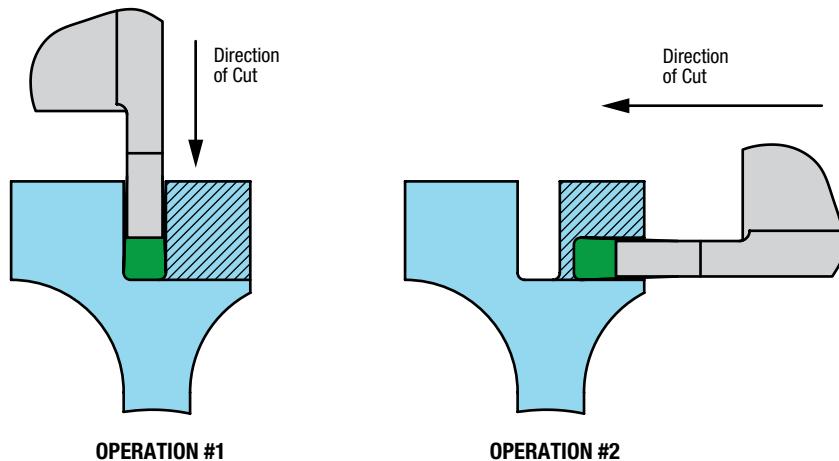

### Grooving Tools for Shoulder Cuts

It is possible to make shoulder cuts with grooving tools involving the removal of large amounts of material by producing a complete ring.

This technique is being applied in the production of large jet engine discs very effectively but requires special set-up. The method is illustrated in *Figure 58*.

In effect, two 90° opposing grooves are plunged into the part using a V-bottom grooving tool. This generates two clean walls and the required corner radius.

When the second groove breaks into the first one, a complete ring is produced which may be used for some other component. A fixture must be used to hold the ring as it parts from the main forging. It is worth constructing a special clamping fixture for such cases since the method itself is so economical.

### Rethink the process


#### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Cut-Off Operation with Ceramic Inserts

Using a whisker-reinforced ceramic grooving tool and then completing the cut-off with a drill or boring tool in a secondary operation is illustrated in *Figure 59*. This will eliminate tool breakage which would occur if attempting to totally cut off with a ceramic tool. This technique works best with smaller components where the cut-off piece can be captured on the drill or boring tool. There are other variations of this method.


**Figure 59 – Ceramic Inserts Used in Cut-Off Operations**

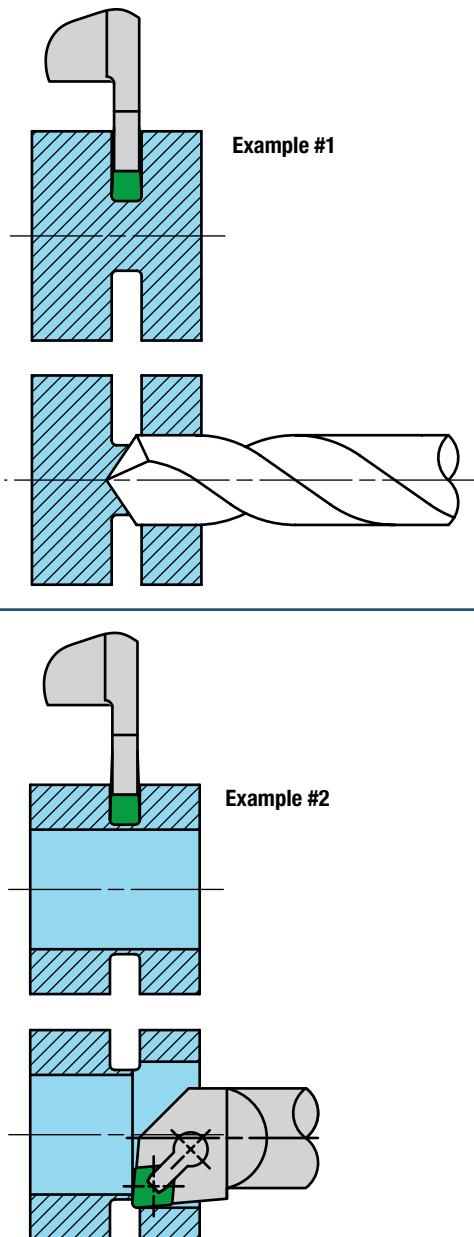

## Thin-Wall Applications


Many turbine components have very thin sections. Distortion of thin-wall parts can become a significant problem. Too much heat in the part due to excessive tool pressure and stress in the material surface due to deformed metal can be the cause of this distortion. In very thin walls, heat may penetrate an entire section causing microstructural damage in the material (*Figure 60*). In these cases, the speed reduction necessary to limit heat penetration may dictate the use of carbide insert technology.

**Figure 60 – Thin-Wall Heat Penetration**

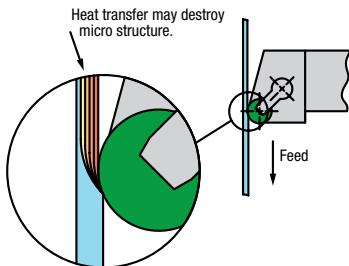

In certain situations, the direction of the cut may be of extreme importance. For example, a severe chatter/deflection problem was eliminated in the illustrated aircraft part by a change to facing from the center out. Facing in this way concentrated the resultant forces into a supported section of the part. (*Figure 61*)

**Figure 61 – Cutting Direction Resultant Forces**

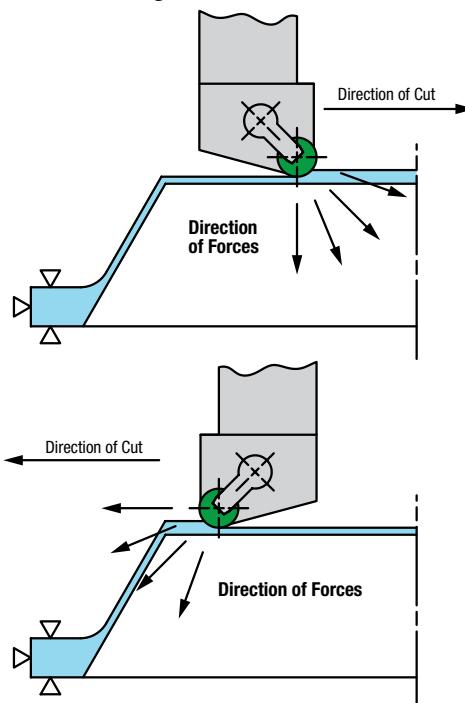

**Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Thin-Wall Applications cont'd

It is important to note the following rules of good practice for thin-walled parts:

1. Reduce the tool nose radius while maintaining the largest radius for best tool life that does not cause distortion.
2. Reduce the lead angle so that the resultant force is directed into a strong or supported section of the part piece.
3. Reduce depth of cut.
4. Do not cause the tool to dwell excessively.
5. Reduce speed.
6. If necessary, change back to carbide for lower surface speed resulting in less deflection, less surface material distortion and less heat.

### **Rethink the process**

## Interrupted Cuts

Whisker-reinforced ceramics are inherently very strong and able to withstand interruptions provided the recommended speeds (*Figure 13*) are increased. Speed is all-important in the successful cutting of parts with interruptions.

Do not give in to the temptation to reduce speed.


The amount of increase in the recommended speed for severely interrupted cuts can usually be calculated. It is necessary to increase the speed to get back into a temperature zone where the interruptions have lowered by virtue of the intermittent contact between tool and workpiece. First, calculate the circumference of the part and then subtract the sum total of the interruptions. This will give a smaller diameter value. Then increase the RPM so the smaller diameter value returns us to the originally recommended surface speed.

As a simple example (*Figure 62*), if 50% of the material is taken away by voids or interruptions at the surface, 50% of the surface remains in contact with the tool compared to an uninterrupted part. In this case, double the surface speed to compensate.

A simple estimate will often suffice. Look at the part. Estimate the percentage of surface missing due to interruptions and then increase the speed by at least that amount.

### **Rethink the process**

**Figure 62 – Interrupted Cuts**

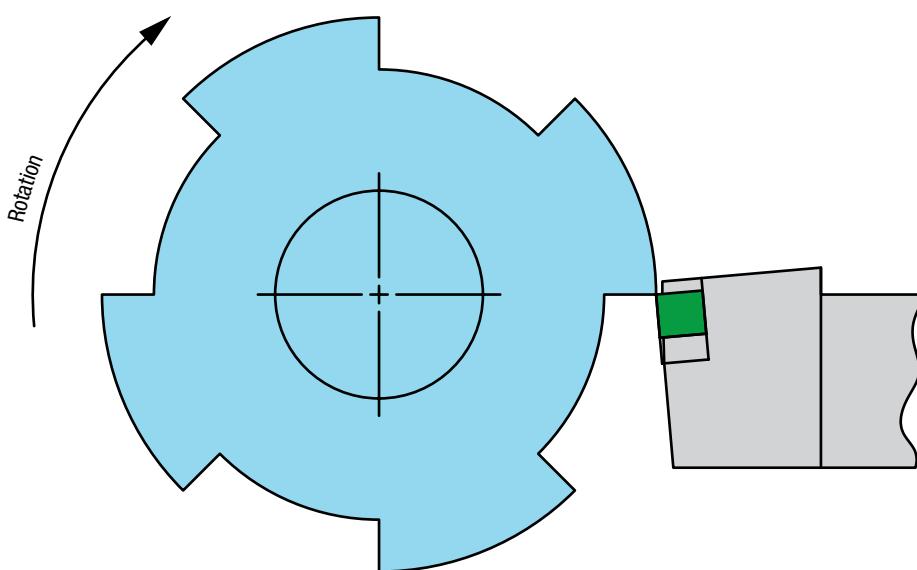

### **Greenleaf Sales**

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Edge Preparations for Interrupted Cuts


It is advantageous in interrupted cutting to ensure that the feed rate is less than the width of the negative edge preparation on the insert. This assures that the insert cutting edge is in compression at all times and not in shear, as would be the case if the feed exceeds the width of the land. For this reason the T2A or T7A edge preparation should be used.

Feed rate must be reduced on severe interruptions to get more heat into a thinner chip. This will reduce the cutting pressures. If these rules are followed, few problems will be encountered on interrupted cuts. (*Figure 63*)


For interrupted cuts, the rules are:

1. Select a larger edge preparation
2. Reduce feed rate
3. Increase recommended speed

**Figure 63 – Edge Preparations**  
Uninterrupted Cuts

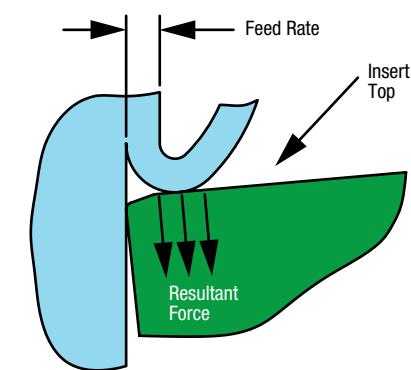

**Interrupted Cuts**

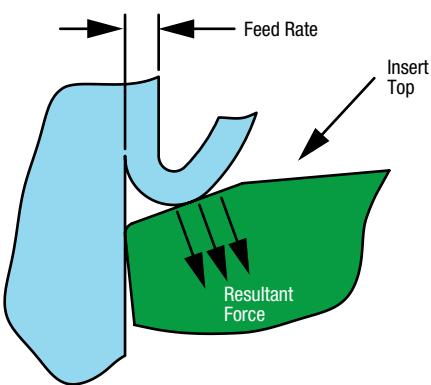

## Surface Hardening

Incorrect tooling practices, worn tools, tools with too much hone, etc., can cause excessive surface hardening effects during the machining of nickel-based alloys, particularly in finishing.

It has been shown that cutting with the higher speeds and feeds will decrease (not eliminate) the work-hardening effect and will be an eventual factor in tool life due to notching of the tool at the depth-of-cut line.

If a tool is allowed to dwell without feed, the workpiece will be burnished or glazed and thereby work-hardened. Sharp tools are needed for light operations to avoid burnishing.

Greenleaf whisker-reinforced ceramics have the advantage of being available without hones to accomplish finishing cuts and has the edge strength to make this possible.


## Smearing

Smearing can often be identified as small hair-like particles embedded into the finished surface. (*Figure 64*) This is caused by the nickel, being very gummy in nature, which is built up on the flank of the tool and then swept past a worn, chipped, or honed area of the insert under great pressure and is embedded or pressure-welded in small fragments into the finished surface.

Greenleaf advanced whisker-reinforced ceramics are strong enough that inserts are recommended and produced as standard without a hone. A clean, sharp edge is then presented to the part piece, reducing stress and eliminating the tendency to smear the material in finishing cuts.

Smearing will occur even with whisker-reinforced ceramics if the tool is allowed to wear excessively before indexing or if it chips or flakes due to side pressures caused by flank wear.

**Figure 64 – Smearing**

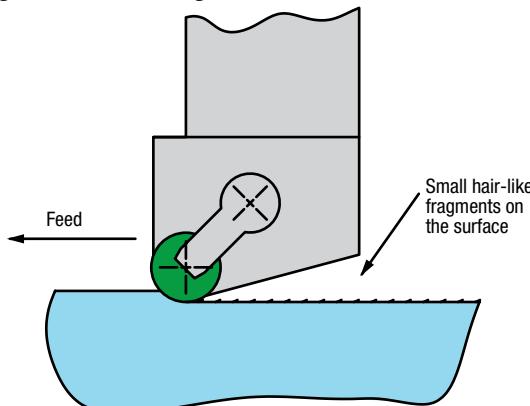


### Greenleaf Sales

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
 EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
 CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Impingement

Conditions can arise where the chip is curled onto the finish surface immediately behind the tool. Under these circumstances, fragments of the hot, plasticized chip may adhere to the finished surface. (*Figure 65*) Every effort must be made to avoid this condition when cutting at ceramic speeds. Usually a change in tool geometry lead angle, tool radius, depth of cut, feed rate or some combination of these will redirect the chip away from the finished surface.

**Figure 65 – Impingement**

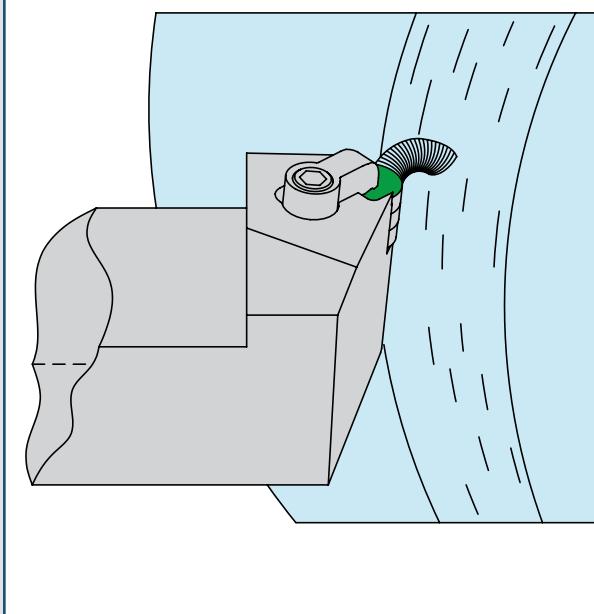

## Boring Holes


With a quill feed machine, boring into a hole increases the spindle extension and as the tool becomes dull, the cutting forces increase (*Figure 66*). The cutting conditions will deteriorate as the quill becomes progressively less rigid. The results are bores that are tapered and not concentric.

Additionally, chips may accumulate in the bottom of the bore and will eventually be re-cut, further worsening conditions.


It is often advantageous to back bore a hole (*Figure 67*). This improves the spindle's stability as the insert wears while giving better size, finish and roundness to the bore with less chance of insert breakage and no chance of chip clogging.

### Rethink the process

**Figure 66 – Spindle Overhang Increasing**

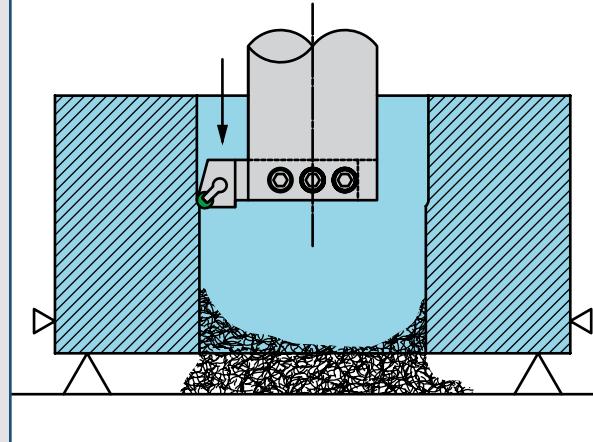

**Figure 67 – Spindle Overhang Decreasing**

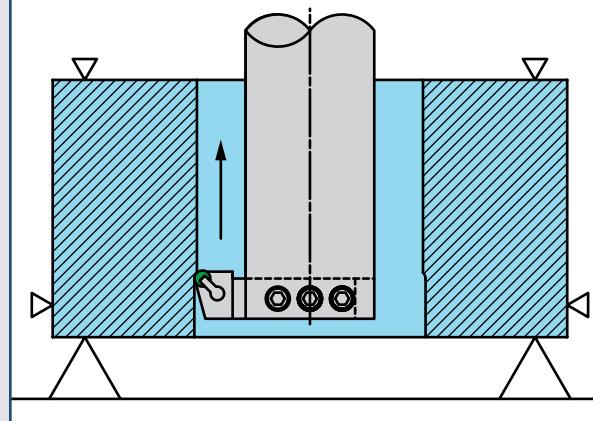

### Greenleaf Sales

US +814-763-2915 • [sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com)  
EU +31-45-404-1774 • [eurooffice@greenleafcorporation.com](mailto:eurooffice@greenleafcorporation.com)  
CN +86-731-89954796 • [info@greenleafcorporation.com.cn](mailto:info@greenleafcorporation.com.cn)  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Wear Mechanisms

The normal wear patterns on Greenleaf advanced whisker-reinforced ceramic inserts are unlike the familiar wear patterns on carbide tools. Any attempts to analyze wear or failure mechanisms based upon that prior knowledge will result in ineffective utilization of the WG Ceramics material.

Flaking off of small pieces around the top periphery of the insert is the result of pressure caused by the development of flank wear. In **roughing operations** where surface finish is not of primary concern, this type of tool wear (*Figure 68*) is not usually detrimental to tool performance. In fact, as the tool flakes, a new sharp edge is produced and the tool may go on cutting for long periods in this flaked condition with satisfactory results. In finishing cuts, the flaking will be detrimental to the finish and may also lead to smearing.

At the moment of flaking, sparking can be seen mainly in an upward direction from the insert top surface.

The high-temperature material now flowing over a rough top surface of the insert creates sparks. This is not a matter of concern for tool failure. We recommend that the feed rate be turned back 50% to finish the cutting operation.

Before the next operation, a tool inspection should determine whether or not the edge needs to be indexed. It is very important to use the insert to the maximum flaked condition in roughing before indexing or discarding the inserts. Do not make hasty judgment of the tool's ability to continue based upon this flaked appearance. Greenleaf whisker-reinforced ceramics are a completely different material. Continue to use the insert until some experience has been gained on where the limits actually lie in your operation.

**Caution!** When sparks are visibly being carried along the cutting surface, then the insert cutting edge is chipped or broken severely enough that it is not able to cut anymore. This may cause catastrophic failure. Quick action to withdraw the cutting tool is recommended.

Unlike traditional ceramics, WG Ceramics does not fail by catastrophic breakage except under conditions of severe misuse. The most commonly observed wear/failure modes are chipping of the edge, flank wear, notching and flaking.

Flank wear is a normal progressive wear phenomenon present in all cutting tools. The magnitude of this wear and the speed at which it develops are the values by which tool life should be judged.

In nickel-based alloys, notching will occur at the depth-of-cut line under almost all circumstances. The ideal tool application would be one in which the notch wear was at an acceptable maximum at exactly the same time as flank wear had developed to an acceptable maximum. However, one wear phenomenon usually develops ahead of the other.

Notch wear should not extend past 1/3 of the thickness of the insert. Rapid notch wear or chipping of the insert is often the result of insufficient heat in the shear zone ahead of the tool. Increasing the speed or decreasing the feed or a combination of both can remedy this.

**Figure 68**



## Indexing of Inserts

If the following indexing practices are observed in the application of Greenleaf whisker-reinforced ceramics, the result may be two to three times more part production per insert than when following indexing practices for traditional ceramic or carbide tools. Tooling costs may be cut in half...or better.

For Optimum Tool Life:

### Method 1 (Figure 69)

When notching has reached the maximum depth of 1/3 the thickness of the insert, but the flank wear land is not


at the maximum; index the inserts as illustrated so that the next notch is developed on an area where the wear land is now present. This is done by turning the insert away from the finished surface so that the notch is clear of the hardened surface layer, but the wear land is still inside the next cutting zone.

### Method 2 (Figure 70)

When both notching and flank wear land have developed at an equal pace and both are at a determined maximum, index the insert's notch towards the finished surface so that the notch is just clear of the finished surface and adjacent to the start of the toolholder pocket.


### Method 1

*Figure 69 – Indexing of Round Inserts (Due to Notching)*

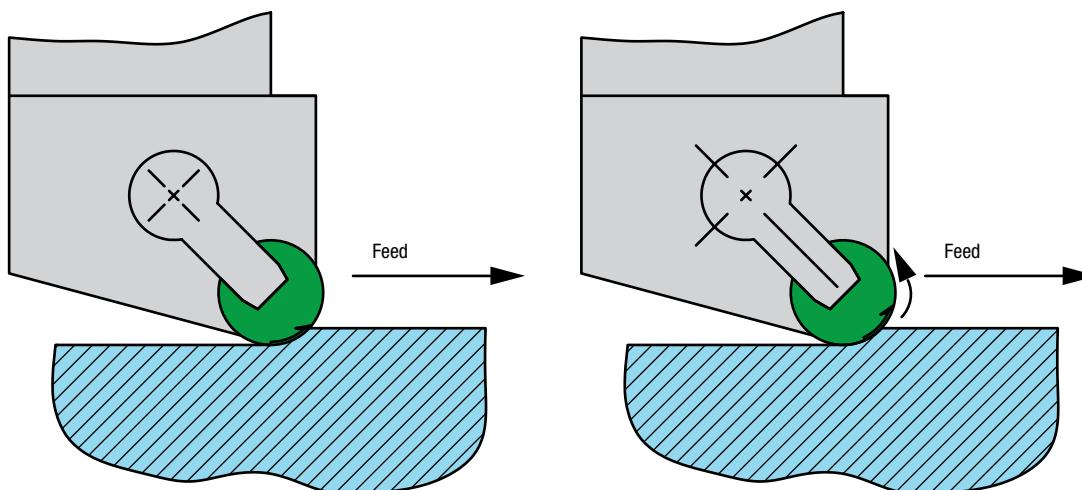

### Method 2

*Figure 70 – Indexing of Round Inserts (Due to Notching and Wear)*

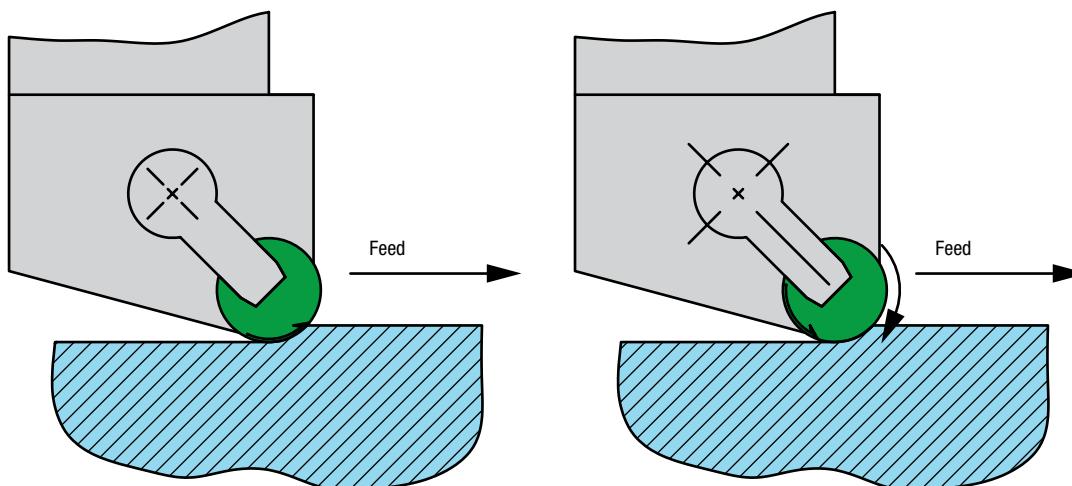


### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Turning Hard Materials 45-65 Rc

**Figure 71 – Machining Recommendations for Hardened Materials**

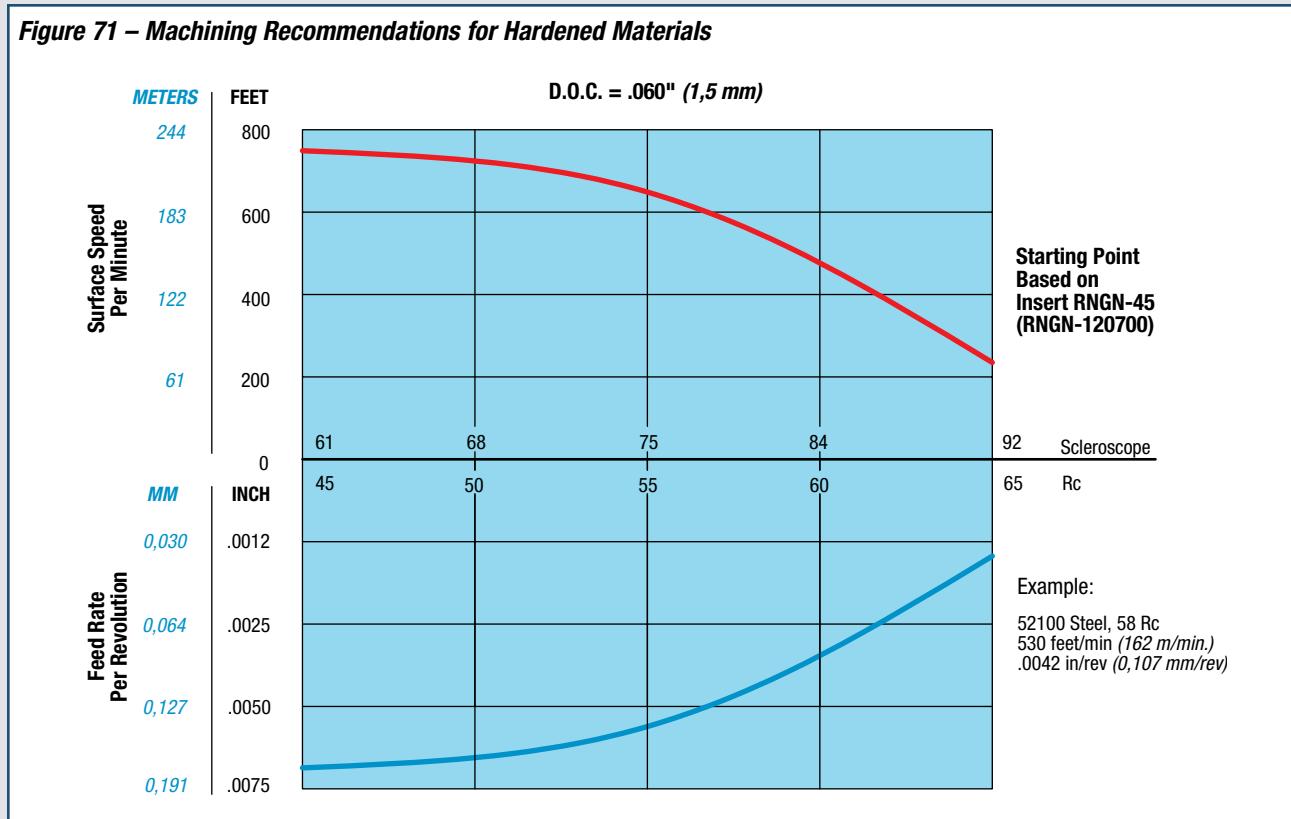

Greenleaf advanced whisker-reinforced ceramics are successfully used for the turning of hard materials other than nickel-based alloys in the range of 45-65 Rc. The outstanding hardness, combined with the high strength imparted by the reinforcing silicon carbide whiskers, makes possible the machining of many materials previously workable only by grinding. Some areas where the greatest savings have been shown are in the heat-treated alloy steels, die steel, weld overlays, hard facings and hard irons.

As in nickel-based alloys, speeds can be increased up to 8x those used for uncoated tungsten carbide tools and 4x those of coated carbide tools.

The above graph (Figure 71) gives starting points for speeds and feeds based upon material hardness. In hard turning the use of a light hone on the insert such as edge preparation T1A may help reduce chipping. **Coolant should not be used.** In this application we also recommend the use of an "ANSI" toolholder system which inherently has a five-degree double-negative rake.

If your job is in the 45 to 65 Rc range, chances are that Greenleaf whisker-reinforced ceramics can increase productivity and cut machining costs substantially.

## Milling of Nickel-Based Alloys

Milling can be compared to interrupted machining in turning. Since each insert is in and out of the cut during each revolution, the desirable temperature ahead of the tool is not easily achieved and calls for increased surface speed, reduced feed per tooth or a combination of both. It can be surprising how much extra speed is needed in some operations to get the heat back compared to machining the same material continuously as in turning. The increase can be many times the turning speed.

If a cutter designed for carbide is employed, new problems can arise. Often carbide insert milling cutter designs do not incorporate safety features to prevent components from dislodging at high speeds.

### The use of coolants is not recommended.

With milling, unlike turning, the chip can be generated from thin to thick as in conventional or "up" milling or thick to thin as in "climb" or "down" milling. It is highly recommended to use the climb milling technique to avoid high heat in a thin section of the chip which encourages chip welding and re-cutting of the chip, which in turn reduces tool life.

### Greenleaf Sales

**US** +814-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



To summarize, when milling with Greenleaf whisker-reinforced ceramics:

1. Increase the speed from the turning recommendations in *Figure 13* according to the width of cut.
2. Reduce the feed rate recommended for turning in *Figure 13* by about 50%. **Remember, this is feed per tooth, not per revolution of the milling cutter.**
3. Be sure to use a Greenleaf high-velocity milling cutter or a cutter designed specifically for use with ceramics at high surface speeds.

### Recommended Speed Increase for Milling with Various Declining Widths of Cut

In a milling operation the width of cut has a direct bearing upon the temperature generated ahead of the inserts. As the width is decreased, so is the temperature since each insert now passes through air for a longer time than it actually cuts material.

*Figure 72* shows the percentage of increase to the speeds given in the graph (*Figure 13*) for various declining widths of cut. The widths are also expressed as percentages of the cutter diameter so the chart can be applied to all cutter sizes.

At the very best, a milling insert can only be cutting 50% of each revolution if the path of cut is equal to the cutter diameter. For this reason, it will always be necessary to increase speed and reduce feed compared to the turning recommendations in *Figure 13* to achieve the same temperature range.


### Example of a Ceramic Milling Application

The following data indicates outstanding success with a ceramic milling application:

Material.....	<i>Waspaloy</i>
Condition.....	<i>Forging</i>
Hardness.....	41 <i>Rc</i>
Operation .....	<i>Rough and Finish Milling</i>
Cutter Diameter.....	3" (76 mm) <i>WSRN-60003</i>
Number of Inserts .....	4
Depth of cut (rough) .....	0.050" (1.27 mm)
Depth of cut (finish).....	0.025" (0.64 mm)
Insert .....	<i>RNGN 45 T2 (120700)</i>
Grade.....	<i>WG-300®</i>
Speed .....	3144 SFM (958 m/min)
Feed.....	64 ipm (1.6 m/min)
Feed per tooth.....	0.004" (0.1 mm)

This application resulted in an 80-to-1 reduction in the cutting time cycle over carbide.

**Figure 72 – Recommended Speed Increase for Milling with Various Declining Widths of Cut**

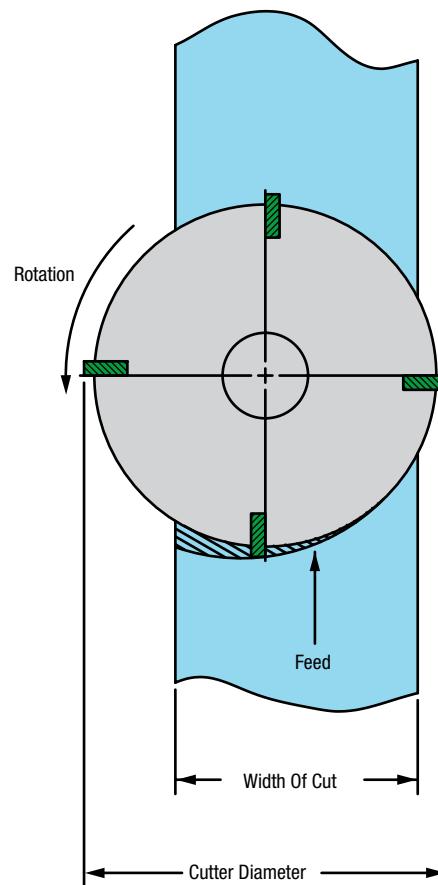

Width of Cut in Percentage of Cutter Diameter Engaged in Workpiece	Surface Speed in Percentage of Graph (Figure 13)
100%	125%
90%	150%
80%	220%
70%	280%
60%	340%
50%	400%
40%	460%

## Targeted Application Areas for Greenleaf Advanced Whisker-Reinforced Ceramics

The potential for applying whisker-reinforced ceramics extends considerably outside of the aircraft industry and involves categories of materials where little or no work has been done to date.

In order to provide you with a starting point for cost justification calculations, a rating list follows.

This list is extrapolated from carbide performance data published by leading users of the alloys listed. A sampling of the data gives us every reason to believe that it will work very well for WG-300® as a starting point. Here's how it works.

- In the Ceramic Productivity Manual, the graph (*Figure 13*) gives speeds and feeds for a given hardness value assuming the use of RNGN 45 (120700) inserts. The value represents 100% in that system.
- The following list gives a percentage rating for a number of materials where there is existing data. **Note:** This is for forged (wrought) materials. Only the speed is to be considered at these new machinability values as a starting point with WG-300®. For values below 100%, speed, feed, depth of cut and time in cut must be reduced to the suggested rating.

### Starting Point from *Figure 13* for Various Materials

Alloy	#AMS	UNS#	% Rating
A-286	5726	S66286	115
A-286	5731	S66286	115
A-286	5732	S66286	130
A-286	5734	S66286	115
Astroloy	5882	N1307	120
Custom 450	5863	S45000	180
Custom 455	5617	545500	140
Greek Ascoloy	5616	S41800	250
Hastelloy B		N10001	
Hastelloy C	5750	N10002	180
Hastelloy D			
Hastelloy G		N06007	

Alloy	#AMS	UNS#	% Rating
Hastelloy N	5771	N10003	150
Hastelloy S	5711	N06635	180
Hastelloy W	5755	N10004	130
Hastelloy X	5754	N06002	130
Haynes 25	5759	R30605	85
Haynes 188	5772	R30188	85
Haynes 263		N07263	50
IN-100	5397	N13100	60
Incoloy 804		N06804	
Incoloy 825		N08825	
Incoloy 901	5660	N09901	130
Incoloy 901 Mod.	5661	N09901	115
Incoloy 903		N19903	120
Incoloy 925			100
Inconel 600	5665	N06600	140
Inconel 601	5715	N06601	140
Inconel 617	5887	N06617	100
Inconel 625	5666	N06625	115
Inconel 700			
Inconel 702		N07702	
Inconel 706	5702	N09706	115
Inconel 718	5662	N07718	100
Inconel 718	5663	N07718	100
Inconel 718	5664	N07718	140
Inconel 721		N07721	
Inconel 722	5717	N07722	115
Inconel X-750	5667	N07750	115
Inconel 751		N07751	
MP-35-N	5758	R30035	115
Monel 400		N04400	
Monel 401		N04401	
Monel 404		N04404	
Monel 502		N05502	
Monel K500		N05500	
Monel R405		N04405	
Nicocraly			
Nickel 200		N02200	
Nickel 201	5553	N02201	200
Nickel 205	5555	N02205	220
Nickel 211		N02211	

#### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



Alloy	#AMS	UNS#	% Rating
Nickel 220		N02220	
Nimonic 75		N06075	
Nimonic 80		N07080	
Nimonic 90		N07090	
Nimonic 95			
Nimonic C-263	5886	N07263	30
Nitralloy 125			
Nitralloy 135			
Nitralloy 135 Mod.			120
Nitralloy 225			
Nitralloy 230			
Nitralloy EZ			
Nitralloy N			
Permanickel 300		N03300	
Rene 41	5712	N07041	80
Rene 41	5713	N07041	80
Rene 63			
Rene 77			
Rene 88			80
Rene 95			60
Stainless Steel 15-5 PH	5659	S15500	115
Stainless Steel 17-4 PH	5622	S17400	115
Stainless Steel 17-4 PH	5643	S17400	115
Stainless Steel 410	5618		85
Stainless Steel 430	5627	S43000	400
Tool Steel D2		T30402	125
Tool Steel D3		T30403	

Alloy	#AMS	UNS#	% Rating
Tool Steel D4		T30404	
Tool Steel D5		T30405	
Tool Steel D6			
Tool Steel D7		T30407	
Tool Steel H-10		T20810	
Tool Steel H-11		T20811	
Tool Steel H-12		T20812	
Tool Steel H-13		T20813	125
Tool Steel H-14		T20814	
Tool Steel H-19		T20819	
Tool Steel H-21		T20821	
Tool Steel H-23		T20823	
Tool Steel H-24		T20824	
Tool Steel H-25		T20825	
Tool Steel H-26		T20826	
Tool Steel H-42		T20842	
Udimet 500	5751	N07500	100
Udimet 500	5384	N07500	85
Udimet 630			
Udimet 700			
Udimet 710			
Waspaloy	5704	N07001	115
Waspaloy	5706	N07001	100
Waspaloy	5707	N07001	100
Waspaloy	5708	N07001	100
Waspaloy	5709	N07001	100

\*AMS # = Aerospace Material Specification Number

#### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com

## NOTES:

**Greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## Product Index – Inserts

<b>Insert</b>	<b>Pages</b>	<b>Insert</b>	<b>Pages</b>	<b>Insert</b>	<b>Pages</b>
ACHN-120308	M31	DNMA	T17	RCMM 190600	T147
ACHN-250308	M31	DNMG	T16	RCMM 250900	T147
ADGT	M06, M07	DXE 314-03 (427721)	M44	RCMX 102 (309161)	T147
APET	M06, M07, M08, M09	DXE 324-007 (427719)	M44	RCMX 105 (303788)	T147
APHT	M06, M07, M08, M09	FPE-21.521 (418104)	M44	RCMX 106 (312242)	T147
C-CDH (ceramic)	HT27	GBN	M34	RD-8P	T147
CCMT 040204 X2	T147	GDE 323R04 (426277)	M44	RD-9P	T147
CCMT 06T308 X2	T147	GRM-GI	RM08	RD-10P	T147
CDE 313L32 (418470)	M44	GTS	GP09	RD-12P	T147
CDE 313L51 (419469)	M44	LNE 323-02 (36767)	M44	RD-16P	T147
CDE 313R41 (419155)	M44	LNE 324-01 (418796)	M44	RD6-C	T147
CDE 313L41 (419156)	M44	LNE 324-05 (302414)	M44	RD8-C	T147
CDE 313R01 (418991)	M44	LNE-335	M39	RNGA	T57
CDE 313R51 (419648)	M44	LNE-335F	M39	RNGG	T18
CDE 313R52 (424817)	M44	LNE-34.57	M39	RNGN	M25, M26 M28,T19, HT13
CDE 313L52 (424818)	M44	LNE-34.57F	M39	RNGN (carbide)	HT13, T19, M18, M17
CDE 322L02 (308859)	M44	LNE 414-08 (309917)	M44	RNMA	HT13, T19
CDE 313R30 (418647)	M44	LNE 424-20 (306518)	M44	RNMG	HT12, T18
CDE 314L39 (429251)	M44	LNE 434-02 (36768)	M44	RNMM	T18, HT12
CDE 322R02 (306908)	M44	LNE 434-05 (418967)	M44	RPGN	T66, M26, M25, M23, M27
CDE 322R04 (428334)	M44	LNE 434-20 (306242)	M44	RPGN (carbide)	T33, M26, M25, M23, M27
CDE 322L03 (427241)	M44	LNE 443-01 (307357)	M44	RPGR	T34
CDE 322R03 (427240)	M44	LNE 443-20 (418641)	M44	RPGR-V	GP16
CDE 322L05 (306968)	M44	LNE 446-01 (38548)	M44	RPGT	T34
CDE 322R05 (306871)	M44	LNES-335	M39	RPGT-V	GP17
CDE 323L05 (312338)	M44	LNES-34.57	M39	RPGX	T67, HT31, GP15, GP16
CDE 323R04 (424081)	M44	LNMM	HT29	RPGX (carbide)	GP15
CDE 323R23 (419375)	M44	LNP-335-90L	M38	SCMT 06T308 X2	T147
CDE 323L23 (427812)	M44	LNP-335-90R	M38	SCMT 220408 X2	T147
CDE 323R05 (307715)	M44	LNP-335L	M41, M43	SD-7P	T147
CDE 323L30 (311843)	M44	LNP-335LW	M41	SD-8P	T147
CDE 323R30 (311842)	M44	LNP-335R	M41, M43	SD-12P	T147
CDE 323R31 (310840)	M44	LNP-335RW	M41	SDH-42	T147
CDE 323L31 (310841)	M44	LNP-34.57-90L	M38	SECN-42A6FR4	M18
CDE 323R32 (311014)	M44	LNP-34.57-90R	M38	SEKR 42AFN (419318)	M45
CDE 323L32 (311015)	M44	LNP-34.57L	M41, M43	SNCN43A2	M45
CDE 424L01 (418969)	M44	LNP-34.57LW	M41	SNCN43A4	M45
CDE 424R01 (418338)	M44	LNP-34.57R	M41, M43	SNCN63A6	M45
CDH (carbide)	HT26	LNP-34.57RW	M41	SNCN63A8	M45
Ceramic with Chipform	T147	LNP-44.57L	M42	SNCN64A8	M45
(425196)		LNP-44.57R	M42	SNCN84A8	M45
(425022)		LNUN	HT28	SNCN63D8	M45
CNGA	T52	LSE 323L02 (311143)	M44	SNCN43E4	M45
CNGG	T14	LSE 323R02 (311142)	M44	SNCN63E8	M45
CNGN	HT21, T53, M25	LSE 434R01 (418956)	M44	SNGA	T59
CNGN (carbide)	HT11, T15, M25	LSE 444R02 (426244)	M44	SNGN	M25, T60, T61, HT23
CNGX-RS	T54	LSE 446L01 (418959)	M44	SNGN (carbide)	M25, T36, HT19
CNMA	HT11, T15	LSE 446R01 (418958)	M44	SNGN-128-R	HT32
CNMG	HT10, T14	OOEW	M12	SNGX-RS	T61
CNMM	T14, HT10	Pulley and Poly Groove	GP18	SNMA	HT15, T21
COS	GP08	RCGR	T34	SNMG	HT14, T20
CPGN	T66, M23	RCGR-V	GP16	SNMM	T20, HT14
CPGN (carbide)	T33, M23	RCGT	T34	SNUN	HT16, T23
CPMT 040204 X2	T147	RCGT 120400 GP	T147	SPE 33R01 (418993)	M45
CPMT 06T308 X2	T147	(421930) (310520)		SPE 55L04 (421410)	M45
CPMW 050204 (310993)	T147	RCGT-V	GP17		
DNGA	T55	RCGX	T67, HT30, GP14		
DNGG	T16	RCGX (carbide)	GP14		
DNGN	T56	RCMM 120400	T147		

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Product Index – Inserts *continued*

<b>Insert</b>	<b>Pages</b>
SPGN	HT25, T68, M23, M30 M32
SPGN (carbide)	HT20, T35, M23, M30 M32
SPMT-070308-X2	M20, ID 04
SPMT-09T308-X2	M20, ID 04
SPMT-120408-X2	M20, ID 04
SPUN	HT20, T35
S-SGUB-63	TS09
S-SNUN-46	TS09
S-SPUB-63	TS08
S-SPUB-86	TS08
TCMT 040204 X2	T147
TCMT 06T308 X2	T147
TNGA	T62
TNGG	T24
TNGN	HT24, T63
TNGN (carbide)	HT18, T27
TNMA	HT17, T26
TNMA- NG	T147
TNMA- NV	T147
TNMC- NG	T147
TNMC- NV	T147
TNMG	HT17, T24, T25
TNMM	T25
TNUN	HT18, T28
TP	T70
TP (carbide)	T38
TPCB-2204PF-L	M16, M17
TPCB-2204PF-R	M16, M17
TPGA	T70
TPGA (carbide)	T38
TPGN	M29, T22, HT19
TPGN (carbide)	HT19, T36, M21
TPK-43P2R (426296)	M45
TPMA- NG	T147
TPMA- NV	T147
TPMC- NG	T147
TPMC- NV	T147
TPMT 040204 X2	T147
TPMT 06T308 X2	T147
TPUN	HT19, T37
VBMT (420864)	T147
VDB 188RA	T147
VDB 188A015	T147
VDB 218RA	T147
VDB 250 RB	T147
VDB 250B015	T147
VNGA	T64
VNGG	T29
VNMA	T30
VNMG	T29
WCMT	T39
WG	GP10, GP11
WG (Carbide)	T147
WGC	GP12, GP13
WNGA	T65
WNMA	T32
WNMG	T31

<b>Insert</b>	<b>Pages</b>
YCE	M43
YCE 434-01 (417787)	M45
YCE 446-01 (423783)	M45
ZT 1967 (420555)	T147



## Product Index – Toolholders, Boring Bars, Support Blades

<b>Toolholders</b>	<b>Pages</b>	<b>Toolholders</b>	<b>Pages</b>	<b>Toolholders</b>	<b>Pages</b>
C-CCKP	T114	G-MTLN	T88	M-411257-156VGS	GP27
C-CCLP	T114	G-MTRN	T88	M-411258-156VGS	GP27
C-CCRP	T114	G-MVJN	T89	M-411259-156VGS	GP27
C-CCSP	T115	G-MVTN	T89	M-411262-187VGS	GP27
C-CRGP	T115	G-MVN	T90	M-411263-187VGS	GP27
C-CSDP	T116	G-MWLN	T90	M-411268-218VGS	GP27
C-CSKP	T116	H-MCLN	T112	M-411269-218VGS	GP27
C-CSRP	T117	H-MRGN	T112	M-411270-218VGS	GP27
C-CSSP	T117	H-MSRN	T113	M-411271-218VGS	GP27
C-CTCP	T118	H-MWLN	T113	M-411275-250VGS	GP27
C-CTFP	T118	M-411009-4VR	GP42	M-411276-250VGS	GP27
C-CTGP	T119	M-411010-4VR	GP42	M-411277-250VGS	GP27
C-CTLP	T119	M-411011-3VR	GP42	M-411280-281VGS	GP27
C-MCKN	T104	M-411012-3VR	GP42	M-411281-281VGS	GP27
C-MCLN	T104	M-411015	GP52	M-411282-281VGS	GP27
C-MCRN	T105	M-411016	GP52	M-411283-281VGS	GP27
C-MCSN	T105	M-411055	GP52	M-411286-312VGS	GP28
C-MDJN	T106	M-411056	GP52	M-411287-312VGS	GP28
C-MDPN	T106	M-411059	GP52	M-411288-312VGS	GP28
C-MRDN	T107	M-411066-156VG	GP43	M-411289-312VGS	GP28
C-MRGN	T107	M-411068-187VG	GP43	M-411292-344VGS	GP28
C-MSKN	T108	M-411081-218VG	GP43	M-411293-344VGS	GP28
C-MSRN	T108	M-411082-218VG	GP44	M-411294-344VGS	GP28
C-MSSN	T109	M-411085-281VG	GP43	M-411295-344VGS	GP28
C-MTFN	T110	M-411086-281VG	GP44	M-411300-375VGS	GP28
C-MTGN	T110	M-411087-312VG	GP43	M-411301-375VGS	GP28
C-MTLN	T111	M-411088-312VG	GP44	M-411449	GP52
C-MWLN	T111	M-411089-344VG	GP43	M-411693-125VGS	GP32
G-CCLP	T91	M-411090-344VG	GP44	M-411694-125VGS	GP32
G-CCRP	T91	M-411122-375VG	GP44	M-411695-125VGS	GP32
G-CSBP	T92	M-411149-06VRS	GP24	M-411696-125VGS	GP32
G-CSDP	T92	M-411150-06VRS	GP24	M-411697-125VGS	GP32
G-CSKP	T93	M-411151-06VRS	GP24	M-411698-125VGS	GP32
G-CTAP	T94	M-411157-09VRS	GP24	M-411701-156VGS	GP32
G-CTBP	T94	M-411158-09VRS	GP24	M-411702-156VGS	GP32
G-CTCP	T95	M-411159-09VRS	GP24	M-411703-156VGS	GP32
G-CTEO	T95	M-411160-09VRS	GP24	M-411704-156VGS	GP32
G-CTFP	T96	M-411161-09VRS	GP24	M-411705-156VGS	GP32
G-CTGP	T96	M-411162-09VRS	GP24	M-411706-156VGS	GP32
G-MCFN	T76	M-411165-12VRS	GP24	M-411709-187VGS	GP32
G-MCGN	T76	M-411166-12VRS	GP24	M-411710-187VGS	GP32
G-MCKN	T77	M-411167-12VRS	GP24	M-411711-187VGS	GP32
G-MCLN	T77	M-411168-12VRS	GP24	M-411712-187VGS	GP32
G-MCRN	T78	M-411169-12VRS	GP24	M-411713-187VGS	GP32
G-MDJN	T79	M-411170-12VRS	GP24	M-411714-187VGS	GP32
G-MDPN	T79	M-411173-125VGS	GP27	M-411717-218VGS	GP32
G-MRAN	T80	M-411178-187VGS	GP27	M-411718-218VGS	GP32
G-MRGN	T80	M-411179-218VGS	GP27	M-411719-218VGS	GP32
G-MSBN	T81	M-411180-218VGS	GP27	M-411720-218VGS	GP32
G-MSDN	T82	M-411183-281VGS	GP27	M-411721-218VGS	GP32
G-MSKN	T82	M-411184-281VGS	GP27	M-411722-218VGS	GP32
G-MSRN	T83	M-411186-312VGS	GP28	M-411725-250VGS	GP32
G-MSSN	T83	M-411187-344VGS	GP28	M-411726-250VGS	GP32
G-MTAN	T84	M-411188-344VGS	GP28	M-411727-250VGS	GP32
G-MTBN	T84	M-411189-375VGS	GP28	M-411728-250VGS	GP32
G-MTEN	T85	M-411190-375VGS	GP28	M-411729-250VGS	GP32
G-MTFN	T86	M-411250-125VGS	GP27	M-411730-250VGS	GP32
G-MTGN	T87	M-411251-125VGS	GP27	M-411733-281VGS	GP32
G-MTJN	T87	M-411256-156VGS	GP27	M-411734-281VGS	GP32

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Product Index – Toolholders, Boring Bars, Support Blades

<b>Toolholders</b>	<b>Pages</b>	<b>Toolholders</b>	<b>Pages</b>	<b>Toolholders</b>	<b>Pages</b>
M-411735-281VGS	GP32	M-415321-125VGS	GP29	M-415431-09VRS	GP24
M-411736-281VGS	GP32	M-415324-156VGS	GP29	M-415432-09VRS	GP24
M-411737-281VGS	GP32	M-415325-156VGS	GP29	M-415435-12VRS	GP24
M-411738-281VGS	GP32	M-415326-156VGS	GP29	M-415436-12VRS	GP24
M-411743-312VGS	GP32	M-415327-156VGS	GP29	M-415437-12VRS	GP24
M-411744-312VGS	GP32	M-415328-156VGS	GP29	M-415438-12VRS	GP24
M-411745-312VGS	GP32	M-415329-156VGS	GP29	M-415439-12VRS	GP24
M-411746-312VGS	GP32	M-415332-187VGS	GP29	M-415440-12VRS	GP24
M-411751-344VGS	GP33	M-415333-187VGS	GP29	M-421100-125VG	GP44
M-411752-344VGS	GP33	M-415334-187VGS	GP29	M-421101-156VG	GP44
M-411753-344VGS	GP33	M-415335-187VGS	GP29	M-421102-187VG	GP44
M-411754-344VGS	GP33	M-415336-187VGS	GP29	M-421103-218VG	GP44
M-411759-375VGS	GP33	M-415337-187VGS	GP29	M-421104-250VG	GP44
M-411760-375VGS	GP33	M-415340-218VGS	GP29	M-421105-281VG	GP44
M-411761-375VGS	GP33	M-415341-218VGS	GP29	M-421106-312VG	GP44
M-411762-375VGS	GP33	M-415342-218VGS	GP29	M-421107-344VG	GP44
M-411956-06VRS	GP24	M-415343-218VGS	GP29	M-421108-375VG	GP44
M-411957-06VRS	GP24	M-415344-218VGS	GP29	M-421109-125VG	GP43
M-411958-06VRS	GP24	M-415345-218VGS	GP29	M-421110-156VG	GP43
M-411959-2VR	GP42	M-415348-250VGS	GP29	M-421111-187VG	GP43
M-411960-2VR	GP42	M-415349-250VGS	GP29	M-421112-218VG	GP43
M-411961-125VGS	GP27	M-415350-250VGS	GP29	M-421113-250VG	GP43
M-411962-125VGS	GP27	M-415351-250VGS	GP29	M-421114-281VG	GP43
M-411963-125VGS	GP27	M-415352-250VGS	GP29	M-421115-312VG	GP43
M-411964-156VGS	GP27	M-415353-250VGS	GP29	M-421116-344VG	GP43
M-411965-156VGS	GP27	M-415356-281VGS	GP29	M-421117-375VG	GP43
M-411970-187VGS	GP27	M-415357-281VGS	GP29	M-421118-125S-030	GP46
M-411971-187VGS	GP27	M-415358-281VGS	GP29	M-421119-125S-035	GP46
M-411972-187VGS	GP27	M-415359-281VGS	GP29	M-421120-125S-0425	GP46
M-411973-250VGS	GP27	M-415360-281VGS	GP29	M-421121-125S-055	GP46
M-411974-250VGS	GP27	M-415361-281VGS	GP29	M-421122-125S-075	GP46
M-411975-250VGS	GP27	M-415364-312VGS	GP30	M-421123-125S-125	GP46
M-411982-312VGS	GP28	M-415365-312VGS	GP30	M-421124-187S-030	GP46
M-411983-375VGS	GP28	M-415366-312VGS	GP30	M-421125-187S-035	GP46
M-411984-375VGS	GP28	M-415367-312VGS	GP30	M-421126-187S-0425	GP46
M-411988-125VG	GP43	M-415368-312VGS	GP30	M-421127-187S-055	GP46
M-411989-125VG	GP44	M-415369-312VGS	GP30	M-421128-187S-075	GP46
M-411990-156VG	GP44	M-415372-344VGS	GP30	M-421129-187S-125	GP46
M-411991-187VG	GP44	M-415373-344VGS	GP30	M-421130-250S-030	GP46
M-411992-250VG	GP43	M-415374-344VGS	GP30	M-421131-250S-0425	GP46
M-411993-250VG	GP44	M-415375-344VGS	GP30	M-421132-250S-060	GP46
M-411994-375VG	GP43	M-415376-344VGS	GP30	M-421133-250S-085	GP46
M-415293-45VGS	GP31	M-415377-344VGS	GP30	M-421134-250S-155	GP46
M-415294-45VGS	GP31	M-415380-375VGS	GP30	M-421135-312S-030	GP46
M-415295-45VGS	GP31	M-415381-375VGS	GP30	M-421136-312S-050	GP46
M-415296-45VGS	GP31	M-415382-375VGS	GP30	M-421137-312S-090	GP46
M-415297-45VGS	GP31	M-415383-375VGS	GP30	M-421138-312S-190	GP46
M-415298-45VGS	GP31	M-415384-375VGS	GP30	M-421139-375S-030	GP46
M-415299-45VGS	GP31	M-415385-375VGS	GP30	M-421140-375S-050	GP46
M-415300-45VGS	GP31	M-415419-06VRS	GP24	M-421141-375S-090	GP46
M-415301-45VGS	GP31	M-415420-06VRS	GP24	M-421142-375S-190	GP46
M-415302-45VGS	GP31	M-415421-06VRS	GP24	M-421143-125L-030	GP46
M-415303-45VGS	GP31	M-415422-06VRS	GP24	M-421144-125L-035	GP46
M-415304-45VGS	GP31	M-415423-06VRS	GP24	M-421145-125L-0425	GP46
M-415316-125VGS	GP29	M-415424-06VRS	GP24	M-421146-125L-055	GP46
M-415317-125VGS	GP29	M-415427-09VRS	GP24	M-421147-125L-075	GP46
M-415318-125VGS	GP29	M-415428-09VRS	GP24	M-421148-125L-125	GP46
M-415319-125VGS	GP29	M-415429-09VRS	GP24	M-421149-187L-030	GP46
M-415320-125VGS	GP29	M-415430-09VRS	GP24	M-421150-187L-035	GP46

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## Product Index – Toolholders, Boring Bars, Support Blades

<b>Toolholders</b>	<b>Pages</b>	<b>Toolholders</b>	<b>Pages</b>	<b>Toolholders</b>	<b>Pages</b>
M-421151-187L-0425	GP46	M-421210-312L-030	GP47	M-421269-125S-035	GP48
M-421152-187L-055	GP46	M-421211-312L-050	GP47	M-421270-125S-0425	GP48
M-421153-187L-075	GP46	M-421212-312L-090	GP47	M-421271-125S-055	GP48
M-421154-187L-125	GP46	M-421213-312L-190	GP47	M-421272-125S-075	GP48
M-421155-250L-030	GP46	M-421214-375L-030	GP47	M-421273-125S-125	GP48
M-421156-250L-0425	GP46	M-421215-375L-050	GP47	M-421274-187S-030	GP48
M-421157-250L-060	GP46	M-421216-375L-090	GP47	M-421275-187S-035	GP48
M-421158-250L-085	GP46	M-421217-375L-190	GP47	M-421276-187S-0425	GP48
M-421159-250L-155	GP46	M-421218-125S-030	GP45	M-421277-187S-055	GP48
M-421160-312L-030	GP46	M-421219-125S-035	GP45	M-421278-187S-075	GP48
M-421161-312L-050	GP46	M-421220-125S-0425	GP45	M-421279-187S-125	GP48
M-421162-312L-090	GP46	M-421221-125S-055	GP45	M-421280-250S-030	GP48
M-421163-312L-190	GP46	M-421222-125S-075	GP45	M-421281-250S-0425	GP48
M-421164-375L-030	GP46	M-421223-125S-125	GP45	M-421282-250S-060	GP48
M-421165-375L-050	GP46	M-421224-187S-030	GP45	M-421283-250S-085	GP48
M-421166-375L-090	GP46	M-421225-187S-035	GP45	M-421284-250S-155	GP48
M-421167-375L-190	GP46	M-421226-187S-0425	GP45	M-421285-312S-030	GP48
M-421168-125S-030	GP47	M-421227-187S-055	GP45	M-421286-312S-050	GP48
M-421169-125S-035	GP47	M-421228-187S-075	GP45	M-421287-312S-090	GP48
M-421170-125S-0425	GP47	M-421229-187S-125	GP45	M-421288-312S-190	GP48
M-421171-125S-055	GP47	M-421230-250S-030	GP45	M-421289-375S-030	GP48
M-421172-125S-075	GP47	M-421231-250S-0425	GP45	M-421290-375S-050	GP48
M-421173-125S-125	GP47	M-421232-250S-060	GP45	M-421291-375S-090	GP48
M-421174-187S-030	GP47	M-421233-250S-085	GP45	M-421292-375S-190	GP48
M-421175-187S-035	GP47	M-421234-250S-155	GP45	M-421293-125L-030	GP48
M-421176-187S-0425	GP47	M-421235-312S-030	GP45	M-421294-125L-035	GP48
M-421177-187S-055	GP47	M-421236-312S-050	GP45	M-421295-125L-0425	GP48
M-421178-187S-075	GP47	M-421237-312S-090	GP45	M-421296-125L-055	GP48
M-421179-187S-125	GP47	M-421238-312S-190	GP45	M-421297-125L-075	GP48
M-421180-250S-030	GP47	M-421239-375S-030	GP45	M-421298-125L-125	GP48
M-421181-250S-0425	GP47	M-421240-375S-050	GP45	M-421299-187L-030	GP48
M-421182-250S-060	GP47	M-421241-375S-090	GP45	M-421300-187L-035	GP48
M-421183-250S-085	GP47	M-421242-375S-190	GP45	M-421301-187L-0425	GP48
M-421184-250S-155	GP47	M-421243-125L-030	GP45	M-421302-187L-055	GP48
M-421185-312S-030	GP47	M-421244-125L-035	GP45	M-421303-187L-075	GP48
M-421186-312S-050	GP47	M-421245-125L-0425	GP45	M-421304-187L-125	GP48
M-421187-312S-090	GP47	M-421246-125L-055	GP45	M-421305-250L-030	GP48
M-421188-312S-190	GP47	M-421247-125L-075	GP45	M-421306-250L-0425	GP48
M-421189-375S-030	GP47	M-421248-125L-125	GP45	M-421307-250L-060	GP48
M-421190-375S-050	GP47	M-421249-187L-030	GP45	M-421308-250L-085	GP48
M-421191-375S-090	GP47	M-421250-187L-035	GP45	M-421309-250L-155	GP48
M-421192-375S-190	GP47	M-421251-187L-0425	GP45	M-421310-312L-030	GP48
M-421193-125L-030	GP47	M-421252-187L-055	GP45	M-421311-312L-050	GP48
M-421194-125L-035	GP47	M-421253-187L-075	GP45	M-421312-312L-090	GP48
M-421195-125L-0425	GP47	M-421254-187L-125	GP45	M-421313-312L-190	GP48
M-421196-125L-055	GP47	M-421255-250L-030	GP45	M-421314-375L-030	GP48
M-421197-125L-075	GP47	M-421256-250L-0425	GP45	M-421315-375L-050	GP48
M-421198-125L-125	GP47	M-421257-250L-060	GP45	M-421316-375L-090	GP48
M-421199-187L-030	GP47	M-421258-250L-085	GP45	M-421317-375L-190	GP48
M-421200-187L-035	GP47	M-421259-250L-155	GP45	M-421450-06VMRS	GP25
M-421201-187L-0425	GP47	M-421260-312L-030	GP45	M-421451-06VMRS	GP25
M-421202-187L-055	GP47	M-421261-312L-050	GP45	M-421452-06VMRS	GP25
M-421203-187L-075	GP47	M-421262-312L-090	GP45	M-421453-06VMRS	GP25
M-421204-187L-125	GP47	M-421263-312L-190	GP45	M-421454-06VMRS	GP25
M-421205-250L-030	GP47	M-421264-375L-030	GP45	M-421455-06VMRS	GP25
M-421206-250L-0425	GP47	M-421265-375L-050	GP45	M-421458-09VMRS	GP25
M-421207-250L-060	GP47	M-421266-375L-090	GP45	M-421459-09VMRS	GP25
M-421208-250L-085	GP47	M-421267-375L-190	GP45	M-421460-09VMRS	GP25
M-421209-250L-155	GP47	M-421268-125S-030	GP48	M-421461-09VMRS	GP25

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## Product Index – Toolholders, Boring Bars, Support Blades

<b>Toolholders</b>	<b>Pages</b>	<b>Toolholders</b>	<b>Pages</b>	<b>Toolholders</b>	<b>Pages</b>
M-421462-09VMRS	GP25	M-511318-250VGB	GP35	M-529680	GP52
M-421463-09VMRS	GP25	M-511319-281VGB	GP35	M-529681	GP52
M-421466-12VMRS	GP25	M-511320-281VGB	GP35	M-529682	GP52
M-421467-12VMRS	GP25	M-511321-312-VGB	GP35	M-529683	GP52
M-421468-12VMRS	GP25	M-511322-312VGB	GP35	M-529684	GP52
M-421469-12VMRS	GP25	M-511323-344VGB	GP35	M-529685	GP52
M-421470-12VMRS	GP25	M-511324-344VGB	GP35	M-529756	GP38
M-421471-12VMRS	GP25	M-511325-375VGB	GP35	M-529757	GP38
M-421498-06VMRS	GP25	M-511326-375VGB	GP35	M-529758	GP38
M-421499-06VMRS	GP25	M-512074-125VGS	GP34	M-CRDPN-2525V	GP22
M-421500-06VMRS	GP25	M-512075-125VGS	GP34	M-CRDPN-2525VM	GP23
M-421501-06VMRS	GP25	M-512086-156VGS	GP34	M-CRDPN-2525VMS	GP23
M-421502-06VMRS	GP25	M-512087-156VGS	GP34	M-CRDPN-2525VS	GP22
M-421503-06VMRS	GP25	M-512098-187VGS	GP34	M-CRGPR-06V	GP26
M-421504-09VMRS	GP25	M-512099-187VGS	GP34	M-CRGPR-06VM	GP26
M-421505-09VMRS	GP25	M-512106-218VGS	GP34	M-HM3X-	ID04
M-421506-09VMRS	GP25	M-512107-218VGS	GP34	M-SBH-C5-F	GP54
M-421507-09VMRS	GP25	M-512116-250VGS	GP34	M-SBH-C5-S	GP54
M-421508-09VMRS	GP25	M-512117-250VGS	GP34	M-SBH-C6-F	GP54
M-421509-09VMRS	GP25	M-512126-281VGS	GP34	M-SBH-C6-S	GP54
M-421510-12VMRS	GP25	M-512127-281VGS	GP34	M-SBH-KM50-F	GP53
M-421511-12VMRS	GP25	M-512132-312VGS	GP34	M-SBH-KM50-S	GP53
M-421512-12VMRS	GP25	M-512133-312VGS	GP34	M-SBH-KM63-F	GP53
M-421513-12VMRS	GP25	M-512138-344VGS	GP34	M-SBH-KM63-S	GP53
M-421514-12VMRS	GP25	M-512139-344VGS	GP34	M-SSCPS	TS11
M-421515-12VMRS	GP25	M-512144-375VGS	GP34	M-WSCNN	TS11
M-421534-2VMR	GP42	M-512145-375VGS	GP34	SB-CCKP	T129
M-421535-2VMR	GP42	M-512227-2VRB	GP37	SB-CCLP	T130
M-421536-3VMR	GP42	M-512228-125VGB	GP35	SB-CSKP	T130
M-421537-3VMR	GP42	M-512229-218VGB	GP35	SB-CTFP	T131
M-421538-4VMR	GP42	M-512230-250VGB	GP35	SB-MCKN	T126
M-421539-4VMR	GP42	M-519700-2VMRB	GP36	SB-MCLN	T126
M-427635-094VGS	GP27	M-519701-2VMRB	GP36	SB-MDJN	T127
M-427636-094VGS	GP27	M-519702-2VMRB	GP36	SB-MSKN	T127
M-427637-094VGS	GP27	M-519703-2VMRB	GP36	SB-MTFN	T128
M-427638-094VGS	GP27	M-519704-2VMRB	GP36	SB-MTKN	T128
M-427639-094VGS	GP27	M-519705-2VMRB	GP36	SB-MWLN	T129
M-427640-094VGS	GP27	M-519706-2VMRB	GP36	S-CCKN	T140
M-427641-094VGS	GP29	M-519707-2VMRB	GP36	S-CCKP	T144
M-427642-094VGS	GP29	M-519708-3VMRB	GP36	S-CCLN	T140
M-427643-094VGS	GP29	M-519709-3VMRB	GP36	S-CCLP	T144
M-427644-094VGS	GP29	M-519710-3VMRB	GP36	S-CDLN	T141
M-427645-094VGS	GP29	M-519711-3VMRB	GP36	S-CRGN	T141
M-427646-094VGS	GP29	M-519712-3VMRB	GP36	S-CRGP	T144
M-427647-094VG	GP43	M-519713-3VRMB	GP36	S-CSKN	T142
M-427648-094VG	GP43	M-519714-4VMRB	GP36	S-CSKP	T145
M-427649-094VG	GP44	M-519715-4VMRB	GP36	S-CSSN	T142
M-427650-094VG	GP44	M-519716-4VMRB	GP36	S-CSSP	T145
M-511287-2VRB	GP37	M-519717-4VMRB	GP36	S-CTFN	T143
M-511288-3VRB	GP37	M-519718-4VMRB	GP36	S-CTFP	T146
M-511289-3VRB	GP37	M-519719-4VMRB	GP36	S-CWLN	T143
M-511290-4VRB	GP37	M-519740-2VMRB	GP37	S-STFN	T131, T146
M-511291-4VRB	GP37	M-519741-2VMRB	GP37	S-SWFC	T132
M-511309-125VGB	GP35	M-519742-3VMRB	GP37	S-SWLC	T133
M-511311-156VGB	GP35	M-519743-3VMRB	GP37		
M-511312-156VGB	GP35	M-519744-4VMRB	GP37		
M-511313-187VGB	GP35	M-519745-4VMRB	GP37		
M-511314-187VGB	GP35	M-529678	GP52		
M-511315-218VGB	GP35	M-529679	GP52		

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## Product Index – Milling Cutters, Ring Max™

<i>Milling Cutters</i>	<i>Pages</i>	<i>Ring Max™</i>	<i>Pages</i>
C-4 SERIES	M24	GRM Groove Cartridges	RM35
C430LNP-H	M42	GRM Chamfer Cartridges	RM36
C430LNP-W	M43	GRM2-BX	RM14
CP-4 SERIES	M22	GRM2-R	RM15
EM90L	M06	GRM2-RX	RM16
EM90S	M06	GRM2-10K	RM16
FM75L	M08	GRM2-15K	RM16
FM90L	M07	GRM3-BX	RM28
FM90S	M07	GRM3-R	RM28
FMC90L	M09	GRM3-RX	RM28
FMRN-R	M26	GRM3-10K	RM28
FMRP-R	M26	GRM3-15K	RM28
FTHP	M16	GRM Shanks	RM29
G-MOFHP	M12	STXBX	RM42
M400LNP-A	M38	STXR	RM42
M402LN-A	M39	STX1015	RM42
M430LNP-A	M41		
SHPC12-345	M18		
SSBN	M34		
WSAN	M31		
WSRN	M28		
WSRP	M27		
WSSCC	M20		
WSSP	M30		
WSTHP	M17		
WSTP	M29		
XFSP	M32		

### Greenleaf Sales

US +814-763-2915 • sales@greenleafcorporation.com  
 EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
 CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)

## NOTES:

**Greenleaf Sales**  
US +814-763-2915 • sales@greenleafcorporation.com  
EU +31-45-404-1774 • eurooffice@greenleafcorporation.com  
CN +86-731-89954796 • info@greenleafcorporation.com.cn  
[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com) • [www.greenleafcorporation.com](http://www.greenleafcorporation.com)



## NOTES:

**Greenleaf Sales**

**Greenleaf Sales**  
**US** +841-763-2915 • sales@greenleafcorporation.com  
**EU** +31-45-404-1774 • eurooffice@greenleafcorporation.com  
**CN** +86-731-89954796 • info@greenleafcorporation.com.cn  
www.greenleafglobalsupport.com • www.greenleafcorporation.com



*Greenleaf Corporation is continually upgrading its products.  
For the most current information, please visit our web site at:*

**[www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)**

**Greenleaf Sales**

Phone: 814-763-2915 • 800-458-1850 • Fax: 814-763-4423  
[sales@greenleafcorporation.com](mailto:sales@greenleafcorporation.com) • [www.greenleafglobalsupport.com](http://www.greenleafglobalsupport.com)